

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 A. First St., Artesia, NM 88210
District III
1000 Rio Brazos Rd. Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-31498 ✓
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/> ✓
6. State Oil & Gas Lease NO.
7. Lease Name or Unit Agreement Name Amerada Wise ✓
8. Well Number 2 ✓
9. OGRID Numer 873 ✓
10. Pool Name Southwest House Yates/7 Rvrs Gas

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR DEEPEN OR PLUG BACK TO A DIFFERENT RESERVIOR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/>
2. Name of Operator Apache Corporation
3. Address of Operator 303 Veterans Airpark Lane, Ste. 3000, Midland, TX 79705
4. Well Location Unit Letter E : 2080 feet from the N line and 660 feet from th W line Section 14 Township 20S Range 38E NMPM County Lea
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3604' GL

12. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL <input type="checkbox"/>
DOWNHOLE COMMINGLE <input type="checkbox"/>	

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK <input type="checkbox"/>
COMMENCE DRILLING OPNS. <input type="checkbox"/>
CASING/CEMENT JOB <input type="checkbox"/>
ALTERING CASING <input type="checkbox"/>
P AND A <input type="checkbox"/>
OTHER: <input type="checkbox"/>

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work.) SEE RULE 1103. For Multiple Completions: Attach wellbore diagram or proposed completion or recompletion.

FEB 06 2013

RECEIVED

RECEIVED

FEB 4 2013

NMOCD ARTESIA

Apache Corporation proposes to P&A the above mentioned well by the attached procedure.

Spud Date: Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE <u><i>Guinn Burks</i></u>	TITLE <u>Reclamation Foreman</u>	DATE <u>1/29/13</u>
Type or print name <u>Guinn Burks</u>	E-mail add. <u>guinn.burks@apachecorp.com</u>	PHONE: <u>432-556-9143</u>
APPROVED BY: <u><i>Mahe White</i></u>	TITLE <u>Compliance Officer</u>	DATE <u>02-08-2013</u>
Conditions of Approval (if any):		



WELL BORE INFO.

LEASE NAME

Amerada Wise

WELL #

2

API #

30-025-31498

COUNTY

Lea

0

322

644

967

1289

1611

1933

2255

2578


2900

3222

12 1/4" Hole
8 5/8" 24# @ 317'
w/200 sx cmt to surf

2 3/8" tbg & TAC @ ?

7 7/8" Hole
4 1/2" 10.5# @ 3222'
w/ 1050 sx cmt to surf

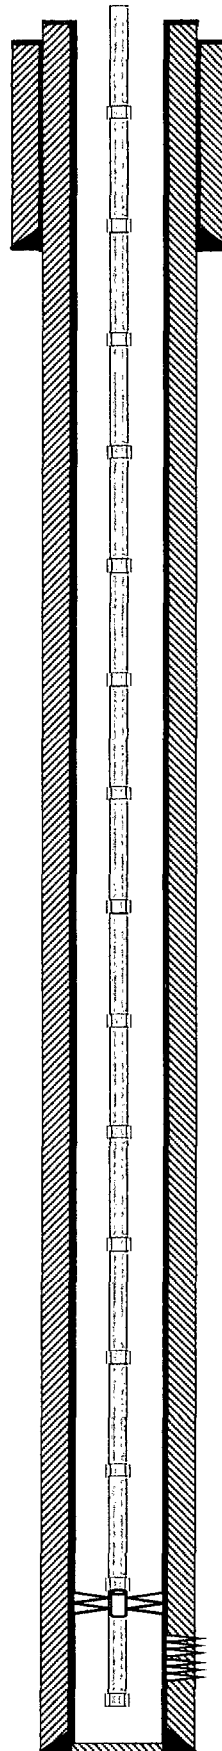

Yates perfs @ 3048'-3133'

PBTD @ 3222'
MD @ 3225'



WELL BORE INFO.

LEASE NAME

Amerada Wise

WELL #

2


API #

30-025-31498

COUNTY

Lea

PROPOSED PROCEDURE

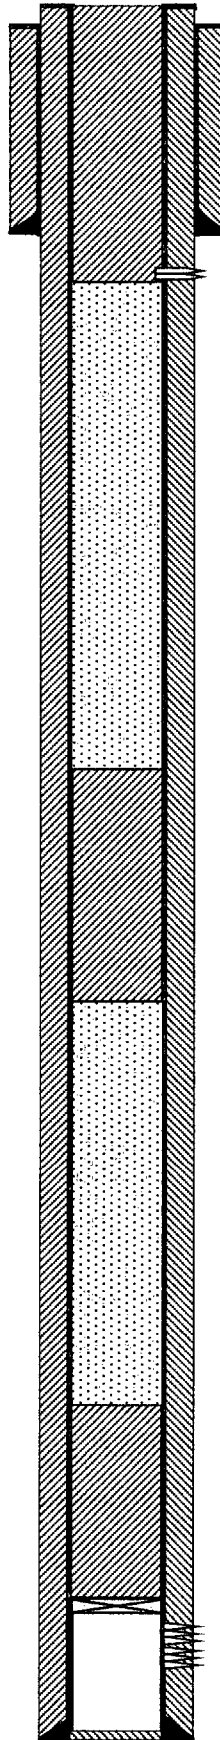

12 1/4" Hole
8 5/8" 24# @ 317'
w/200 sx cmt to surf

3. PUH & perf @ 367' & attempt to sqz 35 sx Class "C"
cmt from 367' to surf. (Shoe & Water Board)

2. PUH & spot 25 sx Class "C" cmt from 1750'-1296'
WOC/TAG (Top of Salt)

1. MIRU SU & POOH w/ tbg & TAC, RDMO. MIRU P&A
unit & RIH w/ WL & gauge ring & set CIBP @ 3000'. RIH
w/ tbg & CIRC w/ MLF & spot 25 sx Class "C" cmt from
3000'-2546' WOC/TAG (CIBP, 7 Rvrs, Yates & Base of
Salt)

Yates perms @ 3048'-3133'

7 7/8" Hole
4 1/2" 10.5# @ 3222'
w/ 1050 sx cmt to surf

PBTD @ 3222'
MD @ 3225'