District 1 1625 N French Dr., Hobbs, NM 88240 District II 1301 W Grand Avenue, Artesia, NM 88210 1000 Rio Brazos Road, Aztec, NM-87410 District IV 1220 S St Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

PM 1

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office. For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD

District Office.

Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application

Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Type of action: Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Existing BGT Modification to an existing permit Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method

Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the

environment Nor does approval relieve the operator of its responsibility	to comply with any other applicable governmental authority's rules, regulations or ordinances
Operator: XTO Energy Inc	OGRID#. 5380
	00.00 //
	OCD Permit Number.
	32N Range 13W County: San Juan
!	Longitude 108.14852 NAD ☐ 1927 ☑ 1983
Surface Owner: Federal State Private Tribal Trust or	
Surface Owner: Federal State Private Inbal Trust of	mulan Anothen
Pit: Subsection F or G of 19.15.17.11 NMAC	
Temporary: Drilling Workover	
Permanent Emergency Cavitation P&A	
	LLDPE HDPE PVC Other
•	JEEDIE - HDIE - IVE - Ould
String-Reinforced	Volumer had Dunancioner I w W w D
Liner Seams: Welded Factory Other	
3. Closed-loop System: Subsection H of 19.15.17.11 NMAC	
	r or Drilling (Applies to activities which require prior approval of a permit or notice of
intent)	
☐ Drying Pad ☐ Above Ground Steel Tanks ☐ Haul-off Bins	Other
Lined Unlined Liner type: Thicknessmil	LLDPE HDPE PVC Other
Liner Seams: Welded Factory Other	
	Other Dept PVC Other RECEIVED & MY 2010
Below-grade tank: Subsection Lof 19.15 17.11 NMAC	(E) MAY (2010) (E)
Volume: 120 - bbl Type of fluid: Proc	luced Water \\2 OIL CONS DIV DIST 2
Tank Construction material Steel	, and a city
Secondary containment with leak detection Visible sidewa	Ils. liner. 6-inch lift and automatic overflow shut-off
•	er Visible sidewalls, vaulted, automatic high-level shut off, no liner
Liner type: Thickness mil HDPE	
Enter type Titlekness init [HDI E]	
5.	

Page Lof 5

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Fencing: Subsection D of 19.15.17 11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)	
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school institution or church)	l, hospital,
Four foot height, four strands of barbed wire evenly spaced between one and four feet	
Alternate. Please specify Four foot height, steel mesh field fence (hogwire) with pipe top railing	
7.	
Netting: Subsection E of 19 15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)	70 1
Screen Netting Other Expanded metal or solid vaulted top	أقمدوانه ووافأ المند
☐ Monthly inspections (If netting or screening is not physically feasible)	
8	
Signs: Subsection C of 19.15.17 11 NMAC	
12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers	
⊠ Signed in compliance with 19.15.3.103 NMAC	
9. Administrative Approvals and Exceptions:	
Justifications and/or demonstrations of equivalency are required Please refer to 19.15.17 NMAC for guidance	
Please check a box if one or more of the following is requested, if not leave blank:	er e
Administrative approval(s). Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau consideration of approval	office for
Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	
10. Siting Critoria (regarding parmitting): 10.15.17.10 NMAC	
<u>Siting Criteria (regarding permitting)</u> : 19.15.17 10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acce	ptable source
material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appro	opriate district
office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of a Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to dry	
above-grade tanks associated with a closed-loop system.	
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ⊠ No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa	☐ Yes ⊠ No
lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	☐ Yes ☒ No
(Applies to temporary, emergency, or cavitation pits and below-grade tanks)	□´NA
- Visual inspection (certification) of the proposed site; Acrial photo; Satellite image	
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	│
'Applies to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	23 177
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock	☐ Yes ⊠ No.
watering purposes or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM.Office of the State, Engineer - iWATERS database scarch; Visual inspection (certification) of the proposed site	;
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	
adopted pursuant to NMSA 1978, Section 3-27-3, as amended	☐ Yes ☒ No
Written confirmation or verification from the municipality, Written approval obtained from the municipality	1
Within 500 feet of a wetland.	☐ Yes ⊠ No
-\Cov US, Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	
Within the area overlying a subsurface minc.	☐ Yes ☒ No
- Written confirmation graverification or map from the NM EMNRD-Mining and Mineral Division	
Within an unstable area —————————————————————————————————	☐ Yes ☒ No
Society; Topographic map	
Vithin a 100-year floodplain.	☐ Yes ⊠ No '
- FEMA map	

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19 15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Mydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19 15 17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19 15 17 9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15.17.10 NMAC
 ☑ Design Plan - based upon the appropriate requirements of 19 15 17 11 NMAC ☑ Operating and Maintenance Plan - based upon the appropriate requirements of 19 15.17 12 NMAC ☑ Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 15.17.9 NMAC and 19.15 17 13 NMAC
Previously Approved Design (attach copy of design) API Number or Permit Number
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.11 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number.
Previously Approved Operating and Maintenance Plan API Number: (Applies only to closed-loop system that use
above ground steel tanks or haul-off bins and propose to implement waste removal for closure)
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15 17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15 17.13 NMAC
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type. Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative Proposed Closure Method. Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Burcau for consideration)
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. □ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC □ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19 15 17.13 NMAC □ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) □ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15 17.13 Instructions: Please indentify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if facilities are required.	
Disposal Facility Name Disposal Facility Permit Number:	
Disposal Facility Name Disposal Facility Permit Number.	
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future se Yes (If yes, please provide the information below) No	
Required for impacted areas which will not be used for future service and operations Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	AC
Siting Criteria (regarding on-site closure methods only): 19.15 17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable son provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate disconsidered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Just demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.	trict office or may be
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search, USGS, Data obtained from nearby wells	Yes No
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby well's	☐ Yes ☐ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkholc, or playa lake (measured from the ordinary high-water mark) - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application - Visual inspection (certification) of the proposed site; Aerial photo, Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	Yes No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	Yes No
Within 500 feet of a wetland - US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources, USGS; NM Geological Society; Topographic map	☐ Yes ☐ No
Within a 100-year floodplain FEMA map	☐ Yes ☐ No
Dn-Site Closure Plan Checklist: (19 15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure play a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19 15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19 15.17.11 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for Inquids, drilling fluids and drill cuttings or in case on-site closure standards cannel Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC	15.17.11 NMAC
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17 13 NMAC	

Operator Application Certification:	ţ	
I hereby certify that the information submitted with this application is true, accur	ate and complete to t	he best of my knowledge and belief
Name (Print) Kim Champlin	Title	Environmental Representative
Signature. Kim Wamflin	Date	01/12/2009
e-mail address: kim_champlin@xtoenergy.com	•	(505) 333-3100
OCD Approval: Permit Application (including closure plan) OCD Representative Signature: Title:	prott .	Klapproval Date: 2/14/10
Closure Report (required within 60 days of closure completion): Subsection Instructions: Operators are required to obtain an approved closure plan prior to The closure report is required to be submitted to the division within 60 days of the section of the form until an approved closure plan has been obtained and the closure.	o implementing any one in included in the completion of the observed against the completion in the complete in	closure activities and submitting the closure report. closure activities. Please do not complete this
12		
Clesure Method: ✓ Waste Excavation and Removal ☐ On-Site Closure Method ☐ Alternate ☐ If different from approved plan, please explain.	tive Closure Method	☐ Waste Removal (Closed-loop systems only)
Closure Report Regarding Waste Removal Closure For Closed-loop Systems Instructions: Please indentify the facility or facilities for where the liquids, drill two facilities were utilized.		
Disposal Facility Name.	Disposal Facility Pe	ermit Number:
Disposal Facility Name:		ermit Number:
Were the closed-loop system operations and associated activities performed on or in Yes (If yes, please demonstrate compliance to the items below) \(\subseteq \) No	in areas that will not b	be used for future service and operations?
Required for impacted areas which will not be used for future service and operation Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique	ons ·	
Closure Report Attachment Checklist: Instructions: Each of the following item mark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division) attached. Proof of Deed Notice (required for on-site closure) Plot Plan (for on-site closures and temporary pits) Confirmation Sampling Analytical Results (if applicable) attached Waste Material Sampling Analytical Results (required for on-site closure) Disposal Facility Name and Permit Number attached Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation) attached On-site Closure Location. Latitude Longituments.	iens BLM M	
25		
Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure rebelief. I also certify that the closure complies with all applicable closure requirements. Name (Print): Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure requirements. Name (Print):	ents and conditions sp Title. EH&S	
Signature.		
e-mail address Sames - McDanie Oxtoenergy com	Telephone:	505-333-3701

XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Closure Plan For Below-Grade Tanks

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure requirements of below-grade tanks on XTO Energy Inc (XTO) locations. This is XTO's standard procedure for all below-grade tanks. A separate plan will be submitted for any below-grade tank which does not conform to this plan.

General Plan

- XTO will close below-grade tanks within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the division requires because of imminent danger to fresh water, public health or the environment.
- 2. XTO will close a below-grade tank that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC.
- 3. XTO will close a permitted below-grade tank within 60 days of cessation of the below-grade tank's operation or as required by the transitional provisions of Subsection B of 19.15.17.17 NMAC in accordance with a closure plan that the appropriate division district office approves. The closure report will be filed on form C-144.
- 4. XTO will remove liquids and sludge from below-grade tanks prior to implementing a closure method and will dispose of the liquids and sludge in a division-approved facility. Approved facilities and waste streams include:

Envirotech Permit No. NM01-0011 and IEI Permit No. NM 01-0010B
Soil contaminated by exempt petroleum hydrocarbons
Produced sand, pit sludge and contaminated bottoms from storage of exempt wastes

Basin Disposal Permit No. NM01-005 Produced water

- 5. XTO will remove the below-grade tank and dispose of it in a division approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office has approved prior to removal. Any associated liners will be removed, properly cleaned and disposed of per 19.15.9.712 NMAC at San Juan County Landfill. Documentation of the final disposition will be included in the closure report.
- 6. XTO will remove any on-site equipment associated with a below-grade tank unless the equipment is required for some other purpose.
- 7. XTO will test the soils beneath the below-grade tank to determine whether a release has occurred.

 At a minimum 5 point composite sample will be collected along with individual grab samples from any area that is wet, discolored or showing other evidence of a release. Samples will be

XTO Energy Inc. San Juan Basin (Northwest New Mexico) General Closure Plan For Below-Grade Tanks Page 2

analyzed for BTEX, TPH and chlorides to demonstrate that the benzene concentration, as determined by EPA SW-846 methods 8021B or 8260B or EPA method that the division approves, does not exceed 0.2 mg/kg, total BTEX concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 50 mg/kg; the TPH concentration, as determined by EPA method 418.1 or other EPA method that the division approves, does not exceed 100mg/kg; and the chloride concentration, as determined by EPA method 300.1 or other EPA method that the division approves, does not exceed 250 mg/kg, or the background concentration, whichever is greater. XTO will notify the division of its results on form C-141.

- 8. If XTO or the division determines that a release has occurred, XTO will comply with 19.15.3.116 NMAC and 19.15.1.19NMAC as appropriate.
- 9. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Paragraph (4) of Subsection E of 19.15.17.13 NMAC, XTO will backfill the excavation with compacted, non-waste containing, earthen material; construct a division prescribed soil cover; recontour and re-vegetate the site.
- 10. Notice of Closure operations will be given to the Aztec Division District III office between 72 hours and one week prior to the start of closure activities via email or verbally.

 The notification will include the following:
 - i. Operator's name
 - ii. Well Name and API Number
 - iii. Location by Unit Letter, Section, Township, and Range

The surface owner shall also be notified prior to the implementation of any closure operations of below-grade tanks as per the approved closure plan using certified mail, return receipt requested.

- 11. Re-contouring of location will match fit, shape, line, form and texture of the surrounding area. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be placed in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 12. A minimum of 4 feet of cover shall be achieved and the cover shall include 1 foot of suitable material to establish vegetation at the site; or the background thickness of topsoil, whichever is greater. Soil cover will be constructed to the site's existing grade and ponding of water and erosion of the cover material will be prevented with drainage control, natural drainages and silt traps where needed.
- 13. XTO will seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will be used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

XTO Energy Inc. San Juan Basın (Northwest New Mexico) General Closure Plan For Below-Grade Tanks Page 3

- All closure activities will include proper documentation and be available for review upon request and will be submitted in closure report form to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on form C-144 and incorporate the following:
 - 1. Proof of closure notice to division and surface owner;
 - ii. Details on capping and covering, where applicable;
 - iii. Inspection reports;
 - iv. Confirmation sampling analytical results;
 - v. Disposal facility name(s) and permit number(s);
 - vi. Soil backfilling and cover installation;
 - vii. Re-vegetation application rates and seeding techniques, (or approved alternative to re-vegetation requirements if applicable);
 - viii. Photo documentation of the site reclamation.

District 1
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 Revised October 10, 2003 ubmit 2 Copies to appropriate

Form C-141

Submit 2 Copies to appropriate District Office in accordance with Rule 116 on back side of form

Release Notification and Corrective Action

						OPERATOR Initial Report Final Report							
Name of Company: XTO Energy, Inc.						Contact: James McDaniel							
Address: 382 Road 3100, Aztec, New Mexico 87410						Telephone No.: (505) 333-3701							
Facility Name: Montoya COM #1A (30-045-24994)						Facility Type: Gas Well (Mesaverde)							
Surface Ow	ner: Privat	te		Mineral C)wner				Lease N	lo · Fee			
Buildee OW	iici. i iivat								Lease IV				
	,		,			N OF REI		,					 ,
Unit Letter	Section	Township	Range	Feet from the	Nortl	n/South Line	Feet from the	East/We		County			
Р	25	32N	13W	1190		FSL	990	FE	L	San Juan			
L	Latitude: 36.9535 Longitude: -108.14852												
				NAT	URE	OF REL	EASE						
Type of Rele						Volume of	Release: Unkno	wn \	/olume R	tecovered: N	٧A		
Source of Re	lease: BGT						lour of Occurren	ce: [Date and	Hour of Disc	covery	: NA	
						Historical	1111 0						
Was Immedia	ate Notice (Yes [No Not R	equired	If YES, To	Whom?						
By Whom?						Date and F	Iour						
Was a Water	course Read	ched?					lume Impacting	the Waterc	ourse.				
			Yes 🗵] No			, ~						
If a Watercon	ırse was Im	pacted, Descr	ibe Fully.	*									
		em and Reme											
A below gra	de tank was	s taken out of	service at	the above mention	ned fac	ility due to plu	gging and aband	loning of th	e well sit	e. A second	I BGT	was	
				vities, and was clo			losure Plan accep	pted for this	s location	i. A below g	grade ta	ank clos	sure
Composite sa	imple was co	ollected for ea	ich on-site bolow the	BGT pursuant to e 0.2 mg/kg benze	the P	It Kule . Idard the 50 m	a/ka total RTFX	Cetandard :	the 100 n	na/ka TPH s	tandar	d and t	the
				release had not oc				Y Standard,	ine roon	ing/kg II II s	tandan	a, and i	ine
BGT #2 – Th	ne sample re	eturned results	below the	e 0.2 mg/kg benze	ene star	ndard, the 50 m	ng/kg total BTEX	standard,	and the 2	50 mg/kg ch	ıloride	standa	rd, but
above the 10	0 mg/kg TP	H standard, co	onfirming	that a release has	occurr	ed from this B	GT.						1
The site was	then ranked	d pursuant to the	he NMOC	D Guidelines for	the Re	mediation of L	eaks, Spills and	Releases.	The site v	vas ranked a	. 30 du	e to a d	lepth
			id a wash a	at less than 1,000	feet fro	om the location	. This set the clo	osure stand	ards to 10	00 mg/kg TP	Ή, 10	mg/kg	
benzene and	50 mg/kg to	otal BTEX.											
Describe Are	a Affected	and Cleanup A	Action Tal	ken.									
A sample wa	s collected	from the BGT	#2 cellar	and analyzed for	ТРН v	ia USEPA Mei	thod 8015 The s	sample retu	rned resu	ılts below the	e 100 r	mg/kg 7	ГРН 📗
standard dete	ermined for	this site, there	efore, no e	xeavation was rec	juired.	Analytical res	ults are attached	for your re	ference.				
I haraby cont	fu that the	information of	ivan abaya	e is true and comp	lata to	the best of my	knowledge and	understand	that nure	uant to NM(OCD r	ules an	d
regulations a	ll operators	are required t	o renort ai	nd/or file certain i	release	notifications a	nd perform corre	ective action	ns for rela	eases which	may er	ndange:	r
				ce of a C-141 rep									
should their o	operations h	nave failed to a	adequately	/ investigate and i	emedia	ate contaminati	on that pose a th	reat to grou	ınd water	, surface wa	iter, hu	ıman he	ealth
				otance of a C-141	report	does not reliev	e the operator of	f responsibi	lity for co	ompliance w	ith any	y other	ļ
federal, state, or local laws and/or regulations.													
OIL CONSERVATION DIVISION													
Signature:	// //		•	1									ļ
Printed Name: James McDaniel Approved by District Supervisor:					501.								
Title: EH&S Specialist Approval Date: Expiration Date													
Title, Lilies	Specialist					11pprovide Da			Priarion				
E-mail Addre	ess: James_	McDaniel@xt	toenergy.c	com		Conditions o	f Approval:			Attached			
Date: 5/11/	2010		Pho	one: 505-333-370	_								

XTO Energy Inc. San Juan Basin Below Grade Tank Closure Report

Lease Name: Montoya COM #1A

API No.: 30-045-24994

Description: Unit P, Section 25, Township 32N, Range 13W, San Juan County

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure requirements of below-grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below-grade tanks. A separate plan will be submitted for any below-grade tank which does not conform to this plan.

General Plan

1. XTO will close below-grade tanks within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the division requires because of imminent danger to fresh water, public health or the environment.

Closure Date is April 30, 2010

2. XTO will close a below-grade tank that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC.

Closure Date is April 30, 2010

3. XTO will close a permitted below-grade tank within 60 days of cessation of the below-grade tank's operation or as required by the transitional provisions of Subsection B of 19.15.17.17 NMAC in accordance with a closure plan that the appropriate division district office approves. The closure report will be filed on form C-144.

Required C-144 Form is attached to this document.

4. XTO will remove liquids and sludge from below-grade tanks prior to implementing a closure method and will dispose of the liquids and sludge in a division-approved facility. Approved facilities and waste streams include:

Envirotech Permit No. NM01-0011

Soil contaminated by exempt petroleum hydrocarbons

Produced sand, pit sludge and contaminated bottoms from storage of exempt wastes

Basin Disposal Permit No. NM01-005

Produced water

All liquids and sludge were removed from the tank prior to closure activities.

5. XTO will remove the below-grade tank and dispose of it in a division approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves. XTO has removed the below grade tank, and will dispose of it at a division approved facility, or recycle, reclaim or reuse it in a manner that is approved by the division.

- 6. XTO will remove any on-site equipment associated with a below-grade tank unless the equipment is required for some other purpose.
 - XTO Energy will remove all associated equipment and P&A this location.
- At a minimum 5 point composite sample will be collected along with individual grab samples from any area that is wet, discolored or showing other evidence of a release. Samples will be analyzed for BTEX, TPH and chlorides to demonstrate that the benzene concentration, as determined by EPA SW-846 methods 8021B or 8260B or EPA method that the division approves, does not exceed 0.2 mg/kg; total BTEX concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 50 mg/kg; the TPH concentration, as determined by EPA method 418.1 or other EPA method that the division approves, does not exceed 50 mg/kg; and the chloride concentration, as determined by EPA method 300.1 or other EPA method that the division approves, does not exceed 250 mg/kg, or the background concentration, whichever is greater. XTO will notify the division of its results on form C-141.

A five point composite sample was taken of each pit using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached).

BGT #1

Components	Test Method	Limit (mg/Kg)	Results
Benzene	EPA SW-846 8021B or 8260B	0.2	ND
BTEX	EPA SW-846 8021B or 8260B	50	ND
ТРН	EPA SW-846 418.1	100	20.3 mg/kg
Chlorides	EPA 300.1	250 or background	35 mg/kg

BGT #2

Components	Test Method	Limit (mg/Kg)	Results
Benzene	EPA SW-846 8021B or 8260B	0.2	ND
BTEX	EPA SW-846 8021B or 8260B	50	ND
TPH	EPA SW-846 418.1	100	2,100 mg/kg
Chlorides	EPA 300.1	250 or background	85 mg/kg

- 8. If XTO or the division determines that a release has occurred, XTO will comply with 19.15.3.116 NMAC and 19.15.1.19NMAC as appropriate.
 - Sample results indicate that a release has occurred from BGT #2. Pursuant to NMAC 19.15.3.116, the site was then ranked pursuant to the NMOCD Guidelines for the Remediation of Leaks, Spills and Releases. The site was ranked a 30 due to a depth to groundwater of less than 50 feet, and a wash at less than 1,000 feet from the location. A sample was collected from the cellar associated with BGT #2 and analyzed for TPH via USEPA Method 8015. The sample returned results of non-detect, well below the 100 mg/kg TPH standard determined for this site. No excavation was required.
- 9. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Paragraph (4) of Subsection E of 19.15.17.13 NMAC, XTO will backfill the excavation with compacted, non-waste containing, earthen material; construct a division prescribed soil cover; recontour and re-vegetate the site.

XTO Energy has backfilled the former BGT area to the above mentioned specifications. The site has been recontoured, and will be re-seeded pursuant to the BLM MOU.

- 10. Notice of Closure operations will be given to the Aztec Division District III office between 72 hours and one week prior to the start of closure activities via email or verbally.

 The notification will include the following:
 - i. Operator's name
 - ii. Well Name and API Number
 - iii. Location by Unit Letter, Section, Township, and Range

Notification was provided to Mr. Brandon Powell with the Aztec office of the OCD via email on April 27, 2010; see attached email printout.

The surface owner shall be notified of XTO's proposal to close the BGT as per the approved closure plan using certified mail, return receipt requested.

The surface owner was notified on March 18, 2010; see attached letter and return receipt.

11. Re-contouring of location will match fit, shape, line, form and texture of the surrounding area. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be placed in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The site will be recontoured to the above mentioned specifications.

12. A minimum of 4 feet of cover shall be achieved and the cover shall include 1 foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.

The BGT areas have been backfilled to match the OCD specifications.

13. XTO will seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will be used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

The site will be re-seeded pursuant to the BLM MOU.

- 14. All closure activities will include proper documentation and be available for review upon request and will be submitted in closure report form to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on form C-144 and incorporate the following:
 - i. Proof of closure notice to division and surface owner; attached
 - ii. Details on capping and covering, where applicable; per OCD Specifications
 - iii. Inspection reports; attached
 - iv. Confirmation sampling analytical results; attached
 - v. Disposal facility name(s) and permit number(s); see above
 - vi. Soil backfilling and cover installation; per OCD Specifications
 - vii. Re-vegetation application rates and seeding techniques, (or approved alternative to re-vegetation requirements if applicable); **pursuant to the BLM MOU**
 - viii. Photo documentation of the site reclamation; attached



EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Client:	XTO	Project #:	98031-0528
Sample ID:	BGT #2 Closure Comp	Date Reported:	04-29-10
Laboratory Number:	53852	Date Sampled:	04-27-10
Chain of Custody No:	9174	Date Received:	04-27-10
Sample Matrix:	Soil	Date Extracted:	04-27-10
Preservative:	Cool	Date Analyzed:	04-28-10
Condition:	Intact	Analysis Requested:	8015 TPH

Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)	
Gasoline Range (C5 - C10)	ND	0.2	
Diesel Range (C10 - C28)	ND	0.1	
Total Petroleum Hydrocarbons	ND	0.2	

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

Montoya Com #1A

Francisco Sub.
Analyst

Review

5796 US Highway 64, Farmington, NM 87401



EPA Method 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Quality Assurance Report

Client:	QA/QC	Project #:	N/A
Sample ID:	04-28-10 QA/QC	Date Reported:	04-29-10
Laboratory Number:	53835	Date Sampled:	N/A
Sample Matrix:	Methylene Chloride	Date Received:	N/A
Preservative:	N/A	Date Analyzed:	04-28-10
Condition:	N/A	Analysis Requested:	TPH

	I-Cal Date	I-Cál RF:	C-Cal RF	% Difference	* Accept Range
Gasoline Range C5 - C10	05-07-07	1.0150E+003	1.0154E+003	0.04%	0 - 15%
Diesel Range C10 - C28	05-07-07	1.0951E+003	1.0955E+003	0.04%	0 - 15%

Blank Conc. (mg/L - mg/Kg)	Concentration	Detection Limit
Gasoline Range C5 - C10	ND	0.2
Diesel Range C10 - C28	ND	0.1
Total Petroleum Hydrocarbons	ND	0.2

Duplicate:Conc. (mg/Kg)	Sample	Duplicate	% Difference	Accept, Range
Gasoline Range C5 - C10	ND	ND	0.0%	0 - 30%
Diesel Range C10 - C28	11.5	12.7	10.4%	0 - 30%

Spike Conc. (mg//kg)	Sample :	Spike Added	Spike Result	% Recovery	Accept: Range
Gasoline Range C5 - C10	ND	250	253	101%	75 - 125%
Diesel Range C10 - C28	11.5	250	259	99.0%	75 - 125%

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

QA/QC for Samples 53835 - 53837 and 53850 - 53855

Analyst



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	хто	Project #:	98031-0528
Sample ID:	BGT #1 Closure Comp	Date Reported:	04-29-10
Laboratory Number:	53851	Date Sampled:	04-27-10
Chain of Custody:	9174	Date Received:	04-27-10
Sample Matrix:	Soil	Date Analyzed:	04-28-10
Preservative:	Cool	Date Extracted:	04-27-10
Condition:	Intact	Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)	
Benzene	ND	0.9	
Toluene	ND	1.0	
Ethylbenzene	ND	1.0	
p,m-Xylene	ND	1.2	
o-Xylene	ND	0.9	
Total BTEX	ND		

ND - Parameter not detected at the stated detection limit.

Surrogate Recoveries:	Parameter	Percent Recovery	
	Fluorobenzene	95.1 %	
	1,4-difluorobenzene	98.8 %	
	Bromochlorobenzene	98.2 %	

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846,

USEPA, December 1996.

Comments:

Montoya Com #1A

Analyst

Review



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	XTO	Project #:	98031-0528
Sample ID:	BGT #2 Closure Comp	Date Reported:	04-29-10
Laboratory Number:	53852	Date Sampled:	04-27-10
Chain of Custody:	9174	Date Received:	04-27-10
Sample Matrix:	Soil	Date Analyzed:	04-28-10
Preservative:	Cool	Date Extracted:	04-27-10
Condition:	Intact	Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)	
Benzene	ND	0.9	
Toluene	ND	1.0	
Ethylbenzene	ND	1.0	
p,m-Xylene	ND	1.2	
o-Xylene	ND	0.9	
Total BTFX	ND		

ND - Parameter not detected at the stated detection limit.

Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	95.7 %
	1,4-difluorobenzene	98.3 %
	Bromochlorobenzene	98.0 %

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846,

USEPA, December 1996.

Comments:

Montoya Com #1A

Analyst

Review



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	N/A	Project #:	N/A
Sample ID:	04-28-BTEX QA/QC	Date Reported:	04-29-10
Laboratory Number:	53835	Date Sampled:	N/A
Sample Matrix:	Soil	Date Received:	N/A
Preservative:	N/A	Date Analyzed:	04-28-10
Condition:	N/A	Analysis:	BTEX

Calibration and Detection Limits (ug/L)	l-CaliRF:	C-CaliRE Accept Rang	%Diff. jel0 = 15%	Blank Conc	Detects Eimit
Benzene	1.4544E+006	1,4574E+006	0.2%	ND	0.1
Toluene	1,3243E+006	1.3269E+006	0.2%	ND	0.1
Ethylbenzene	1.1927E+006	1,1951E+006	0.2%	ND	0.1
p,m-Xylene	2,9809E+006	2.9869E+006	0.2%	ND	0.1
o-Xylene	1.1275E+006	1.1297E+006	0.2%	ND	0.1

Duplicate Conc. (ug/Kg). Sample Duplicate %Diff, Accept Range Detect. Limit					
Benzene	' ND	ND	0.0%	0 - 30%	0.9
Toluene	ND	ND	0.0%	0 - 30%	1.0
Ethylbenzene	ND	ND	0.0%	0 - 30%	1.0
p,m-Xylene	ND	ND	0.0%	0 - 30%	1.2
o-Xylene	ND	ND	0.0%	0 - 30%	0.9

Spike Conc. (ug/Kg)	Sample Amo	untiSpiked Spik	ed Sample	% Recovery	Accept Range
Benzene	ND	50.0	50.8	102%	39 - 150
Toluene	ND	50.0	50.5	101%	46 - 148
Ethylbenzene	ND	50.0	49.9	99.8%	32 - 160
p,m-Xylene	ND	100	97.6	97.6%	46 - 148
o-Xylene	ND	50.0	49.8	99.6%	46 - 148

ND - Parameter not detected at the stated detection limit.

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA, References:

December 1996.

Method 8021B, Aromatic and Halogenated Volatiles by Gas Chromatography Using Photoionization and/or Electrolytic Conductivity Detectors, SW-846, USEPA December 1996.

QA/QC for Samples 53835 - 53837 and 53849 - 53855. Comments:



EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:	XTO	Project #:	98031-0528
Sample ID:	BGT #1 Closure Comp	Date Reported:	04-28-10
Laboratory Number:	53851	Date Sampled:	04-27-10
Chain of Custody No:	9174	Date Received:	04-27-10
Sample Matrix:	Soil	Date Extracted:	04-28-10
Preservative:	Cool	Date Analyzed:	04-28-10
Condition:	Intact	Analysis Needed:	TPH-418.1

		Det.
	Concentration	Limit
Parameter	(mg/kg)	(mg/kg)

Total Petroleum Hydrocarbons

20.3

14.9

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

Montoya Com #1A

EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:	хто	Project #:	98031-0528
Sample ID:	BGT #2 Closure Comp	Date Reported:	04-28-10
Laboratory Number:	53852	Date Sampled:	04-27-10
Chain of Custody No:	9174	Date Received:	04-27-10
Sample Matrix:	Soil	Date Extracted:	04-28-10
Preservative:	Cool	Date Analyzed:	04-28-10
Condition:	Intact	Analysis Needed:	TPH-418.1

		Det.
	Concentration	Limit
Parameter	(mg/kg)	(mg/kg)

Total Petroleum Hydrocarbons

2,100

14.9

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

Montoya Com #1A

Analyst Julia



EPA METHOD 418.1 TOTAL PETROLEUM HYROCARBONS QUALITY ASSURANCE REPORT

Client:

QA/QC

Project #:

N/A

Sample ID:

QA/QC

Date Reported:

04-28-10

Laboratory Number:

04-28-TPH.QA/QC 53832

Date Sampled:

N/A

Sample Matrix: Preservative:

Freon-113 N/A

Date Analyzed:

04-28-10 04-28-10

Condition:

N/A

Date Extracted: Analysis Needed:

TPH

Calibration

C-Cal Date 04-28-10

1,690

1,850

9.5%

C-Cal RF: % Difference Accept: Range +/- 10%

Blank Conc. (mg/Kg)

Concentration.

Detection Limit ---

TPH

ND

14.9

Duplicate Conc. (mg/Kg)

Sample

Duplicate % Difference Accept Range

TPH

18.6

18.9

1.6%

+/- 30%

Spike Conc: (mg/Kg) Sample

TPH 18.6

I-Cal Date

04/22/2010

2,000

1,760

Spike Added ... Spike Result ... % Recovery ... 87.2%

Accept Range 80 - 120%

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

QA/QC for Samples 53832, 53834 - 53837 and 53850 - 53853.



Chloride

Project #: 98031-0528 Client: OTX Sample ID: **BGT #1 Closure Comp** Date Reported: 04-29-10 Date Sampled: 04-27-10 Lab ID#: 53851 Sample Matrix: Date Received: 04-27-10 Soil 04-28-10 Preservative: Date Analyzed: Cool Condition: Chain of Custody: 9174 Intact

Parameter

Concentration (mg/Kg)

Total Chloride

35

Reference:

U.S.E.P.A., 4500B, "Methods for Chemical Analysis of Water and Wastes", 1983. Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments:

Montoya Com #1A

Analyst July

Review



Chloride

Client: XTO Project #: 98031-0528 Sample ID: **BGT #2 Closure Comp** Date Reported: 04-29-10 Lab ID#: 53852 Date Sampled: 04-27-10 Sample Matrix: Soil Date Received: 04-27-10 Preservative: Cool Date Analyzed: 04-28-10 Condition: Intact Chain of Custody: 9174

Parameter

Concentration (mg/Kg)

Total Chloride

85

Reference:

U.S.E.P.A., 4500B, "Methods for Chemical Analysis of Water and Wastes", 1983.

Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments:

Montoya Com #1A

Analyst

Review

09174 CHAIN OF CUSTODY RECORD Client: Project Name / Location: ANALYSIS / PARAMETERS XTO Montoya COM # 1A BTEX (Method 8021) Client Address: VOC (Method 8260) TPH (Method 8015) 382 CR 3100 RCRA 8 Metals TCLP with H/P Cation / Anion Sample Intact Client Phone No.: Sample Cool TPH (418.1) CHLORIDE 787-0519 98031-0528 Sample No./ No./Volume Preservative Sample Sample Sample PAH Lab No. Containers Hack High Identification Date Time Matrix Sludge Solid Aqueous Soil) Sludge Aqueous Soil Sludge Solid Aqueous Relinquished by: (Signature) Received by: (Signature) Date Time Received by: (Signature Relinquished by: (Signature) Relinguished by: (Signature) Received by: (Signature)



5796 US Highway 64 • Farmington, NM 87401 • 505-632-0615 • lab@envirotech-inc.com



March 18, 2010

Montoya Sheep and Cattle Co. Stella Montoya 1592 Highway 170 La Plata, NM 87418

RE:

Montoya Com #1A

Sec. 25P- T32N- R13W, San Juan County

Dear Ms. Montoya:

This submittal is pursuant to Rule 19.15.17.13 requiring operators to notify surface owners of closure of a below grade tank pit. XTO Energy Inc. (XTO) is hereby providing written documentation of our proposal to close the below grade tank pit associated with the aforementioned location by means of waste excavation and removal.

Should you have any questions or require additional information please feel free to contact me at your earliest convenience (505) 333-3100.

Respectfully submitted,

Kim Champlin EHS Administrative Coordinator XTO Energy Inc. San Juan Division

Cc:

OCD

File

COMPLETE THIS SECTION ON DELIVERY SENDER: COMPLETE THIS SECTION ■ Complete items 1, 2, and 3. Also complete ☐ Agent item 4 if Restricted Delivery is desired. Print your name and address on the reverse □ Addressee so that we can return the card to you. C. Date of Delivery ■ Attach this card to the back of the mailpiece, or on the front if space permits. □ No If YES, enter delivery address below: 3. Service Type ☐ Certified Mail ☐ Express Mail ☐ Registered ☐ Return Receipt for Merchandise ☐ Insured Mail ☐ C.O.D. 4. Restricted Delivery? (Extra Fee) ☐ Yes PS Form 3811, February 2004 Domestic Return Receipt 102595-02-M-1540

> U.S. Postal Service ™ Man CERTIFIED MAIL... RE (Domestic Mail Only; No Insurance Coverage Provided) 5 'n ተረረቱ Postage ON Certified Fee 0003 Return Receipt Fee (Endorsement Required) **18**^{re}2 2010 Restricted Delivery Fee (Endorsement Required) 03.50 USPS Total Postage & Fees 7008



James McDaniel/FAR/CTOC 04/27/2010 07:25 AM

To brandon.powell@state.nm.us

cc Martin Nee/FAR/CTOC@CTOC, Kim Champlin/FAR/CTOC@CTOC, Kurt Hoekstra/FAR/CTOC@CTOC

bcc Tony Espinosa/FAR/CTOC@CTOC

Subject Montoya COM #1A

Brandon,

Please consider this the required 72 hour notice for pit closure activities taking place at the Montoya COM #1A (3004524994). This well site is located in Section 25P, Township 32N, Range 13W, San Juan County, New Mexico. Please don't hesitate to contact me if you have any additional questions or concerns.





James McDaniel/FAR/CTOC 04/29/2010 11:26 AM

bcc

Subject Montoya com #1A

Brandon,

Per our conversation, I woud like to inform you of the discovery of and additional bgt at the above mentioned location. XTO Energy will close this additional bgt, refered to as bgt #2, using the closure plan already approved by the OCD for this site. Please don't hesitate to contact me if you have any additional questions or concerns. Thanks much.

James McDaniel EH&S Specialst XTO Energy, Inc 505-787-0519

RouteName FAR NM Run 51		StopName MONTOYA	COM 001A	Pumper Blackwell, Frankie	Foreman Durham, Ken	WellName MONTOY	e 'A COM 00	11A	APIWellNumber 3004524994	Section 25	Range 13W	Township 32N	
InspectorName	Inspection Date	Inspection Time	Visible LinerTears	VisibleTankLeak Overflow	Collection OfSurfaceRun	Visible LayerOil	Visible Leak	Freeboard EstFT	PitLocation PitTyp	e Notes			
FB	01/29/2010	09 00	No	No	No	No	No	4	Well Water Pit Below	Gr ₁			
FB	02/23/2010	08 00	No	No	No	No	No	4	Well Water Pit Below	Gr ₁			
FB	03/01/2010	11 00	No	No	No	No	No	4	Well Water Pit Below	Gr ₁			

RouteName FAR NM Run 51		StopName MONTOYA	COM 001A	Pumper Blackwell, Frankie	Foreman Durham, Ken	WellNam MONTOY	e /A COM 00	01A	APIWellNumber 3004524994	Section 25	Range 13W	Township 32N	
InspectorName	Inspection Date	Inspection Time	Visible LinerTears	VisibleTankLeak Overflow	Collection OfSurfaceRun	Visible LayerOil	Visible Leak	Freeboard EstFT	PitLocation PitType	Notes			
FB	10/14/2009	09 00	No	No	No	No	No	4	Well Water Pit Below G	r			
FB	11/18/2009	11 00	No	No	No	No	No	4	Well Water Pit Below G	r.			
FB	12/28/2009	02 00	No	No	No	No	No	4	Well Water Pit Below G	r.			

RouteName FAR NM Run 51		StopName MONTOYA	COM 001A	Pumper Blackwell, Frankie	Foreman Durham, Ken	WellName MONTOY	e 'A COM 00	1A	APIWellNumber 3004524994	Section 25	Range 13W	Township 32N	
InspectorName	Inspection Date	Inspection Time	Visible LinerTears	VisibleTankLeak Overflow	Collection OfSurfaceRun	Visible LayerOil	Visible Leak	Freeboard EstFT	PitLocation PitTyp	e Notes			
FB	06/30/2009	01 00	No	No	No	No	No	3	Well Water Pit Below	Gr ₁			
FB	07/31/2009	10 00	No	No	No	No	No	4	Well Water Pit Below	Gr _'			
FB	08/19/2009	02 00	No	No	No	No	No	4	Well Water Pit Below	Gr₁			
FB	09/25/2009	08 00	No	No	No	No	No	4	Well Water Pit Below	Gr _'			

RouteName FAR NM Run 51		StopName MONTOYA	COM 001A	Pumper Blackwell, Frankie	Foreman Durham, Ken	WellName MONTOY	e /A COM 00	1A	APIWellNumber 3004524994	Section 25	Range 13W	Township 32N
InspectorName	Inspection Date	Inspection Time	Visible LinerTears	VisibleTankLeak Overflow	Collection OfSurfaceRun	Visible LayerOil	Visible Leak	Freeboard EstFT	PitLocation PitTyp	e Notes		
FB	04/30/2009	04 00	No	No	No	No	No	4	Well Water Pit Below	Gr _'		
FB	05/26/2009	09 00	No	No	No	No	No	4	Well Water Pit Below	Gr _'		
FB	06/30/2009	01 00	No	No	No	No	No	3	Well Water Pit Below	Gr ₁		

RouteName FAR NM Run 51		StopName MONTOYA	. COM 001A	Pumper Blackwell, Frankie	Foreman Durham, Ken	WellNam MONTO	e YA COM 00	91A	APIWellNumber 3004524994	Section 25	Range 13W	Township 32N	
inspectorName	Inspection Date	Inspection Time	Visible LinerTears	VisibleTankLeak Overflow	Collection OfSurfaceRun	Visible LayerOil	Visible Leak	Freeboard EstFT	PitLocation PitType	Notes	 -		
FB	01/07/2009	11 00	No	No	No	No	No	4	Well Water Pit Below 0	∃r₁			***
FB	02/10/2009	02 00	No	No	No	No	No	4	Well Water Pit Below (Эr∙			
FB	03/18/2009	08 00	No	No	No	No	No	3	Well Water Pit Below (∋r _'			

RouteName FAR NM Run 51		StopName MONTOYA	COM 001A	Pumper Blackwell, Frankie	Foreman Durham, Ken	WellName MONTOY	e (A COM 00	1A	APIWellNumber 3004524994	Section 25	Range 13W	Township 32N	
InspectorName	Inspection Date	Inspection Time	Visible LinerTears	VisibleTankLeak Overflow	Collection OfSurfaceRun	Visible LayerOil	Visible Leak	Freeboard EstFT	PitLocation PitType	Notes		- · · · · ·	
FB	10/29/2008	08 00	No	No	No	No	No	4	Well Water Pit Below 0	Эr:			
FB	11/27/2008	08 00	No	No	No	No	No	4	Well Water Pit Below 0	Gr∙			
FB	12/02/2008	12 00	No	No	No	No	No	4	Well Water Pit Below 0	∃r₁			

RouteName FAR NM Run 51		StopName MONTOYA	COM 001A	Pumper Blackwell, Frankie	Foreman Durham, Ken	WellNam MONTO	e /A COM 00	01A	APIWellNumi 3004524994		Section 25	Range 13W	Township 32N	
InspectorName	Inspection Date	Inspection Time	Visible LinerTears	VisibleTankLeak Overflow	Collection OfSurfaceRun	Visible LayerOil	Visible Leak	Freeboard EstFT	PitLocation	PıtType	Notes			
FB	08/14/2008	09 30	No	No	No	No	No	4						
FB	09/04/2008	09 30	No	No	No	No	No	4						

XTO Energy, Inc. Montoya COM #1A Section 25, Township 32N, Range 13W Closure Date 4/30/2010



Photo 1: Montoya COM #1A Well Site

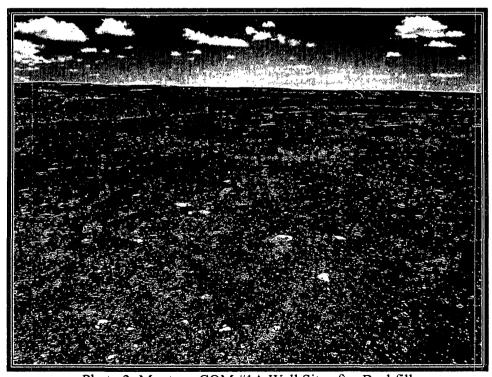


Photo 2: Montoya COM #1A Well Site after Backfill