

Form 3160-3 (April 2004)

MAY 03 20

FORM APPROVED OMB No. 1004-0137 Expires March 31, 2007

UNITED STATES			
DEPARTMENT	OF	THE	INTERIOR
BUREAU OF L	ANI	) MAI	NAGEMEN'

Farminaton Fie d Offician 78060

APPLICATION FOR PERMIT TO		Land Mi	116 9 If Indian, Allotee	or Tribe Name
la. Type of work: X DRILL REENTE	ER		7 If Unit or CA Agree	ment, Name and No.
lb. Type of Well: Oil Well X Gas Well Other	X Single Zone Multip	ole Zone	8. Lease Name and W St. Morit	
2 Name of Operator  Dugan Production Corp.			9 API Well No. 30-045- 3	5285
3a. Address 709 East Murray Drive Farmington, NM 87401	3b. Phone No. (include area code) 505-325-1821		10. Field and Pool, or Exploratory  Basin Fruitland Coal	
4. Location of Well (Report location clearly and in accordance with an	y State requirements.*)		11. Sec., T R. M. or Bl	k and Survey or Area
At surface 660' FNL & 1145' FWL	Lat.36.29034 N		Sec. 26,	T24N, R10W
At proposed prod. zone Same as above	Long. 107.87090	W	NMPM	
14. Distance in miles and direction from nearest town or post office*  Approx. 40-miles SE of Farmin	ngton, New Mexico		12. County or Parish San Juan	13. State NM
15. Distance from proposed*	16. No. of acres in lease	17. Spacing	g Unit dedicated to this w	eli
location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)	760-acres	<u> </u>	20.0 Acres	(N/2)
18. Distance from proposed location* to nearest well, drilling, completed,	19. Proposed Depth	20. BLM/E	IA Bond No.	RCVD SEP 6'1
applied for, on this lease, ft.	1430-ft.	0	n File	Marker care in m.
21. Elevations (Show whether DF, KDB, RT, GL, etc.) G. L. 6758-Feet	22 Approximate date work will star ASAP	rt*	23. Estimated duration 5-Days	UIL VONS. DIV DIST. 3
	24. Attachments			
The following, completed in accordance with the requirements of Onshor	e Oil and Gas Order No.1, shall be a	ttached to thi	s form:	
<ol> <li>Well plat certified by a registered surveyor.</li> <li>A Drilling Plan.</li> <li>A Surface Use Plan (if the location is on National Forest System SUPO shall be filed with the appropriate Forest Service Office).</li> </ol>	4. Bond to cover the litem 20 above).  Lands, the 5. Operator certific	Re operation		existing bond on file (see
	authorized offic	er.		
25. Signature	Name (Printed/Typed) Kurt Fagrel	ius		Date 5-3-2011
Title Geologist				. /
Approved by (Signature) Manifestes (8	Name (Printed/Typed)	··		Date 9/6/11
Title AEM	Office FE	٥		
Application approval does not warrant or certify that the applicant hold conduct operations thereon.  Conditions of approval, if any, are attached.	s legal or equitable little to those righ	ts in the subj	ect lease which would en	title the applicant to
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a ci States any false, fictitious or fraudulent statements or representations as	rime for any person knowingly and vito any matter within its jurisdiction.	willfully to m	ake to any department or	agency of the United

\*(Instructions on page 2)

A water based gel-mud will be used to drill surface and production casing hole. Standard 2,000 psi BOP will be used to drill production hole. The Fruitland Coal will be completed from approximately 1260' - 1280'. The interval will be fracture stimulated.

NOTIFY AZTEC OCD 24 HRS. PRIOR TO CASING & CEMENT

SEP 2 0 2011

NMCCD

BLM'S APPROVAL OR ACCEPTANCE OF THIS ACTION DOES NOT RELIEVE THE LESSEE AND OPERATOR FROM OBTAINING ANY OTHER AUTHORIZATION REQUIRED FOR OPERATIONS ON FEDERAL AND INDIAN LANDS

District I 1625 N. French Dr., Hobbs, NM 88240 State of New Mexico

Energy, Minerals & Natural Resources Department

Form C-102 Revised October 12, 2005 Instructions on back

1301 W. Grand Avenue, Artesia, NM 88210 District III

1220 South St. FrancisF@ProjectFieldOffic.

OIL CONSERVATION DIVISION

MAY OSUBARITO Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies

1000 Rio Brazos Rd., Aztec, NM 87410 District IV 1220 S. St Francis Dr., Santa Fe, NM 87505

Santa Fe, NM 87505reau of Land Manageme


AMENDED REPORT

## WELL LOCATION AND ACREAGE DEDICATION PLAT

'API Number	² Pool Code	³Pool Name	
30-045-35285	71629	BASIN FRUITLAND (	COAL
Property Code	°Property Name ST. MORITZ		*Well Number 91
'0GRID No. 006515	*Operator Name DUGAN PRODUCTION CORPORATION		*Elevation 6758

<sup>10</sup> Surface Location UL or lot no. Range Sect 100 Feet from the North/South line County Lot Idn Feet from the East/West line D 26 24N 10W WEST 660 NORTH 1145 SAN JUAN <sup>11</sup>Bottom Hole Different From Surface Location UL or jot no. Section Township Lot Idn Feet from the North/South line Feet from the East/West line County <sup>15</sup> Order No 12 Dedicated Acres 33 Joint or Infill <sup>14</sup> Consolidation Code 320.0 Acres - (N/2)

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

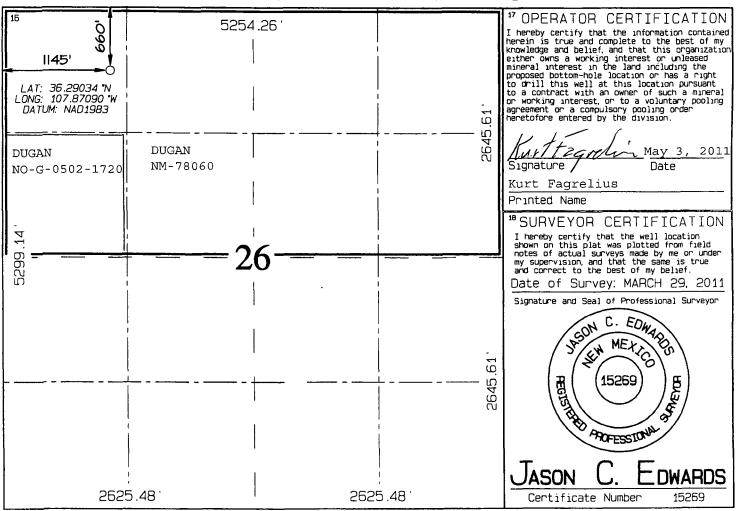

# EXHIBIT B OPERATIONS PLAN

St. Moritz #91

#### APPROXIMATE FORMATION TOPS:

Total Depth	1430′
Pictured Cliffs	1280 <b>′</b>
Fruitland	970 <b>′</b>
Kirtland	565 <b>′</b>
Ojo Alamo	480′

Catch samples every 10 feet from 900-feet to total depth.

#### LOGGING PROGRAM:

Run cased hole GR-CCL-CNL from total depth to surface.

## CASING PROGRAM:

Hole	Casing		Setting	Grade and
Size	Size	Wt./ft.	Depth	Condition
12-1/4"	<del>8-5</del> /8"	24#	120'	J-55
7-7/8"	5-1/2"	15.5#	1430 <b>′</b>	J-55

Plan to drill a 12-1/4" hole and set 120' of 8-5/8" OD, 24#, J-55 surface casing, then plan to drill a 7-7/8" hole to total depth with gel-water mud program to test the Fruitland Coal. 5-1/2", 15.5#, J-55 production casing will be run and cemented. Cased hole GR-CCL-CNL log will be run. Productive zone will be perforated and fractured. After frac, the well will be cleaned out and production equipment will be installed.

#### CEMENTING PROGRAM:

Surface: Cement to surface with 75-cf Class B + 2% CaCl<sub>2</sub>. Circulate to surface.

Production Stage- Cement w/160-sx Premium Lite FM 3% BWOC

Calcium Chloride + 0.25 lbs/sx Celloflake + 5 lbs/sk

LCM-1 + 0.4% BWOC FL-52 + 8% BWOC Bentonite + 0.4%

BWOC Sodium Metasilicate + 112.3% fresh water (12.1 lb/gal, 2.13 cu ft/sx - 220-cu ft slurry). Tail

w/163-sx Type III cement + 1 lb/sk Calcium Chloride + 0.25 lb/sx Celloflake + 0.2% BWOC FL-52 + 59% fresh water (14.6 lb/gal, 1.38 cu ft/sx-150-cu ft slurry).

Total cement slurry for production stage is 370-cf Circulate cement to surface.

An adequate spacer will be pumped ahead of the cement slurry to help prevent mud contamination of the cement. An adequate number of casing centralizers will be run through useable water zones to ensure that casing is centralized through these zones. The adequate number of centralizers will be determined based on API standards. Centralizers to impart a swirling action around the casing will be used just below and into the base of the lowest usable water zone. These devices will assist mud displacement, increase cement bonding potential and create an effective hydraulic seal. A chronological log will be kept which records the pump rate, pressure, slurry density, and slurry volume for the cement job. The log will be sent to the BLM after completion of the job.

Maximum Anticipated Bottom Hole Pressure - 300 psi.

Drilling Fluid - will be fresh water with bentonite 8.9#/gal.

### WELLHEAD EQUIPMENT:

Huber 8-5/8"x5-1/2" casing head, 1000# WP, tested to 2000#. Huber 5-1/2"x2-7/8" tubing head, 1000# WP, tested to 2000#.

# Blow-Out Preventer Equipment (BOPE): Exhibit D.

Annular preventer, double ram, or 2 rams with one being blind and one being a pipe ram.

Kill line (2" minimum)

1 kill line valve (2" minimum)

1 choke line valve

2 adjustable chokes

Upper kelly cock valve with handle available.

Safety valve and subs to fit all drill string connections in use.

Pressure gauge on choke manifold.

2" minimum choke line.

Fill-up line.


Working pressure for all BOPE will be 2,000 psi or greater.

Will test BOPE (blind rams, pipe rams, choke manifold and surface casing) separately. Each test will include a low pressure test to 250-psig held for five minutes and a high pressure test to 800-psig held for thirty minutes (with no more than a 10-percent pressure drop during the duration of the tests). If a 10-percent or greater pressure drop occurs; a packer will be run to isolate the surface casing and BOPE to locate the source of the leak.

Contacts: Dugan Prod.Corp. Office & Radio Dispatch: 325-1821

Mark Brown	Kurt Fagrelius	John Alexander
3 <del>27-3632 (H)</del>	325-4327 (H)	325-6927 (H)
320-8247 (M)	320-8248 (M)	320-1935 (M)


# PLAT 1.

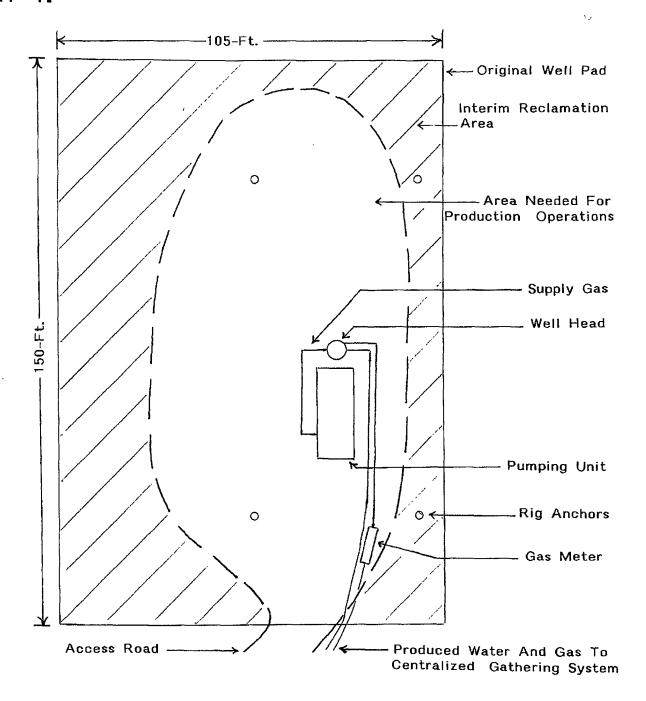


# Anticipated Production Facilities

Dugan Production Corp.

St. Moritz #91

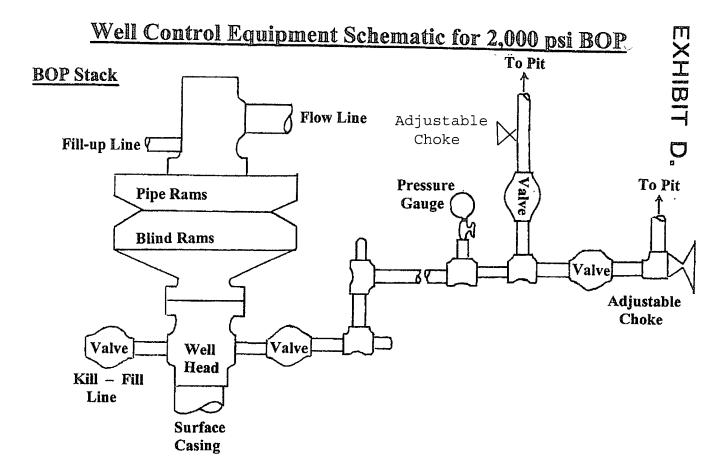

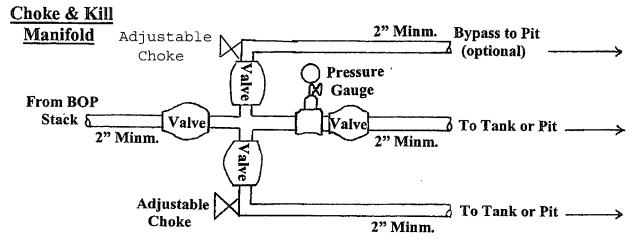

Working Pressure for all equipment is 2,000 psi or greater

DUGAN PRODUCTION CORP.
St. Moritz #91