

District I
1625 N French Dr., Hobbs, NM 88240
Phone (575) 393-6161 Fax (575) 393-0720
District II
811 S First St., Artesia, NM 88210
Phone (575) 748-1283 Fax (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone (505) 334-6178 Fax (505) 334-6170
District IV
1220 S St. Francis Dr., Santa Fe, NM 87505
Phone (505) 476-3460 Fax (505) 476-3462

State of New Mexico
Energy Minerals and Natural Resources
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-101
Revised December 16, 2011

Permit

RCVD JUN 28 '12
OIL CONS. DIV.

DIST. 3

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

Operator Name and Address Koch Exploration Company, LLC PO Box 489, Aztec, NM 87410		OGRID Number 12807
		API Number 30-045-35386
Property Code 39315	Property Name Bisti 2	Well No 1

Surface Location

UL - Lot	Section	Township	Range	Lot Idn	Feet from	N/S Line	Feet From	E/W Line	County
A	2	24N	13W	1	660	North	660	East	San Juan

Pool Information

Fruitland Coal

Additional Well Information

Work Type N	Well Type G	Cable/Rotary R	Lease Type S	Ground Level Elevation 6296'
Multiple N	Proposed Depth 1100'	Formation Fruitland Coal	Contractor TBD	Spud Date 10-01-12
Depth to Ground water 615'	Distance from nearest fresh water well >1 Mile	Distance to nearest surface water >24 miles		

Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
SC	12 1/4"	8 5/8"	24.0# J-55 STC	120'	98	Surface
PC	6 1/4"	4 1/2"	10.5# J-55 LTC	1100'	120	Surface

Casing/Cement Program: Additional Comments

--

Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Double-gated with pipe rams and blind rams with rotation	2000 psi	250 psi - low pressure 2000 psi - high pressure	

I hereby certify that the information given above is true and complete to the best of my knowledge and belief
I further certify that the drilling pit will be constructed according to NMOCD guidelines ☒ a general permit ☐, or an (attached) alternative OCD-approved plan ☐.

Signature 

Printed name. Donald Johnson

Title Operations Manager


E-mail Address johnso4d@kochind.com

Date 06/28/2012

Phone 505-334-9111

OIL CONSERVATION DIVISION

Approved By

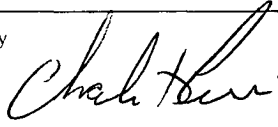 7-9-12

Title SUPERVISOR DISTRICT #3

Approved Date JUL 10 2012 Expiration Date JUL 10 2014

Conditions of Approval Attached

NOTIFY AZTEC OCD 24 HRS.
PRIOR TO CASING & CEMENT

A COMPLETE C-144 MUST BE SUBMITTED TO AND APPROVED BY THE NMOCD FOR: A PIT, CLOSED LOOP SYSTEM, BELOW GRADE TANK, OR PROPOSED ALTERNATIVE METHOD, PURSUANT TO NMOCD PART 19.15.17, PRIOR TO THE USE OR CONSTRUCTION OF THE ABOVE APPLICATIONS.

JUL 10 2012 ca

Ar

1625 N. French Dr., Hobbs, N.M. 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

DISTRICT II

811 S First St., Artesia, N.M. 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

DISTRICT II

1000 Rio Brazos Rd., Aztec, N.M. 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

DISTRICT IV

1220 S. St. Francis Dr., Santa Fe, N.M. 87505
Phone: (505) 476-3480 Fax: (505) 476-3482

State of New Mexico
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.
Santa Fe, N.M. 87505

Form C-102

Revised August 1, 2011

Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-045-35386		² Pool Code 71629	³ Pool Name Fruitland Coal	
⁴ Property Code 39315	⁵ Property Name BISTI 2			⁶ Well Number 1
⁷ GRID No. 12807	⁸ Operator Name KOCH EXPLORATION			⁹ Elevation 6296

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	2	24 N	13 W	LOT 1	660	NORTH	660	EAST	SAN JUAN

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot ldn	Feet from the	North/South line	Feet from the	East/West line	County
---------------	---------	----------	-------	---------	---------------	------------------	---------------	----------------	--------

¹³ Dedicated Acres 299.01 E/2	¹⁵ Joint or Infill	¹⁴ Consolidation Code	¹⁶ Order No.
---	-------------------------------	----------------------------------	-------------------------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

<p>18 N 89°46'32" W</p> <p>LOT 4 (29.47)</p>	<p>LOT 3 (29.48)</p>	<p>5281.77'</p> <p>LOT 2 (29.50)</p> <p>LAT: 36.3486226° N LONG: 108.1876922° W NAD 83</p>	<p>660'</p> <p>LOT 1 (29.51)</p> <p>660'</p> <p>2293.38'</p> <p>N 00°12'44" E</p>
		<p>LAT: 36°20.91686' N LONG: 108°11.22387' W NAD 27</p>	
SECTION 2			

LEGEND:

○ = SURFACE LOCATION

● = 1911 B.L.M. BRASS CAP

⦿ = 1911 B.L.M. BRASS CAP (C.C.)

17 OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

6/28/12
 Signature Date

Donald L. Johnson
 Printed Name

johnso4d@kcoind.com
 E-Mail Address

18 SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

10/01/12
 Date of Survey

John A. Yukonich
 Signature and Seal of Professional Surveyor

14831
 Certificate Number

OCT. 28, 2011

Bisti 2-1

Surface: 660'FNL &, 660 FEL – Sec. 2, T24N, R13W (A)

San Juan County, NM

Lease # ST NM VO-8293-0000

Drilling Program**1) Formation Tops**

Estimated tops of important geological markers:

	<u>Measured Depth</u>	<u>Sub-sea</u>
Kirtland Shale	215'	5951'
Fruitland Fm	615'	5551'
Fruitland Coal	830'	5336'
Pictured Cliffs	880'	5286'
TD	1100'	5091'

2) Estimated depths of Notable Zones:

Water	0' to 615'
Oil and Gas	615' to 1100'

3) Pressure Control Equipment:

- a. 10-inch 900 series or 2,000 psi test double gate hydraulic with 4-1/2" pipe rams and cross spool with flanged outlets. See BOP diagram at **Exhibit F-1** for drawing of choke lines, kill lines and choke manifold. Procedures will include waiting on cement 12 hours, nipple up blowout preventer (BOP) assembly and test to 70% of yield of casing or 600 psi maximum. The production casinghead pressure rating will be 5,000 psi.
- b. Type of BOP rams: Blind rams and pipe rams are used as shown on the BOP diagram at **Exhibit F-1**. Occasionally, the position of the rams is reversed depending on the drilling contractor's methods.
- c. The choke manifold and header will have 2 - 2" choke outlets and a 2" straight through line. A 2" adjustable choke will be installed on each of the choke outlets. The manifold inlet from the drilling spool will be a 2" line. All lines, valves, chokes and fittings will be rated to 2000 psi. The choke manifold and header system will have manual control valves. No hydraulic valves will be installed. Casing testing procedure – Surface casing will be tested at 600 psi maximum for 30 minutes, after cementing in place and before drilling out of shoe. Production casing will be tested to 3,800 psi for 30 minutes, after drilling to the required depth, and after cementing in place.
- d. The BOPS are hydraulic controlled.
- e. BOP testing procedures and frequency:

BOP tests will be performed using an appropriately sized test plug. The test will be performed and recorded using a test pump, calibrated test gauges, and a properly calibrated strip or chart recorder. The test will be recorded in the driller's log and will include a low pressure test of 250 psi held for five minutes and a high pressure test of 2,000 psi for ten minutes as described in Onshore Order No. 2.

Bisti 2-1

Surface: 660'FNL &, 660 FEL – Sec. 2, T24N, R13W (A)

San Juan County, NM

Lease # ST NM VO-8293-0000

- f. Casing head connections will be 2-inch; these outlets will usually be bull plugged during drilling operations. No pumping through these connections is allowed except in emergency to keep from wearing out the head.
- g. The drilling spool will be a series 900 2,000 psi WP with a 2-inch kill line and a 2-inch outlet.

4) Proposed Casing Program:

Surface Casing Program:	Hole Size				Depth
Surface Casing	12 ¼"	8 5/8"	24.0#	J-55 STC	120'
Production Casing	6 ¼"	4 ½"	10.5#	J-55 LTC	1100'

Proposed setting depth, amount and type of cement including additives:

8 5/8" Surface Casing – Surface to 120' – Cement with 98 sks Premium Cement (15.80 ppg, yield 1.17 cf/sk) Cement + 2% Calcium Chloride + .125 lbs/sk. Poly-E-Flake, volume: 115 cf., includes 100% excess. Centralizers will be run all joints starting at the shoe joint.

4 1/2" Production Liner – Surface to 1100' - Lead cement with 70 sks. Halliburton Light Premium + 2% Calcium Chloride + 5 lb/sk Kol-Seal + .125 lb/sk Poly-E-Flake (wt. 12.5 ppg, yield 1.88) volume: 132 cf., includes 50% excess. Tail with 50 sks. Premium Cement + 1% Calcium Chloride (wt 15.8 ppg, yield 1.16) volume: 58 cf., includes no excess. Centralizers will be run on the bottom 2 joints, then every 10th joint thereafter or +/- 400'.

5) Mud Program:

0' – 120' – Spud mud and water treated with gel lime.

120' – 1100' – Lime mud, water, and polymer.

6) Testing, Logging, and Coring Program:

No drill stem tests, cores, will be taken, a CBL log will be run if cement does not circulate to surface on production casing. The following open hole logs; Gamma Ray/Induction/Density/Neutron will be ran.

7) Expected Pressures –

Fruitland Fm. 200 psi

Bottom Hole 200 psi

No abnormal pressures, temperature or poisonous gas anticipated.


Anticipated Spud Date:

October 1, 2012

Anticipated Completion Date:

November 1, 2012

DRILLING RIG 2000 psi System

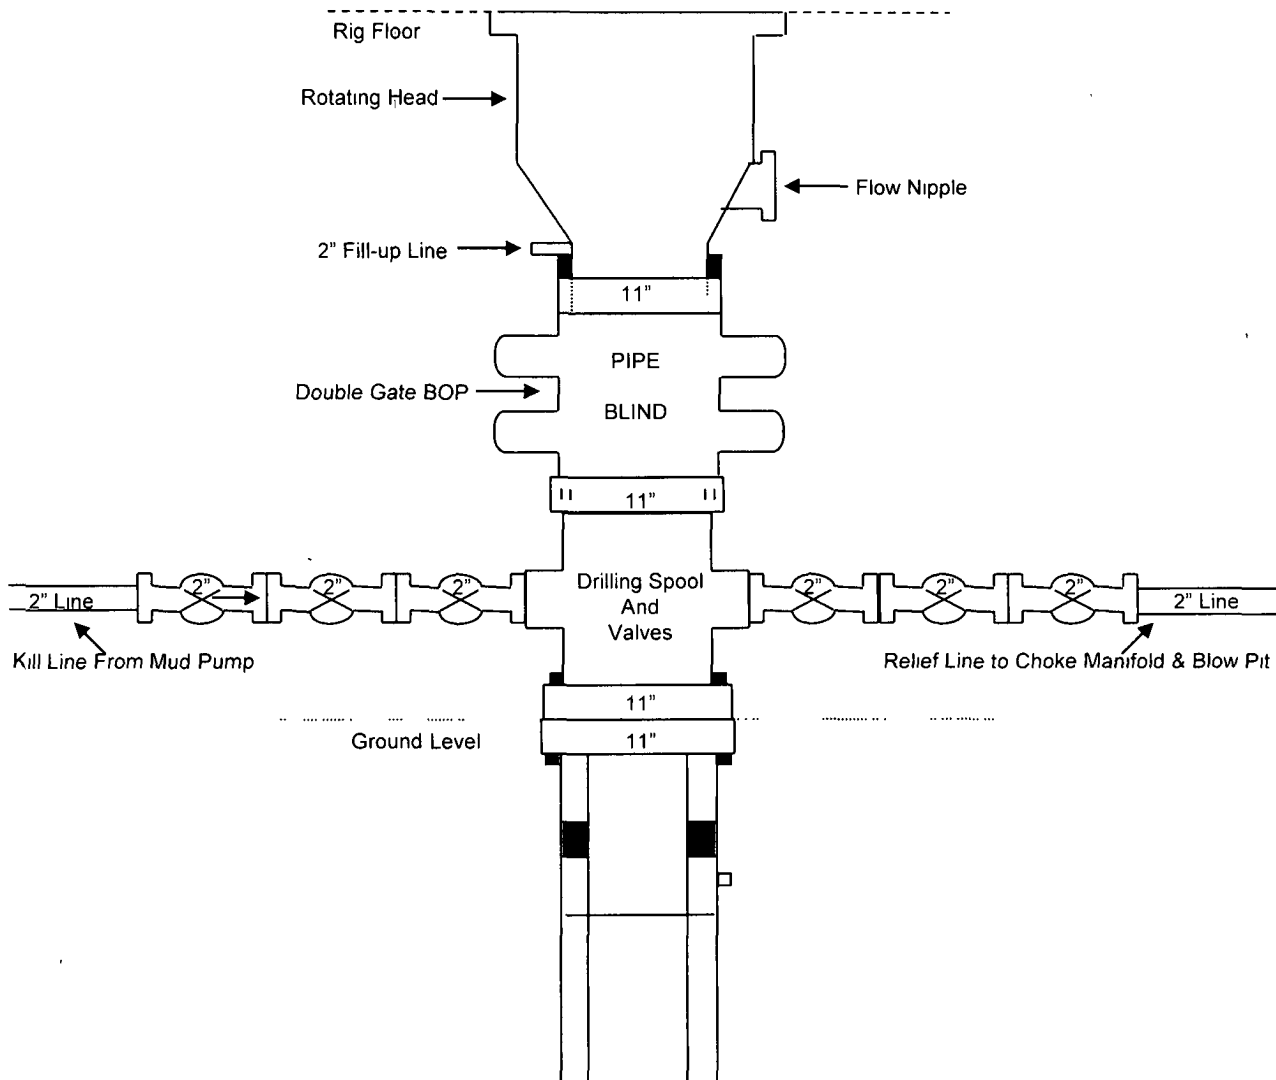


11" Bore (10" Nominal). 2000 psi working pressure minimum double Gate BPO to be equipped with blind and pipe rams. A rotating head On the top of the rams. All BOP equipment is 2000 psi working pressure.

NOTE: A floor safety valve and upper kelly cock with handle will be available.

EXHIBIT F-1

Drilling Rig Choke Manifold Configuration 2000 psi System

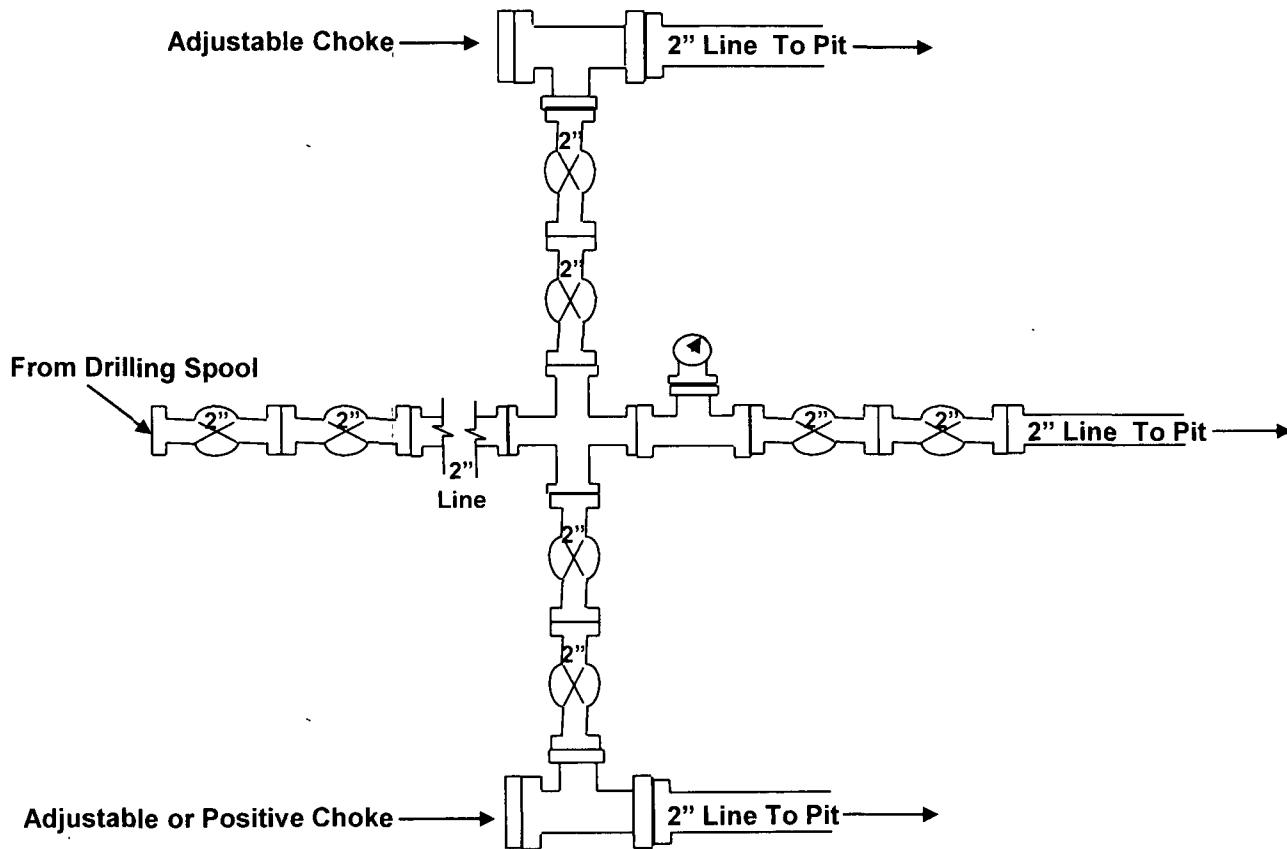

2000 psi working pressure equipment with two chokes.