

RECEIVED

RCVD JUN 27 '12
OIL CONS. DIV.

DIST. 3

Form 3160-3
(August 2007)

MAY 08 2012

FORM APPROVED
OMB No. 1004-0137
Expires July 31, 2010UNITED STATES Farmington Field Office
DEPARTMENT OF THE INTERIOR Bureau of Land Management
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: ☒ DRILL ☐ REENTER		5. Lease Serial No. NMNM 121498	
1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other ☐ Single Zone ☐ Multiple Zone		6. If Indian, Allottee or Tribe Name	
2. Name of Operator ROBERT L BAYLESS, PRODUCER LLC		7. If Unit or CA Agreement, Name and No.	
3a. Address PO BOX 168 FARMINGTON, NM 87499		8. Lease Name and Well No. HORSESHOE GALLUP 18-8H	
3b. Phone No. (include area code) 505 326 2659		9. API Well No. NOT ASSIGNED 30-045-35373	
4. Location of Well (Report location clearly and in accordance with any State requirements*) At surface 2420' FNL & 245' FEL SENE At proposed prod. zone 1720' FNL & 400' FWL SWANW LOT 2		10. Field and Pool, or Exploratory HORSESHOE GALLUP	
14. Distance in miles and direction from nearest town or post office* 4 MILES NE OF WATERFLOW, NM		11. Sec., T. R. M. or Blk. and Survey or Area SEC 18, T30N, R15W	
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 400 FT - LEASE LINE		12. County or Parish SAN JUAN	
16. No. of acres in lease 160		13. State NM	
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 720 FT - HAMILTON 1		17. Spacing Unit dedicated to this well 160	
19. Proposed Depth 8558 FT (MD), 4050 (TVD) **HORIZONTAL WELL**		20. BLM/BIA Bond No. on file 40540023024BCA Nm 10883	
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 5396 FT G.L. This action is subject to technical and procedural review pursuant to 43 CFR 3165.3 and appeal pursuant to 43 CFR 3165.4		22. Approximate date work will start* 07/01/2012	
23. Estimated duration 30 DAYS		24. Attachments DRILLING OPERATIONS AUTHORIZED ARE SUBJECT TO COMPLIANCE WITH ATTACHED "GENERAL REQUIREMENTS".	

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

1. Well plat certified by a registered surveyor.	4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
2. A Drilling Plan.	5. Operator certification
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).	6. Such other site specific information and/or plans as may be required by the BLM.

25. Signature 	Name (Printed/Typed) JOHN D THOMAS	Date 05/08/2012
Title OPERATIONS ENGINEER		
Approved by (Signature) 	Name (Printed/Typed) D. Manikiewicz	Date 6/21/12
Title AFM		
Office FFO		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)

A COMPLETE C-144 MUST BE SUBMITTED TO AND APPROVED BY THE NMOCD FOR: A PIT, CLOSED LOOP SYSTEM, BELOW GRADE TANK, OR PROPOSED ALTERNATIVE METHOD, PURSUANT TO NMOCD PART 19.15.17, PRIOR TO THE USE OR CONSTRUCTION OF THE ABOVE APPLICATIONS.

Hold C104
for Directional Survey
and "As Drilled" plat

BLM'S APPROVAL OR ACCEPTANCE OF THIS ACTION DOES NOT RELIEVE THE LESSEE AND OPERATOR FROM OBTAINING ANY OTHER AUTHORIZATION REQUIRED FOR OPERATIONS ON FEDERAL AND INDIAN LANDS

NOTIFY AZTEC OCD 24 HRS.
PRIOR TO CASING & CEMENT

JUL 11 2012 ca

NMOCD
FSM

RECEIVED

MAY 08 2012

District I

1529 N. French Dr., Hobbs, NM 88240
Phone: (505) 396-0000 Fax: (505) 396-0029

District II

811 S. First St., Artesia, NM 88210
Phone: (505) 748-1200 Fax: (505) 748-0770

District III

1430 E. 16th Ave., Aztec, NM 87410
Phone: (505) 341-6078 Fax: (505) 341-6070

District IV

1720 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 426-5100 Fax: (505) 426-5107

State of New Mexico Farmington Field Office Form C-102
Energy, Minerals & Natural Resources Department Bureau of Land Management (Revised August 1, 2011)
OIL CONSERVATION DIVISION Submit one copy to appropriate District Office
1220 South St. Francis Dr.
Santa Fe, NM 87505

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

1. Well Number 30-045-35373	2. Pool Code 32870	3. Pool Name HORSESHOE GALLUP
4. Property Code 381093	5. Property Name HORSESHOE GALLUP 18	6. Well Number 8H
7. OGRD No. 150182	8. Operator Name ROBERT L. BAYLESS, PRODUCER LLC	9. Elevation 5396

10 Surface Location

11. Well No.	Section	Township	Range	Lot No.	Feet from the	North-South Line	Feet from the	East-West Line	County
H	18	30 N	15 W		2420	North	245	East	San Juan

11 Bottom Hole Location If Different From Surface

12. Well No.	Section	Township	Range	Lot No.	Feet from the	North-South Line	Feet from the	East-West Line	County
AE	18	30 N	15 W	2	1720	North	400	West	San Juan

13. Dedicated Acres 160 5 1/2 N 1/2	14. Type of Well	15. Consolidation Code	16. Order No.
---	------------------	------------------------	---------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

17. OPERATOR CERTIFICATION I certify that the information contained herein is true and accurate to the best of my knowledge and belief, and that this organization either owns a working interest or undivided mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such mineral or working interest, or in a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. John D Thomas 5/8/12 Signature Date John D Thomas Printed Name jthomas@rlbayless.com Email Address		18. SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Date of Survey Signature of Surveyor Professional Seal Certificate Number	



Robert L Bayless, Producer LLC
Drilling Plan
Horseshoe Gallup
2420' FNL & 245' FEL Sec 18 T30N R15W
San Juan County, NM

Rig Telephone #:
Rig FAX #:

505-320-5234
505-326-6911

GL =

5396 ft

Horseshoe Gallup 18-8H - DRILLING PROGRAM

1 Location :

Surface location: 2420' FNL & 245' FEL Sec 18 T30N R15W
Bottom Hole Location: 1720' FSL & 400' FWL Sec 18 T30N R15W

2 Estimate Formation Tops

	Depth (ft)
Surface - Pictured Cliffs	0
Cliff House	1520
Menefee	1590
Point Lookout	2520
Mancos	3740
Gallup	4057

3 Notable Anticipated Fresh Water, Oil and Gas Formations

The Gallup is a potential oil and gas zones. Water zones will be protected by setting 9 5/8" casing to 300' and circulating cement back to the surface. All zones containing commercial quantities of oil or gas will have cement circulated across them by cementing the 7" Intermediate casings; The 7" casing cement volumes will be pumped to provide cement back to the 9 5/8".

4 Casing Program (New Casing)

Hole Size	Interval	OD Casing	Weight	Grade	Connection	Section
12 1/4"	0-300	9 5/8"	36 #	J-55	LTC	Surface
8 3/4"	300-4335	7"	23 #	J-55	LTC	Intermediate
6 1/8"	3788-8557	4 1/2"	11.6#	N-80	LTC	Production

5 Cement Program

Surface CSG:

Surface casing will be cemented to surface w/ 75% excess.
157 sacks. Premium Cement + 2% Calcium Chloride + 0.125 lbm/sk Poly-E-Flake.
Mixed at 15.8 ppg, 1.17 cu ft/sx, 5.0 Gal/sk of water.
Two centralizers will be installed on the float joint and one every second joint thereafter.

7" Intermediate CSG:

Cement will be from 4390' to Surface with 75% excess.
Lead cement: 515 sacks Premium Plus Type III + 3% Econolite + .125 lb/sx Gilsonite
Mixed at 12.3 ppg, 1.93 cu ft/sx, 9.25 Gal/sk of water.
Tail cement: 150 sx 50/50 poz standard + 5 lb/sx Gilsonite



Robert L Bayless, Producer LLC
Drilling Plan
Horseshoe Gallup
2420' FNL & 245' FEL Sec 18 T30N R15W
San Juan County, NM

Rig Telephone #:
Rig FAX #:

505-320-5234
505-326-6911

GL =

5396 ft

Mixed at 13.5 ppg, 1.30 cu ft/sx, 5.15 Gal/sk of water.

Two centralizers will be installed on the float joint and one every second joint through all prospective pays.

4 1/2" Production C Will not be cemented.

Zones will be isolated with open hole packers.

For completion 4 1/2" Casing will be run from surface

After completion casing will be cut and removed from surface to 3802'

6 Pressure Control & Wellhead Equipment

The maximum expected bottom hole pressure will be +/- 900 psi.

The drilling contractor has not yet been found, thus the exact BOP model to be used is not yet known. A typical 3,000 psi model will be expected with double ram-type (3,000 psi WP) preventer and a rotating head as seen on Appendix A. This unit will be hydraulically operated and tested by a third party.

The BOPs will be equipped with the rotating head on top. The double rams will be below the rotating head with the 4-1/2" drill pipe rams on top and blind rams on the bottom.

The BOPE will be nipped up on the 9 5/8" surface casing and tested to 1,000 psi by a third party.

BOPs will be operationally checked each 24 hour period. Pressure tests will be conducted before drilling out from under all casing strings which are set and cemented, anytime a seal is broken.

Additional safety equipment will include a safety valve and sub with a full opening valve to fit the drill pipe and collars. The choke lines and a choke manifold will have at least a 3,000 psi WP rating.

7 Types and Characteristics of the Proposed Mud System

The surface hole will be drilled with a fresh water mud.

The intermediate hole will be drilled on KCL gel/polymer mud.

The production hole will be drilled with KCL gel/polymer mud.

DEPTH	TYPE	WEIGHT	VISCOSITY	WATER LOSS
0-300'	Gel	8.4-8.6	60-75	NC
300'-TD'	XANTHAM POLYMER	8.6-8.8	30-40	10-12

Sufficient mud materials will be kept at the well site to maintain mud properties and meet minimum lost circulation and weight increase requirements at all times.

8 Auxillary Well Control and Monitoring Equipment

A. Upper Kelly cock will be kept in the drill string at all times.



Robert L Bayless, Producer LLC
Drilling Plan
Hoseshoe Gallup
2420' FNL & 245' FEL Sec 18 T30N R15W
San Juan County, NM

Rig Telephone #:
Rig FAX #:

505-320-5234
505-326-6911

GL =

5396 ft

- B. A full opening drill pipe-stabbing valve with proper drill pipe connections will be on the rig floor at all times.

9 Logging, Testing and Coring Program

- A. The electric logging program will consist of a Cased Hole Gamma Ray & Induction log from Intermediate shoe (4335') to the surface casing shoe.
- B. Gamma ray only will be run from KOP (3788') to TD.
- C. Mud logger will be present from 3500' to TD.
- D. No conventional coring is anticipated.

10 Abnormal conditions, Pressure, Temperatures and Potential Hazards

No abnormal pressures or temperatures or hydrogen sulfide are anticipated.
Lost returns have been experienced in offset wells.
Maximum bottom hole pressure will be +/- 900 psi.

11 Anticipated Starting Date and Duration of Operations

Anticipated start date is July 1, 2012.
Road and location work will not begin until approval has been received from the Surface Owner (BLM).
Once commenced, drilling operations should be finished in approximately 30 days and about 2 weeks to complete the well.


12 Safety

Conduct Tour Safety Meetings with all crews and record topics of these meetings on the IADC and morning reports. Document all personnel in attendance and topics of these Safety Meetings. Keep these documents on file in company representative's office for inspection.

WELL		Horseshoe Gallup 18-8H		Robert L Bayless, Producer LLC	
TYPE	DIRECTIONAL	RIG	D&J #2	DATE	5/7/2012
FIELD	Horseshoe	COUNTY	San Juan, New Mexico	ELEVATION	5,395' est
FASOL	OIL	WJD	Water/Gel KCL	CEMENT	TSD from Caliper Log
LOCATION	2420' FNL & 245' FEL of SEC 18 T30N R15W			BH/HHP	120 F/800 psi
CONVENTS OBJECTIVE FORMATION: Gallup					
NOTE					

HOLE SECTIONS	SURVEYS	WORKPH BT	FORMATION TOPS HOLE SIZES	DEPTH TVD	MUD WEIGHT	OPEN HOLE LOGS	CEMENT	REMARKS
Surface Section								
Picture Cliffs								
12-1/4" HOLE >				300'				SPUD MUD High visc.
8-5/8" 385 J55 STC @ 388'								
Intermediate Section								
8-3/4" HOLE >								
Cliff House >				1520'				
Monafee >				1590'				
Point Lookout >				2520'				
KOP #1 Start Well >				3462'				
Mancoos >				3740'				
Gallup >								
KOP of 3835'								
7" 238 J-55 LT&C 4335' to Surface								
AZMUTH = 270 Deg								
20 DEG INCLINATION @ LANDING								
240' Vertical Section								
Tocito Sand >								
TD >				4338'				
Window 3748-3882'				4073'				
Casing cut @ 3807' with 5' open hole section								
Lateral 8 6-8 8 PPG 3% KCL Xanthan Polymer 30-40 Visc.								
OPEN HOLE LOGS: SH/LUMBERGER								
GR / INDUCTION LOG								

SAFE #	REGULATORY	NA	OFFICE
EV #	ENGINEER	John D Thomas	(505)-320-5234
API #	GEOLOGIST	George Coryell	(303)-382-0908
API # Not Assigned			



Robert L. Bayless, Producer LLC.

Horseshoe Gallup 18-8H
Pilot
Sec 18 T30N R15W
San Juan Co., NM



Ground Level: 5396.0
 KB: 15'



A Schlumberger Company

WELLBORE TARGET DETAILS (MAP CO-ORDINATES)

Name	TVD	+N/-S	+E/-W	Northing	Easting	Shape
BHL - Pilot	4300.0	182.0	-155.1	2116634.05	2542338.24	Point

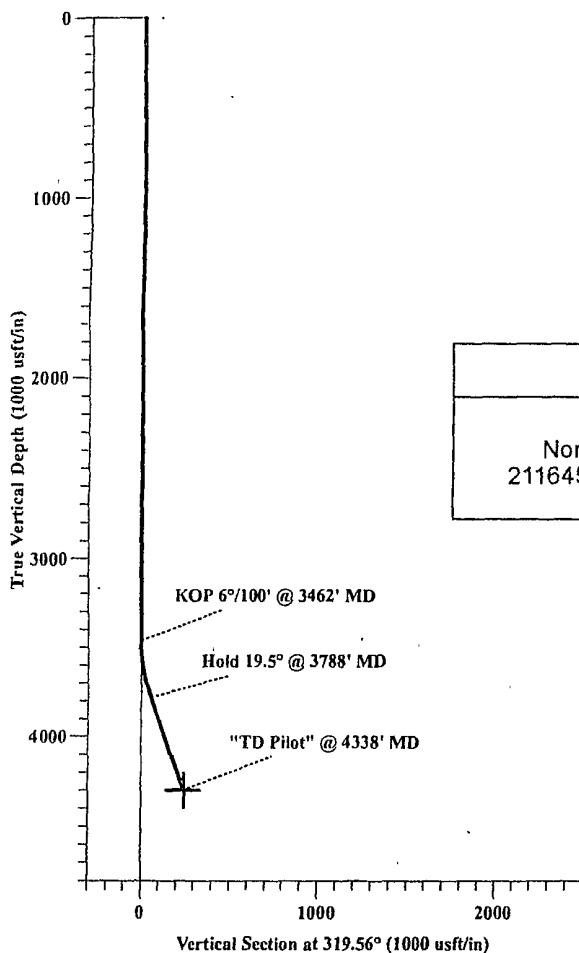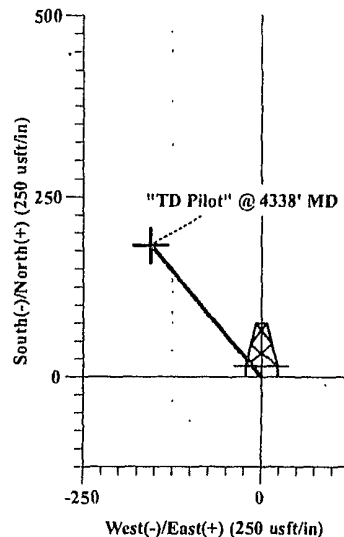

WELL DETAILS: Horseshoe Gallup 18-8H

Ground Level: 5396.0			
Northing	Easting	Latitude	Longitude
2116451.02	2542492.21	36° 48' 52.884 N	108° 27' 1.116 W

SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
3462.1	0.00	0.00	3462.1	0.0	0.0	0.00	0.00	0.0	
3788.0	19.56	319.56	3781.7	41.9	-35.7	6.00	319.56	55.1	
4338.0	19.56	319.56	4300.0	182.0	-155.1	0.00	0.00	239.2	BHL - Pilot

Plan: Design #2 (Horseshoe Gallup 18-8H/Pilot)

Created By: Breck Enoch

Date: 16-Apr-2012



Pathfinder Planning Report

PATHFINDER
A Schlumberger Company

Database: EDM 5000.1 Single User Db
Company: Robert L. Bayless, Producer LLC
Project: San Juan Co., NM
Site: Sec 18 T30N R15W
Well: Horseshoe Gallup 18-8H
Wellbore: Pilot
Design: Design #2

Local Co-ordinate Reference: Well Horseshoe Gallup 18-8H
TVD Reference: WELL @ 5411.0usft (Original Well Elev)
MD Reference: WELL @ 5411.0usft (Original Well Elev)
North Reference: True
Survey Calculation Method: Minimum Curvature

Project	San Juan Co., NM		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Western Zone		

Site	Sec 18 T30N R15W		
Site Position:		Northing:	2,113,810.65 usft
From:	Lat/Long	Easting:	2,542,615.69 usft
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "
		Latitude:	36° 48' 26.784 N
		Longitude:	108° 26' 59.388 W
		Grid Convergence:	-0.37 °

Well	Horseshoe Gallup 18-8H		
Well Position	+N/-S	2,639.5 usft	Northing:
	+E/-W	-140.5 usft	Easting:
Position Uncertainty	0.0 usft	Wellhead Elevation:	Ground Level:
			5,396.0 usft
			Latitude:
			36° 48' 52.884 N
			Longitude:
			108° 27' 1.116 W

Wellbore	Pilot		
Magnetics	Model Name	Sample Date	Declination
			(°)
	IGRF2010	04/16/12	10.09
			Dip Angle
			(°)
			63.37
			Field Strength
			(nT)
			50,608

Design	Design #2		
Audit Notes:			
Version:	Phase:	PROTOTYPE	Tie On Depth:
			0.0
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W
	(usft)	(usft)	(usft)
	0.0	0.0	0.0
			Direction
			(°)
			319.56

Plan Sections										
Measured	Inclination	Azimuth	Vertical	+N/-S	+E/-W	Dogleg	Build	Turn	TFO	Target
Depth	(°)	(°)	Depth	(usft)	(usft)	Rate	Rate	Rate	(°)	
(usft)			(usft)			(°/100usft)	(°/100usft)	(°/100usft)		
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
3,462.1	0.00	0.00	3,462.1	0.0	0.0	0.00	0.00	0.00	0.00	
3,788.0	19.56	319.56	3,781.7	41.9	-35.7	6.00	6.00	0.00	319.56	
4,338.0	19.56	319.56	4,300.0	182.0	-155.1	0.00	0.00	0.00	0.00	BHL - Pilot



Pathfinder Planning Report

PATHFINDER
A Schlumberger Company

Database: EDM 5000.1 Single User Db
Company: Robert L. Bayless, Producer LLC.
Project: San Juan Co., NM
Site: Sec 18 T30N R15W
Well: Horseshoe Gallup 18-8H
Wellbore: Pilot
Design: Design #2

Local Co-ordinate Reference: Well Horseshoe Gallup 18-8H
TVD Reference: WELL @ 5411.0usft (Original Well Elev)
MD Reference: WELL @ 5411.0usft (Original Well Elev)
North Reference: True
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
1,600.0	0.00	0.00	1,600.0	0.0	0.0	0.0	0.00	0.00	0.00
1,700.0	0.00	0.00	1,700.0	0.0	0.0	0.0	0.00	0.00	0.00
1,800.0	0.00	0.00	1,800.0	0.0	0.0	0.0	0.00	0.00	0.00
1,900.0	0.00	0.00	1,900.0	0.0	0.0	0.0	0.00	0.00	0.00
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.0	0.00	0.00	0.00
2,100.0	0.00	0.00	2,100.0	0.0	0.0	0.0	0.00	0.00	0.00
2,200.0	0.00	0.00	2,200.0	0.0	0.0	0.0	0.00	0.00	0.00
2,300.0	0.00	0.00	2,300.0	0.0	0.0	0.0	0.00	0.00	0.00
2,400.0	0.00	0.00	2,400.0	0.0	0.0	0.0	0.00	0.00	0.00
2,500.0	0.00	0.00	2,500.0	0.0	0.0	0.0	0.00	0.00	0.00
2,600.0	0.00	0.00	2,600.0	0.0	0.0	0.0	0.00	0.00	0.00
2,700.0	0.00	0.00	2,700.0	0.0	0.0	0.0	0.00	0.00	0.00
2,800.0	0.00	0.00	2,800.0	0.0	0.0	0.0	0.00	0.00	0.00
2,900.0	0.00	0.00	2,900.0	0.0	0.0	0.0	0.00	0.00	0.00
3,000.0	0.00	0.00	3,000.0	0.0	0.0	0.0	0.00	0.00	0.00
3,100.0	0.00	0.00	3,100.0	0.0	0.0	0.0	0.00	0.00	0.00
3,200.0	0.00	0.00	3,200.0	0.0	0.0	0.0	0.00	0.00	0.00
3,300.0	0.00	0.00	3,300.0	0.0	0.0	0.0	0.00	0.00	0.00
3,400.0	0.00	0.00	3,400.0	0.0	0.0	0.0	0.00	0.00	0.00
3,462.1	0.00	0.00	3,462.1	0.0	0.0	0.0	0.00	0.00	0.00
KOP 6°/100' @ 3462' MD									
3,500.0	2.27	319.56	3,500.0	0.6	-0.5	0.8	6.00	6.00	0.00
3,550.0	5.27	319.56	3,549.9	3.1	-2.6	4.0	6.00	6.00	0.00
3,600.0	8.27	319.56	3,599.5	7.6	-6.4	9.9	6.00	6.00	0.00
3,650.0	11.27	319.56	3,648.8	14.0	-12.0	18.4	6.00	6.00	0.00
3,700.0	14.27	319.56	3,697.5	22.4	-19.1	29.5	6.00	6.00	0.00
3,750.0	17.27	319.56	3,745.7	32.8	-27.9	43.1	6.00	6.00	0.00
3,788.0	19.56	319.56	3,781.7	41.9	-35.7	55.1	6.00	6.00	0.00
Hold 19.5° @ 3788' MD									
3,800.0	19.56	319.56	3,793.0	45.0	-38.3	59.1	0.00	0.00	0.00
3,900.0	19.56	319.56	3,887.2	70.5	-60.0	92.6	0.00	0.00	0.00
4,000.0	19.56	319.56	3,981.5	95.9	-81.8	126.0	0.00	0.00	0.00
4,100.0	19.56	319.56	4,075.7	121.4	-103.5	159.5	0.00	0.00	0.00
4,200.0	19.56	319.56	4,169.9	146.9	-125.2	193.0	0.00	0.00	0.00
4,300.0	19.56	319.56	4,264.2	172.4	-146.9	226.5	0.00	0.00	0.00
4,338.0	19.56	319.56	4,300.0	182.0	-155.1	239.2	0.00	0.00	0.00
"TD Pilot" @ 4338' MD									



Pathfinder
Planning Report



Database: EDM 5000 1 Single User Db
Company: Robert L. Bayless, Producer LLC.
Project: San Juan Co., NM
Site: Sec 18 T30N R15W
Well: Horseshoe Gallup 18-8H
Wellbore: Pilot
Design: Design #2

Local Co-ordinate Reference: Well Horseshoe Gallup 18-8H
TVD Reference: WELL @ 5411.0usft (Original Well Elev)
MD Reference: WELL @ 5411.0usft (Original Well Elev)
North Reference: True
Survey Calculation Method: Minimum Curvature


Design Targets

Target Name

- hit/miss target	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- Shape									
BHL - Pilot	0.00	0.00	4,300.0	182.0	-155.1	2,116,634.05	2,542,338.24	36° 48' 54.684 N	108° 27' 3.024 W
- plan hits target center									
- Point									

Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
3,462.1	3,462.1	0.0	0.0	KOP 6°/100' @ 3462' MD
3,788.0	3,781.7	41.9	-35.7	Hold 19.5° @ 3788' MD
4,338.0	4,300.0	182.0	-155.1	"TD Pilot" @ 4338' MD



Robert L. Bayless, Producer LLC.

**Horseshoe Gallup 18-8H
ST01
Sec 18 T30N R15W
San Juan Co., NM**


PATHFINDER

A Schlumberger Company

Ground Level: 5396.0
KB: 15'


WELLBORE TARGET DETAILS (MAP CO-ORDINATES)

Name	TVD	+N/-S	+E/-W	Northing	Easting	Shape
BHL - ST01	4050.0	710.3	-4616.2	2117191.11	2537880.71	Point
Land - ST01	4050.0	199.4	-373.1	2116652.83	2542120.40	Point

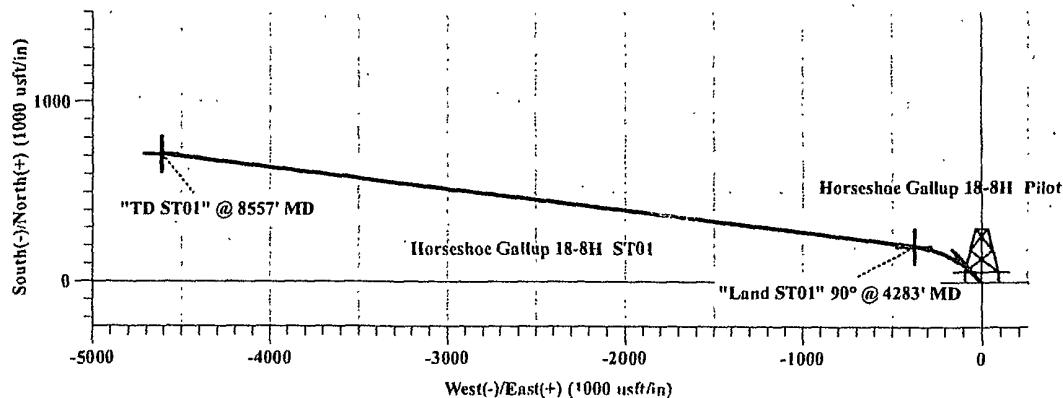

WELL DETAILS: Horseshoe Gallup 18-8H

Ground Level: 5396.0			
Northing	Easting	Latitude	Longitude
2116451.02	2542492.21	36° 48' 52.884 N	108° 27' 1.116 W

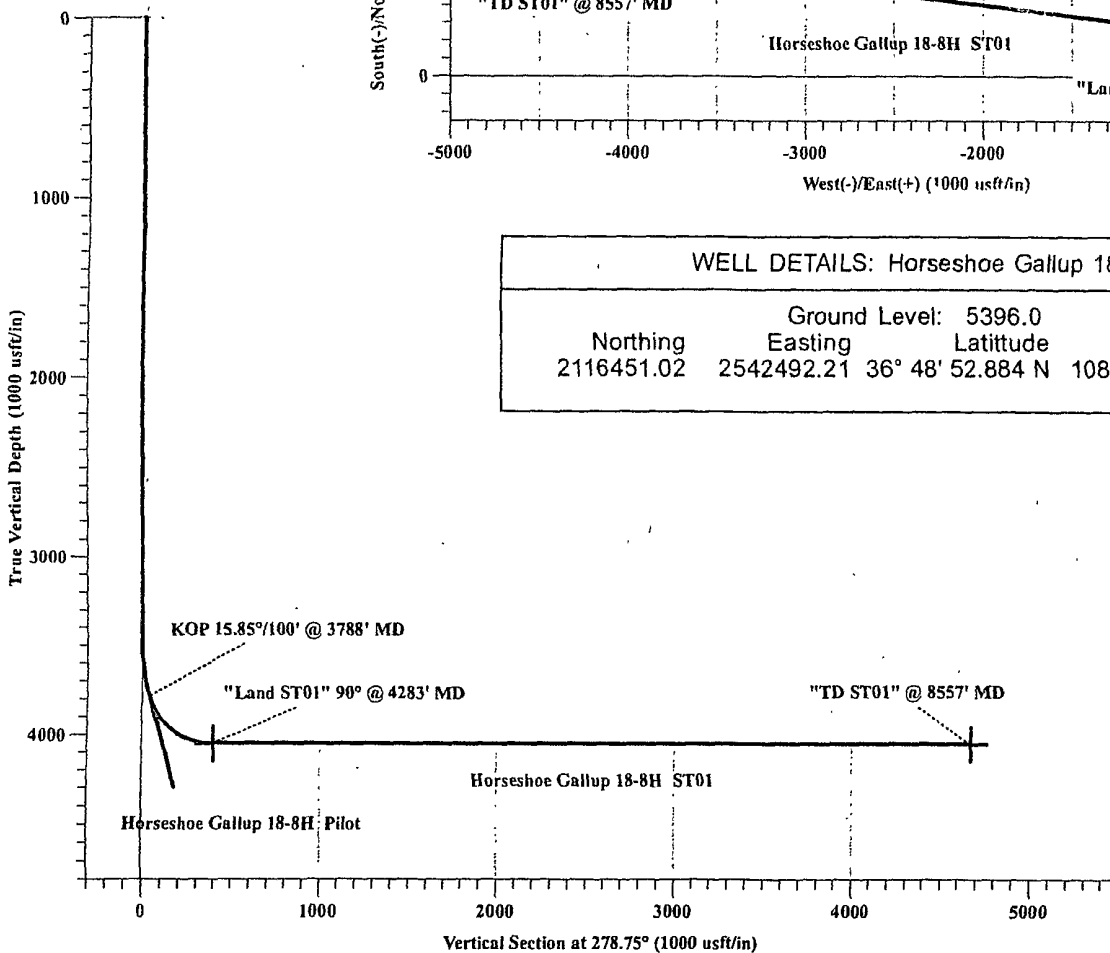

SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect	Target
3788.0	19.55	319.56	3781.7	41.9	-35.7	0.00	0.00	41.7	
4283.8	90.00	276.87	4050.0	199.4	-373.1	15.85	-26.34	399.1	
8557.6	90.00	276.87	4050.0	710.3	-4616.2	0.00	0.00	4670.5	BHL - ST01

Plan: Design #2 (Horseshoe Gallup 18-8H/ST01)

Created By: Breck Enoch

Date: 16-Apr-2012



Pathfinder

Planning Report

PATHFINDER
A Schlumberger Company

Database: EDM 5000.1 Single User Db
Company: Robert L. Bayless, Producer LLC.
Project: San Juan Co., NM
Site: Sec 18 T30N R15W
Well: Horseshoe Gallup 18-8H
Wellbore: ST01
Design: Design #2

Local Co-ordinate Reference: Well Horseshoe Gallup 18-8H
TVD Reference: WELL @ 5411.0usft (Original Well Elev)
MD Reference: WELL @ 5411.0usft (Original Well Elev)
North Reference: True
Survey Calculation Method: Minimum Curvature

Project	San Juan Co., NM		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Western Zone		

Site	Sec 18 T30N R15W		
Site Position:		Northing:	2,113,810.65 usft
From:	Lat/Long	Easting:	2,542,615.69 usft
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "
		Latitude:	36° 48' 26.784 N
		Longitude:	108° 26' 59.388 W
		Grid Convergence:	-0.37 °

Well	Horseshoe Gallup 18-8H		
Well Position	+N/-S	2,639.5 usft	Northing: 2,116,451.02 usft
	+E/-W	-140.5 usft	Easting: 2,542,492.21 usft
Position Uncertainty	0 0 usft	Wellhead Elevation:	Latitude: 36° 48' 52.884 N
			Longitude: 108° 27' 1.116 W
			Ground Level: 5,396.0 usft

Wellbore	ST01				
Magnetics	Model Name	Sample Date	Declination	Dip Angle	Field Strength
	IGRF2010	04/16/12	(°)	(°)	(nT)
			10.09	63.37	50,608

Design	Design #2				
Audit Notes:					
Version:	Phase:	PROTOTYPE		Tie On Depth:	3,788.0
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W	Direction	
	(usft)	(usft)	(usft)	(°)	
	0.0	0.0	0.0	278.75	

Plan Sections										
Measured	Inclination	Azimuth	Vertical	+N/-S	+E/-W	Dogleg	Build	Turn	TFO	Target
Depth	(°)	(°)	Depth	(usft)	(usft)	Rate	Rate	Rate	(°)	
(usft)			(usft)			(°/100usft)	(°/100usft)	(°/100usft)		
3,788.0	19.55	319.56	3,781.7	41.9	-35.7	0.00	0.00	0.00	0.00	
4,283.8	90.00	276.87	4,050.0	199.4	-373.1	15.85	14.21	-8.61	-26.34	
8,557.6	90.00	276.87	4,050.0	710.3	-4,616.2	0.00	0.00	0.00	0.00	BHL - ST01



Pathfinder Planning Report

PATHFINDER
A Schlumberger Company

Database: EDM 5000.1 Single User Db
Company: Robert L. Bayless, Producer LLC.
Project: San Juan Co., NM
Site: Sec 18 T30N R15W
Well: Horseshoe Gallup 18-8H
Wellbore: ST01
Design: Design #2

Local Co-ordinate Reference: Well Horseshoe Gallup 18-8H
TVD Reference: WELL @ 5411.0usft (Original Well Elev)
MD Reference: WELL @ 5411.0usft (Original Well Elev)
North Reference: True
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
1,600.0	0.00	0.00	1,600.0	0.0	0.0	0.0	0.00	0.00	0.00
1,700.0	0.00	0.00	1,700.0	0.0	0.0	0.0	0.00	0.00	0.00
1,800.0	0.00	0.00	1,800.0	0.0	0.0	0.0	0.00	0.00	0.00
1,900.0	0.00	0.00	1,900.0	0.0	0.0	0.0	0.00	0.00	0.00
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.0	0.00	0.00	0.00
2,100.0	0.00	0.00	2,100.0	0.0	0.0	0.0	0.00	0.00	0.00
2,200.0	0.00	0.00	2,200.0	0.0	0.0	0.0	0.00	0.00	0.00
2,300.0	0.00	0.00	2,300.0	0.0	0.0	0.0	0.00	0.00	0.00
2,400.0	0.00	0.00	2,400.0	0.0	0.0	0.0	0.00	0.00	0.00
2,500.0	0.00	0.00	2,500.0	0.0	0.0	0.0	0.00	0.00	0.00
2,600.0	0.00	0.00	2,600.0	0.0	0.0	0.0	0.00	0.00	0.00
2,700.0	0.00	0.00	2,700.0	0.0	0.0	0.0	0.00	0.00	0.00
2,800.0	0.00	0.00	2,800.0	0.0	0.0	0.0	0.00	0.00	0.00
2,900.0	0.00	0.00	2,900.0	0.0	0.0	0.0	0.00	0.00	0.00
3,000.0	0.00	0.00	3,000.0	0.0	0.0	0.0	0.00	0.00	0.00
3,100.0	0.00	0.00	3,100.0	0.0	0.0	0.0	0.00	0.00	0.00
3,200.0	0.00	0.00	3,200.0	0.0	0.0	0.0	0.00	0.00	0.00
3,300.0	0.00	0.00	3,300.0	0.0	0.0	0.0	0.00	0.00	0.00
3,400.0	0.00	0.00	3,400.0	0.0	0.0	0.0	0.00	0.00	0.00
3,462.1	0.00	0.00	3,462.1	0.0	0.0	0.0	0.00	0.00	0.00
3,500.0	2.27	319.56	3,500.0	0.6	-0.5	0.6	6.00	6.00	0.00
3,550.0	5.27	319.56	3,549.9	3.1	-2.6	3.1	6.00	6.00	0.00
3,600.0	8.27	319.56	3,599.5	7.6	-6.4	7.5	6.00	6.00	0.00
3,650.0	11.27	319.56	3,648.8	14.0	-12.0	13.9	6.00	6.00	0.00
3,700.0	14.27	319.56	3,697.5	22.4	-19.1	22.3	6.00	6.00	0.00
3,750.0	17.27	319.56	3,745.7	32.8	-27.9	32.6	6.00	6.00	0.00
3,788.0	19.55	319.56	3,781.7	41.9	-35.7	41.7	6.00	6.00	0.00
KOP 15.85°/100' @ 3788' MD									
3,800.0	21.26	318.53	3,793.0	45.1	-38.5	44.9	14.52	14.21	-8.61
3,825.0	24.81	316.37	3,816.0	52.3	-45.1	52.5	14.60	14.21	-8.61
3,850.0	28.36	314.22	3,838.3	60.2	-53.0	61.5	14.72	14.21	-8.61
3,875.0	31.92	312.07	3,859.9	68.8	-62.1	71.9	14.85	14.21	-8.61
3,900.0	35.47	309.92	3,880.7	77.9	-72.6	83.6	14.99	14.21	-8.61
3,925.0	39.02	307.76	3,900.6	87.4	-84.4	96.7	15.13	14.21	-8.61
3,950.0	42.57	305.61	3,919.5	97.1	-97.5	111.1	15.28	14.21	-8.61
3,975.0	46.12	303.46	3,937.4	107.0	-111.9	126.8	15.43	14.21	-8.61
4,000.0	49.68	301.31	3,954.2	117.0	-127.5	143.8	15.58	14.21	-8.61
4,025.0	53.23	299.15	3,969.8	126.8	-144.4	162.0	15.72	14.21	-8.61



Pathfinder
Planning Report

PATHFINDER
A Schlumberger Company

Database: EDM 5000.1 Single User Db
Company: Robert L. Bayless, Producer LLC.
Project: San Juan Co., NM
Site: Sec 18 T30N R15W
Well: Horseshoe Gallup 18-8H
Wellbore: ST01
Design: Design #2

Local Co-ordinate Reference: Well Horseshoe Gallup 18-8H
TVD Reference: WELL @ 5411.0usft (Original Well Elev)
MD Reference: WELL @ 5411.0usft (Original Well Elev)
North Reference: True
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,050.0	56.78	297.00	3,984.1	136.4	-162.5	181.3	15.86	14.21	-8.61
4,075.0	60.33	294.85	3,997.1	145.8	-181.7	201.7	15.99	14.21	-8.61
4,100.0	63.88	292.69	4,008.8	154.7	-201.9	223.1	16.12	14.21	-8.61
4,125.0	67.44	290.54	4,019.1	163.0	-223.1	245.3	16.23	14.21	-8.61
4,150.0	70.99	288.39	4,028.0	170.8	-245.1	268.2	16.33	14.21	-8.61
4,175.0	74.54	286.24	4,035.4	177.9	-267.9	291.8	16.42	14.21	-8.61
4,200.0	78.09	284.08	4,041.3	184.3	-291.3	316.0	16.49	14.21	-8.61
4,225.0	81.64	281.93	4,045.7	189.8	-315.3	340.5	16.54	14.21	-8.61
4,250.0	85.20	279.78	4,048.6	194.5	-339.7	365.3	16.58	14.21	-8.61
4,275.0	88.75	277.63	4,049.9	198.3	-364.3	390.3	16.61	14.21	-8.61
4,283.8	90.00	276.87	4,050.0	199.4	-373.1	399.1	16.61	14.21	-8.61
"Land ST01" 90° @ 4283' MD									
4,300.0	90.00	276.87	4,050.0	201.3	-389.2	415.3	0.00	0.00	0.00
4,400.0	90.00	276.87	4,050.0	213.3	-488.4	515.2	0.00	0.00	0.00
4,500.0	90.00	276.87	4,050.0	225.2	-587.7	615.1	0.00	0.00	0.00
4,600.0	90.00	276.87	4,050.0	237.2	-687.0	715.1	0.00	0.00	0.00
4,700.0	90.00	276.87	4,050.0	249.1	-786.3	815.0	0.00	0.00	0.00
4,800.0	90.00	276.87	4,050.0	261.1	-885.6	915.0	0.00	0.00	0.00
4,900.0	90.00	276.87	4,050.0	273.1	-984.9	1,014.9	0.00	0.00	0.00
5,000.0	90.00	276.87	4,050.0	285.0	-1,084.1	1,114.9	0.00	0.00	0.00
5,100.0	90.00	276.87	4,050.0	297.0	-1,183.4	1,214.8	0.00	0.00	0.00
5,200.0	90.00	276.87	4,050.0	308.9	-1,282.7	1,314.8	0.00	0.00	0.00
5,300.0	90.00	276.87	4,050.0	320.9	-1,382.0	1,414.7	0.00	0.00	0.00
5,400.0	90.00	276.87	4,050.0	332.8	-1,481.3	1,514.7	0.00	0.00	0.00
5,500.0	90.00	276.87	4,050.0	344.8	-1,580.6	1,614.6	0.00	0.00	0.00
5,600.0	90.00	276.87	4,050.0	356.7	-1,679.8	1,714.6	0.00	0.00	0.00
5,700.0	90.00	276.87	4,050.0	368.7	-1,779.1	1,814.5	0.00	0.00	0.00
5,800.0	90.00	276.87	4,050.0	380.6	-1,878.4	1,914.4	0.00	0.00	0.00
5,900.0	90.00	276.87	4,050.0	392.6	-1,977.7	2,014.4	0.00	0.00	0.00
6,000.0	90.00	276.87	4,050.0	404.6	-2,077.0	2,114.3	0.00	0.00	0.00
6,100.0	90.00	276.87	4,050.0	416.5	-2,176.3	2,214.3	0.00	0.00	0.00
6,200.0	90.00	276.87	4,050.0	428.5	-2,275.5	2,314.2	0.00	0.00	0.00
6,300.0	90.00	276.87	4,050.0	440.4	-2,374.8	2,414.2	0.00	0.00	0.00
6,400.0	90.00	276.87	4,050.0	452.4	-2,474.1	2,514.1	0.00	0.00	0.00
6,500.0	90.00	276.87	4,050.0	464.3	-2,573.4	2,614.1	0.00	0.00	0.00
6,600.0	90.00	276.87	4,050.0	476.3	-2,672.7	2,714.0	0.00	0.00	0.00
6,700.0	90.00	276.87	4,050.0	488.2	-2,771.9	2,814.0	0.00	0.00	0.00
6,800.0	90.00	276.87	4,050.0	500.2	-2,871.2	2,913.9	0.00	0.00	0.00
6,900.0	90.00	276.87	4,050.0	512.2	-2,970.5	3,013.9	0.00	0.00	0.00
7,000.0	90.00	276.87	4,050.0	524.1	-3,069.8	3,113.8	0.00	0.00	0.00
7,100.0	90.00	276.87	4,050.0	536.1	-3,169.1	3,213.7	0.00	0.00	0.00
7,200.0	90.00	276.87	4,050.0	548.0	-3,268.4	3,313.7	0.00	0.00	0.00
7,300.0	90.00	276.87	4,050.0	560.0	-3,367.6	3,413.6	0.00	0.00	0.00
7,400.0	90.00	276.87	4,050.0	571.9	-3,466.9	3,513.6	0.00	0.00	0.00
7,500.0	90.00	276.87	4,050.0	583.9	-3,566.2	3,613.5	0.00	0.00	0.00
7,600.0	90.00	276.87	4,050.0	595.8	-3,665.5	3,713.5	0.00	0.00	0.00
7,700.0	90.00	276.87	4,050.0	607.8	-3,764.8	3,813.4	0.00	0.00	0.00
7,800.0	90.00	276.87	4,050.0	619.8	-3,864.1	3,913.4	0.00	0.00	0.00
7,900.0	90.00	276.87	4,050.0	631.7	-3,963.3	4,013.3	0.00	0.00	0.00
8,000.0	90.00	276.87	4,050.0	643.7	-4,062.6	4,113.3	0.00	0.00	0.00
8,100.0	90.00	276.87	4,050.0	655.6	-4,161.9	4,213.2	0.00	0.00	0.00
8,200.0	90.00	276.87	4,050.0	667.6	-4,261.2	4,313.1	0.00	0.00	0.00
8,300.0	90.00	276.87	4,050.0	679.5	-4,360.5	4,413.1	0.00	0.00	0.00



Pathfinder
Planning Report



Database: EDM 5000.1 Single User Db
Company: Robert L. Bayless, Producer LLC.
Project: San Juan Co., NM
Site: Sec 18 T30N R15W
Well: Horseshoe Gallup 18-8H
Wellbore: ST01
Design: Design #2

Local Co-ordinate Reference: Well Horseshoe Gallup 18-8H
TVD Reference: WELL @ 5411 0usft (Original Well Elev)
MD Reference: WELL @ 5411 0usft (Original Well Elev)
North Reference: True
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,400.0	90.00	276.87	4,050.0	691.5	-4,459.8	4,513.0	0.00	0.00	0.00
8,500.0	90.00	276.87	4,050.0	703.4	-4,559.0	4,613.0	0.00	0.00	0.00
8,557.6	90.00	276.87	4,050.0	710.3	-4,616.2	4,670.5	0.00	0.00	0.00

"TD ST01" @ 8557' MD

Design Targets

Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
Land - ST01 - plan hits target center - Point	0.00	0.00	4,050.0	199.4	-373.1	2,116,652.82	2,542,120.40	36° 48' 54.856 N	108° 27' 5.704 W
BHL - ST01 - plan hits target center - Point	0.00	0.00	4,050.0	710.3	-4,616.2	2,117,191.11	2,537,880.71	36° 48' 59.904 N	108° 27' 57.888 W

Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
3,788.0	3,781.7	41.9	-35.7	KOP 15 85°/100' @ 3788' MD
4,283.8	4,050.0	199.4	-373.1	"Land ST01" 90° @ 4283' MD
8,557.6	4,050.0	710.3	-4,616.2	"TD ST01" @ 8557' MD



BOP DIAGRAM
Horseshoe Gallup 18-8H
San Juan, New Mexico

