

RECEIVED

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SEP 20 2012

FORM APPROVED
OMB No 1004-0137
Expires: July 31, 2010

5. Lease Serial No
NO-G-0905-1759/NO-G-0902-1754

6. If Indian, Allottee or Tribe Name
Navajo Allottee
Allotment No. 258806 and 258808

SUNDRIY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE – Other instructions on page 2.

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator
Encana Oil & Gas (USA) Inc.

3a. Address
370 17th Street, Suite 1700
Denver, CO 80202

3b. Phone No. (include area code)
720-876-3437

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SHL: 675' FSL and 330' FEL Section 34, T24N, R10W
BHL: 675' FSL and 330' FWL Section 34, T24N, R10W

7. If Unit of CA/Agreement, Name and/or No
Pending

8. Well Name and No
Good Times P34-2410 01H-CONS. DIV.

9. API Well No.
30-045-35367

10. Field and Pool or Exploratory Area
South Bisti-Gallup (5860)

11. Country or Parish, State
San Juan County, New Mexico

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input checked="" type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation. Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

Encana Oil & Gas (USA) Inc. (Encana) would like to adjust the surface hole location, bottom hole location, BOP, casing and cementing program and mud program for the Good Times P34-2410 01H oil well.

The new surface hole location will be 675' FSL, 330' FEL Section 34, T24N, R10W in order to accommodate drilling two wells on this pad. There will be no additional surface disturbance. The new bottom hole location will be 675' FSL, 330' FWL Section 34, T24N, R10W.

Encana's casing program will contain the following changes: Surface casing: from 13 3/8" to 9 5/8". Intermediate casing: from 9 5/8" to 7", will be set at 4980' MD (72deg in curve). Production string: from 5 1/2" to 4 1/2" to be set from 4780' to 9166' MD at the well's TD. Encana will use a gelled freshwater mud system in the surface and intermediate sections and an oil-based mud system from 4980' MD/4800' TVD (intermediate casing point) to the TD of the horizontal lateral.

Hold C104

Please see attached 10 point drilling plan for cement changes.

for Directional Survey
and "As Drilled" plat

CONDITIONS OF APPROVAL
Adhere to previously issued stipulations.

BLM'S APPROVAL OR ACCEPTANCE OF THIS ACTION DOES NOT RELIEVE THE LESSEE AND OPERATOR FROM OBTAINING ANY OTHER AUTHORIZATION REQUIRED FOR OPERATIONS ON FEDERAL AND INDIAN LANDS

CONFIDENTIAL

for Directional Survey
and "As Drilled" plat

14. I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

Amanda Cavoto

Title Engineering Technologist

Signature

Amanda Cavoto

Date 09/19/12

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Troy L. Salyers

Title Petroleum Engineer

Date 9/25/2012

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office FFO

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

Hold C104

for Directional Survey
and "As Drilled" plat

NMOCD

District I
1625 N. French Drive, Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II
811 S. First Street, Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV
1220 S. St. Francis Drive, Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department

Form C-102
Revised August 1, 2011

Submit one copy to
Appropriate District Office

OIL CONSERVATION DIVISION

1220 South St. Francis Drive
Santa Fe, NM 87505

AMENDED REPORT
RECEIVED

WELL LOCATION AND ACREAGE DEDICATION PLAT

SEP 20 2012

¹ API Number 30-045-35367	² Pool Code 5860	³ Pool Name SOUTH BISTI - Gallup Farmington Field Office Bureau of Land Management
⁴ Property Code	⁵ Property Name GOOD TIMES P34-2410	⁶ Well Number 01H
⁷ GRID No. 282327	⁸ Operator Name ENCANA OIL & GAS (USA) INC.	⁹ Elevation 6759'

¹⁰Surface Location


UL or lot no	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	34	24N	10W		675	SOUTH	330	EAST	SAN JUAN

¹¹Bottom Hole Location If Different From Surface

UL or lot no	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
M	34	24N	10W		675	SOUTH	330	WEST	SAN JUAN

¹² Dedicated Acres 320.0 Acres - S/2	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
--	-------------------------------	----------------------------------	-------------------------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

¹⁶ S88°32'W 2616.24' (RECORD) S88°40'27"W 2616.86' (MEASURED)	¹⁷ OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom-hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. <i>Brenda R. Linster</i> 09.19.12 Signature Date Brenda R. Linster, Regulatory Advisor Printed Name brenda.linster@encana.com E-mail Address
¹⁸ SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Date of Survey: JULY 13, 2011 Signature and Seal of Professional Surveyor  JASON C. EDWARDS Certificate Number 15269	

END OF LATERAL
LAT: 36.26478°N
LONG: 107.89081°W
DATUM: NAD1927

LAT: 36.26479°N
LONG: 107.89143°W
DATUM: NAD1983

SURFACE LOCATION
LAT: 36.26487°N
LONG: 107.87526°W
DATUM: NAD1927

LAT: 36.26488°N
LONG: 107.87588°W
DATUM: NAD1983

Gallup Penetration Point
675' FSL 424' FEL

330'

675'

330'

675'

589°36.2'W 4585.0'

N89°33'E 2622.84' (RECORD)

N89°33'E 2622.84' (RECORD)

N89°37'11"E 2624.49' (MEASURED)

N89°35'17"E 2622.46' (MEASURED)

N0°02'E 2603.04' (RECORD)
N0°03'57"E 2601.96' (MEASURED)

N0°02'E 2603.04' (RECORD)
N0°03'45"E 2602.61' (MEASURED)

N0°07'W 2649.57' (RECORD)
N0°06'22"W 2647.11' (MEASURED)

N0°06'25"W 2648.43' (MEAS)
N0°07'W 2649.57' (RECORD)

Good Times P34-2410 01H
SHL: SESE Section 34, T24N, R10W
675 FSL and 330 FEL
BHL: SWSW Section 34, T24N, R10W
675 FSL and 330 FWL
San Juan County, New Mexico
Lease Number: NM-G-0905-1759/NO-G-0902-1754

**Encana Oil & Gas (USA) Inc.
Drilling Plan**

1. ESTIMATED TOPS OF GEOLOGICAL MARKERS (TVD)

The estimated tops of important geologic markers are as follows:

<u>Formation</u>	<u>Depth (TVD)</u>
Ojo Alamo Ss.	392'
Kirtland	522'
Fruitland Coal	807'
Pictured Cliffs	1179'
Lewis	1360'
Cliffhouse	1985'
Menefee	2542'
Point Lookout	3580'
Mancos Shale	3782'
Gallup	4568'

The referenced surface elevation is 6759', KB 6772'

2. ESTIMATED DEPTH OF POTENTIAL WATER, OIL, GAS, & OTHER MINERAL BEARING FORMATIONS

<u>Substance</u>	<u>Formation</u>	<u>Depth (TVD)</u>
Gas	Fruitland Coal	807'
Gas	Pictured Cliffs	1179'
Gas	Cliffhouse	1985'
Gas	Point Lookout	3580'
Oil/Gas	Mancos	3782'

All shows of fresh water and minerals will be reported and protected.

3. PRESSURE CONTROL

- a) Pressure control equipment and configuration will be designed to meet 2M standards.
- b) Working pressure on rams and BOPE will be 3,000 psi
- c) Function test and visual inspection of the BOP will be conducted daily and noted in the IADC Daily Drilling Report.
- d) The Annular BOP will be pressure tested to a minimum of 50 percent of its rated working pressure.
- e) Blind and Pipe Rams/BOP will be tested against a test plug to 100 percent of rated working pressure.
- f) Pressure tests are required before drilling out from under all casing strings set and cemented in place.
- g) BOP controls must be installed prior to drilling the surface casing plug and will remain in use until the well is completed or abandoned.
- h) BOP testing procedures and testing frequency will conform to Onshore Order No. 2.
- i) BOP remote controls shall be located on the rig floor at a location readily accessible to the driller. Master controls shall be on the ground at the accumulator and shall have the capability to function all preventers.

Good Times P34-2410 01H

**SHL: SESE Section 34, T24N, R10W
675 FSL and 330 FEL**

**BHL: SWSW Section 34, T24N, R10W
675 FSL and 330 FWL**

San Juan County, New Mexico

Lease Number: NM-G-0905-1759/NO-G-0902-1754

- j) The kill line shall be 2-inch minimum and contain two kill line valves, one of which shall be a check valve.
- k) The choke line shall be a 2-inch minimum and contain two choke line valves (2-inch minimum).
- l) The choke and manifold shall contain two adjustable chokes.
- m) Hand wheels shall be installed on all ram preventers.
- n) Safety valves and wrenches (with subs for drill string connections) shall be available on the rig floor at all times.
- o) Inside BOP or float sub shall also be available on the rig floor at all times.

Proposed BOP and choke manifold arrangements are attached.

4. CASING & CEMENTING PROGRAM

The proposed casing and cementing program has been designed to protect and/or isolate all usable water zones, potentially productive zones, lost circulation zones, abnormally pressured zones, and any prospectively valuable deposits of minerals. Any isolating medium other than cement shall receive approval prior to use. The casing setting depth shall be calculated to position the casing seat opposite a competent formation which will contain the maximum pressure to which it will be exposed during normal drilling operations. All indications of useable water shall be reported.

- a) The proposed casing design is as follows:

Casing	Depth	Hole Size	Csg Size	Weight	Grade
Conductor	0-60'	30"	20"	94#	H40, STC New
Surface	0'-500'	12 1/4"	9 5/8"	36#	J55, STC New
Intermediate	0'-4980'MD	8 1/2"	7"	26#	J55, LTC New
Production Liner	4780'-9166'	6 1/8"	4 1/2"	11.6#	B80*, LTC New

Casing String				Casing Strength Properties			Minimum Design Factors		
Size	Weight (lb/ft)	Grade	Connection	Collapse (psi)	Burst (psi)	Tensile (1000lb)	Collapse	Burst	Tension
9 5/8"	36	J55	STC	2020	3520	394	1.125	1.1	1.5
7"	26	J55	LTC	4320	4980	367	1.125	1.1	1.5
4 1/2"	11.6	B80	LTC	6350	7780	201	1.125	1.1	1.5

*B80 pipe specifications are attached

Casing design is subject to revision based on geologic conditions encountered.

All casing strings below the conductor shall be pressure tested to 0.22 psi per foot of casing string length or 1,500 psi, whichever is greater, but not to exceed 70 percent of the minimum internal yield. If pressure declines more than 10 percent in 30 minutes, corrective action shall be taken.

- b) The proposed cementing program is as follows:

Top plugs shall be used to reduce contamination of cement by displacement fluid. A bottom plug or other acceptable technique, such as a pre-flush fluid, inner string cement method, etc. shall be utilized to help isolate the cement from contamination by the mud fluid being displaced ahead of the cement slurry.

Good Times P34-2410 01H

SHL: SESE Section 34, T24N, R10W
675 FSL and 330 FEL

BHL: SWSW Section 34, T24N, R10W
675 FSL and 330 FWL

San Juan County, New Mexico

Lease Number: NM-G-0905-1759/NO-G-0902-1754

Casing	Depth	Cement Volume (sacks)	Cement Type&Yield	Designed TOC	Centralizers
Conductor	60'	100sk	Type I Neat 48.8ppg cmt	Surface	None
Surface	500'	178sk	Type III Cement + 1% CaCl + 0.25lb/sk Cello Flake + 0.2% FL, 14.6ppg, 1.38cuf/sk	Surface	1 per joint on bottom 3 joints
Intermediate	4980'	30% open hole excess Lead: 155sk Tail: 362sk	Lead: PremLite + 3% CaCl + 0.25lb/sk Cello Flake + 5lb/sk LCM, 12.1ppg 2.13cuf/sk Tail: Type III Cmt + 1% CaCl + 0.25lb/sk Cello Flake 14.5ppg 1.38cuf/sk	Surface	1 per joint for bottom 3 joints, 1 every 3 joints for remaining joints
Production Liner*	4780'-9166'	None – External casing packers	N/A	N/A	N/A

*Production liner clarification: Utilizing external swell casing packer system for zonal isolation will not use cement in the production liner.

Actual volumes will be calculated and determined by conditions onsite. All cement slurries will meet or exceed minimum BLM and New Mexico Oil Conservation Division requirements. Slurries used will be the slurries listed above or equivalent slurries depending on service provider selected. Cement yields may change depending on slurries selected.

All waiting on cement times shall be a minimum of 8 hours or adequate to achieve a minimum of 500 psi compressive strength at the casing shoe prior to drilling out.

5. WELL PLAN & DIRECTIONAL DRILLING PROGRAM

The proposed horizontal well will have a kick off point of 4255'. Directional plans are attached to original APD.

Description	Proposed Depth (TVD/MD)	Formation
Horizontal Lateral TD	4814'/9166'	Gallup

Good Times P34-2410 01H

**SHL: SESE Section 34, T24N, R10W
675 FSL and 330 FEL**

**BHL: SWSW Section 34, T24N, R10W
675 FSL and 330 FWL**

San Juan County, New Mexico

Lease Number: NM-G-0905-1759/NO-G-0902-1754

6. DRILLING FLUIDS PROGRAM

a) Surface through Intermediate Casing Point:

Hole Size (in)	Depth (ft)	Mud Type	Density (lb/gal)	Viscosity (sec/qt)	Fluid Loss (cc)
30"	0-60' TVD	Fresh Water	8.3-9.2	38-100	4-28
12 1/4"	0-500' TVD	Fresh Water	8.4-8.6	60-70	NC
8 1/2"	500'TVD- 4800'TVD/4980'MD	Fresh Water LSND	8.5-8.8	40-50	8-10

b) Intermediate Casing Point to TD:

Hole Size (in)	MD (ft)	Mud Type	Density (lb/gal)	Viscosity (sec/qt)	Fluid Loss (cc)
6 1/8"	4980'-9166'	Synthetic Oil Based Mud	8.6-9.0	15-25	<15

- c) There will be sufficient mud on location to control a blowout should one occur. Mud flow and volume will be monitored both visually and with electronic pit volume totalizers. Mud tests shall be performed every 24 hours after mudding up to determine, as applicable: density, viscosity, gel strength, filtration, and pH.
- d) A closed-loop system will be used to recover drilling fluid and dry cuttings in both phases of the well and on all hole intervals, including fresh water and oil-based operations. Above-ground tanks will be utilized to hold cuttings and fluids for rig operations. A frac tank will be on location to store fresh water. Waste will be disposed of properly at an EPA-approved hazardous waste facility. Fresh water cuttings will be disposed of at Basin Disposal, Inc. and/or Industrial Ecosystems, Inc. The location will be lined in accordance with the Surface Use Plan of Operations.

7. TESTING, CORING and LOGGING

- a) Drill Stem Testing – None anticipated
- b) Coring – None anticipated.
- c) Mud Logging – Mud loggers will be on location from kick off point to TD.
- d) Logging – See Below

Cased Hole:

CBL/CCL/GR/VDL will be run as needed for perforating control

8. ABNORMAL PRESSURES & HYDROGEN SULFIDE

The anticipated bottom hole pressure is +/- 2259 psi based on a 9.0 ppg at 4828' TVD of the landing point of the horizontal lateral. No abnormal pressure or temperatures are anticipated.

No hydrogen sulfide gas is anticipated, however, if H₂S is encountered, the guidelines in Onshore Order No. 6 will be followed.

Good Times P34-2410 01H

**SHL: SESE Section 34, T24N, R10W
675 FSL and 330 FEL**

**BHL: SWSW Section 34, T24N, R10W
675 FSL and 330 FWL**

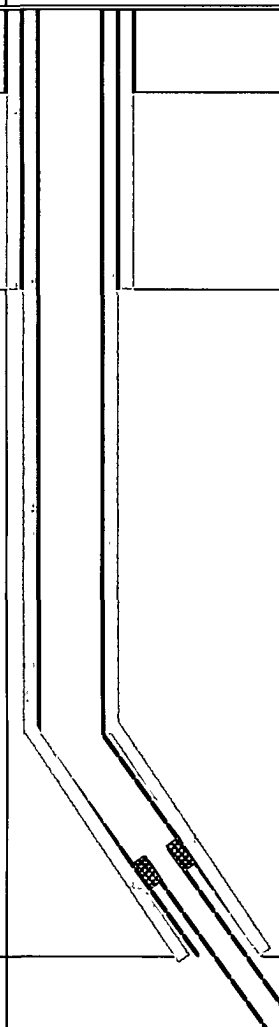
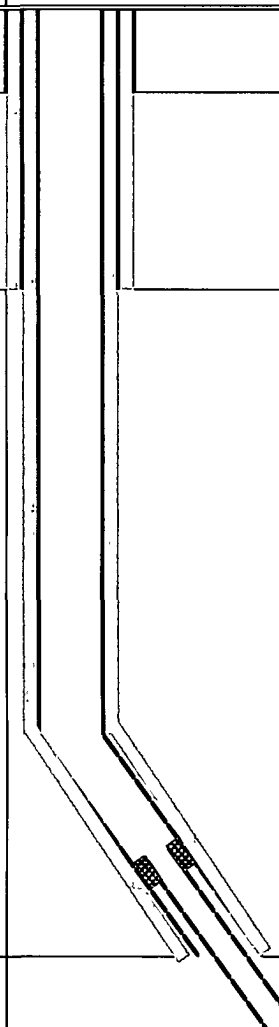
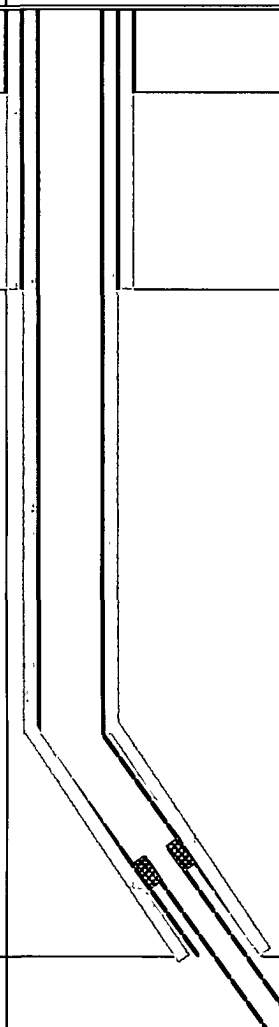
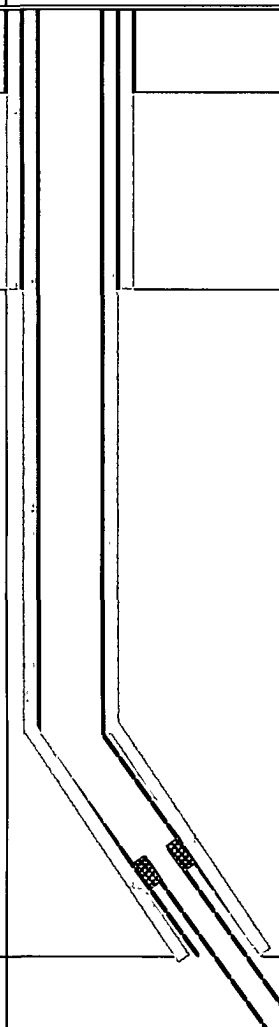
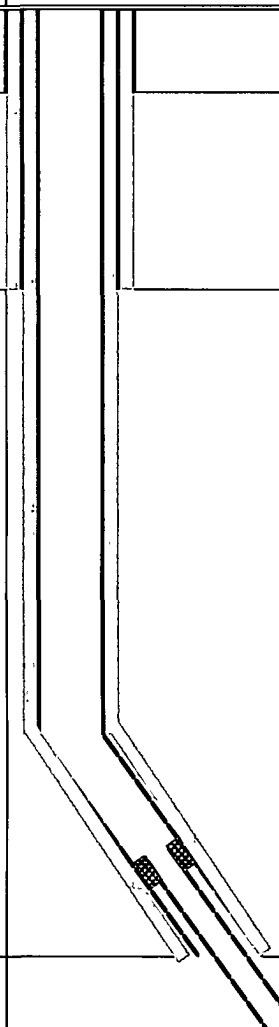
San Juan County, New Mexico

Lease Number: NM-G-0905-1759/NO-G-0902-1754

9. ANTICIPATED START DATE AND DURATION OF OPERATIONS

Drilling is estimated to commence on March 1, 2013. It is anticipated that completion operations will begin within 30 days after the well has been drilled depending on fracture treatment schedules with various pumping service companies.

It is anticipated that the drilling of this well will take approximately 25 days.

LOC: Sec 34-T24N-R10W County: San Juan WELL: Good Times P34-2410 01H			Encana Natural Gas WELL SUMMARY			<div>encana[™]</div> <div>natural gas</div>		ENG: J. Fox/ A. RIG: GLE: 6759 RKBE: 6772		9/19/12
MWD LWD	OPEN HOLE LOGGING	FORM	DEPTH			HOLE SIZE	CASING SPECS	MW MUD TYPE	DEVIATION INFORMATION	
			TVD	MD						
			60	60'		30	20" 94# 100sx Type I Neat 48 8ppg cmt	Fresh wtr 8 3-9 2		
Surveys After csg is run	None	Ojo Alamo	392			12 1/4	9 5/8" 36ppf J55 STC TOC @ surface 178 sks Type III Cmt	Fresh wtr 8 4-8 6	Vertical <1°	
			500	500						
Surveys every 500'	No OH logs	Kirtland Fruitland Coal Pictured Cliffs Ss Lewis Shale Cliffhouse Ss Menefee Fn Point Lookout Ss Mancos Sh	522 807 1179 1360 1985 2542 3580 3782			8 1/2	7" 26ppf J55 LTC TOC @ surface 30% OH excess 517sks Lead 155 sks Tail 362 sks	Fresh Wtr 8 5-8 8	Vertical <1°	
	Mud logger onsite	KICK OFF PT	4255							
		Gallup Top	4568	5157						KOP 4255 10 deg/100'
			4800	4980						
						6 1/8	200' overlap at liner top			
							4010' Lateral	8 6-9 0 OBM		
Surveys every 500' Gyro at CP MWD Gamma Directional	No OH Logs	horz target Base Gallup	4828 4877	5157			4 1/2" 11.6ppf SB80 LTC Running external swellable csg packers for isolation of prod string	Switch to OBM 8 6-9 0	25deg updip 4814'TVD TD = 9166' MD	

NOTES:

- 1) Drill with 30" bit to 60', set 20" 94# conductor pipe
- 2) Drill surface to 500', R&C 9 5/8" casing
- 3) N/U BOP and surface equipment
- 4) Drill to KOP of 4255', 8 1/2" hole size,
- 5) PU directional tools and start curve at 10deg/100' build rate
- 6) Drill to casing point of 4980' MD (72deg)
- 7) R&C 7" casing, circ cmt to surface, switch to OBM
- 8) Land at 90deg, drill 4010' lateral to 9166', run 4 1/2" liner with external swellable csg packers

WELLHEAD BLOWOUT CONTROL SYSTEM



Well name and number:

Good Times P34-2410 01H

