



RECEIVED

703 SEP 26 AM 10:44

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

070 Farmington, NM

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED
OMB No. 1004-0136
Expires November 30, 2000

5. Lease Serial No.

SF-077968

6. If Indian, Allottee or Tribe Name

7. If Unit or CA Agreement, Name and No.

8. Lease Name and Well No.

C. J. Holder #101S

9. API Well No.

3004531918

10. Field and Pool, or Exploratory

Basin Fruitland Coal

11. Sec., T., R., M., or Blk. and Survey or Area

0 Sec. 16, T28N, R13W

12. County or Parish

San Juan

13. State

NM

1a. Type of Work: ☒ DRILL

☐ REENTER

b. Type of Well: ☐ Oil Well

☒ Gas Well

☐ Other

☒ Single Zone

☐ Multiple Zone

2. Name of Operator

ENERGEN RESOURCES CORPORATION

3A. Address

c/o Walsh Engineering, 7415 E. Main, Farmington, NM 87402

3b. Phone No. (include area code)

(505) 327-4892

4. Location of Well (Report location clearly and in accordance with any State requirements. *)

At surface

660' FNL and 660' FWL

At proposed prod. Zone

14. Distance in miles and direction from nearest town or post office*

4 miles south of Farmington, NM

15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)

660'

16. No. of Acres in lease

320 +

17. Spacing Unit dedicated to this well

320 Acres (North Half)

18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.

2850'

19. Proposed Depth

1890' +/-

20. BLM/BIA Bond No. on file

21. Elevations (Show whether DF, KDB, RT, GL, etc.)

6061' GL

22. Approximate date work will start*

As soon as permit is approved

23. Estimated duration

1 week

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

1. Well plat certified by a registered surveyor.

2. A Drilling Plan.

3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office.

4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).

5. Operator certification.

6. Such other site specific information and/or plans as may be required by the authorized office.

25. Signature

Paul C. Thompson

Name (Printed/Typed)

Paul C. Thompson, P.E.

Date

9/24/03

Title

Agent

Approved by (Signature)

B. J. Mancini

Name (Printed/Typed)

Date

5-18-05

Title

Office

FTO

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

DRILLING OPERATIONS AUTHORIZED ARE
SUBJECT TO COMPLIANCE WITH ATTACHED
"GENERAL REQUIREMENTS".

This action is subject to technical and
procedural review pursuant to 43 CFR 3165.3
and appeal pursuant to 43 CFR 3165.4

NMOC

District I
PO Box 1980, Hobbs, NM 88241-1980

District II
PO Drawer DD, Artesia, NM 88211-0719

District III
1000 Rio Brazos Rd., Aztec, NM 87410

District IV
PO Box 2088, Santa Fe, NM 87504-2088

State of New Mexico
Energy, Minerals & Natural Resources Department

Form C-102
Revised February 21, 1994
Instructions on back
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

OIL CONSERVATION DIVISION
PO Box 2088
Santa Fe, NM 87504-2088

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

1 API Number 30-045-31918		2 Pool Code 71629		3 Pool Name BASIN FRUITLAND COAL	
4 Property Code 21180		5 Property Name C.J. HOLDER			6 Well Number 101S
7 OGRID No. 162928		8 Operator Name ENERGEN RESOURCES CORPORATION			9 Elevation 6061'

10 Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
D	16	28N	13W		660	NORTH	660	WEST	SAN JUAN

11 Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County


12 Dedicated Acres 320.0 Acres - (N/2)		13 Joint or Infill Y		14 Consolidation Code		15 Order No.	
---	--	-------------------------	--	-----------------------	--	--------------	--

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

16 660' 660'		5289.90'		17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief <u>Paul C. Thompson</u> Signature <u>PAUL C. THOMPSON</u> Printed Name <u>AGENT</u> Title <u>9/24/03</u> Date	
5280.00'		16		18 SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Survey Date: FEBRUARY 14, 2003 Signature and Seal of Professional Surveyor <u>JASON C. EDWARDS</u> Certificate Number: 15269	
RECEIVED 2003 SEP 26 AM 10:44 070 Farmington, NM		5285.28'			

PLAT 2

EDGE OF ABANDONED WELLPAD

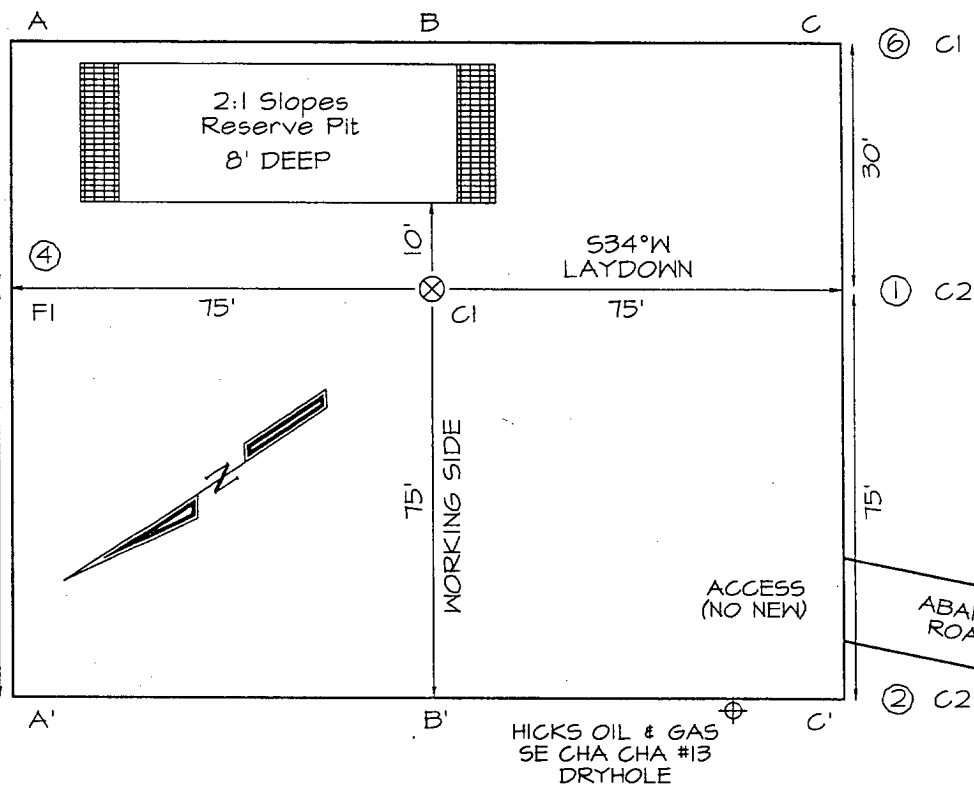

LATITUDE: 36°40'04"
LONGITUDE: 108°13'51"

A-A'						
6070'						
6060'						
6050'						

B-B'						
6070'						
6060'						
6050'						

C-C'						
6070'						
6060'						
6050'						

Note: Contractor should call One-Call for location of any marked or unmarked buried pipelines or cables on well pad and/or access road at least two (2) working days prior to construction

ENERGEN RESOURCES CORP.
OPERATIONS PLAN
C. J. Holder #101S

I. Location: 660' FNL & 660' FWL
Sec 16 T28N R13W
San Juan County, NM

Date: September 24, 2003

Field: Basin Fruitland Coal
Surface: Navajo Tribe / NAPI
Minerals: Federal SF 077968

Elev: GL 6061'

II. Geology: Surface formation _ Nacimiento

A. Formation Tops	Depths
Ojo Alamo	278'
Kirtland	378'
Fruitland	1353'
Pictured Cliffs	1693'
Total Depth	1890'

Estimated depths of anticipated water, oil, gas, and other mineral bearing formations which are expected to be encountered:

Water and gas - 1353' and 1693'.

B. Logging Program: Induction/GR and density logs at TD.

C. No over pressured zones are expected in this well. No H₂S zones will be penetrated in this well. Max. BHP = 600 psig.

III. Drilling

A. Contractor:

B. Mud Program:

The surface hole will be drilled with a fresh water mud.

The production hole will be drilled with a fresh water polymer mud. The weighting material will be drill solids or if conditions dictate, barite. The maximum mud weight expected is 8.5 ppg.

C. Minimum Blowout Control Specifications:

Double ram type or annular type 2000 psi working pressure BOP with a rotating head. See the attached exhibits #1 and #2 for details on the BOP equipment. All ram type preventers and related equipment will be hydraulically tested at nipple-up and after any use under pressure to 1000 psi.

C. Cont.

The blind rams will be hydraulically activated and checked for operational readiness each time pipe is pulled out of the hole. All checks of the BOP stack and equipment will be noted on the daily drilling report. The BOP equipment will include a kelly cock, floor safety valve, and choke manifold all rated to 2000 psi.

IV. Materials

A. Casing Program:

Hole Size	Depth	Casing Size	Wt. & Grade
8-3/4"	120'	7"	20# K-55
6-1/4"	1890'	4-1/2"	10.5# K-55

B. Float Equipment:

a) Surface Casing: None

b) Production Casing: 4-1/2" cement guide shoe and self fill insert float collar. Place float one joint above shoe. Five centralizers spaced every other joint above shoe and five turbolizers every other joint from the top of the well.

V. Cementing:

Surface casing: 7" - Use 50 sx (59 cu. ft.) of Cl "B" with ¼ #/sk celloflake and 2% CaCl₂ (Yield = 1.18 cu. ft./sk; slurry weight = 15.6 PPG). 100% excess to circulate cement to surface. WOC 12 hours. Pressure test surface casing to 600 psi for 30 min.

Production Casing: 4-1/2" - Before cementing circulate hole with at least 1-1/2 hole volumes of mud. Precede cement with 30 bbls of fresh water. **Lead** with 135 sx (278 cu.ft) of Cl "B" with 2% metasilicate and ¼ #/sk celloflake. (Yield = 2.06 cu.ft./sk; slurry weight = 12.5 PPG). **Tail** with 100 sx (118 cu.ft.) of Cl "B" with ¼ #/sk celloflake (Yield = 1.18 cu. ft./sk; slurry weight = 15.6 PPG). Total cement volume is 396 cu.ft. (100% excess to circulate cement to surface).



Paul C. Thompson, P.E.

EXHIBIT #1
Energen Resources, Inc.

Well Control Equipment Schematic for 2M Service



Attachment to Drilling Technical Program

Typical BOP setup

Location: San Juan Basin, New Mexico

Date: March, 2003

By: John Thompson (Walsh E&P)

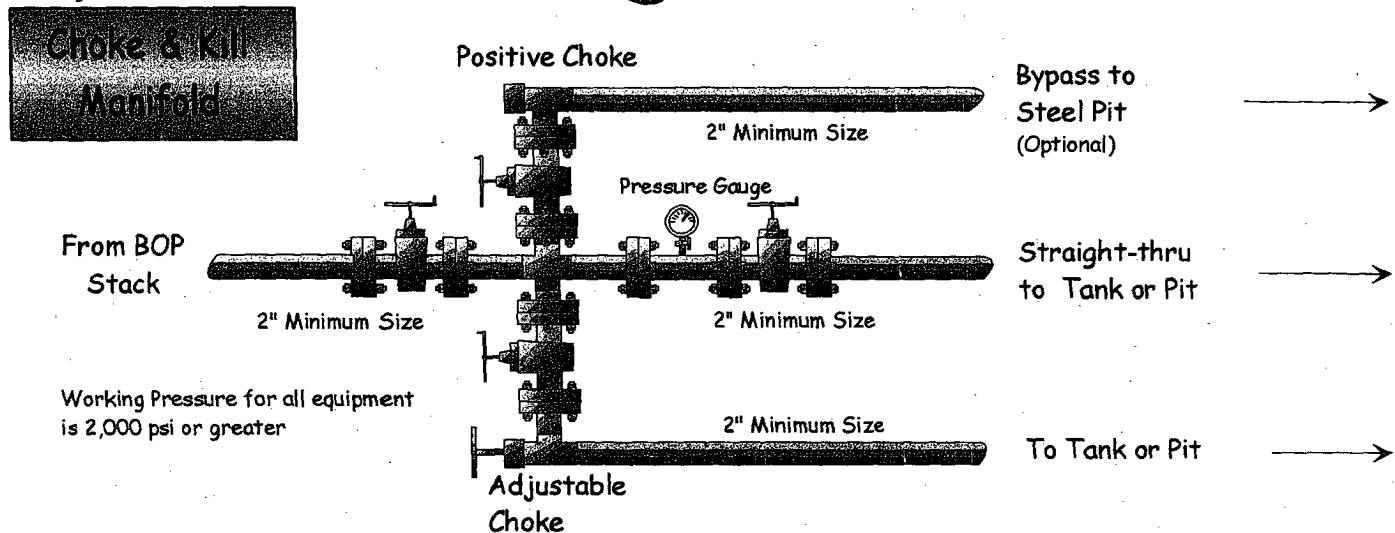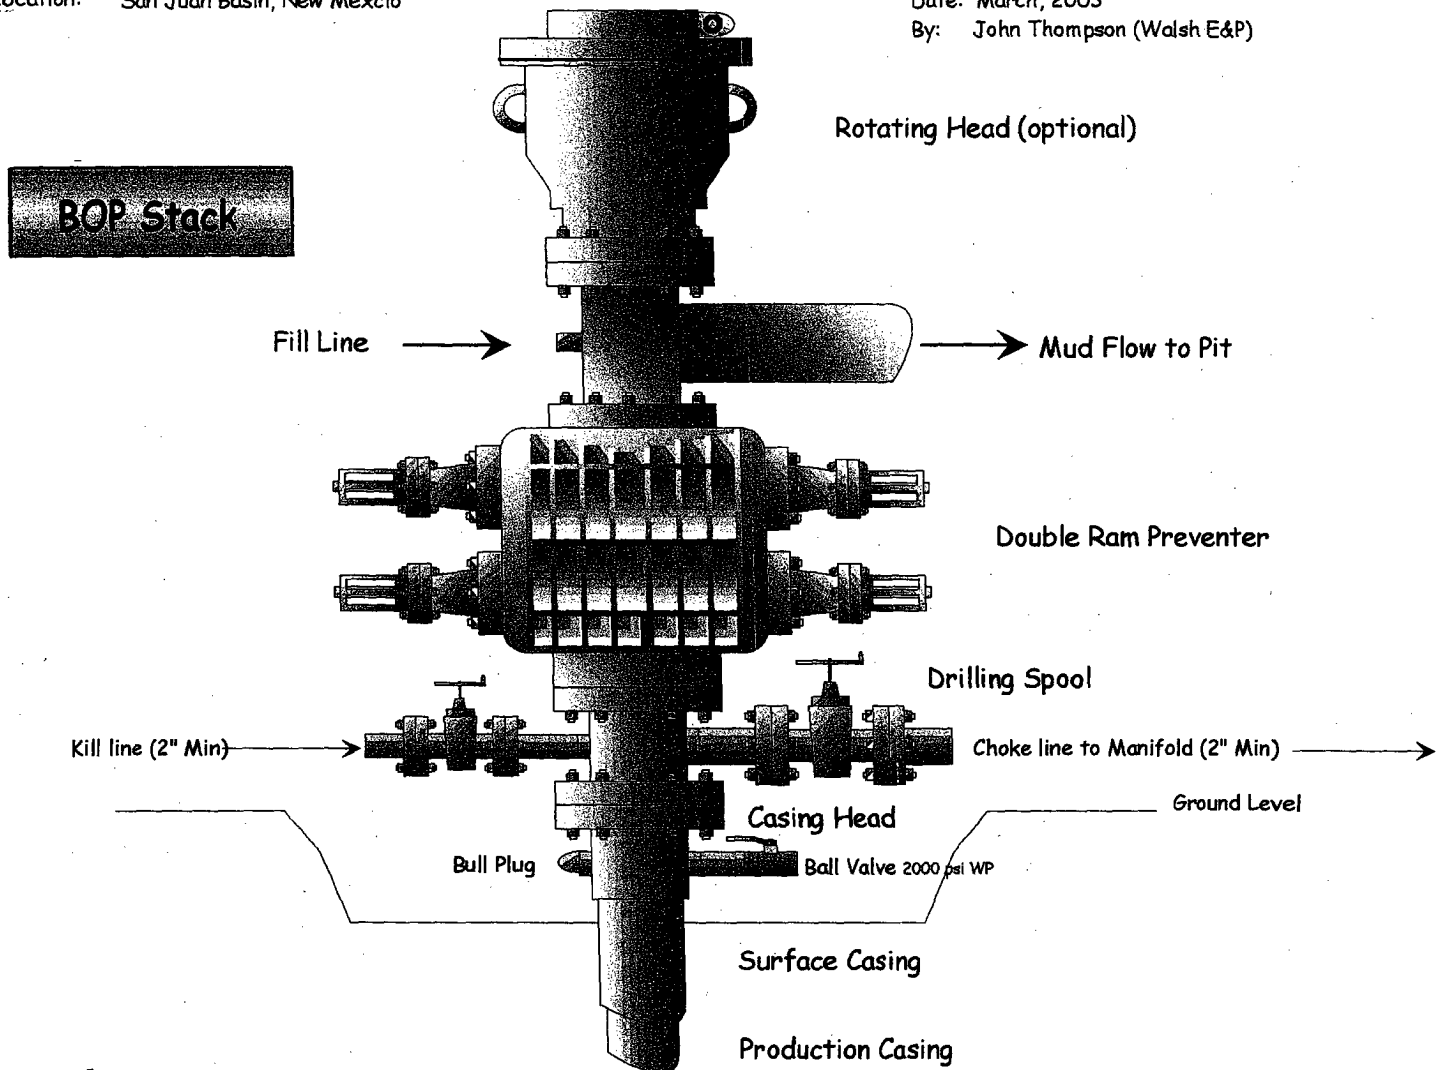

ANNULAR PREVENTER

