District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe. NM 87505 For drilling and production facilities, submit to appropriate NMOCD District Office.
For downstream facilities, submit to Santa Fe office

Form C-144


June 1, 2004

Santa Fe, NM 87505

Pit or Below-Grade Tank Registration or Closure

Type of action: Registration of a pit or below-grade tank Closure of a pit or below-grade tank Closure of a pit or below-grade tank Closure of a pit or below-grade tank		
)perator: Synergy Operating, LLC (OGRID # 163458) Telep	hone: (505) 325-5449 e-mail addres	ss: <u>tom.mullins@synergyoperating.com</u>
Address: PO Box 5513, Farmington, NM 87499		
acility or well name: Crawford 29-12-24 # 102 A	PI #: <u>30-045-32861</u> U/L or	Qtr/Qtr <u>J</u> Sec <u>24</u> T <u>29N</u> R <u>12W</u>
County: San Juan_Latitude: 36 Deg. 42 Min. 31.4 Sec N Longitude: 108 Deg.	02 Min.46.4 Sec W NAD: 1927 ☐ 1983 ⊠ Su	urface Owner Federal 🛭 State 🗌 Private 🗌 Indian 🗌
<u>'it</u>	Below-grade tank	<u> </u>
'ype: Drilling ☑ Production ☐ Disposal ☐	Volume:bbl Type of fluid:	
Workover Emergency	Construction material:	— Some
ined 🛛 Unlined 🔲	Double-walled, with leak detection? Yes	If not, explain why not.
iner type: Synthetic M Thickness 12+ mil Clay		
it Volume 1000 bbl		- P 2008 9
	Less than 50 feet	(20 points)
Pepth to ground water (vertical distance from bottom of pit to seasonal high	50 feet or more, but less than 100 feet	(10 points)
vater elevation of ground water.)	100 feet or more	(0 points)
Wallback and an extension and of sea than 200 feat from a minute demonstra	Yes	(20 points)
Vellhead protection area: (Less than 200 feet from a private domestic	No	(0 points)
vater source, or less than 1000 feet from all other water sources.)		
Distance to surface water: (horizontal distance to all wetlands, playas,	Less than 200 feet	(20 points)
rigation canals, ditches, and perennial and ephemeral watercourses.)	200 feet or more, but less than 1000 feet	(10 points)
	1000 feet or more	(0 points)
	Ranking Score (Total Points)	
If this is a pit closure: (1) attach a diagram of the facility showing the pit's	relationship to other equipment and tanks. (2) Is	ndicate disposal location: (check the onsite box if
your are burying in place) onsite 🛛 offsite 🔲 If offsite, name of facility_	. (3) Attach a gene	eral description of remedial action taken including
remediation start date and end date. (4) Groundwater encountered: No 🛛 Y	es [If yes, show depth below ground surface	ft. and attach sample results. (5)
Attach soil sample results and a diagram of sample locations and excavations	3.	
Additional Comments:		
Synergy plans to close the pit per the general guidelines upon return of this a	pproved application. The pit has been empty of	all fluids, remains fenced, but awaits a bull dozer to
Complete final closure.		
I hereby certify that the information above is true and complete to the best of been/will be constructed or closed according to NMOCD guidelines , Date: 06-25-2005		
Printed Name/Title Thomas E. Mullins	Signature / h & h	12
Your certification and NMOCD approval of this application/closure does not otherwise endanger public health or the environment. Nor does it relieve the regulations.		
Approval: Printed Name/Title H. Villanueva	BEPUTY OIL & GAS INSPECTO	OR, DIST. OF JUN 28 2005

SYNERGY OPERATING LLC CRAWFORD 29-12-24 NO. 102, 1540' FSL 1325' FEL SECTION 24, T29N, R12W, N.M.P.M., SAN JUAN COUNTY, N. M. GROUND ELEVATION: 5634', DATE: NOVEMBER 10, 2004

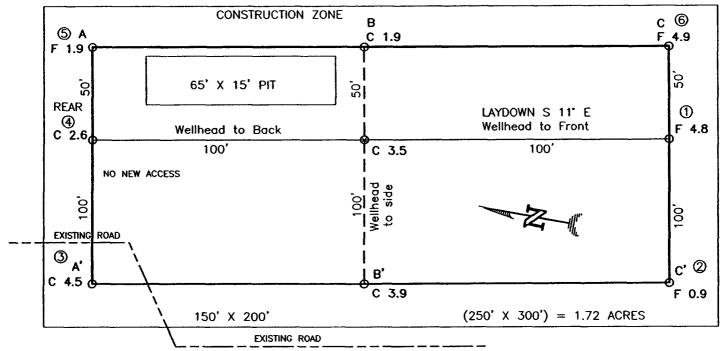

RESERVE PIT DIKE: TO BE 8' ABOVE DEEP SIDE (OVERFLOW — 3' WIDE AND 1' ABOVE SHALLOW SIDE). BLOW PIT: OVERFLOW PIPE HALFWAY BETWEEN TOP AND BOTTOM AND TO EXTEND OVER PLASTIC LINER AND INTO BLOW PIT.

Surveying and Oil Field Services
P. 0. Box 15068 · Farmington, NM 87401
Phone (505) 326-1772 · Fax (505) 326-6019
NEW MEXICO L.S. No. 14831

Jaggett

DAGGETT ENTERPRISES, INC. IS NOT LIABLE FOR UNDERGROUND UTILITIES OR PIPELINES. NEW MEXICO ONE CALL TO BE NOTIFIED 48 HOURS PRIOR TO EXCAVATION OR CONSTRUCTION. NOTE: C/L ELEV. A-A' 5640 5630 5620 5610 C/L ELEV. B-B' 5640 5630 5620 5610 C/L ELEV. C-C' 5640 5630 5620 5610

NOTE: CONTRACTOR SHOULD CALL ONE-CALL FOR LOCATION OF ANY MARKED OR UNMARKED BURIED PIPELINES OR CABLES ON WELL PAD AND OR ACCESS ROAD AT LEAST TWO (2) WORKING DAYS PRIOR TO CONSTRUCTION.

__1000 FEET 0

Printed from TOPO! @2001 National Geographic Holdings (www.topo.com)

1000 METERS

ти†/ми