Form 3	160-3
(April	2004)

FORM APPROVED OMB No. 1004-0137 Expires March 31, 2007

UNITED STATES 2005 MAR 30 AM DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

Lease Serial No.

BUREAU OF LAND MAN		RECEI	Arn A	6. If Indian, Allotee or	Tribe Name	
APPLICATION FOR PERMIT TO	DRILL OR	REENTER	igmon	1. A.		
Ia. Type of work: DRILL REENT	`ER			7 If Unit or CA Agreeme Northeast Blanco		
lb. Type of Well: Oil Well Gas Well Other	Sin	gle Zone Multip	le Zone	8. Lease Name and Well No. NEBU 224		
2. Name of Operator Devon Energy Production Company, I	L.P.			9. API Well No.	33001	
3a. Address PO Box 6459 Farmington, NM 87419	(include area code) -0244		10. Field and Pool, or Expl	oratory red Cliffs		
4. Location of Well (Report location clearly and in accordance with a At surface SE NW, Unit F, 1,900' FNL & 1,94 At proposed prod. zone Same		nts.*)		11. Sec., T. R. M. or Blk.a Sec. 19, T31N, R6	nd Survey or Area	
14. Distance in miles and direction from nearest town or post office* Approximately 12.8 miles				12. County or Parish San Juan	13. State	
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 1,900'	16. No. of ac 2,560	res in lease	17. Spacing Unit dedicated to this			
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.	19. Proposed 3,514'	Depth	20. BLM/E	BIA Bond No. on file		
21. Elevations (Show whether DF, KDB, RT, GL, etc.) GR 6,367'	22. Approxim	nate date work will star 05/23/2005	rt*	23. Estimated duration Unknown		
	24. Attacl	hments				
The following, completed in accordance with the requirements of Onshe	ore Oil and Gas C	Order No.1, shall be at	tached to thi	is form:		
 Well plat certified by a registered surveyor. A Drilling Plan. A Surface Use Plan (if the location is on National Forest System SUPO shall be filed with the appropriate Forest Service Office). 	n Lands, the	Item 20 above). 5. Operator certific	ation specific info	ormation and/or plans as ma	· ·	
25. Signature 11.5. 3		Name (Printed/Typed) Melisa Zimmerman			23-05	
Title Senior Operations Technician						
Approved by (Agnature)	Name	(Printed/Typed)		Da	te 9/12/2	
Application applicated does not warrant or certify that the applicant hol conduct operations thereon. Conditions of approval, if any, are attached.	Office Office Ids legal or equita	C > able title to those right	ts in the sub	ject lease which would entitl	le the applicant to	
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a States any false, fictitious or fraudulent statements or representations as	crime for any pe s to any matter wi	rson knowingly and within its jurisdiction.	villfully to m	nake to any department or ag	gency of the United	

*(Instructions on page 2)

This action is subject to technical and procedural review pursuant to 43 CFR 3165.3 and appeal pursuant to 43 CFR 3165.4

DRILLING OPERATIONS AUTHORIZED ARE SUBJECT TO COMPLIANCE WITH ATTACHED "GENERAL REQUIREMENTS".

NMOCD

District I
PO Box 1980, Hobbs NM 88241-1980
District II
PO Drawer KK, Artesia, NM 87211-0719
District III
1000 Rio Brazos Rd., Aztec, NM 87410

PO Box 2088, Santa Fe, NM 87504-2088

District IV

State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION PO Box 2088 Santa Fe, NM 87504-2088 Form C-102
Revised February 21, 1994
Instructions on back
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

[†] API Number	Food Code 175 Second Pool Name	
Property Code	³ Property Name	⁶ Well Number
191.41	NEBU	# 224
7 OGRID No.	⁸ Operator Name	⁹ Elevation
6137	Devon Energy Production Company, L.P.	6367

Surface Location


UL or Lot No.	Section	Township	Range	Lot ldn	Feet from the	North/South line	Feet from the	East/West line	County
F	19	31 N	6 W		1900	NORTH	1940	WEST	SAN JUAN

" Rottom Hole Location If Different From Surface

Bottom Hole Escation in Billional Holli Samuec										
⁷ UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County	
12 Dedicated Acres	i i Join	t or Infill 14	Consolidation	on Code 15	Order No.					
160										

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED

OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

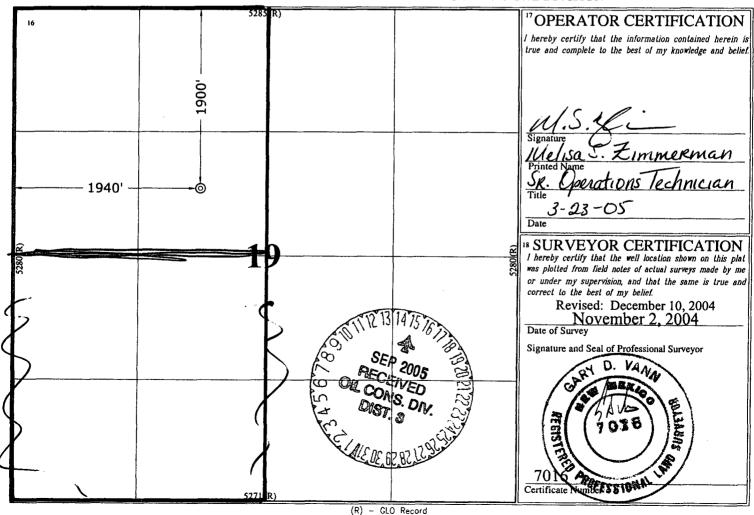



Submit 3 Copies To Appropriate District	State of Ne	w Mexico		Form C-103
Office District 1	Energy, Minerals and	l Natural Resources		March 4, 2004
1625 N. French Dr., Hobbs, NM 88240			WELL API NO.	
District II 1301 W. Grand Ave., Artesia, NM 88210	OIL CONSERVA	TION DIVISION	6 Indicate Time	of Lagra
District III	1220 South St	. Francis Dr.	5. Indicate Type	
1000 Rio Brazos Rd., Aztec, NM 87410 District IV	Santa Fe, N	11/16/8/19/5/0530 AM	6. State Oil & G	
1220 S. St. Francis Dr., Santa Fe, NM 87505	, ,	RECEIVED	SF 078988	as bease 110.
SUNDRY NOTIC DO NOT USE THIS FORM FOR PROPOSA		VELLS BACK TO A	7. Lease Name of	or Unit Agreement Name
DIFFERENT RESERVOIR. USE "APPLICA	TION FOR PERMIT" (FORM C	-101) FOR SUCH	NORTHEAST I	BLANCO UNIT
PROPOSALS.) 1. Type of Well:			8. Well Number	
Oil Well Gas Well 🛛	Other		224	
2. Name of Operator	P	T D	9. OGRID Num 6137	ber
3. Address of Operator	rgy Production Company	, L.P.	10. Pool name o	r Wildcat
PO Box 6459, Navajo Dam, NM 8	7419		S. Los Pinos Pic	
l. Well Location				10 11 1C 13 14 15
Unit LetterF_:_1,900'	feet from theNorth	_ line and1,940'fe	et from theWest	line SEP 200
Section 19 Township	31N Range 6W	NMPM	County - SAN Л	UAN COMPECEIVED
All his to the second of the s	11. Elevation (Show wheth			CO OST ON
it or Below-grade Tank Application (For p	GR 6,367' it or below-grade tank closures	a form C-144 must be attach	ed)	
t Location: UL F Sect 19 Two 31	N Rng 6W Pit type Drilli	ng Denth to Groundwater	>100' Distance from ne	earest fresh water cell 2000 3
Distance from nearest surface water	Below-grade Tank Locatio	n UL Sect Tw	p Rng	QUE OU LUE
feet from theline and		· ·	r	'
NOTICE OF INT PERFORM REMEDIAL WORK ☐ —		SUE REMEDIAL WOR	BSEQUENT RE	EPORT OF: ALTERING CASING -
EMPORARILY ABANDON	CHANGE PLANS L	_ COMMENCE DE	RILLING OPNS.	PLUG AND ABANDONMENT
PULL OR ALTER CASING	MULTIPLE [COMPLETION	CASING TEST A CEMENT JOB	AND .	
OTHER: CONSTRUCT DRILLING P	TIT [OTHER:		П
13. Describe proposed or comple of starting any proposed work or recompletion.14.				
Devon Energy will be own with the NMOCD regu				
hereby certify that the information ab	pove is true and complete to	o the best of my knowled	ge and belief. I furt	her certify that any pit or below-
ade tank has been/will be constructed or cl	/ .	Telines ⊠, a general permit ∟ LESr_Operations Te		native OCD-approved plan □DATE 3-23-05
pe or print name Melisa Zimmer		Melisa.zimmerman@dv		e No. 405-552-7917
This space for State use)	2.			
PPPROVED BY	TIT	LEGEPLITY OR A GAS IN		DATE SEP 1 5 20
onditions of approval, if any:			HOLIER, USI. (S)	DATE SEE 1 0 CO

PAD LAYOUT PLAN & PROFILE DEVON ENERGY PRODUCTION COMPANY, L.P.

Nebu # 224 1900' F/NL 1940' F/WL SEC. 19, T31N, R6W, N.M.P.M. SAN JUAN COUNTY, NEW MEXICO

Lat:

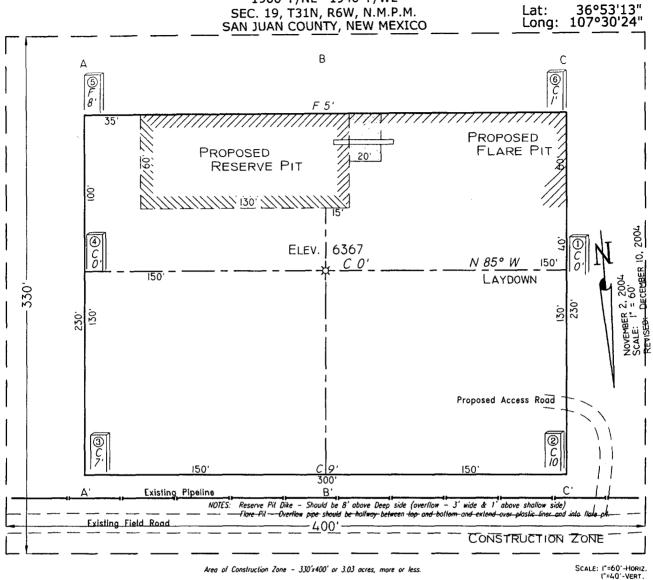

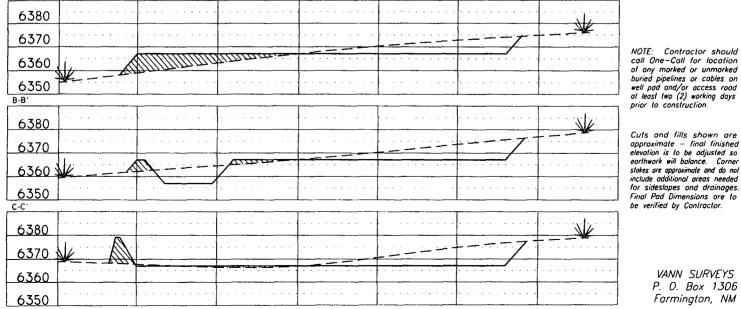

A-A'

Cuts and fills shown are approximate — final finished elevation is to be adjusted so earthwork will balance. Corner stakes are approximate and do not include additional areas needed for sideslopes and drainages.

Final Pad Dimensions are to be verified by Contractor.

> VANN SURVEYS P. O. Box 1306 Farmington, NM

NEBU 224 Unit F 19-31N-6W San Juan Co., NM

DRILLING PLAN

1. ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS & ANTICIPATED WATER, OIL, GAS OR MINERAL FORMATIONS:

Formation	TVD (ft)	Hydrocarbon/Water Bearing Zones
San Jose	Surface	
Ojo Alamo	2304	Aquifer
Kirtland	2431	
Fruitland	2879	Gas
Pictured Cliffs Tongue	3211	Gas
Pictured Cliffs	3290	Gas
Lewis	3414	
TD	3514	

All shows of fresh water and minerals will be adequately protected and reported.

2. PRESSURE CONTROL EQUIPMENT:

All well control equipment shall be in accordance with Onshore Order #2 for 2M systems.

The minimum specifications for pressure control equipment that will be provided are included on the attached schematic diagram, which shows the size, and pressure ratings.

2000# BOP With Pipe Rams and 2000# BOP With Blind Rams Auxiliary equipment to be used:

• Upper kelly cock with handle available.

The manifold includes appropriate valves and adjustable chokes. The kill line will have one check valve. Ram type preventers will be pressure tested to full working pressure (utilizing a test plug) or 70% of the internal yield pressure (without a test plug) at:

- Initial installation
- Whenever any seal subject to test pressure is broken
- Following related repairs
- At 30 day intervals

Pipe and blind rams shall be activated each trip.

A BOPE pit level drill will be conducted weekly for each drilling crew. All tests and drills will be recorded in the drilling log.

The accumulator will have sufficient capacity to close all rams and retain 200 psi above precharge pressure without the use of closing unit pumps.

Master controls will be at the accumulator. Anticipated bottom hole pressure is 1500 psi.

3. Casing & CEMENTING PROGRAM:

A. The proposed casing program will be as follows:

TVD	Hole Size	Size	Grade	Weight	Thread	Condition
0-285	12-1/4"	9-5/8"	H-40	32#	STC	New
0-TD	6-1/4"	4-1/2"	J-55	11.6#	LTC	New

The 9-5/8" surface pipe will be tested to 750 psi. All casing strings below the surface shoe shall be pressure tested to 0.22 psi/ft. of casing string length or 1500 psi, whichever is greater, but not to exceed 70% minimum internal yield.

<u>Surface</u>: The bottom three joints of the surface casing will have a minimum of one centralizer per joint and one centralizer every joint thereafter (Total 5 centralizers estimated)

<u>4-1/2" Casing</u>: The bottom three joints of the casing will have a minimum of one centralizer per joint and one centralizer every fifth joint thereafter to above Ojo Alamo with turbolizers below and throughout the Ojo Alamo. (Total 12 centralizers, 3 turbolizers estimated).

B. The proposed cementing program will be as follows:

Surface String: 9-5/8" Surface cemented in a 12-1/4" hole at 285'.

32.3# H-40 ST&C 8 Rnd Saw tooth guide shoe

Cemented with 200 sx Class B mixed at 15.6 ppg w/.25 pps Celloflake, 2% calcium chloride. Yeild 1.19 ft3/sx ,cement

Designed to circulate to surface.

* Minor variations possible due to existing conditions

Production String: 4-1/2" Production casing cemented in an 6-1/4" hole

11.6# J-55 LT&C 8 Rnd

Float collar

Joint

Float Shoe

Lead: 500 sx 50/50 Poz, Yield-1.45 ft3/sx, Mixed @ 13ppg Foamed W/ N2 Down To 9.0# Additives 2% Gel, 0.2% Versaset, 0.1% Diacel Lwl.

Tail: 75 sx 50/50 Poz, Yield-1.45 ft3/sx, 13 lb/gal, Additives 2%

Gel, 0.2% Versaset, 0.1% Diacel Lwl.

Actual volumes will be calculated and adjusted with caliper log prior to cementing.

4. DRILLING FLUIDS PROGRAM:

TVD	Туре	Weight (ppg)	Viscosity	рН	Water Loss	Remarks
0-285'	Spud	8.4-9.0	29-70	8.0	NC	FW gel,
285-TD	LSND/Air	8.4-9.0	29-70	8.0	10-12	LCM as needed

NC = no control

Sufficient quantities of mud material will be maintained on site or be readily accessible for the purpose of assuring well control. SPR will be recorded on daily drilling report after mudding up. Visual mud monitoring will be conducted during operations.

5. EVALUATION PROGRAM:

Wireline Logs: None

Mud Logs: Possible mud logging in Fruitland Coal & Pictured Cliffs.

Survey: Deviation surveys will be taken every 500' from 0-TD of 6-1/4" hole or first

succeeding bit change.

Cores: None anticipated.

DST's: None anticipated.

6. ABNORMAL CONDITIONS:

The Fruitland Coal will be encountered at approximately 3030' TMD. Estimated formation pressure is 300 psi. No other abnormal pressures and/or temperatures are expected. No hydrogen sulfide should be present.

7. OTHER INFORMATION:

The anticipated starting date and duration of the operation will be as follows:

^{*} Minor variations possible due to existing conditions

Starting Date:

Upon Approval

Duration:

20 days

If the well is completed as a dry hole or as a producer, Well Completion or Recompletion Report and Log (Form 3160-4) will be submitted within 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3160. Copies of all logs, core descriptions, core analyses, well test data, geologic summaries, sample descriptions, daily drilling reports, daily completion reports, and all other surveys or data obtained and compiled during the drilling, completion, and/or workover operations, will be submitted directly to the Authorized Officer or filed with Form 3160-4.

Well Control Equipment 2,000 psi Configuration

