

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

CONFIDENTIAL

FORM APPROVED  
OMB No. 1004-0137  
Expires: July 31, 2010

**SUNDRY NOTICES AND REPORTS ON WELLS**  
**Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.**

5. Lease Serial No.  
NMNM 112955

6. If Indian, Allottee or Tribe Name  
N/A

**SUBMIT IN TRIPLICATE** - Other instructions on page 2

RECEIVED

APR 11 2013

1. Type of Well

☒ Oil Well

☐ Gas Well

☐ Other

7. If Unit of CA/Agreement, Name and/or No.  
N/A

8. Well Name and No.  
Escrito M07-2409 01H

2. Name of Operator  
Encana Oil & Gas (USA) Inc.

9. API Well No.  
30-045-35435

3a. Address  
370 17th Street, Suite 1700  
Denver, CO 80202

3b. Phone No. (include area code)  
Bureau of Land Management  
720-876-5353

10. Field and Pool or Exploratory Area  
Bisti Lower - Gallup

4. Location of Well (Footage, Sec., T, R., M., or Survey Description)  
SHL: 1026' FSL and 503' FWL Sec 7, T24N, R9W  
BHL: 1980' FSL and 330' FWL Sec 12, T24N, R10W

11. Country or Parish, State  
San Juan, NM

**12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input checked="" type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

Encana Oil & Gas (USA) Inc. (Encana) would like to change the intermediate hole size and intermediate cementing plans Escrito M07-2409 01H well. Encana would like to change the intermediate hole size from 8 1/2" to 8 3/4" and increase the intermediate cementing plans to accomodate the larger hole size. Please see attached 10 point drilling plan and wellbore diagram.

RCVD APR 25 '13  
OIL CONS. DIV.  
DIST. 3

THIS APPROVAL OR ACCEPTANCE OF THIS  
NOTICE DOES NOT RELIEVE THE LESSEE AND  
OPERATOR FROM OBTAINING ANY OTHER  
PERMITS OR LICENSES REQUIRED FOR OPERATIONS  
ON FEDERAL AND INDIAN LANDS

**CONDITIONS OF APPROVAL**  
Adhere to previously issued stipulations.

14. I hereby certify that the foregoing is true and correct.

Name (Printed/Typed)

Amie Weis

Title Drilling Engineer

Signature

Amie Weis

Date

4/9/2013

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by

William Tambekou

Title

Petroleum Engineer

Date

04/11/2013

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

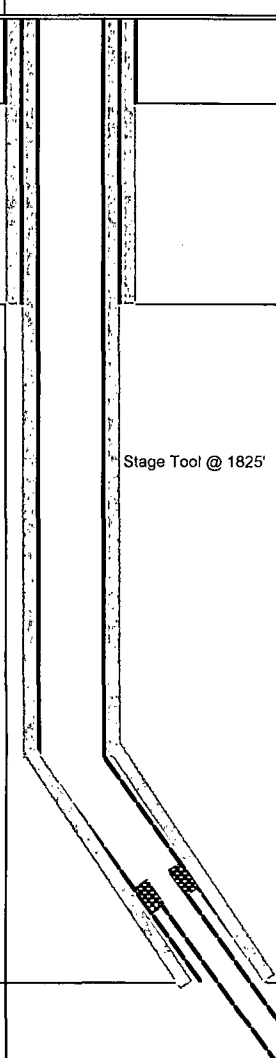
Office FFD

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

RECEIVED

Ar

LOC: Sec 7-T24N-R9W County: San Juan WELL: Escrito M07-2409 01H			Encana Natural Gas  WELL SUMMARY			<div>encana™</div> <div>natural gas</div>		ENG: J. Fox/ A. RIG: GLE: 6910 RKBE: 6923		4/9/13
MWD LWD	OPEN HOLE LOGGING	FORM	DEPTH			HOLE SIZE	CASING SPECS	MW MUD TYPE	DEVIATION INFORMATION	
			TVD	MD						
			60	60'		30	20" 94# 100sx Type I Neat 48.8ppg cmt	Fresh wtr 8.3-9.2		
Surveys After csg is run	None					12 1/4	9 5/8" 36ppf J55 STC  TOC @ surface 178 sks Type III Cmt	Fresh wtr 8.4-8.6		Vertical <1°
Surveys every 500'	No OH logs	Ojo Alamo Kirtland  Fruitland Coal  Pictured Cliffs Ss Lewis Shale  Cliffhouse Ss Menefee Fn Point Lookout Ss Mancos Sh	945 1128  1508  1775 1929  2583 3303 4230 4442			8 3/4	7" 26ppf J55 LTC  TOC @ surface 30% OH excess: 646 sks Stage 1 Lead 289 sks Stage 1 Tail 197 sks Stage 2 Lead 161 sks	Fresh Wtr 8.5-8.8		Vertical <1°
	Mud logger onsite	KICK OFF PT  Mancos Silt  Gallup Top	4600  5043  5253 5479	6320						KOP 4600 10 deg/100'
Surveys every 500' Gyro at CP MWD Gamma Directional	No OH Logs	horz target  Base Gallup	5480 5563	6423		6 1/8	200' overlap at liner top  4510' Lateral  4 1/2" 11.6ppf SB80 LTC  Running external swellable csg packers for isolation of prod string Plan on setting top packer within 100' of intermediate casing shoe	8.6-9.0 OBM  Switch to OBM 8.6-9.0	.25deg updip 5449'TVD TD = 10963' MD	

**NOTES:**

- 1) Drill with 30" bit to 60', set 20" 94# conductor pipe
- 2) Drill surface to 500', R&C 9 5/8" casing
- 3) N/U BOP and surface equipment
- 4) Drill to KOP of 4600' , 8 3/4" hole size,
- 5) PU directional tools and start curve at 10deg/100' build rate
- 6) Drill to casing point of 6320' MD
- 7) R&C 7" casing, circ cmt to surface, switch to OBM
- 8) Land at 90deg, drill 4510' lateral to 10963', run 4 1/2" liner with external swellable csg packers

**Escrito M07-2409 01H**

**SHL: SWSW Section 7, T24N, R9W  
1026 FSL and 503 FWL**

**BHL: NWSW Section 12, T24N, R10W  
1980 FSL and 330 FWL**

**San Juan County, New Mexico**

**Lease Number: NMNM 112955**

**Encana Oil & Gas (USA) Inc.  
Drilling Plan**

**1. ESTIMATED TOPS OF GEOLOGICAL MARKERS (TVD)**

The estimated tops of important geologic markers are as follows:

<u>Formation</u>	<u>Depth (TVD)</u>
Ojo Alamo Ss.	945'
Kirtland	1128'
Fruitland Coal	1508'
Pictured Cliffs	1775'
Lewis	1929'
Cliffhouse	2583'
Menefee	3303'
Point Lookout	4230'
Mancos Shale	4442'
Mancos Silt	5043'
Gallup	5253'

The referenced surface elevation is 6910', KB 6923'

**2. ESTIMATED DEPTH OF POTENTIAL WATER, OIL, GAS, & OTHER MINERAL BEARING FORMATIONS**

<u>Substance</u>	<u>Formation</u>	<u>Depth (TVD)</u>
Gas	Fruitland Coal	1508'
Gas	Pictured Cliffs	1775'
Gas	Cliffhouse	2583'
Gas	Point Lookout	4230'
Oil/Gas	Mancos	4442'

All shows of fresh water and minerals will be reported and protected.

**3. PRESSURE CONTROL**

- a) Pressure control equipment and configuration will be designed to meet 2M standards.
- b) Working pressure on rams and BOPE will be 3,000 psi
- c) Function test and visual inspection of the BOP will be conducted daily and noted in the IADC Daily Drilling Report.
- d) The Annular BOP will be pressure tested to a minimum of 50 percent of its rated working pressure.
- e) Blind and Pipe Rams/BOP will be tested against a test plug to 100 percent of rated working pressure.
- f) Pressure tests are required before drilling out from under all casing strings set and cemented in place.
- g) BOP controls must be installed prior to drilling the surface casing plug and will remain in use until the well is completed or abandoned.
- h) BOP testing procedures and testing frequency will conform to Onshore Order No. 2.

**Escrito M07-2409 01H**

**SHL: SWSW Section 7, T24N, R9W  
1026 FSL and 503 FWL**

**BHL: NWSW Section 12, T24N, R10W  
1980 FSL and 330 FWL**

**San Juan County, New Mexico**

**Lease Number: NMNM 112955**

- i) BOP remote controls shall be located on the rig floor at a location readily accessible to the driller. Master controls shall be on the ground at the accumulator and shall have the capability to function all preventers.
- j) The kill line shall be 2-inch minimum and contain two kill line valves, one of which shall be a check valve.
- k) The choke line shall be a 2-inch minimum and contain two choke line valves (2-inch minimum).
- l) The choke and manifold shall contain two adjustable chokes.
- m) Hand wheels shall be installed on all ram preventers.
- n) Safety valves and wrenches (with subs for drill string connections) shall be available on the rig floor at all times.
- o) Inside BOP or float sub shall also be available on the rig floor at all times.

Proposed BOP and choke manifold arrangements are attached.

#### **4. CASING & CEMENTING PROGRAM**

The proposed casing and cementing program has been designed to protect and/or isolate all usable water zones, potentially productive zones, lost circulation zones, abnormally pressured zones, and any prospectively valuable deposits of minerals. Any isolating medium other than cement shall receive approval prior to use. The casing setting depth shall be calculated to position the casing seat opposite a competent formation which will contain the maximum pressure to which it will be exposed during normal drilling operations. All indications of useable water shall be reported.

- a) The proposed casing design is as follows:

<b>Casing</b>	<b>Depth</b>	<b>Hole Size</b>	<b>Csg Size</b>	<b>Weight</b>	<b>Grade</b>
Conductor	0-60'	30"	20"	94#	H40, STC New
Surface	0'-500'	12 1/4"	9 5/8"	36#	J55, STC New
Intermediate	0'-6320'MD	8 3/4"	7"	26#	J55, LTC New
Production Liner	6120'-10963'MD	6 1/8"	4 1/2"	11.6#	B80*, LTC New

<b>Casing String</b>				<b>Casing Strength Properties</b>			<b>Minimum Design Factors</b>		
<b>Size</b>	<b>Weight (lb/ft)</b>	<b>Grade</b>	<b>Connection</b>	<b>Collapse (psi)</b>	<b>Burst (psi)</b>	<b>Tensile (1000lb)</b>	<b>Collapse</b>	<b>Burst</b>	<b>Tension</b>
9 5/8"	36	J55	STC	2020	3520	394	1.125	1.1	1.5
7"	26	J55	LTC	4320	4980	367	1.125	1.1	1.5
4 1/2"	11.6	B80	LTC	6350	7780	201	1.125	1.1	1.5

\*B80 pipe specifications are attached

Casing design is subject to revision based on geologic conditions encountered.

All casing strings below the conductor shall be pressure tested to 0.22 psi per foot of casing string length or 1,500 psi, whichever is greater, but not to exceed 70 percent of the minimum internal yield. If pressure declines more than 10 percent in 30 minutes, corrective action shall be taken.

- b) The proposed cementing program is as follows:

Top plugs shall be used to reduce contamination of cement by displacement fluid. A bottom plug or other acceptable technique, such as a pre-flush fluid, inner string cement method, etc. shall be utilized to help isolate the cement from contamination by the mud fluid being displaced ahead of the cement slurry.

Escrito M07-2409 01H

SHL: SWSW Section 7, T24N, R9W  
1026 FSL and 503 FWL

BHL: NWSW Section 12, T24N, R10W  
1980 FSL and 330 FWL

San Juan County, New Mexico

Lease Number: NMNM 112955

Casing	Depth	Cement Volume (sacks)	Cement Type&Yield	Designed TOC	Centralizers
Conductor	60'	100sk	Type I Neat 14.8 ppg	Surface	None
Surface	500'	178sk	Type III Cement + 1% CaCl + 0.25lb/sk Cello Flake + 0.2% FL, 14.6ppg, 1.38cuf/sk	Surface	1 per joint on bottom 3 joints
Intermediate	6320'MD	30% open hole excess Lead: 289sk Tail: 197sk <del>Tail: 161sk</del> <i>Lead 2</i>	Lead: PremLite + 3% CaCl + 0.25lb/sk CelloFlake + 5lb/sk LCM, 12.1ppg 2.13cuf/sk Tail: Type III Cmt + 1% CaCl + 0.25lb/sk Cello Flake 14.5ppg 1.38cuf/sk	Surface	1 per joint for bottom 3 joints, 1 every 3 joints for remaining joints
Production Liner*	6120'-10963'	None – External casing packers	N/A	N/A	N/A

\*Production liner clarification: Utilizing external swell casing packer system for zonal isolation will not use cement in the production liner.

Actual volumes will be calculated and determined by conditions onsite. All cement slurries will meet or exceed minimum BLM and New Mexico Oil Conservation Division requirements. Slurries used will be the slurries listed above or equivalent slurries depending on service provider selected. Cement yields may change depending on slurries selected.

All waiting on cement times shall be a minimum of 8 hours or adequate to achieve a minimum of 500 psi compressive strength at the casing shoe prior to drilling out.

## 5. WELL PLAN & DIRECTIONAL DRILLING PROGRAM

The proposed horizontal well will have a kick off point of 4600'. Directional plans are attached.

Description	Proposed Depth (TVD/MD)	Formation
Horizontal Lateral TD	5449'/10963'	Gallup

**Escrito M07-2409 01H**

**SHL: SWSW Section 7, T24N, R9W  
1026 FSL and 503 FWL**

**BHL: NWSW Section 12, T24N, R10W  
1980 FSL and 330 FWL**

**San Juan County, New Mexico**

**Lease Number: NMNM 112955**

## **6. DRILLING FLUIDS PROGRAM**

a) Surface through Intermediate Casing Point:

Hole Size (in)	Depth (ft)	Mud Type	Density (lb/gal)	Viscosity (sec/qt)	Fluid Loss (cc)
30"	0-60' TVD	Fresh Water	8.3-9.2	38-100	4-28
12 1/4"	0-500' TVD	Fresh Water	8.4-8.6	60-70	NC
8 3/4"	500'TVD- 5479'TVD/6320'MD	Fresh Water LSND	8.5-8.8	40-50	8-10

b) Intermediate Casing Point to TD:

Hole Size (in)	MD (ft)	Mud Type	Density (lb/gal)	Viscosity (sec/qt)	Fluid Loss (cc)
6 1/8"	6320'-10963'	Synthetic Oil Based Mud	8.6-9.0	15-25	<15

- c) There will be sufficient mud on location to control a blowout should one occur. Mud flow and volume will be monitored both visually and with electronic pit volume totalizers. Mud tests shall be performed every 24 hours after mudding up to determine, as applicable: density, viscosity, gel strength, filtration, and pH.
- d) A closed-loop system will be used to recover drilling fluid and dry cuttings in both phases of the well and on all hole intervals, including fresh water and oil-based operations. Above-ground tanks will be utilized to hold cuttings and fluids for rig operations. A frac tank will be on location to store fresh water. Waste will be disposed of properly at an EPA-approved hazardous waste facility. Fresh water cuttings will be disposed of at Basin Disposal, Inc. and/or Industrial Ecosystems, Inc. The location will be lined in accordance with the Surface Use Plan of Operations.

## **7. TESTING, CORING and LOGGING**

- a) Drill Stem Testing – None anticipated
- b) Coring – None anticipated.
- c) Mud Logging – Mud loggers will be on location from kick off point to TD.
- d) Logging – See Below

Cased Hole:

CBL/CCL/GR/VDL will be run as needed for perforating control

## **8. ABNORMAL PRESSURES & HYDROGEN SULFIDE**

The anticipated bottom hole pressure is +/- 2565 psi based on a 9.0 ppg at 5480' TVD of the landing point of the horizontal lateral. No abnormal pressure or temperatures are anticipated.

No hydrogen sulfide gas is anticipated, however, if H<sub>2</sub>S is encountered, the guidelines in Onshore Order No. 6 will be followed.

**Escrito M07-2409 01H**

**SHL: SWSW Section 7, T24N, R9W  
1026 FSL and 503 FWL**

**BHL: NWSW Section 12, T24N, R10W  
1980 FSL and 330 FWL**

**San Juan County, New Mexico**

**Lease Number: NMNM 112955**

#### **9. ANTICIPATED START DATE AND DURATION OF OPERATIONS**

Drilling is estimated to commence on October 22, 2013. It is anticipated that completion operations will begin within 30 days after the well has been drilled depending on fracture treatment schedules with various pumping service companies.

It is anticipated that the drilling of this well will take approximately 25 days.