

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

OCD Hobbs

FORM APPROVED
OMB NO. 1004-0135
Expires: July 31, 2010**SUNDRY NOTICES AND REPORTS ON WELLS**
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.*5. Lease Serial No.
NMNM02965A

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other8. Well Name and No.
THOR 21 FED COM 703H

2. Name of Operator

EOG RESOURCES, INC. ✓

Contact: STAN WAGNER

E-Mail: stan_wagner@eogresources.com

9. API Well No.

30-025-42815 ✓

3a. Address

P.O. BOX 2267
MIDLAND, TX 79702

3b. Phone No. (include area code)

Ph: 432-686-3689

10. Field and Pool, or Exploratory

WC-025 G-09 S263327G

HOBBS OCD

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Sec 21 T26S R33E SWSE 170FSL 1640FEL

APR 04 2016

11. County or Parish, and State

LEA COUNTY, NM

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

☒ Notice of Intent☐ Subsequent Report☐ Final Abandonment Notice☐ Acidize☐ Alter Casing☐ Casing Repair☐ Change Plans☐ Convert to Injection☐ Deepen☐ Fracture Treat☐ New Construction☐ Plug and Abandon☐ Plug Back☐ Production (Start/Resume)☐ Reclamation☐ Recomplete☐ Temporarily Abandon☐ Water Disposal☐ Water Shut-Off☐ Well Integrity☒ Other
Change to Original A
PD

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompletable horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletable in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

EOG Resources requests an amendment to our approved APD for this well to reflect a change in casing design and TVD.

Changing TVD from 12420' TO: 12520' TVD, 17266' MD.

New casing design details attached.

**SEE ATTACHED FOR
CONDITIONS OF APPROVAL**

14. I hereby certify that the foregoing is true and correct.

Electronic Submission #334888 verified by the BLM Well Information System
For EOG RESOURCES, INC., sent to the Hobbs
Committed to AFMSS for processing by KENNETH RENNICK on 03/30/2016 ()

Name (Printed/Typed) STAN WAGNER

Title REGULATORY ANALYST

Signature (Electronic Submission)

Date 03/29/2016

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By

Kenneth Rennick

Title

Petroleum Engineering

Date

3/31/2014

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Carlsbad Field Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ******APR 18 2016**

**Thor 21 Fed Com 703H
30-025-42815
EOG Resources, Inc
Surface Location: Sec. 21, T. 26S, R. 33E
Conditions of Approval**

See below for the change in the Conditions of Approval for the Drilling Section.

DRILLING

A. DRILLING OPERATIONS REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ **Lea County**

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240,
(575) 393-3612

1. A Hydrogen Sulfide (H₂S) Drilling Plan shall be activated 500 feet prior to drilling into the **Delaware** formation. **As a result, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.**
2. **The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.**
3. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works is located, this does not include the dog house or stairway area.

4. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

B. CASING

Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.).

The initial wellhead installed on the well will remain on the well with spools used as needed.

Wait on cement (WOC) for Water Basin:

After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. **DURING THIS WOC TIME, NO DRILL PIPE, ETC. SHALL BE RUN IN THE HOLE.**

Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.

No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.

Risks:

Medium Cave/ Karst Occurrence

Possibility of Water Flows in the Castile and in the Salado

Possibility of Lost Circulation in the Rustler, in the Red Beds and in the Delaware

Abnormal pressures may be encountered upon penetrating the 3rd Bone Spring Sandstones and all subsequent formations.

1. The **10 3/4 inch** surface casing shall be set at approximately **900 feet** (**in a competent bed below the Magenta Dolomite, which is a Member of the Rustler, and if salt is encountered, set casing at least 25 feet above the salt**) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry.**
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Formation below the 10 3/4 inch shoe to be tested according to Onshore Order 2.III.B.1.i. Test to be done as a mud equivalency test using the mud weight necessary for the pore pressure of the formation below the shoe (not the mud weight required to prevent dissolving the salt formation) and the mud weight for the bottom of the hole. Report results to BLM office.

2. The minimum required fill of cement behind the **7 5/8 inch** intermediate casing is:

☒ Cement to surface. If cement does not circulate see B.1.a, c-d above.

If cement does not circulate to surface on the intermediate casing, the cement on the production casing must come to surface.

Formation below the 7 5/8 inch shoe to be tested according to Onshore Order 2.III.B.1.i. Test to be done as a mud equivalency test using the mud weight necessary for the pore pressure of the formation below the shoe (not the mud weight required to prevent dissolving the salt formation) and the mud weight for the bottom of the hole. Report results to BLM office.

Variance is granted for centralizers in the production interval per the drilling program.

3. The minimum required fill of cement behind the 5 1/2 inch production casing is:

☒ Cement should tie-back at least **500** feet into previous casing string. Operator shall provide method of verification. **Additional cement may be required since excess was calculated to be 24%.**

4. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

C. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API 53.
2. Variance approved to use flex line from BOP to choke manifold. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. **Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.** If the BLM inspector questions the straightness of the hose, a BLM engineer will be contacted and will review in the field or via picture supplied by inspector to determine if changes are required (operator shall expect delays if this occurs).
3. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M) psi. 5M system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.**

4. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. The tests shall be done by an independent service company utilizing a test plug **not a cup or J-packer**.
 - c. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
 - d. The results of the test shall be reported to the appropriate BLM office.
 - e. All tests are required to be recorded on a calibrated test chart. **A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.**
 - f. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
 - g. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the 3rd **Bone Springs** formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

D. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the 3rd **Bone Springs** and **Wolfcamp** formation, and shall be used until production casing is run and cemented.

Proposed mud weight may not be adequate for drilling through 3rd Bone Springs and Wolfcamp.

E. DRILL STEM TEST

If drill stem tests are performed, Onshore Order 2.III.D shall be followed.

F. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

KGR 03312016



Rennick, Kenneth <krennick@blm.gov>

Sundry NOI - Casing Change - Thor 21 Fed Com 703H & 704H

Rennick, Kenneth <krennick@blm.gov>

Wed, Mar 30, 2016 at 8:58 AM

To: Stan Wagner <Stan_Wagner@eogresources.com>

Cc: Bruce Coit <Bruce_Coit@eogresources.com>, Steve Munsell <Steve_Munsell@eogresources.com>

Hello Gentlemen,

I already communicated with Mr. Steve Munsell about the addition of information about centralizers in the notifications. But there is another issue that I identified.

I am reviewing on the 703H, I was doing my calculations and I noticed a 10M BOP & BOPE system is actually required below the intermediate casing. As of now the the Drilling Program only proposes a 5M system.

My calculation follows:

$12,520 \text{ [Max TVD in Sundry]} * (12.00 \text{ [Max MW at that Depth in Sundry]} / 19.25 - 0.22 \text{ [Assumed Gas Gradient]}) = 5045.543 > 5000$. Therefore BOP & BOPE needs to be rated, as well as tested, to a 10M System.

Because of this, I am requesting EOG to review the BOP and BOPE for this notification to address this issue.

You may also want to check the other wells that you sent notifications for. I just started on the one with the closest spud date.

Best Regards,

Kenny Rennick

[Quoted text hidden]

Kenneth Rennick

Petroleum Engineer
Bureau of Land Management
Carlsbad Field Office
(575) 234-5964
krennick@blm.gov



Rennick, Kenneth <krennick@blm.gov>

Sundry NOI - Casing Change - Thor 21 Fed Com 703H & 704H

Steve Munsell <Steve_Munsell@eogresources.com>

Wed, Mar 30, 2016 at 9:27 AM

To: "Rennick, Kenneth" <krennick@blm.gov>, Stan Wagner <Stan_Wagner@eogresources.com>

Cc: Bruce Coit <Bruce_Coit@eogresources.com>

Kenneth,

We will resubmit and change the anticipated mud weight range to 10.0 to 11.5 ppg. Normally we drill these laterals with mud weights ranging from 9.5 to 11.5 ppg. Almost always we get it done with 10.5 ppg or less.

So the 11.5 ppg maximum anticipated MW keeps us below the 5000 psi shut in surface pressure scenario.

I'm very comfortable with this. All of our rigs are equipped with 10,000 psi BOPs and chokes. The only piece of equipment that is not rated for 10,000 psi is the annular BOP.

Also we have all rigs equipped with two sets of pipe rams and one set of blinds (single BOP, mud cross, dual BOP, annular).

Thanks for your help.

>>>Munsell.

From: Rennick, Kenneth [mailto:krennick@blm.gov]

Sent: Wednesday, March 30, 2016 9:59 AM

To: Stan Wagner <Stan_Wagner@eogresources.com>

Cc: Bruce Coit <Bruce_Coit@eogresources.com>; Steve Munsell <Steve_Munsell@eogresources.com>

Subject: Re: Sundry NOI - Casing Change - Thor 21 Fed Com 703H & 704H

** External email. Use caution.**

Hello Gentlemen,

[Quoted text hidden]

[Quoted text hidden]

EOG RESOURCES, INC.
THOR 21 FED COM NO. 703H

1. GEOLOGIC NAME OF SURFACE FORMATION:

Permian

2. ESTIMATED TOPS OF IMPORTANT GEOLOGICAL MARKERS:

Rustler	830'
Top of Salt	1,180'
Base of Salt / Top Anhydrite	4,770'
Base Anhydrite	4,950'
Lamar	4,950'
Bell Canyon	4,980'
Cherry Canyon	5,990'
Brushy Canyon	7,750'
Bone Spring Lime	9,135'
1 st Bone Spring Sand	10,070'
2 nd Bone Spring Lime	10,500'
2 nd Bone Spring Sand	10,664'
3 rd Bone Spring Carb	11,520'
3 rd Bone Spring Sand	11,775'
Wolfcamp	12,163'
TD	12,520'

3. ESTIMATED DEPTHS OF ANTICIPATED FRESH WATER, OIL OR GAS:

Upper Permian Sands	0- 400'	Fresh Water
Cherry Canyon	5,990'	Oil
Brushy Canyon	7,750'	Oil
1 st Bone Spring Sand	10,070'	Oil
2 nd Bone Spring Lime	10,500'	Oil
2 nd Bone Spring Sand	11,664'	Oil
3 rd Bone Spring Carb	11,520'	Oil
3 rd Bone Spring Sand	11,775'	Oil
Wolfcamp	12,163'	Oil

No other Formations are expected to give up oil, gas or fresh water in measurable quantities. Surface fresh water sands will be protected by setting 10.75" casing at 900' and circulating cement back to surface.

EOG RESOURCES, INC.
THOR 21 FED COM NO. 703H

4. CASING PROGRAM - NEW

SEE
CDA

Hole Size	Interval	Csg OD	Weight	Grade	Conn	DF _{min} Collapse	DF _{min} Burst	DF _{min} Tension
14.75"	0 - 900'	10.75"	40.5#	J55	STC	1.125	1.25	1.60
9.875"	0-8,000'	7.625"	29.7#	HCP-110	LTC	1.125	1.25	1.60
8.75"	8,000' - 10,900'	7.625"	29.7#	HCP-110	Ultra FJ	1.125	1.25	1.60
6.75"	0'-17,266'	5.5"	23#	HCP-110	ULT SFII	1.125	1.25	1.60

Variance is requested to wave the centralizer requirements for the 7-5/8" FJ casing in the 8-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 8-3/4" hole interval to maximize cement bond and zonal isolation. Centralizers will be placed in the 9-7/8" hole interval at least one every third joint.

Variance is also requested to wave any centralizer requirements for the 5-1/2" FJ casing in the 6-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 6-3/4" hole interval to maximize cement bond and zonal isolation.

Cementing Program:

SEE
CDA

Depth	No. Sacks	Wt. ppg	Yld Ft ³ /ft	Mix Water Gal/sk	Slurry Description
10-3/4" 900	325	13.5	1.73	9.13	Class C + 4.0% Bentonite + 0.6% CD-32 + 0.5% CaCl ₂ + 0.25 lb/sk Cello-Flake (TOC @ Surface)
	200	14.8	1.34	6.34	Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate
7-5/8" 10,900'	750	9.0	2.50	9.06	Class C + 0.6% ASM-3 + 0.15% CDF-4P + 0.6% LTR + 0.5% SCA-6 + 0.13 pps LCL-11 + 0.13 pps LDP-c-0215
	500	12.5	1.71	9.06	Class C + 0.6% LTR + 0.5% SCA-6 + 0.6% ASM-3 + 0.15% CDF-4P + 0.13% LCL-11 + 0.13% LCF-7
	250	15.6	1.19	5.20	Class H + 0.2% ASM-3 + 0.3% SCA-6 + 0.65% LTR + 0.3% SPC-2
5-1/2" 17,266'	575	14.1	1.26	5.80	Class H + 0.1% C-20 + 0.05% CSA-1000 + 0.20% C-49 + 0.40% C-17

Note: Cement volumes based on bit size plus at least 25% excess in the open hole plus 10% excess in the cased-hole overlap section.

EOG RESOURCES, INC.
THOR 21 FED COM NO. 703H

5. MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:

Variance is requested to use a co-flex line between the BOP and choke manifold (instead of using a 4" OD steel line).

SEE
COA

The minimum blowout preventer equipment (BOPE) shown in Exhibit #1 will consist of a single ram, mud cross and double ram-type (10,000 psi WP) preventer and an annular preventer (5000-psi WP). Both units will be hydraulically operated and the ram-type will be equipped with blind rams on bottom and drill pipe rams on top. All BOPE will be tested in accordance with Onshore Oil & Gas order No. 2.

Before drilling out of the surface casing, the ram-type BOP and accessory equipment will be tested to 5000/ 250 psig and the annular preventer to 5000/ 250 psig. The surface casing will be tested to 1500 psi for 30 minutes.

Before drilling out of the intermediate casing, the ram-type BOP and accessory equipment will be tested to 5000/ 250 psig and the annular preventer to 5000/ 250 psig. The intermediate casing will be tested to 2000 psi for 30 minutes.

Pipe rams will be operationally checked each 24-hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

A hydraulically operated choke will be installed prior to drilling out of the intermediate casing shoe.

6. TYPES AND CHARACTERISTICS OF THE PROPOSED MUD SYSTEM:

During this procedure we plan to use a Closed-Loop System and haul contents to the required disposal.

The applicable depths and properties of the drilling fluid systems are as follows.

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 - 900'	Fresh - Gel	8.6-8.8	28-34	N/c
900' - 10,900'	Brine	8.8-10.0	28-34	N/c
10,900' - 17,266' Lateral	Oil Base	10.0-11.5	58-68	3 - 6

An electronic pit volume totalizer (PVT) will be utilized on the circulating system, to monitor pit volume, flow rate, pump pressure and stroke rate.

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept at the wellsite at all times.

EOG RESOURCES, INC.
THOR 21 FED COM NO. 703H

7. AUXILIARY WELL CONTROL AND MONITORING EQUIPMENT:

- (A) A kelly cock will be kept in the drill string at all times.
- (B) A full opening drill pipe-stabbing valve (inside BOP) with proper drill pipe connections will be on the rig floor at all times.
- (C) H₂S monitoring and detection equipment will be utilized from surface casing point to TD.

8. LOGGING, TESTING AND CORING PROGRAM:

SEE COA

Open-hole logs are not planned for this well.

GR-CCL Will be run in cased hole during completions phase of operations.

9. ABNORMAL CONDITIONS, PRESSURES, TEMPERATURES AND POTENTIAL HAZARDS:

SEE
COA

The estimated bottom-hole temperature (BHT) at TD is 190 degrees F with an estimated maximum bottom-hole pressure (BHP) at TD of 7487 psig. No hydrogen sulfide or other hazardous gases or fluids have been encountered, reported or are known to exist at this depth in this area. Severe loss circulation is expected from 7,300' to Intermediate casing point.

10. ANTICIPATED STARTING DATE AND DURATION OF OPERATIONS:

The drilling operation should be finished in approximately one month. If the well is productive, an additional 60-90 days will be required for completion and testing before a decision is made to install permanent facilities.

PERFORMANCE DATA

TMK UP ULTRA™ FJ
Technical Data Sheet

7.625 in

29.70 lbs/ft

P110 HC - EVRAZ

Tubular Parameters


Size	7.625	in	Minimum Yield	110,000	psi
Nominal Weight	29.70	lbs/ft	Minimum Tensile	125,000	psi
Grade	P110 HC - EVRAZ				
PE Weight	29.04	lbs/ft	Yield Load	939,000	lbs
Wall Thickness	0.375	in	Tensile Load	1,067,000	lbs
Nominal ID	6.875	in	Min. Internal Yield Pressure	9,420	psi
Drift Diameter	6.750	in	Collapse Pressure	7,610	psi
Nom. Pipe Body Area	8.541	in ²			

Connection Parameters

Connection OD	7.625	in
Connection ID	6.881	in
Make-Up Loss	4.022	in
Critical Section Area	5.316	in ²
Tension Efficiency	62.2	%
Compression Efficiency	62.2	%
Yield Load in Tension	584,000	lbs
Min. Internal Yield Pressure	9,470	psi
Collapse Pressure	7,610	psi
Uniaxial Bending	41	°/ 100 ft

Make-Up Torques

Min. Make-Up Torque	17,700	ft-lbs
Opt. Make-Up Torque	19,700	ft-lbs
Max. Make-Up Torque	21,700	ft-lbs
Yield Torque	31,500	ft-lbs

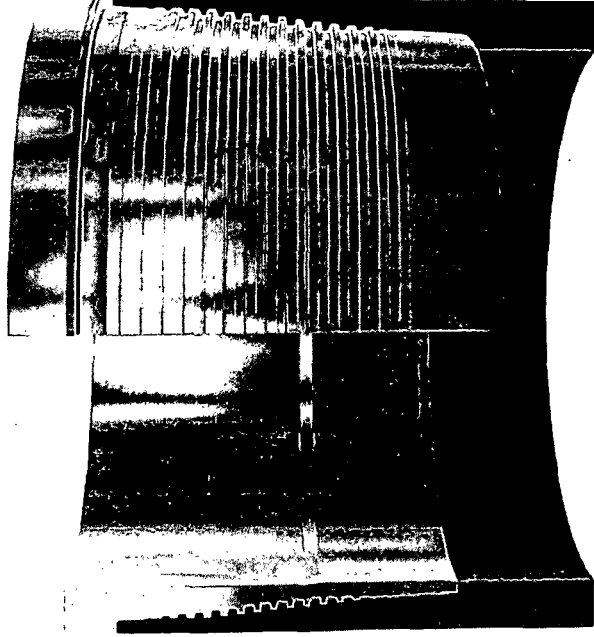


PREMIUM CONNECTIONS PERFORMANCE DATA

Size NomWt Grade

TMK UP ULTRA™
SFII
5.500in 23.0lbs/ft P-110 HC

Technical Data Sheet

Tubular Parameters							
Size	5.500	in		Minimum Yield	110,000	psi	
Nominal Weight	23.0	lbs/ft		Minimum Tensile	125,000	psi	
Grade	P-110 HC			Yield Load	729,000	lbs	
PE Weight	22.54	lbs/ft		Tensile Load	828,000	lbs	
Wall Thickness	0.415	in		Min. Internal Yield Pressure	14,500	psi	
Nominal ID	4.670	in		Collapse Pressure	15,110	psi	
Drift Diameter	4.545	in					
Nom. Pipe Body Area	6.630	in²					

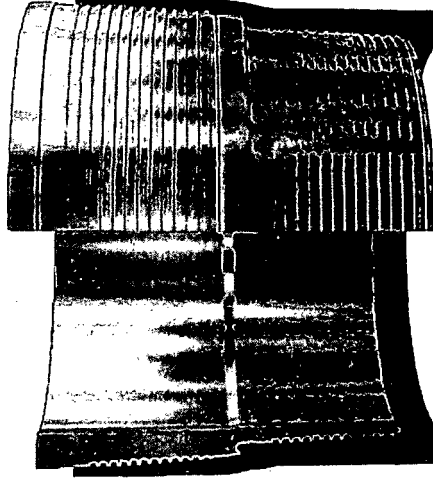

Connection Parameters			
Connection OD	5.726	in	
Connection ID	4.626	in	
Make - Up Loss	5.653	in	
Critical Section Area	5.817	in²	
Efficiency - Tension	85%	%	
Efficiency - Compression	73%	%	
Yield Load In Tension	621,000	lbs	
Min. Internal Yield Pressure	14,500	psi	
Collapse Pressure	15,110	psi	
Uniaxial Bending	78	°/ 100 ft	


Make-Up Torques			
Min. Make-Up Torque	15,500	ft-lbs	
Optimum Make-Up Torque	16,300	ft-lbs	
Max. Make-Up Torque	18,700	ft-lbs	
Yield Torque	24,800	ft-lbs	

Thor 21 Fed Com #703H

**170' FSL
1640' FEL
Section 21
T-26-S, R-33-E**

**Lea County, New Mexico
Proposed Wellbore
Revised 3/29/16
API: 30-025-42815**

**KB: 3,286'
GL: 3,256'**

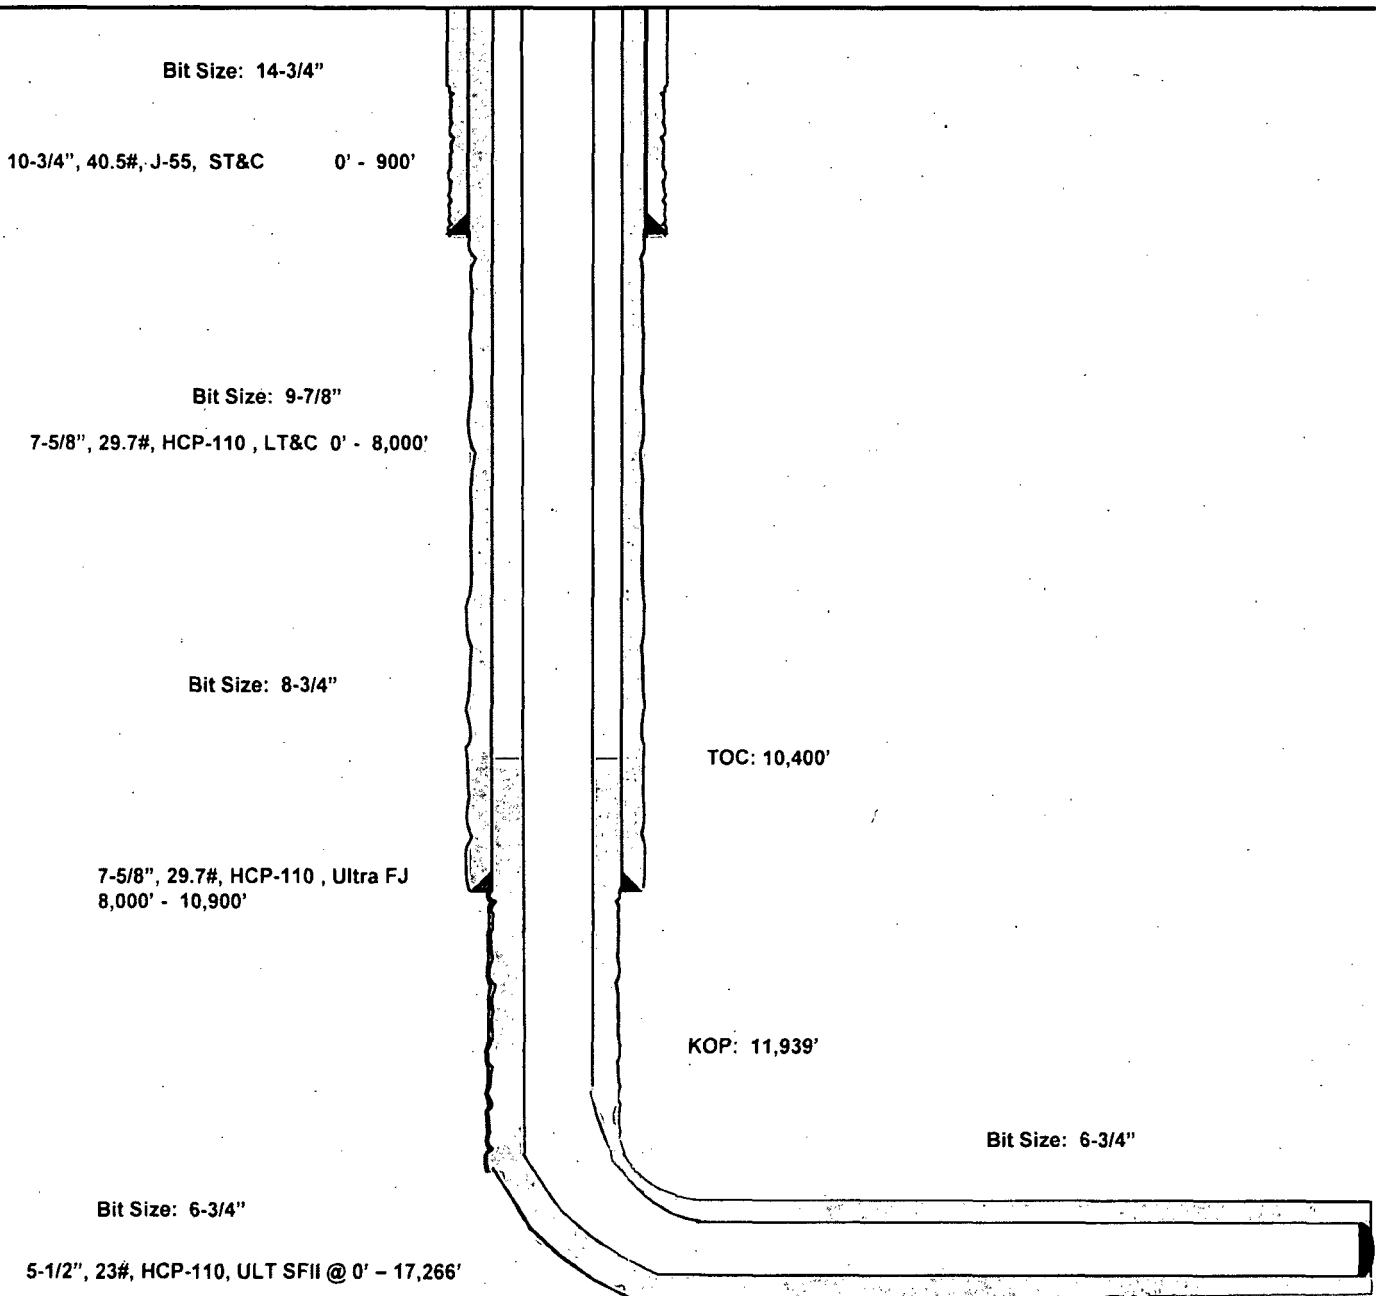

Lateral: 17,266' MD, 12,520' TVD
Upper Most Perf:
330' FSL & 1675' FEL Sec. 21
Lower Most Perf:
330' FNL & 1675' FEL
BH Location: 230' FNL & 1675' FEL
Section 21
T-26-S, R-33-E