- Form C-144 July 21, 2008

District I 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr.

Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

. 16	00	\
1,		

Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application

O roposed Alternative Method Fel	thin of Closure Fian Application	
Modification to an existing perm Closure plan only submitted for	tem, below-grade tank, or proposed alternative m	nethod
below-grade tank, or proposed alternative method		
Instructions: Please submit one application (Form C-144) per indivi		•
Please be advised that approval of this request does not relieve the operator of liabilit environment. Nor does approval relieve the operator of its responsibility to comply v		
1.	The state of the s	
Operator: BP AMERICA PRODUCTION COMPANY	OGRID #: 778	
Address: 200 Energy Court, Farmington, NM 87401		
Facility or well name: HEATON LS 005		
API Number: 3004510251 OCI	D Permit Number:	
U/L or Qtr/Qtr M Section 28.0 Township 31.0N	Range 11W County: San Juan Co	unty
Center of Proposed Design: Latitude 36.865248 Lo	ngitude <u>-108.000818</u> NAI	D: □1927 🗷 1983
Surface Owner: 🗷 Federal 🗌 State 🗍 Private 🔲 Tribal Trust or Indian Allo	tment	
2		
Pit: Subsection F or G of 19.15.17.11 NMAC	מת	VD DEC 6 '13
Temporary: Drilling Workover		L COMS. DIV.
☐ Permanent ☐ Emergency ☐ Cavitation ☐ P&A		il vuito. Div. DIST. 3
Lined Unlined Liner type: Thicknessmil LLDPE	☐ HDPE ☐ PVC ☐ Other	
☐ String-Reinforced		
Liner Seams:	Volume:bbl Dimensions: Lx V	<i>W</i> x D
3.		
Closed-loop System: Subsection H of 19.15.17.11 NMAC		
Type of Operation: P&A Drilling a new well Workover or Drilling intent)	g (Applies to activities which require prior approval of	a permit or notice of
☐ Drying Pad ☐ Above Ground Steel Tanks ☐ Haul-off Bins ☐ Other		
☐ Lined ☐ Unlined Liner type: Thicknessmil ☐ LLDP	E HDPE PVC Other	
Liner Seams: Welded Factory Other	_	
4		
Below-grade tank: Subsection I of 19.15.17.11 NMAC Tank ID:	Α	
Volume: 95.0 bbl Type of fluid: Produced Water		
Tank Construction material: Steel		
Secondary containment with leak detection Visible sidewalls, liner, 6	-inch lift and automatic overflow shut-off	
☐ Visible sidewalls and liner ☐ Visible sidewalls only ■ Other SINGLI		T VISIBLE
Liner type: Thicknessmil HDPE PVC C		
5. Alternative Method:		
Submittal of an exception request is required. Exceptions must be submitted t	to the Santa Fe Environmental Bureau office for consider	deration of approval.
		1.1

Form C-144

Oil Conservation Division

Page 1 of 5

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school,	hamital							
institution or church)	похриш,							
Four foot height, four strands of barbed wire evenly spaced between one and four feet Alternate. Please specify 4' Hogwire with single barbed wire.								
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other								
☐ Monthly inspections (If netting or screening is not physically feasible)								
8.								
Signs: Subsection C of 19.15.17.11 NMAC 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers								
Signed in compliance with 19.15.16.8 NMAC								
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	office for							
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate of fice or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of a Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to dry above-grade tanks associated with a closed-loop system.	opriate district approval.							
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes 🗷 No							
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	¥ Yes ☐ No							
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Yes No							
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Yes No							
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes 🗷 No							
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes 🗷 No							
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes 🗷 No							
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes 🗷 No							
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	Yes 🗶 No							
Within a 100-year floodplain FEMA map	☐ Yes 🗷 No							

11. Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are
attached.
and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number: or Permit Number:
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number:
Previously Approved Operating and Maintenance Plan API Number:(Applies only to closed-loop system that use
above ground steel tanks or haul-off bins and propose to implement waste removal for closure)
13. Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are
attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment
Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC
Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC
Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan
☐ Emergency Response Plan ☐ Oil Field Waste Stream Characterization
Monitoring and Inspection Plan
☐ Erosion Control Plan ☐ Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Proposed Closure: 19.15.17.13 NMAC
Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type: ☐ Drilling ☐ Workover ☐ Emergency ☐ Cavitation ☐ P&A ☐ Permanent Pit ☒ Below-grade Tank ☐ Closed-loop System ☐ Alternative
Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only)
On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.
 ▶ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC ▶ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
 ☑ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) ☑ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

16. Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13.D NMAC) Instructions: Please indentify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if more than two facilities are required.										
Disposal Facility Name: Disposal Facility Permit Number:										
Disposal Facility Name: Disposal Facility Permit Number:										
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future service and operations? Yes (If yes, please provide the information below) No										
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC										
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.										
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA									
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No									
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA									
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No									
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image										
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site										
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	Yes No									
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No									
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	Yes No									
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ☐ No									
Within a 100-year floodplain FEMA map	☐ Yes ☐ No									
18. On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of subsection F of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved) Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC										

Operator Application Certification:
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.
Name (Print): Jeffrey Peace Title: Field Environmental Advisor
Signature: Date: 06/14/2010
e-mail address: Peace Jeffrey @ pp.com Telephone: 505-326-9479
20.
OCD Approval: Permit Application (including closure plan) Closure Plan (only) 000 Condition (see atjachment)
OCD Representative Signature: Approval Date: 4/2/12
Title: 1000 Permit Number: OCD Permit Number:
21. Closure Report (required within 60 days of closure completion): Subsection K of 19.15.17.13 NMAC
Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.
Closure Completion Date: 5-10-2013
22. Closure Method: Waste Excavation and Removal On-Site Closure Method Alternative Closure Method Waste Removal (Closed-loop systems only) If different from approved plan, please explain.
23. Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: Instructions: Please indentify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities were utilized.
Disposal Facility Name: Disposal Facility Permit Number:
Disposal Facility Name: Disposal Facility Permit Number:
Were the closed-loop system operations and associated activities performed on or in areas that will not be used for future service and operations? Yes (If yes, please demonstrate compliance to the items below) No
Required for impacted areas which will not be used for future service and operations: Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique
24.
Closure Report Attachment Checklist: Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the box, that the documents are attached.
Proof of Closure Notice (surface owner and division) Proof of Deed Notice (required for on-site closure)
Plot Plan (for on-site closures and temporary pits)
☐ Confirmation Sampling Analytical Results (if applicable) ☐ Waste Material Sampling Analytical Results (required for on-site closure)
Disposal Facility Name and Permit Number
 Soil Backfilling and Cover Installation ☐ Re-vegetation Application Rates and Seeding Technique
(Photo Post market)
On-site Closure Location: Latitude 36-865248 Longitude 108. MAD: 1927 1983
Operator Closure Certification:
I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.
Name (Print): <u>Jeff Reace</u> Title: <u>Field Environmental Advisor</u>
Signature: Date: December 5, 2013
e-mail address: pacce c jeffrey @ bp.com Telephone: (505) 326-9479

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 District II 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Submit 1 Copy to appropriate District Office in accordance with 19.15.29 NMAC.

Form C-141

Revised August 8, 2011

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

Release Notification and Corrective Action												
						OPERA	TOR	al Report	\boxtimes	Final Report		
Name of Co						Contact: Jef						
		Court, Farmi	ngton, N	M 87401		Telephone N	No.: 505-326-94	79				
Facility Nar	ne: Heatoi	n LS 5				Facility Typ	e: Natural gas v	vell				
Surface Ow	ner: Feder	al		Mineral C	wner:	Federal			API No	. 30045102	51	
				LOCA	TIO	N OF REI	LEASE			_		
Unit Letter	Section	Township	Range	Feet from the		/South Line	Feet from the	Fast/W	est Line	County: Sa	n luan	
M	28	31N	11W	880	South		1,190	West	est Eme	County. Be	ar s dan	
		· · · · · ·		065040			100,00010					
Latitude 36.865248 Longitude 108.000818												
				NAI	UKE	OF REL						
Type of Rele		w grade tanks	05 hh1				Release: N/A our of Occurrence			Recovered: N		
Was Immedia			- 93 001			If YES, To		e	Date and	Hour of Disc	overy.	
was illinear	ate Notice v		Yes	No 🛭 Not Re	quired		Whom:					
By Whom?						Date and F	our					
Was a Watercourse Reached? ☐ Yes ☒ No					If YES, Vo	lume Impacting t	he Water	course.				
If a Wateress	iree was Im	pacted, Descr	ha Fully 8	<u> </u>								
ii a watercot	iise was iii	ipacieu, Descr	ibe Fully.									
				n Taken.* Sampli TPH, BTEX and						g removal to	ensure	e no soil
		•		ten.* BGT was read over the site.	noved	and the area u	nderneath the BG	T was sa	mpled. T	ne excavated	area v	vas
I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to NMOCD rules and regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger public health or the environment. The acceptance of a C-141 report by the NMOCD marked as "Final Report" does not relieve the operator of liability should their operations have failed to adequately investigate and remediate contamination that pose a threat to ground water, surface water, human health or the environment. In addition, NMOCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, or local laws and/or regulations.									ndanger Tiability man health			
				<u>.</u>			OIL CONS	SERV	ATION	DIVISIO	N	
Signature:	Af	Peace										
Printed Name	e: Jeff Peac	e				Approved by	Environmental S ₁	pecialist:				
Title: Field E	nvironmen	tal Advisor				Approval Dat	e:	Е	xpiration	Date:		
E-mail Addre	ess: peace.jo	effrey@bp.coi	n			Conditions of	Approval:					
Date: Decem	ber 5, 201	3	P <u>h</u> or	ne: 505-326-9479		Attached						

^{*} Attach Additional Sheets If Necessary

CLIENT: BP	P.O. BOX 87, BLO	INEERING, INC OMFIELD, NM 632-1199		API #: 3004510251 TANK ID (if applicble): A						
FIELD REPORT:	(circle one): BGT CONFIRMATION / REL		THER:	PAGE#: 1	of 1					
SITE INFORMATION	J: SITE NAME: HEATON L	S#5		DATE STARTED:	05/10/13					
QUAD/UNIT: M SEC: 28 TWP:		IM CNTY: SJ	ST: NM	DATE FINISHED:						
1/4-1/4/FOOTAGE: 800'S / 1,190' \	W SW/SW LEASE TYPE:	FEDERAL/ STATE /	FEE / INDIAN	ENVIRONMENTAL						
	PROD. FORMATION: MV CONTR	ELKHODN		SPECIALIST(S):	NJV					
REFERENCE POINT				GLELEV:	5,870'					
	GPS COORD.: 36.865				79', N55.5E					
2)				ARING FROM W.H.:						
3)				ARING FROM W.H.:						
4)	GPS COORD.:			ARING FROM W.H.:						
SAMPLING DATA:	CHAIN OF CUSTODY RECORD(S) # OR LAE	USED: HAII	<u>, , , , , , , , , , , , , , , , , , , </u>		OVM READING					
	_! (95) SAMPLE DATE: 05/10/13			8015B/8021B/300 ((ppm)					
·	SAMPLE DATE:				V(VI)					
	SAMPLE DATE:									
·	SAMPLE DATE:									
	SOIL TYPE: SAND SILTY SAN									
SOIL COLOR: DARK Y	ELLOWISH BROWN	SILI / <u>SILI Y CLAY I</u> C	LAY / GRAVEL / UTI							
COHESION (ALL OTHERS): NON COHESIVE / SLIGHTL		PLASTICITY (CLAYS): NON PLA	ASTIC / SLIGHTLY PLASTIC (COHESIVE / MEDIUM PLASTIC / H	HIGHLY PLASTIC					
CONSISTENCY (NON COHESIVE SOILS): LO		DENSITY (COHESIVE C								
MOISTURE: DRY/SLIGHTLYMOIST MOIST / W SAMPLE TYPE: GRAB COMPOSITE :		HC ODOR DETECTED	D: YES NO EXPL	ANATION						
DISCOLORATION/STAINING OBSERVED										
ANY AREAS DISPLAYING WETNESS: YES / NO										
	DBSERVED AND/OR OCCURRED: YES / ER LOW PROFILE BGT REMOVED. AG		ADDROY SAME I	OCATION						
ADDITIONAL COMMENTS. 15 DIAMETI	IN LOW PROFILE DOT NEWOVED. AC	1 TO BE INSTALLED W	AFFROX. SAME LO	JOATION.						
SOIL IMPACT DIMENSION ESTIMATION DEPTH TO GROUNDWATER: >100' N		X NA ft. AREST SURFACE WATER:		IMATION (Cubic Yards D TPH CLOSURE STD:): <u>NA</u> 100 _{ppm}					
SITE SKETCH		PLOT PLAN circle	e: attached OVM	ONLID DEAD						
OTTE OTTE OTT		PLOTPLAN CITCH		CALIB. READ. = NA	ppm RF = 0.52					
			[]	CALIB. GAS = <u>NA</u> : <u>NA</u> am/pm DATE	ppm					
	PBGTL T.B. ~'	/ ·	18							
	$\begin{array}{c} \text{I.B.} \\ \text{B.G.} \end{array} \left(\begin{array}{c} X \\ X \\ X \end{array} \right)$	BERM		MISCELL. N						
		DEKIN .		<u>0: N1583564</u>	·					
			PI	0 #: K: ZEVH01B (GT2					
				J#: Z2-00690-						
*					6/14/10					
ТО W .H.		PROD.	1	CD Appr. date(s): 0	4/02/12					
	\	TANK	Tan ID	k OVM = Organic Va						
	\		Α	BGT Sidewalls Visible						
		X - S	S.P.D.	BGT Sidewalls Visible						
NOTES: BGT = BELOW-GRADE TANK; E.D. = EXCAVATION		.H. = TEST HOLE; ~ = APPROX.; W	/,H. = WELL HEAD;	BGT Sidewalls Visible						
	LOW-GRADE TANK LOCATION;		VALL; NA - NOT M	agnetic declination	: 10 E					
TRAVEL NOTES: CALLOUT:		_ ONSITE:05/1	0/13							

Analytical Report

Lab Order 1305525

Date Reported: 5/21/2013

Hall Environmental Analysis Laboratory, Inc.

CLIENT: Blagg Engineering

HEATON LS #5

Lab ID: 1305525-001

Project:

Matrix: SOIL

Client Sample ID: 5PC-TB @ 4.5' (95)

Collection Date: 5/10/2013 11:00:00 AM

Received Date: 5/14/2013 10:10:00 AM

Analyses	Result RL Qual Units		Units	DF	Date Analyzed	Batch	
EPA METHOD 8015D: DIESEL RANGE					Analyst	: JME	
Diesel Range Organics (DRO)	ND	10		mg/Kg	1	5/17/2013 4:03:47 PM	7474
Surr: DNOP	116	63-147		%REC	1	5/17/2013 4:03:47 PM	7474
EPA METHOD 8015D: GASOLINE RAN	GE					- Analyst	: NSB
Gasoline Range Organics (GRO)	ND	4.7		mg/Kg	1	5/17/2013 4:03:15 PM	7477
Surr: BFB	121	80-120	S	%REC	1	5/17/2013 4:03:15 PM	7477
EPA METHOD 8021B: VOLATILES						Analyst	: NSB
Benzene	ND	0.047		mg/Kg	1	5/17/2013 4:03:15 PM	7477
Toluene	ND	0.047		mg/Kg	1	5/17/2013 4:03:15 PM	7477
Ethylbenzene	ND	0.047		mg/Kg	1	5/17/2013 4:03:15 PM	7477
Xylenes, Total	ND	0.093		mg/Kg	1	5/17/2013 4:03:15 PM	7477
Surr: 4-Bromofluorobenzene	101	80-120		%REC	1	5/17/2013 4:03:15 PM	7477
EPA METHOD 300.0: ANIONS						Analyst	: JRR
Chloride	28	1.5		mg/Kg	1	5/16/2013 3:21:08 PM	7472
EPA METHOD 418.1: TPH						Analyst	: LRW
Petroleum Hydrocarbons, TR	ND	20		mg/Kg	1	5/16/2013 12:00:00 PM	7476

Refer to the QC Summary report and sample login checklist for flagged QC data and preservation information.

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH greater than 2 for VOA and TOC only.
- RL Reporting Detection Limit

- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit

Page 1 of 7

- R RPD outside accepted recovery limits
- S Spike Recovery outside accepted recovery limits

Hall Environmental Analysis Laboratory, Inc.

WO#: 1305525

21-May-13

Client:

Blagg Engineering

Project:

HEATON LS #5

Sample ID MB-7472

SampType: MBLK

TestCode: EPA Method 300.0: Anions

Client ID:

PBS

Batch ID: 7472

RunNo: 10696

Prep Date:

SeqNo: 302221

Analyte

5/16/2013

Analysis Date: 5/16/2013

Units: mg/Kg

HighLimit

%RPD **RPDLimit**

Qual

Chloride

Result **PQL** ND 1.5

Sample ID LCS-7472 LCSS

Prep Date: 5/16/2013

SampType: LCS Batch ID: 7472 TestCode: EPA Method 300.0: Anions

RunNo: 10696

Client ID:

Analysis Date: 5/16/2013

SeqNo: 302222

Units: mg/Kg

Analyte

%REC

HighLimit

RPDLimit Qual

PQL

15.00

SPK value SPK Ref Val

110

Chloride

15

1.5

SPK value SPK Ref Val %REC LowLimit

98.0

90

%RPD

Qualifiers:

Value exceeds Maximum Contaminant Level.

E Value above quantitation range

Analyte detected below quantitation limits J

Sample pH greater than 2 for VOA and TOC only.

RLReporting Detection Limit

Analyte detected in the associated Method Blank В

Н Holding times for preparation or analysis exceeded

ND Not Detected at the Reporting Limit

R RPD outside accepted recovery limits

S Spike Recovery outside accepted recovery limits Page 2 of 7

Hall Environmental Analysis Laboratory, Inc.

WO#: 1305525

21-May-13

Client:

Blagg Engineering

Project:

Analyte

HEATON LS #5

Sample ID MB-7476

SampType: MBLK

TestCode: EPA Method 418.1: TPH

Client ID:

PBS

Batch ID: 7476

PQL

20

RunNo: 10676

Prep Date: 5/16/2013 Analysis Date: 5/16/2013

SPK value SPK Ref Val

SeqNo: 301529

%REC LowLimit

Units: mg/Kg

HighLimit

RPDLimit

Qual

Petroleum Hydrocarbons, TR

Sample ID LCS-7476

Prep Date: 5/16/2013

Client ID: LCSS

ND

100

Result

SampType: LCS Batch ID: 7476

TestCode: EPA Method 418.1: TPH

RunNo: 10676

80

120

Analysis Date: 5/16/2013

SeqNo: 301530

100

Units: mg/Kg

Analyte

PQL 20

SPK value SPK Ref Val %REC LowLimit HighLimit

%RPD **RPDLimit**

Qual

Petroleum Hydrocarbons, TR

Prep Date:

Sample ID LCSD-7476

SampType: LCSD Batch ID: 7476

TestCode: EPA Method 418.1: TPH

RunNo: 10676 SeqNo: 301531

Units: mg/Kg

120

%RPD

RPDLimit Qual

Analyte

Client ID: LCSS02

5/16/2013

Analysis Date: 5/16/2013

SPK value SPK Ref Val %REC LowLimit 0

HighLimit

%RPD

Petroleum Hydrocarbons, TR

Result **PQL** 100 20

100.0

100.0

102

1.41

20

Qualifiers:

Value exceeds Maximum Contaminant Level.

Е Value above quantitation range

Analyte detected below quantitation limits J

P Sample pH greater than 2 for VOA and TOC only. Reporting Detection Limit RL

В Analyte detected in the associated Method Blank

Not Detected at the Reporting Limit ND

R RPD outside accepted recovery limits

S Spike Recovery outside accepted recovery limits

Н Holding times for preparation or analysis exceeded

Page 3 of 7

Hall Environmental Analysis Laboratory, Inc.

WO#: 1305525

21-May-13

Client: Project: Blagg Engineering

HEATON LS #5

Sample	ID	MB-7474

SampType: MBLK

TestCode: EPA Method 8015D: Diesel Range Organics

LowLimit

LowLimit

63

Client ID:

PBS

Batch ID: 7474

RunNo: 10701

Prep Date:

SeqNo: 303158

Units: mg/Kg

Analyte

5/16/2013

Analysis Date: 5/17/2013 **PQL**

%REC

HighLimit

Qual

Diesel Range Organics (DRO)

ND 11

10.00

SPK value SPK Ref Val

108

147

RPDLimit

Surr: DNOP

Sample ID LCS-7474

SampType: LCS

TestCode: EPA Method 8015D: Diesel Range Organics

%RPD

Client ID:

LCSS

Batch ID: 7474

RunNo: 10701

Prep Date: 5/16/2013

Analysis Date: 5/17/2013

10

SeqNo: 303159

%REC

Units: mg/Kg

Diesel Range Organics (DRO)

Result PQL

50.00

5.000

5.000

SPK value SPK Ref Val

HighLimit

128

%RPD

Surr: DNOP

5.1

42

83.2 102

77.1

63

63

RPDLimit

Qual

5/20/2013

SampType: LCS

TestCode: EPA Method 8015D: Diesel Range Organics

147

Sample ID LCS-7513 Client ID:

Sample ID MB-7513

LCSS

Batch ID: **7513**

RunNo: 10726

SeqNo: 303445

Analyte

Prep Date:

Result

Analysis Date: 5/20/2013 **PQL**

SPK value SPK Ref Val

%REC LowLimit Units: %REC HighLimit

147

RPDLimit Qual

Surr: DNOP

SampType: MBLK

TestCode: EPA Method 8015D: Diesel Range Organics

129

Client ID:

PBS

Batch ID: 7513

RunNo: 10726

Prep Date: Analyte

5/20/2013

Analysis Date: 5/20/2013

S

SeqNo: 303446

Units: %REC

%RPD

Qual

Surr: DNOP

Result

SPK value SPK Ref Val

105

63

LowLimit

HighLimit

%RPD

RPDLimit

10

10.00

%REC

147

P

- Qualifiers: Value exceeds Maximum Contaminant Level.
 - E Value above quantitation range
 - Analyte detected below quantitation limits
- Sample pH greater than 2 for VOA and TOC only. RLReporting Detection Limit
- В Analyte detected in the associated Method Blank

Spike Recovery outside accepted recovery limits

- Н Holding times for preparation or analysis exceeded ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits

Page 4 of 7

Hall Environmental Analysis Laboratory, Inc.

WO#:

1305525 21-May-13

Client:

Blagg Engineering

HEATON LC #5

Project: HEATO	ON LS #5	
Sample ID MB-7477	SampType: MBLK TestCode: EPA Method 8015D: Gasoline Range	
Client ID: PBS	Batch ID: R10713 RunNo: 10713	
Prep Date: 5/16/2013	Analysis Date: 5/17/2013 SeqNo: 303069 Units: %REC	
Analyte	Result PQL SPK value SPK Ref Val %REC LowLimit HighLimit %RPD RPDLimit Qu	al
Surr: BFB	940 1000 94.3 80 120	
Sample ID LCS-7477	SampType: LCS TestCode: EPA Method 8015D: Gasoline Range	
Client ID: LCSS	Batch ID: R10713 RunNo: 10713	
Prep Date: 5/16/2013	Analysis Date: 5/17/2013 SeqNo: 303070 Units: %REC	
Analyte	Result PQL SPK value SPK Ref Val %REC LowLimit HighLimit %RPD RPDLimit Qui	al
Surr: BFB	1100 1000 112 80 120	
Sample ID MB-7477	SampType: MBLK TestCode: EPA Method 8015D: Gasoline Range	
Client ID: PBS	Batch ID: 7477 RunNo: 10713	
Prep Date: 5/16/2013	Analysis Date: 5/17/2013 SeqNo: 303086 Units: mg/Kg	
Analyte	Result PQL SPK value SPK Ref Val %REC LowLimit HighLimit %RPD RPDLimit Qu	al
Gasoline Range Organics (GRO) Surr: BFB	ND 5.0 940 1000 94.3 80 120	
Sample ID LCS-7477	SampType: LCS TestCode: EPA Method 8015D: Gasoline Range	
Client ID: LCSS	Batch ID: 7477 RunNo: 10713	
Prep Date: 5/16/2013	Analysis Date: 5/17/2013 SeqNo: 303087 Units: mg/Kg	
Analyte Gasoline Range Organics (GRO)	Result PQL SPK value SPK Ref Val %REC LowLimit HighLimit %RPD RPDLimit Quality 29 5.0 25.00 0 117 62.6 136	al
Surr: BFB	1100 1000 112 80 120	
Sample ID MB-7482	SampType: MBLK TestCode: EPA Method 8015D: Gasoline Range	
Client ID: PBS	Batch ID: 7482 RunNo: 10713	
Prep Date: 5/16/2013	Analysis Date: 5/17/2013 SeqNo: 303115 Units: %REC	
Analyte	Result PQL SPK value SPK Ref Val %REC LowLimit HighLimit %RPD RPDLimit Qua	al
Surr: BFB	950 1000 94.7 80 120	
Sample ID LCS-7482	SampType: LCS TestCode: EPA Method 8015D: Gasoline Range	
Client ID: LCSS	Batch ID: 7482 RunNo: 10713	
Prep Date: 5/16/2013	Analysis Date: 5/17/2013 SeqNo: 303116 Units: %REC	
Analyte	Result PQL SPK value SPK Ref Val %REC LowLimit HighLimit %RPD RPDLimit Qua	al
Surr: BFB	1000 1000 101 80 120	

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- Value above quantitation range E
- Analyte detected below quantitation limits
- Sample pH greater than 2 for VOA and TOC only.
- RLReporting Detection Limit

- Analyte detected in the associated Method Blank
- Н Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- RPD outside accepted recovery limits
- Spike Recovery outside accepted recovery limits

Page 5 of 7

Hall Environmental Analysis Laboratory, Inc.

WO#: 1305525

21-May-13

Client:

Blagg Engineering

Project:

HEATON LS #5

Sample ID MB-7482

SampType: MBLK

TestCode: EPA Method 8015D: Gasoline Range

Client ID:

PBS

Batch ID: R10713

RunNo: 10713

Prep Date: 5/16/2013

Analysis Date: 5/17/2013

SeqNo: 303122

Units: %REC

120

Analyte

Result

SPK value SPK Ref Val

HighLimit

RPDLimit

Qual

Surr: BFB

950

1000

%REC 94.7

80

LowLimit

%RPD

%RPD

Sample ID LCS-7482

SampType: LCS

TestCode: EPA Method 8015D: Gasoline Range

Client ID: LCSS

Batch ID: R10713

PQL

RunNo: 10713

Units: %REC

Prep Date: 5/16/2013

Analysis Date: 5/17/2013

SPK value SPK Ref Val %REC

SeqNo: 303123

HighLimit

RPDLimit Qual

Analyte Surr: BFB Result 1000

1000

101

80

LowLimit

120

Qualifiers:

Value exceeds Maximum Contaminant Level.

E Value above quantitation range

1 Analyte detected below quantitation limits

P Sample pH greater than 2 for VOA and TOC only.

RLReporting Detection Limit

Analyte detected in the associated Method Blank В

Н Holding times for preparation or analysis exceeded

ND Not Detected at the Reporting Limit

R RPD outside accepted recovery limits

S Spike Recovery outside accepted recovery limits Page 6 of 7

Hall Environmental Analysis Laboratory, Inc.

WO#:

1305525

21-May-13

Client: Project: Blagg Engineering

HEATON LS #5

Sample ID MB-7477

SampType: MBLK

TestCode: EPA Method 8021B: Volatiles

Lowl imit

80

Client ID:

PBS

Batch ID: R10713

RunNo: 10713

Prep Date: 5/16/2013

SeqNo: 303133

Units: %REC

Analyte

Analysis Date: 5/17/2013

%REC

101

HighLimit

Qual

Surr: 4-Bromofluorobenzene

SampType: LCS

TestCode: EPA Method 8021B: Volatiles

RPDLimit

%RPD

%RPD

Sample ID LCS-7477

Client ID: LCSS

Batch ID: R10713

RunNo: 10713

120

Prep Date: 5/16/2013

SeqNo: 303134

Units: %REC

Analyte

Analysis Date: 5/17/2013

%REC

HighLimit

Surr: 4-Bromofluorobenzene

Result 1.1

Result

1.0

SPK value SPK Ref Val 1.000

SPK value SPK Ref Val

1.000

106

120

RPDLimit

Qual

Sample ID MB-7477

PBS

SampType: MBLK Batch ID: 7477

0.050

0.050

PQL

TestCode: EPA Method 8021B: Volatiles

RunNo: 10713

LowLimit

80

Analyte

Client ID:

Prep Date:

5/16/2013

Analysis Date: 5/17/2013 Result **PQL** ND

ND

1.0

SPK value SPK Ref Val

SeqNo: 303146 %REC LowLimit Units: mg/Kg HighLimit

%RPD

RPDLimit

Qual

Benzene Toluene

Ethylbenzene Xylenes, Total

0.050 ND ND 0.10

1.000

101

80

120

Surr: 4-Bromofluorobenzene Sample ID LCS-7477

Prep Date: 5/16/2013

Client ID: LCSS

Result

1.1

1.1

SampType: LCS Batch ID: 7477

Analysis Date: 5/17/2013

TestCode: EPA Method 8021B: Volatiles

RunNo: 10713

SeqNo: 303147

110

111

110

106

Units: mg/Kg

RPDLimit Qual

Analyte Benzene Toluene Ethylbenzene

Xylenes, Total

1.1 3.3 Surr: 4-Bromofluorobenzene 1.1

PQL 0.050 0.050 1.000

0.050

0.10

1.000

1.000

3.000

1.000

SPK value SPK Ref Val 0 0

0

0

%REC 111

LowLimit 80

80

80

80

80

HighLimit 120 120

120

120

120

%RPD

Qualifiers:

Value exceeds Maximum Contaminant Level.

E Value above quantitation range

Analyte detected below quantitation limits J Sample pH greater than 2 for VOA and TOC only. P

RLReporting Detection Limit В Analyte detected in the associated Method Blank

Н Holding times for preparation or analysis exceeded

ND Not Detected at the Reporting Limit

RPD outside accepted recovery limits R S Spike Recovery outside accepted recovery limits Page 7 of 7

Chain-of-Custody Record			Turn-Around			- 18 Jr	ı	-I A	i I	E	N	/T F	3 0	N	ME	N-	ГА	L			
Client: BLAGG ENGR. / BP AMERICA				✓ Standard ☐ Rush														R			
				Project Name						•											-
Mailing Address: P.O. BOX 87			X 87		HEATON LS	# 5		www.hallenvironmental.com 4901 Hawkins NE - Albuquerque, NM 87109													
BLOOMFIELD, NM 87413			FIELD, NM 87413	Project #:			Tel. 505-345-3975 Fax 505-345-4107														
Phone #:		(505) 63	32-1199				Analysis Request														
email or f	ax#:		-	Project Manag	jer:		****	e 3	m/	_		A 782	200	Carrie Carre		٠,٠			20.0	يا و الا الدار	
QA/QC Pa	-		Level 4 (Full Validation)	NELSON VELEZ			(8021B)	only)	FMR9)	i i		S)		04,504	PCB's		:	er - 300.1)	ļ):	
Accredita	tion:		· · · · · · · · · · · · · · · · · · ·	Sampler:	NELSON VI	ELEZ 91V	-₩ ₩	Gas	2		7	NIS		02,5	087	<u> </u>		wat	j	•	ğ
□ NELAF	·	□ Other		On ice:	y¥Yes.		L.	표	0/	118.	50.	32.70		၂ ကို	8/s		₹	30.0	ı	}	e sa
	Type)			Sample Temp	erature: :		1	, + W	(GR	Po Po	po	or §	etals	Ž	cide	ব	. <u>.</u>	ii - 3(힐	osit
Date	Time	Matrix	Sample Request ID	Container Type and #	Preservative Type	HEALNO: 1305525	BTEX +-MTBE	BTEX + MTBE + TPH (Gas only)	TPH 8015B (GRO / DRO	TPH (Method 418.1)	EDB (Method 504.1)	PAH (8310 or 8270SIMS)	RCRA 8 Metals	Anions (F,Cl,NO ₃ ,NO ₂ ,PO ₄ ,SO ₄)	8081 Pesticides / 8082 PCB's	8260B (VOA)	8270 (Semi-VOA)	Chloride (soil - 300.0 / water		Grab sample	5 pt. composite sample
5/10/13	1100	SOIL	5PC-TB @ 4.5' (95)	4 oz 2	Cool	Toul	٧		٧	٧								٧	\Box	\neg	V
																		\Box	ヿ		
							_												一		十
																			寸	7	+
																			寸	\dashv	十
																			\dashv	_	+
																			\dashv	_	十
	<u> </u>																		\dashv	\dashv	十
				ļ <u></u>	<u> </u>									-					十	\dashv	十
		-																\vdash	十		十
		 																	\dashv	十	十
Date: /	Time:	Relinquishe	ed by:	Received by:		Date Time	Ren	nark	 S:												
5/13/13 Date:	815 Time:	Relinquishe	inly	Received by: Date Time			BILL DIRECTLY TO BP: Jeff Peace, 200 Energy Court, Farmington, NM 87401														
5/3/3 1757 Mristul actor			XA	200	14/18/10/10	Wo	ork O	rder	:	N15	835	64_		Pay	/key:	Z	EVHC	<u>)1BC</u>	5T2	_	

٠,


٠.




Hall Environmental Analysis Laboratory 4901 Hawkins NE Albuquergue, NM 87105 TEL: 505-345-3975 FAX: 505-345-410; Website: www.hallenvironmental.com

Sample Log-In Check List

Client Name: B	LAGG	Work Order Number: 130552			525	RcptNo: 1				
Received by/date:_	A	- 05/	14/13							
Logged By:	Logged By: Anne Thorne 5/14/2013 10:10				AM		anne A-			
Completed By:	apleted By: Anne Thorne 5/15/2013						anne St.			
Reviewed By:	A	05/15/13	}				0,,,,,			
Chain of Custo	70	-2. /1 -1/-								
1. Custody seals	intact on sa	mple bottles?			Yes		No 🗆	Not Present 🗹		
2. Is Chain of Cus	stody compl	ete?			Yes	\checkmark	No 🗌	Not Present \square		
3. How was the sample delivered?					Cou	<u>ier</u>				
<u>Log In</u>										
4. Was an attem	pt made to o	cool the samp	les?		Yes	V	No 🗌	na 🗆		
5. Were all sample	les received	at a tempera	ture of >0° C	to 6.0°C	Yes	✓	No 🗌	NA 🗀		
6. Sample(s) in p	roper conta	iner(s)?	٠		Yes	V	No 🗌			
7. Sufficient samp	ole volume f	or indicated te	est(s)?		Yes	\checkmark	No 🗆			
8. Are samples (e	xcept VOA	and ONG) pro	perly preserve	ed?	Yes	V .	No 🗆			
9. Was preservative added to bottles?					Yes	□ .	No 🗹	NA 🗆		
10.VOA vials have	zero heads	space?			Yes		No 🗆	No VOA Vials 🗹		
11. Were any sample containers received broken?					Yes		No 🗹	4.5		
					•			# of preserved bottles checked		
12. Does paperwor			١		Yes	V	No ∐	for pH: (<2	or >12 unless noted)	
(Note discrepancies on chain of custody) 13. Are matrices correctly identified on Chain of Custody?					Yes	¥	No 🗆	Adjusted?		
14. Is it clear what analyses were requested?					Yes	Y	No 🗌			
15. Were all holding times able to be met?					Yes	✓	No 🗌	Checked by:		
(If no, notify cus	stomer for a	uthorization.)								
Special Handlin	ng (if app	licable)								
16. Was client notified of all discrepancies with this order?					Yes		No 🗆	NÁ 🗹		
Person N	otified:			Date				•		
By Whom	າ:		A CONTRACTOR OF THE PARTY OF TH	Via:	☐ eMa	il _	Phone 🔲 Fax	ic 🔲 in Person		
Regarding	g: 🗍	aller i piga seriena no ma a disco.				want - town-	- The Final CYP Add to 1888 at 1888 page 12, 1884 page 1	Company of the second control of the second		
Client Ins	tructions:	- Administrative Parks (according to the Parks)			Mayaran and July		and an experience of the second secon	and the second s		
17. Additional rem	arks:									
18. <u>Cooler Information</u>										
Cooler No	Temp °C	Condition	Seal Intact	Seal No	Seal Da	ite	Signed By			
[1	1.0	Good	Yes		L		·	_]		

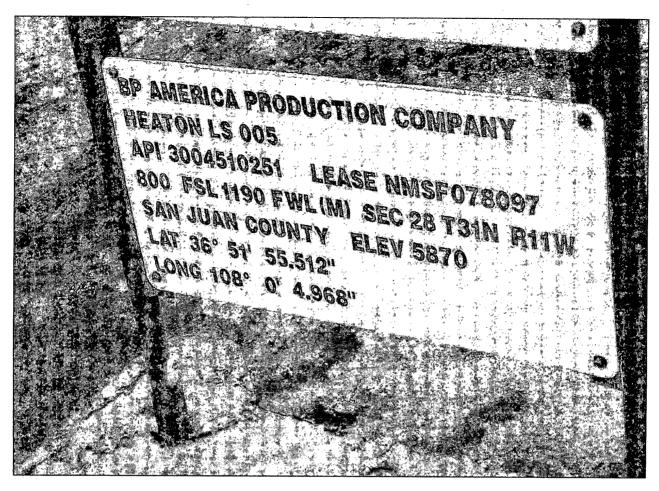

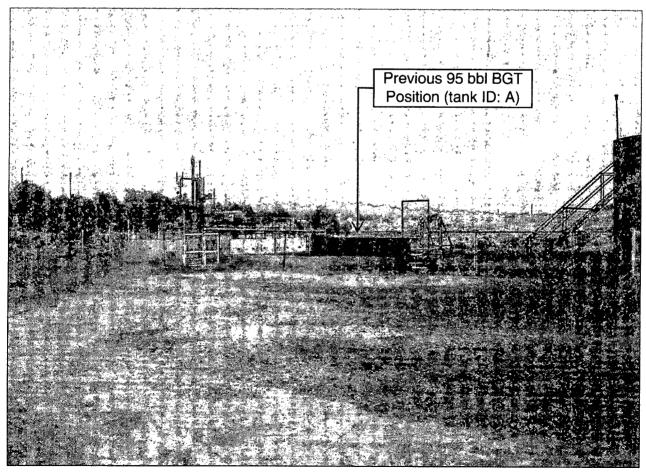

BP AMERICA PRODUCTION COMPANY

SAN JUAN BASIN, NORTHWEST NEW MEXICO

BELOW-GRADE TANK CLOSURE PLAN

<u>Heaton LS 5</u> <u>API No. 3004510251</u> <u>Unit Letter M, Section 28, T31N, R11W</u>

RCVD DEC 6'13 OIL CONS. DIV. DIST. 3

This plan will address the standard protocols and procedures for closure of below-grade tanks (BGTs) on BP America Production Company (BP) well sites. As stipulated in Paragraph A of 19.15.17.13 NMAC, BP shall close a BGT within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the New Mexico Oil Conservation Division (NMOCD) requires because of imminent danger to fresh water, public health, safety or the environment. If deviations from this plan are necessary, any specific changes will be included on form C-144 and approved by the NMOCD. BP shall close an existing BGT that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008, if not retrofit with a BGT that complies with the BP NMOCD approved BGT design attached to the BP Design and Construction Plan. BP shall close an existing BGT that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC, if not previously retrofitted to comply with the BP NMOCD approve BGT Design attached to the BP Design and Construction Plan, prior to any sale or change in operator pursuant to 19.15.9.9 NMAC. BP shall close the permitted BGT within 60 days of cessation of the BGTs operation or as required by the transitional provisions of Subsection B, D, or E of 19.15.17.17 NMAC.

General Closure Plan

- 1. BP shall notify the surface owner by certified mail that it plans to close a BGT. Evidence of mailing of the notice to the address of the surface owner shown in the county tax records demonstrates compliance with this requirement.
 - No notice was made due to misunderstanding of the notice requirements. BP did not think notice was necessary if BGT replaced with LPT, but realizes notice is required for any BGT closure. Closure notices will be made for all BGT closures from this point forward.
- 2. BP shall notify the division District III office verbally or by other means at least 72 hours, but not more than one (1) week, prior to any closure operation. The notice shall include the operator's name, and the location to be closed by unit letter, section, township and range. If the BGT closure is associated with a particular well, then the notice shall also include the well's name, number and API number.

No notice was made due to misunderstanding of the notice requirements. BP did not think notice was necessary if BGT replaced with LPT, but realizes notice is required for any BGT closure. Closure notices will be made for all BGT closures from this point forward.

- 3. BP shall remove liquids and sludge from the BGT prior to implementing a closure method and dispose of the liquids and sludge in a NMOCD's division-approved facility. The facilities to be used are:
 - a. BP Crouch Mesa Landfarm, Permit NM-02-003 (Solids)
 - b. JFJ Landfarm, Permit NM-01-010(B) (Solids and Sludge)
 - c. Basin Disposal, Permit NM-01-0005 (Liquids)
 - d. Envirotech Inc Soil Remediation Facility, Permit NM-01-0011 (Solids and Sludge)
 - e. BP Operated E.E. Elliott SWD #1, API 30-045-27799 (Liquids)
 - f. BP Operated 13 GCU SWD #1, API 30-045-28601 (Liquids)
 - g. BP Operated GCU 259 SWD, API 30-045-20006 (Liquids)
 - h. BP Operated GCU 306 SWD, API 30-045-24286 (Liquids)
 - i. BP Operated GCU 307 SWD, API 30-045-24248 (Liquids)
 - j. BP Operated GCU 328 SWD, API 30-045-24735 (Liquids)
 - k. BP Operated Pritchard SWD #1, API 30-045-28351 (Liquids)

All liquids and sludge in the BGT were removed and sent to one of the above NMOCD approved facilities for disposal.

4. BP shall remove the BGT and dispose of it in a NMOCD approved facility or recycle, reuse, or reclaim it in a manner that the NMOCD approves. If a liner is present and must be disposed of it will be cleaned by scraping any soils or other attached materials on the liner to a de minimus amount and disposed at a permitted solid waste facility, pursuant to Subparagraph (m) of Paragraph (1) of Subsection C of 19.15.35.8 NMAC. Documentation as to the final disposition of the removed BGT will be provided in the final closure report.

The BGT was transported to a storage area for sale and re-use.

5. BP shall remove any on-site equipment associated with a BGT unless the equipment is required for well production.

All equipment associated with the BGT has been removed.

6. BP shall test the soils beneath the BGT to determine whether a release has occurred. BP shall collect at a minimum: a five (5) point composite sample and individual grab samples from any area that is wet, discolored or showing other evidence of a release and analyze for BTEX, TPH and chlorides. The testing methods for those constituents are as follows;

Constituents	Testing Method	Release Verification	Sample
1		(mg/Kg)	results
Benzene	US EPA Method SW-846 8021B or 8260B	0.2	ND
Total BTEX	US EPA Method SW-846 8021B or 8260B	50	ND
TPH	US EPA Method SW-846 418.1	100	ND
Chlorides	US EPA Method 300.0 or 4500B	250 or background	28

Notes: mg/Kg = milligram per kilogram, BTEX = benzene, toluene, ethylbenzene, and total xylenes, TPH = total petroleum hydrocarbons. Other EPA methods that the division approves may be applied to all constituents listed. Chloride closure standards will be determined by which ever concentration level is greatest.

Soil under the BGT was sampled and TPH, BTEX and chloride levels were below the stated limits. Sampling data is attached.

- 7. BP shall notify the division District III office of its results on form C-141. **C-141 is attached.**
- 8. If it is determined that a release has occurred, then BP will comply with 19.15.30 NMAC and 19.15.29 NMAC, as appropriate.

 Sampling results indicate no release occurred.
- 9. If the sampling demonstrates that a release has not occurred or that any release does not exceed the concentrations specified above, then BP shall backfill the excavation, with compacted, non-waste containing, earthen material; construct a division-prescribed soil cover, re-contour and re-vegetate the location. The location will be reclaimed if it is not with in the active process area

The area under the BGT was backfilled with clean soil. It is still within the active area and is covered by the LPT.

10. BP shall reclaim the BGT location and all areas associated with the BGT including associated access roads to a safe and stable condition that blends with the surrounding undisturbed area. BP shall substantially restore the impacted surface area to the condition that existed prior to oil and gas operations by placement of the soil cover as provided in Subsection H of 19.15.17.13 NMAC, re-contour the location and associated areas to a contour that approximates the original contour and blends with the surrounding topography and re-vegetate according to Subsection 1 of 19.15.17.13 NMAC.

The area under the BGT is covered by the LPT. This area will be reclaimed when the well is plugged and abandoned as part of final reclamation.

11. The soil cover for closures where the BGT has been removed or remediated to the NMOCD's satisfaction shall consist of the background thickness of topsoil or one foot of suitable material to establish vegetation at the site, whichever is greater. The soil cover will be constructed to the site's existing grade and all practicable efforts will be made to prevent ponding of water and erosion of the cover material.

The area under the BGT is covered by the LPT. This area will be reclaimed when the well is plugged and abandoned as part of final reclamation.

12. BP shall seed the disturbed area the first growing season after closure of the BGT. Seeding will be accomplished by drilling on the contour whenever practical or by other division-approved methods. Vegetative cover will be, at a minimum, 70% of the native perennial vegetative cover (un-impacted by overgrazing, fire or other intrusion damaging to native vegetation), consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintenance of that cover through two successive growing seasons. During the two growing seasons that prove viability, there shall be no artificial irrigation of the vegetation.

The area under the BGT is covered by the LPT. This area will be reclaimed when the well is plugged and abandoned as part of final reclamation.

13. BP shall seed, plant and re-seed pursuant to Paragraph (3) of Subsection I of 19.15.17.13 NMAC, until the location successfully achieves the required vegetative cover.

BP will seed the area when the well is plugged and abandoned.

14. Pursuant to Paragraph (5) of Subsection I of 19.15.17.13 NMAC, BP shall notify the NMOCD when it has seeded or planted and when it successfully achieves revegetation.

BP will notify NMOCD when re-vegetation is successful.

- 15. Within 60 days of closure completion, BP shall submit a closure report on NMOCD's form C-144, and will include the following;
 - a. proof of closure notification (surface owner and NMOCD)
 - b. sampling analytical reports; information required by 19.15.17 NMAC;
 - c. disposal facility name and permit number
 - d. details on back-filling, capping, covering, and where applicable re-vegetation application rates and seeding techniques and
 - e. site reclamation, photo documentation.

 Closure report on C-144 form is included.
- 16. BP shall certify that all information in the report and attachments is accurate, truthful, and compliant with all applicable closure requirements and conditions specified in the approved closure plan.

Certification section of C-144 has been completed.