District I
1625 N French Dr., Hobbs, NM 88240
District II
1301 W Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S St Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate. NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

11493

. V.C

Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application

Type of action: Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method

Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Modification to an existing permit Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.
Operator: BP AMERICA PRODUCTION COMPANY OGRID #:778
Address: 200 Energy Court, Farmington, NM 87401
Facility or well name: ELLIOTT GAS COM F 001A
API Number: 3004522279 OCD Permit Number: U/L or Qtr/Qtr P. Section 33.0 Township 30.0N Range 09W County: San Juan County
Center of Proposed Design: Latitude 36.7643 Longitude -107.7794 NAD: ☐1927 ■ 1983
Surface Owner: ☐ Federal ☐ State ▼ Private ☐ Tribal Trust or Indian Allotment
Pit Subsection F or G of 19.15.17.11 NMAC Temporary: Drilling Workover DIST. 3
Permanent Emergency Cavitation P&A
Lined Unlined Liner type: Thicknessmil LLDPE HDPE PVC Other
String-Reinforced
Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x D
Closed-loop System: Subsection H of 19.15.17.11 NMAC Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent) Drying Pad Above Ground Steel Tanks Haul-off Bins Other Lined Unlined Liner type: Thickness mil LLDPE HDPE PVC Other Liner Seams: Welded Factory Other
Selow-grade tank: Subsection of 19.15.17.11 NMAC (Closure Plan submittal only) Volume: 21.0
5. Alternative Method:

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

6	
Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)	
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church)	hospital,
Four foot height, four strands of barbed wire evenly spaced between one and four feet	
Alternate. Please specify	
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)	
Screen Netting Other	
Monthly inspections (If netting or screening is not physically feasible)	
8 Signs: Subsection C of 19.15.17.11 NMAC	
12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers	
☐ Signed in compliance with 19.15.16.8 NMAC	
Administrative Approvals and Exceptions. Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.	
Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau	office for
consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	
10	
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accematerial are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the approoffice or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of a Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to dry above-grade tanks associated with a closed-loop system.	opriate district noproval.
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank.	☐ Yes ☐ No
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	_
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No ☐ NA
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits)	☐ Yes ☐ No ☐ NA
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within 500 feet of a wetland.	
- US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	Yes No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	Yes No
Within a 100-year floodplain FEMA map	☐ Yes ☐ No

Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number: or Permit Number:
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API Number:
Previously Approved Operating and Maintenance Plan API Number: (Applies only to closed-loop system that use above ground steel tanks or haul-off bins and propose to implement waste removal for closure)
Permanent Pits Permit Application Checklist Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. □ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC □ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC □ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) □ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Instructions: Please indentify the facility or facilities for the disposal of liquids, facilities are required.		
Disposal Facility Name:	Disposal Facility Permit Number:	
Disposal Facility Name:	Disposal Facility Permit Number:	
Will any of the proposed closed-loop system operations and associated activities of Yes (If yes, please provide the information below) \(\square\) No	occur on or in areas that will not be used for future ser	vice and operations?
Required for impacted areas which will not be used for future service and operation Soil Backfill and Cover Design Specifications based upon the appropriate Re-vegetation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection	e requirements of Subsection H of 19.15.17.13 NMA n I of 19.15.17.13 NMAC	С
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the provided below. Requests regarding changes to certain siting criteria may required considered an exception which must be submitted to the Santa Fe Environmenta demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC	ire administrative approval from the appropriate dist al Bureau office for consideration of approval. Just	trict office or may be
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Da	ta obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Da	ta obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Da	ta obtained from nearby wells	☐ Yes ☐ No ☐ NA
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other siglake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	gnificant watercourse or lakebed, sinkhole, or playa	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church - Visual inspection (certification) of the proposed site; Aerial photo; Satellit		☐ Yes ☐ No
Within 500 horizontal feet of a private, domestic fresh water well or spring that les watering purposes, or within 1000 horizontal feet of any other fresh water well or - NM Office of the State Engineer - iWATERS database; Visual inspection	spring, in existence at the time of initial application.	☐ Yes ☐ No
Within incorporated municipal boundaries or within a defined municipal fresh wat adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approx	•	☐ Yes ☐ No
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visu	al inspection (certification) of the proposed site	☐ Yes ☐ No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining	g and Mineral Division	☐ Yes ☐ No
 Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geolog Society; Topographic map 	y & Mineral Resources; USGS; NM Geological	☐ Yes ☐ No
Within a 100-year floodplain FEMA map		☐ Yes ☐ No
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Construction/Design Plan of Temporary Pit (for in-place burial of a drying protocols and Procedures - based upon the appropriate requirements of 19.1 Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Disposal Facility Name and Permit Number (for liquids, drilling fluids and Confirmation Plan - based upon the appropriate requirements of Subsection Re-vegetation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection	puirements of 19.15.17.10 NMAC f Subsection F of 19.15.17.13 NMAC propriate requirements of 19.15.17.11 NMAC pad) - based upon the appropriate requirements of 19.15.17.13 NMAC quirements of Subsection F of 19.15.17.13 NMAC Subsection F of 19.15.17.13 NMAC drill cuttings or in case on-site closure standards cannot of 19.15.17.13 NMAC 1 of 19.15.17.13 NMAC	15.17.11 NMAC

Operator Application Certification: I hereby certify that the information submitted with this application is true, accur	rate and complete to the best of my knowledge and belief
Name (Print): Jeffrey Peace	Title: Field Environmental Advisor
Signature: Herry H. Vesce	Date: <u>06/14/2010</u>
e-mail address: Peace.Jeffrey@bp.com	Telephone: _505-326-9479
OCD Approval: Permit Application (including closure plan) OCD Representative Signature: Title:	Compliance Officer OCD Conditions (see attachment) Approval Date: 5 (0/11 OCD Permit Number:
Closure Report (required within 60 days of closure completion): Subsection Instructions: Operators are required to obtain an approved closure plan prior The closure report is required to be submitted to the division within 60 days of section of the form until an approved closure plan has been obtained and the c	to implementing any closure activities and submitting the closure report. the completion of the closure activities. Please do not complete this
Closure Method: Waste Excavation and Removal On-Site Closure Method Altern If different from approved plan, please explain.	ative Closure Method Waste Removal (Closed-loop systems only)
Closure Report Regarding Waste Removal Closure For Closed-loop Systems Instructions: Please indentify the facility or facilities for where the liquids, dri two facilities were utilized.	illing fluids and drill cuttings were disposed. Use attachment if more than
Disposal Facility Name:	
	Disposal Facility Permit Number:
Were the closed-loop system operations and associated activities performed on on Yes (If yes, please demonstrate compliance to the items below) \(\subseteq \text{No} \)	r in areas that <i>will not</i> be used for future service and operations?
Required for impacted areas which will not be used for future service and operated Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique	'ion s :
Closure Report Attachment Checklist: Instructions: Each of the following in mark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division) Proof of Deed Notice (required for on-site closure) Plot Plan (for on-site closures and temporary pits) Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (required for on-site closure) Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation) On-site Closure Location: Latitude 36.7643 Longin	
Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure belief. I also certify that the closure complies with all applicable closure requirer Name (Print):	
Name (Print): Sere leace	
Signature: Signature:	Date: Decomber 5, 2013
e-mail address: peace jeffrey @ bf-con	Telephone: (505) 326-9479

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 District III

1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Revised August 8, 2011

Form C-141

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

Submit 1 Copy to appropriate District Office in accordance with 19.15.29 NMAC.

Release Notification and Corrective Action																
						OPERA	ΓOR] Initia	al Report	\boxtimes	Final Report				
Name of Co						Contact: Jeff Peace										
Address: 20			ngton, N	M 87401		Telephone No.: 505-326-9479										
Facility Nan	ne: Elliott	GC F 1A				Facility Type: Natural gas well										
Surface Ow	ner: Privat	e		Mineral O	wner:	Fee	· · · · · · · · · · · · · · · · · · ·		API No	. 30045222	279					
				LOCA	TIO	N OF REI	FASE									
Unit Letter	Section	Township	Range	Feet from the		/South Line	Feet from the	East/Wes	t Line	County: Sa	ın luar					
P	33	30N	9W	1,244	South		820	East	it cine	County. St	in Juai	'				
Latitude36.76415Longitude107.77953																
					URE	OF RELI	EASE					<u>.</u>				
Type of Relea							Release: N/A			Recovered: N						
Source of Rel			<u>– 21 bbl a</u>	nd 95 bbl			lour of Occurrenc	e: D	ate and	Hour of Disc	covery	:				
Was Immedia	ite Notice (Yes [] No 🛛 Not Re	quired	If YES, To	wnom?									
By Whom?						Date and H	lour									
Was a Watero	course Read					If YES, Vo	lume Impacting t	the Waterco	ourse.							
			Yes 🗵] No												
If a Watercou	If a Watercourse was Impacted, Describe Fully.*															
				n Taken.* Samplin				lone to ensi	ire no so	oil impacts fi	om the	e BGT. Soil				
analysis snow	ed non-det	ection inn,	DIEA and	d chloride. Analys	sis resu	ins are attached	u.									
Describe Are	a Affected	and Cleanup A	Action Tak	en.* BGT's were	remov	ed and the area	a underneath the I	BGT's was	backfill	led and comp	acted.	The raised				
				5 bbl BGT and the												
						·····										
				e is true and compl nd/or file certain re												
				ce of a C-141 repo												
				investigate and re												
or the enviror	iment. In a	ddition, NMC	CD accep	tance of a C-141												
federal, state,	or local lav	ws and/or regu	llations.		- 1		OH COM	ODDIA	TION	DIVIGIO	.					
a: . ().	PAP.	rocl					OIL CONS	SERVA	HON	DIVISIO	<u>'N</u>					
Signature:	11 13					A	F	! . 1! . 4 .								
Printed Name	: Jeff Peace	e				Approved by	Environmental S ₁	pecialist:								
Title: Field E	nvironment	al Advisor				Approval Date: Expiration Date:										
E-mail Addre	ss: peace.je	ffrey@bp.co	n			Conditions of	Approval:			Attached						
Date: Decem	mail Address: peace.jeffrey@bp.com Conditions of Approval: Attached Phone: 505-326-9479															

^{*} Attach Additional Sheets If Necessary

CLIENT: BP	BLAGG ENGINEERING P.O. BOX 87, BLOOMFIELD (505) 632-1199	•	API #: 3004522279 TANK ID (if applicble): A & B
FIELD DEDANT.	(circle one): BGT CONFIRMATION / RELEASE INVESTIGATION	ON / OTHER:	
FIELD REPORT:			PAGE #: 1 of 1
SITE INFORMATION			DATE STARTED: 08/16/13
QUAD/UNIT: P SEC: 33 TWP:	30N RNG: 9W PM: NM CNTY:	SJ ST: NM	DATE FINISHED:
1/4 -1/4/FOOTAGE: 1,244'S / 820'E	SE/SE `LEASE TYPE: FEDERAL / S		ENVIRONMENTAL
LEASE#: -	PROD. FORMATION: MV CONTRACTOR: MBF	B. SCHURMAN	SPECIALIST(S): NJV
REFERENCE POINT	WELL HEAD (W.H.) GPS COORD.: 36	.76441 X <u>107.77947</u>	GL ELEV.: 5,681'
1) 95 BGT (SW/DB) - A	GPS COORD.: 36.76415 X 107.77	953 DISTANCE/BE	ARING FROM W.H.: 105', S8W
2) 21 BGT (SW/DB) - B	GPS COORD.: 36.76430 X 107.77	940 DISTANCE/BE	ARING FROM W.H.: 49', \$31.5E
3)	GPS COORD.:	DISTANCE/BE	ARING FROM W.H.:
4)	GPS COORD.:	DISTANCE/BE	ARING FROM W.H.:
SAMPLING DATA:	CHAIN OF CUSTODY RECORD(S) # OR LAB USED:	HALL	OVM READING (ppm)
<u> </u>	A SAMPLE DATE: 08/16/13 SAMPLE TIME: 1		3015B/8021B/300.0(CI) NA
2) SAMPLE ID: <u>5PC-TB@6'(21)-</u>	B SAMPLE DATE: 08/16/13 SAMPLE TIME: 1	310 LAB ANALYSIS: 418.1/8	8015B/8021B/300.0(CI) NA
	SAMPLE DATE: SAMPLE TIME:		
	SAMPLE DATE: SAMPLE TIME:	LAB ANALYSIS;	
SOIL DESCRIPTION		CLAY / CLAY / GRAVEL / OT	HER
SOIL COLOR: DARK YELLOWISH C			
COHESION (ALL OTHERS): NON COHESIVE SLIGHTL CONSISTENCY (NON COHESIVE SOILS): LC MOISTURE: DRY (SLIGHTLY MOIST) MOIST / W SAMPLE TYPE: GRAB (COMPOSITE) + DISCOLORATION/STAINING OBSERVED	OSE / FIRM DENSE / VERY DENSE DENSITY (COH T / SATURATED / SUPER SATURATED HC ODOR DE OF PTS	ESIVE CLAYS & SILTS): SOFT	COHESNE / MEDIUM PLASTIC / HIGHLY PLASTIC / FIRM / STIFF / VERY STIFF / HARD ANATION -
ANY AREAS DISPLAYING WETNESS: YES / NO		TION:	
	NA ft. X NA ft. X NA ft. X NA SAREST WATER SOURCE: >1,000' NEAREST SURFACE V		TIMATION (Cubic Yards) : NA CD TPH CLOSURE STD: 100 ppm
SITE SKETCH	⊕ PLOT PLAN	circle: attached OVM	CALIB. READ. = NA ppm RF = 0.52
	W .H.	↑ OVM	CALIB. GAS = NA ppm
		N I TIME	.:NA am/pm DATE:NA
	(21) PBGTL	WOODEN	MISCELL. NOTES
COMPRESSOR	T.B. ~ 6' (x \(\frac{1}{2} \) X (\(\frac{1}{2} \) B.G.		/O: N15280303
	7		O#:
	7		K: ZEVH01BGT2
	WOODEN		J#: Z2-006Q0
SEPARATOR	R.W.		ermit date(s): 06/14/10 CD Appr. date(s): 05/10/11
1	(95)	ŢΤā	nk OVM = Organic Vapor Meter
	PBGTL		
	T.B. ~ 5' B.G.	X - S.P.D.	BGT Sidewalls Visible: Y N
	N DEPRESSION; B.G. = BELOW GRADE; B = BELOW; T.H. = TEST HOLE; ~ = A	PPROX.; W.H. = WELL HEAD;	BGT Sidewalls Visible: Y / N
)W-GRADE TANK LOCATION; SPD = SAMPLE POINT DESIGNATION; R.W. = RI WALL; DW - DOUBLE WALL; SB - SINGLE BOTTOM; DB - DOUBLE BOTTOM.	TAINING WALL; NA - NOT	Magnetic declination: 10° E
TRAVEL NOTES: CALLOUT:	ONSITE:	08/16/13	

Analytical Report

Lab Order 1308901

Date Reported: 8/27/2013

Hall Environmental Analysis Laboratory, Inc.

CLIENT: Blagg Engineering

Client Sample ID: 5PC-TB @ 5' (95)-A

ELLIOTT GC F #1A Project:

Collection Date: 8/16/2013 1:20:00 PM

1308901-001 Lab ID:

Matrix: SOIL

Received Date: 8/20/2013 9:50:00 AM

Analyses	Result	RL Qual Units		DF	Date Analyzed	Batch
EPA METHOD 8015D: DIESEL RANG	E ORGANICS				Analys	: JME
Diesel Range Organics (DRO)	ND	10	mg/Kg	1	8/23/2013 10:54:50 AM	1 8966
Surr: DNOP	93.9	63-147	%REC	1	8/23/2013 10:54:50 AM	8966
EPA METHOD 8015D: GASOLINE RA	NGE				Analys	: NSB
Gasoline Range Organics (GRO)	ND	4.6	mg/Kg	1	8/22/2013 3:38:16 PM	8970
Surr: BFB	95.8	80-120	%REC	1	8/22/2013 3:38:16 PM	8970
EPA METHOD 8021B: VOLATILES					Analys	: NSB
Benzene	ND	0.046	mg/Kg	1	8/22/2013 3:38:16 PM	8970
Toluene	ND	0.046	mg/Kg	1	8/22/2013 3:38:16 PM	8970
Ethylbenzene	ND	0.046	mg/Kg	1	8/22/2013 3:38:16 PM	8970
Xylenes, Total	ND	0.092	mg/Kg	1	8/22/2013 3:38:16 PM	8970
Surr: 4-Bromofluorobenzene	102	80-120	%REC	1	8/22/2013 3:38:16 PM	8970
EPA METHOD 300.0: ANIONS					Analys	: JRR
Chloride	ND	1.5	mg/Kg	1	8/22/2013 12:36:59 PM	1 8984
EPA METHOD 418.1: TPH					Analys	t: BCN
Petroleum Hydrocarbons, TR	ND	20	mg/Kg	1	8/23/2013	8999

Refer to the QC Summary report and sample login checklist for flagged QC data and preservation information.

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- 0 RSD is greater than RSDlimit
- RPD outside accepted recovery limits
- Spike Recovery outside accepted recovery limits
- Analyte detected in the associated Method Blank В
- Holding times for preparation or analysis exceeded Н
- ND Not Detected at the Reporting Limit
- Page 1 of 7 Sample pH greater than 2 for VOA and TOC only P
- Reporting Detection Limit RL

Analytical Report

Lab Order 1308901

Date Reported: 8/27/2013

Hall Environmental Analysis Laboratory, Inc.

CLIENT: Blagg Engineering

Client Sample ID: 5PC-TB @ 6' (21)-B

Project: ELLIOTT GC F #1A Collection Date: 8/16/2013 1:10:00 PM

1308901-002 Lab ID:

Matrix: SOIL

Received Date: 8/20/2013 9:50:00 AM

Analyses	Result	RL Qu	al Units	DF	Date Analyzed	Batch
EPA METHOD 8015D: DIESEL RANGE	ORGANICS				Analyst	:: JME
Diesel Range Organics (DRO)	ND	10	mg/Kg	1	8/23/2013 3:59:42 PM	8966
Surr: DNOP	82.2	63-147	%REC	1	8/23/2013 3:59:42 PM	8966
EPA METHOD 8015D: GASOLINE RAN	GE				Analyst	: NSB
Gasoline Range Organics (GRO)	ND	4.6	mg/Kg	1	8/22/2013 5:08:45 PM	8970
Surr: BFB	97.3	80-120	%REC	1	8/22/2013 5:08:45 PM	8970
EPA METHOD 8021B: VOLATILES					Analyst	: NSB
Benzene	ND	0.046	mg/Kg	1	8/22/2013 5:08:45 PM	8970
Toluene	ND	0.046	mg/Kg	1	8/22/2013 5:08:45 PM	8970
Ethylbenzene	ND	0.046	mg/Kg	1	8/22/2013 5:08:45 PM	8970
Xylenes, Total	ND	0.092	mg/Kg	1	8/22/2013 5:08:45 PM	8970
Surr: 4-Bromofluorobenzene	104	80-120	%REC	1	8/22/2013 5:08:45 PM	8970
EPA METHOD 300.0: ANIONS					Analyst	: JRR
Chloride	ND	7.5	mg/Kg	5	8/22/2013 1:01:48 PM	8984
EPA METHOD 418.1: TPH					Analyst	BCN
Petroleum Hydrocarbons, TR	ND	20	mg/Kg	1	8/23/2013	8999

Refer to the QC Summary report and sample login checklist for flagged QC data and preservation information.

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- Analyte detected below quantitation limits J
- RSD is greater than RSDlimit
- RPD outside accepted recovery limits R
- Spike Recovery outside accepted recovery limits
- Analyte detected in the associated Method Blank
- Н Holding times for preparation or analysis exceeded
- NDNot Detected at the Reporting Limit
 - Page 2 of 7 Sample pH greater than 2 for VOA and TOC only.
- Reporting Detection Limit RL

Hall Environmental Analysis Laboratory, Inc.

WO#:

1308901

27-Aug-13

Client:

Blagg Engineering

Project:

ELLIOTT GC F #1A

Sample ID MB-8984

SampType: MBLK

TestCode: EPA Method 300.0: Anions

Client ID: PBS

Batch ID: 8984

RunNo: 12843

Prep Date: 8/22/2013

Analysis Date: 8/22/2013 **PQL**

SeqNo: 366272

Units: mg/Kg

Analyte

HighLimit

RPDLimit

Chloride

ND 1.5

Analysis Date: 8/22/2013

Sample ID LCS-8984

Prep Date: 8/22/2013

SampType: LCS

TestCode: EPA Method 300.0: Anions

Client ID: LCSS

Batch ID: 8984

Result

RunNo: 12843

SeqNo: 366273

Units: mg/Kg HighLimit

Analyte

Result

PQL SPK value SPK Ref Val 1.5

0

SPK value SPK Ref Val %REC LowLimit

%REC 91.8

90

110

%RPD

RPDLimit Qual

Chloride

14

15.00

LowLimit

Qualifiers:

S

Value exceeds Maximum Contaminant Level.

Spike Recovery outside accepted recovery limits

Е Value above quantitation range

Analyte detected below quantitation limits

o RSD is greater than RSDlimit

R RPD outside accepted recovery limits

В Analyte detected in the associated Method Blank Н

ND Not Detected at the Reporting Limit

Sample pH greater than 2 for VOA and TOC only.

Reporting Detection Limit

Holding times for preparation or analysis exceeded

Page 3 of 7

Hall Environmental Analysis Laboratory, Inc.

WO#:

1308901 27-Aug-13

Client:

Blagg Engineering

Project:

ELLIOTT GC F #1A

Sample ID MB-8999

SampType: MBLK

TestCode: EPA Method 418.1: TPH

Client ID: PBS

Batch ID: 8999

RunNo: 12846

Prep Date: 8/22/2013

Analysis Date: 8/23/2013

SeqNo: 366322

Units: mg/Kg

HighLimit

%RPD **RPDLimit**

Qual

Analyte Petroleum Hydrocarbons, TR

Sample ID LCS-8999

Client ID: LCSS

Result ND

20

PQL

TestCode: EPA Method 418.1: TPH

SampType: LCS Batch ID: 8999

RunNo: 12846

Analysis Date: 8/23/2013

PQL

20

SeqNo: 366323

Units: mg/Kg

Analyte

Prep Date:

Result

100.0

SPK value SPK Ref Val %REC 89.3

HighLimit

RPDLimit

Qual

Qual

Petroleum Hydrocarbons, TR Sample ID LCSD-8999 89

SPK value SPK Ref Val %REC LowLimit

LowLimit

%RPD 120

SampType: LCSD

Batch ID: 8999

RunNo: 12846

TestCode: EPA Method 418.1: TPH

Client ID: LCSS02 Prep Date:

8/22/2013

8/22/2013

Analysis Date: 8/23/2013

20

SeqNo: 366324

Units: mg/Kg HighLimit

%RPD

RPDLimit

20

Analyte Petroleum Hydrocarbons, TR Result 95 SPK value SPK Ref Val %REC LowLimit 100.0

94.5

80

120

5.75

Qualifiers:

R

- Value exceeds Maximum Contaminant Level.
- Value above quantitation range E
- Analyte detected below quantitation limits
- RSD is greater than RSDlimit 0 RPD outside accepted recovery limits
- Spike Recovery outside accepted recovery limits
- В Analyte detected in the associated Method Blank
- Н Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- Sample pH greater than 2 for VOA and TOC only.
- Reporting Detection Limit

Page 4 of 7

Hall Environmental Analysis Laboratory, Inc.

WO#:

1308901

27-Aug-13

Client:

Blagg Engineering

Project:

ELLIOTT GC F #1A

Sample ID MB-8966

SampType: MBLK

TestCode: EPA Method 8015D: Diesel Range Organics

Client ID:

PBS

Batch ID: 8966

RunNo: 12805

Prep Date:

10

8/21/2013

Analysis Date: 8/22/2013

SeqNo: 365836

Units: mg/Kg

Analyte

Result PQL SPK value SPK Ref Val %REC

Diesel Range Organics (DRO)

ND 9.9

LowLimit

%RPD HighLimit

147

RPDLimit

Qual

Surr: DNOP

10.00

98.8

63

Sample ID LCS-8966

SampType: LCS Batch ID: 8966

TestCode: EPA Method 8015D: Diesel Range Organics RunNo: 12805

Client ID: LCSS Prep Date: 8/21/2013

Analysis Date: 8/22/2013

43

4.8

SeqNo: 365840

Units: mg/Kg

Qual

Analyte Diesel Range Organics (DRO) Result

SPK value SPK Ref Val 50.00

%REC LowLimit 85.2 95.7

77.1

128

RPDLimit

Surr: DNOP

10 5.000

63

HighLimit

147

%RPD

Qualifiers:

Ε Value above quantitation range Analyte detected below quantitation limits

0 RSD is greater than RSDlimit R RPD outside accepted recovery limits

Spike Recovery outside accepted recovery limits

Value exceeds Maximum Contaminant Level.

В Analyte detected in the associated Method Blank

Н Holding times for preparation or analysis exceeded

ND Not Detected at the Reporting Limit

Sample pH greater than 2 for VOA and TOC only.

Reporting Detection Limit

Page 5 of 7

Hall Environmental Analysis Laboratory, Inc.

WO#: 1308901

27-Aug-13

Client:

Blagg Engineering

Project:

ELLIOTT GC F #1A

Sample ID MB-8970

SampType: MBLK

TestCode: EPA Method 8015D: Gasoline Range

LowLimit

Client ID:

PBS

Batch ID: 8970

PQL

5.0

RunNo: 12812

Prep Date: 8/21/2013

%REC

Analysis Date: 8/22/2013

SeqNo: 365624

Units: mg/Kg

Analyte

Result ND

HighLimit

120

%RPD **RPDLimit**

Qual

Gasoline Range Organics (GRO) Surr: BFB

980

1000

SPK value SPK Ref Val

SPK value SPK Ref Val %REC

97.9

80

Sample ID LCS-8970

Client ID: LCSS SampType: LCS Batch ID: 8970 TestCode: EPA Method 8015D: Gasoline Range RunNo: 12812

Prep Date:

8/21/2013

Analysis Date: 8/22/2013

SeqNo: 365625

Units: mg/Kg

LowLimit HighLimit

RPDLimit Qual

Gasoline Range Organics (GRO)

24

Result

74.5 80

126 120 %RPD

5.0 25.00 96.0 Surr: BFB 1000 1000 104

PQL

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- Ē Value above quantitation range
- Analyte detected below quantitation limits
- RSD is greater than RSDlimit 0
- RPD outside accepted recovery limits R
- Spike Recovery outside accepted recovery limits
- В Analyte detected in the associated Method Blank
- Н Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
 - Sample pH greater than 2 for VOA and TOC only.
- Reporting Detection Limit RL

Page 6 of 7

Hall Environmental Analysis Laboratory, Inc.

WO#: 1308901 27-Aug-13

Client:

Blagg Engineering

Project:

ELLIOTT GC F #1A

Sample ID MB-8970 Client ID: PBS	TestCode: EPA Method 8021B: Volatiles RunNo: 12812									
Prep Date: 8/21/2013	Analysis Date: 8/22/2013			S	eqNo: 3	65767	Units: mg/K	(g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	ND	0.050		-						
Toluene	ND	0.050								
Ethylbenzene	ND	0.050								
Xylenes, Total	ND	0.10								
Surr: 4-Bromofluorobenzene	1.1		1.000		108	80	120			

Sample ID LCS-8970	Samp	Type: LC	s	Tes											
Client ID: LCSS Batch ID: 8970 RunNo: 12812															
Prep Date: 8/21/2013	Analysis [Date: 8/	22/2013	S	SeqNo: 3	65773	Units: mg/k	(g							
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual					
Benzene	0.94	0.050	1.000	0	93.8	80	120								
Toluene	0.95	0.050	1.000	0	94.5	80	120								
Ethylbenzene	0.94	0.050	1.000	0	94.0	80	120								
Xylenes, Total	s, Total 2.8 0.10 3.000 0 94.9				80	120									
Surr: 4-Bromofluorobenzene	11		1 000		109	กล	120								

Qualifiers:

- * Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- O RSD is greater than RSDlimit
- R RPD outside accepted recovery limits
- S Spike Recovery outside accepted recovery limits
- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- P Sample pH greater than 2 for VOA and TOC only.
- RL Reporting Detection Limit

Page 7 of 7

C	hain-	of-Cus	stody Record	Lurn-Around Lime:				. 0			LAI	i 1		riz.	/TE	20	NI I	ME	net.	ra'	
Client:	BLAG	G ENGR.	/ BP AMERICA	✓ Standard	Rush		L	534										R/			
				Project Name	•					,	wwv	v.ha	llen	viro	nme	ntal	.con	า			
Mailing A	ddress:	P.O. BO	X 87	E	LLIOTT GC F	# 1A		4901 Hawkins NE - Albuquerque, NM 87109													
		BLOOM	FIELD, NM 87413	Project #:					Tel. 505-345-3975 Fax 505-345-4107												
Phone #:		(505) 63	2-1199	_				Analysis Request										4. W.			
email or F	ax#:			Project Manager:					ny	$\overline{}$											
QA/QC Pa	_		Level 4 (Full Validation)	NELSON VELEZ				1	/mmo)			S)		04,504	PCB's			er - 300.1)			اره
Accreditat	tion:			NELSON VELEZ Sampler: NELSON VELEZ					~ 1			or 8270SIMS)		02,F	087			- 300.0 / water			ğ
□ NELAF		□ Other		On Ice: ☑ Yes ☑ No.				Hd.	0/0	118.	904	270		N,E(s / 8		€	0.0			e sa
□ EDD (Гуре)			Sample Temp	erature: / ()			E + 1	GRO	od 4	g	ه ا	tals),N(cide	æ	٠٠٠)E - II		<u>e</u>	osit
Date	Time	Matrix	Sample Request ID	Container Type and #	Preservative Type	HEAL NO.	BTEX +-NATE	BTEX + MTBE + TPH (Gas only)	TPH 8015B (GRO / DRO	TPH (Method 418.1)	EDB (Method 504.1)	PAH (8310	RCRA 8 Metals	Anions (F,Cl,NO ₃ ,NO ₂ ,PO ₄ ,SO ₄)	8081 Pesticides / 8082	8260B (VOA)	8270 (Semi-VOA)	Chloride (soil		Grab sample	5 pt. composite sample
8/16/13	1320	SOIL	5PC-TB @ 5' (95)-A	4 oz 2	Cool	-001	٧		٧	٧								٧	\Box		٧
- 4 1							<u> </u>				4	-							\dashv	_	_
8/16/13	1310	SOIL	5PC-TB @ 6' (21)-B	4 oz 2	Cool	7002	V		٧	۷		_						٧	_	\dashv	<u> </u>
					ļ		<u> </u>			_		_						\perp	\rightarrow	\dashv	\dashv
																			_		
							<u> </u> 		_	_	_	_							\dashv	_	_
									\dashv	+	\dashv		\dashv					\dashv	\dashv	\dashv	\dashv
									+	\dashv								-	+	\dashv	+
										\dashv	\dashv	_							\dashv		十
																			\top	\exists	\top
											-	1	\exists					7	丁	_	丁
Date:	Time:	Relinquishe	ed by:	Received by:	<u>. </u>	Date Time	Ren	narks	:									<u>1</u> _			
	937	an.	envj	Phristy.	Walter	8/19/13 937	1	L DIR						•	! <u></u>	NI	N 4 O-				
Date: 8 19 13	Time:	Relinquishe	ata. Lanala.	Received by:	Received by: Date Time			f Pead ork Oi							_			′401 <u>EVH(</u>	<u>)1BC</u>	<u>3T2</u>	_
717117	If necessar	rv. samples si	ubmitted to Hall Environmental may be s	ubcontracted to other	accredited laboratories	s. This serves as notice o	this oc	ossibilit	v. Am	sub-c	ontrac	ted da	ata wi	ill be c	learly	notate	ed on t	he ana	lvtical	report	





Hall Environmental Analysis Laboratory 4901 Hawkins NE Albuquerque, NM 87109


TEL: 505-345-3975 FAX: 505-345-4107 Website: www.hallenvironmental.com


Sample Log-In Check List

Client	Name:	BLAGG		Work C	order Numb	er: 1308901			RcptNo:	1
Receiv	ved by/dat	te:	17 08/2	01/3		·				
Logge	d By:	Anne Thor	пе	8/20/201	9:50:00 A	М	arne .			
Compl	leted By:	Anne Thor	ne	8/21/20/1	3 1		anne	11.	_	
Review	wed By:	~ ¢)	OR	an 1 =	2	una.	<i></i>		
Chain	of Cus	tody	6	<u> </u>	- -					
1. Cu	ustody sea	als intact on sa	ample bottles?	•		Yes 🗌	No		Not Present	
2. Is	Chain of (Custody comp	lete?			Yes 🗹	No		Not Present	
3. Ho	ow was the	e sample deliv	ered?			Courier				
Log I	<u>In</u>									
4. w	las an atte	empt made to	cool the samp	les?		Yes 🗹	No		na 🗆	
5. W	ere all sar	mples receive	d at a tempera	ature of >0° C	to 6.0°C	Yes 🗹	, No		, NA 🗆	
6. Sample(s) in proper container(s)?					Yes 🗹	No	, 			
7. Sufficient sample volume for Indicated test(s)?						Yes 🗹	No			
8. Are	e samples	e (except VOA	and ONG) pr	operly preserve	ed?	Yes 🗹	No			
9. W	as presen	vative added t	o bottles?			Yes 🗌	No	\checkmark	NA 🗌	
10.vc	OA vials h	ave zero head	space?			Yes 🗌	No		No VOA Vials	
11. Were any sample containers received broken?					Yes	No	V	# =====================================		
						_			# of preserved bottles checked	
12. Does paperwork match bottle labels?						Yes 🗹	No	Ш	for pH:	or >12 unless noted)
(Note discrepancies on chain of custody) 13. Are matrices correctly identified on Chain of Custody?						Yes 🗸	No		Adjusted?	
		nat analyses w		-		Yes 🗹	. No			
15. Were all holding times able to be met?					Yes 🗸	No		Checked by:		
(If	no, notify	customer for	authorization.)	· ·						
Snaci	al Hano	lling (if app	nlicable)							
				vith this order?		Yes 🗌	No		na 🗹	
	Perso	n Notified:			Date					7
1	By Whom:		Via:			ı ☐ eMail │	Phone) Fax	In Person	
	Regarding:									
Client Instructions:							·			
17. Ac	dditional r	emarks:								-
18. <u>Cc</u>	ooler Info									
 	Cooler N			Seal Intact	Seal No	Seal Date	Signed	Ву		
[]	,	1.0	Good	Not Present	i				j	

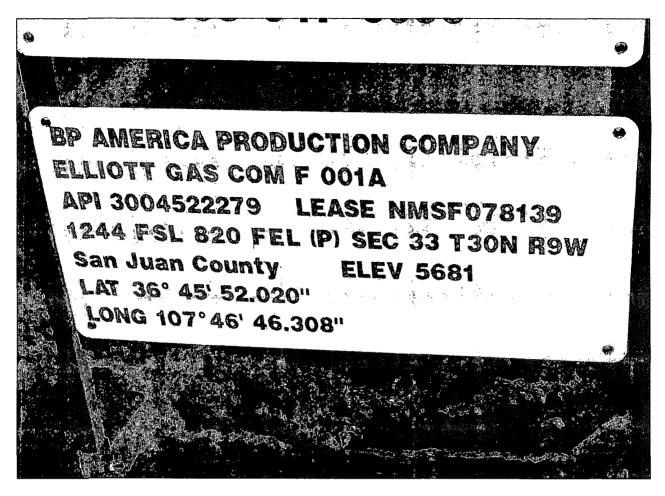

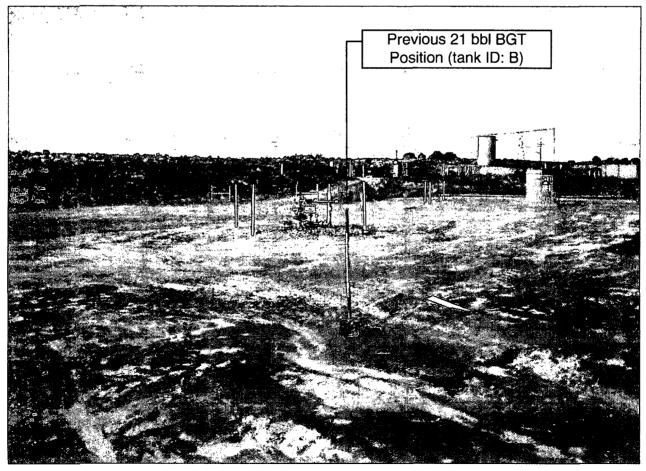

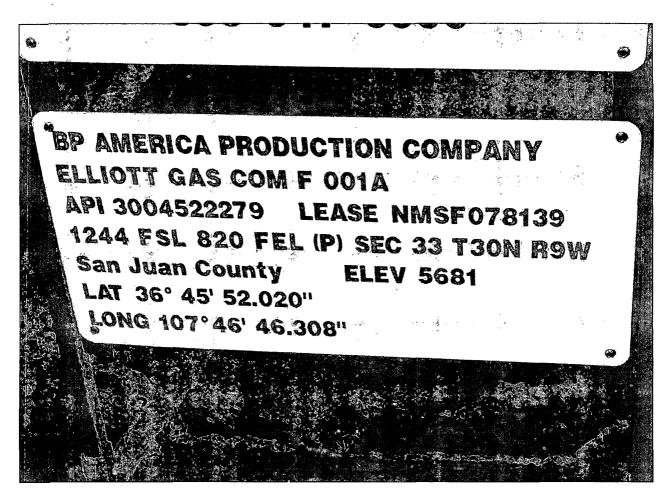

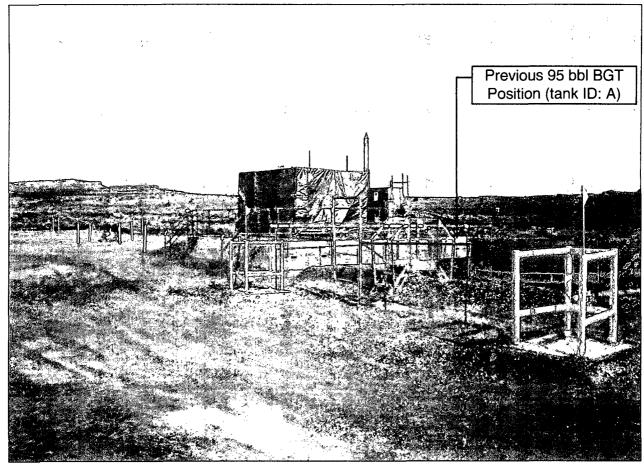

BP America Production Company

200 Energy Court Farmington, NM 87401 Phone: (505) 326-9200

SENT VIA E-MAIL TO: BRANDON.POWELL@STATE.NM.US

August 27, 2013

New Mexico Oil Conservation Division 1000 Rio Brazos Road Aztec, New Mexico 87410

RE: Notice of Proposed Below-Grade Tank (BGT) Closure

Elliott GC F 001A API 30-045-26191 (P) Section 33 – T30N – R09W San Juan County, New Mexico

Dear Mr. Brandon Powell:

In regards to the captioned subject and requirements of the NMOCD pit rule, this letter is notification that BP is planning to close a 21 bbl BGT that will no longer be operational at this well site.

Should you have any questions, please feel free to contact BP at our Farmington office.

Sincerely,

Jeff Peace

BP Field Environmental Advisor

(505) 326-9479

BP AMERICA PRODUCTION COMPANY

SAN JUAN BASIN, NORTHWEST NEW MEXICO

BELOW-GRADE TANK CLOSURE PLAN

Elliott Gas Com F 1A
API No. 3004522279
Unit Letter P, Section 33, T30N, R9W

RCVD DEC 6'13 OIL CONS. DIV. DIST. 3

This plan will address the standard protocols and procedures for closure of below-grade tanks (BGTs) on BP America Production Company (BP) well sites. As stipulated in Paragraph A of 19.15.17.13 NMAC, BP shall close a BGT within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the New Mexico Oil Conservation Division (NMOCD) requires because of imminent danger to fresh water, public health, safety or the environment. If deviations from this plan are necessary, any specific changes will be included on form C-144 and approved by the NMOCD. BP shall close an existing BGT that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008, if not retrofit with a BGT that complies with the BP NMOCD approved BGT design attached to the BP Design and Construction Plan. BP shall close an existing BGT that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC, if not previously retrofitted to comply with the BP NMOCD approve BGT Design attached to the BP Design and Construction Plan, prior to any sale or change in operator pursuant to 19.15.9.9 NMAC. BP shall close the permitted BGT within 60 days of cessation of the BGTs operation or as required by the transitional provisions of Subsection B, D, or E of 19.15.17.17 NMAC.

General Closure Plan

- 1. BP shall notify the surface owner by certified mail that it plans to close a BGT. Evidence of mailing of the notice to the address of the surface owner shown in the county tax records demonstrates compliance with this requirement.
 - No notice was sent to the surface owner due to mis-understanding of the notice requirements. BP did not think notice was necessary if BGT replaced with LPT, but realizes notice is required for any BGT closure. Closure notices will be made for all BGT closures from this point forward.
- 2. BP shall notify the division District III office verbally or by other means at least 72 hours, but not more than one (1) week, prior to any closure operation. The notice shall include the operator's name, and the location to be closed by unit letter, section, township and range. If the BGT closure is associated with a particular well, then the notice shall also include the well's name, number and API number.

Notice is attached.

- 3. BP shall remove liquids and sludge from the BGT prior to implementing a closure method and dispose of the liquids and sludge in a NMOCD's division-approved facility. The facilities to be used are:
 - a. BP Crouch Mesa Landfarm, Permit NM-02-003 (Solids)

- b. JFJ Landfarm, Permit NM-01-010(B) (Solids and Sludge)
- c. Basin Disposal, Permit NM-01-0005 (Liquids)
- d. Envirotech Inc Soil Remediation Facility, Permit NM-01-0011 (Solids and Sludge)
- e. BP Operated E.E. Elliott SWD #1, API 30-045-27799 (Liquids)
- f. BP Operated 13 GCU SWD #1, API 30-045-28601 (Liquids)
- g. BP Operated GCU 259 SWD, API 30-045-20006 (Liquids)
- h. BP Operated GCU 306 SWD, API 30-045-24286 (Liquids)
- i. BP Operated GCU 307 SWD, API 30-045-24248 (Liquids)
- j. BP Operated GCU 328 SWD, API 30-045-24735 (Liquids)
- k. BP Operated Pritchard SWD #1, API 30-045-28351 (Liquids)

All liquids and sludge in the BGT's were removed and sent to one of the above NMOCD approved facilities for disposal.

4. BP shall remove the BGT and dispose of it in a NMOCD approved facility or recycle, reuse, or reclaim it in a manner that the NMOCD approves. If a liner is present and must be disposed of it will be cleaned by scraping any soils or other attached materials on the liner to a de minimus amount and disposed at a permitted solid waste facility, pursuant to Subparagraph (m) of Paragraph (1) of Subsection C of 19.15.35.8 NMAC. Documentation as to the final disposition of the removed BGT will be provided in the final closure report.

The BGT's were transported to a storage area for sale and re-use.

5. BP shall remove any on-site equipment associated with a BGT unless the equipment is required for well production.

All equipment associated with the BGT's has been removed.

6. BP shall test the soils beneath the BGT to determine whether a release has occurred. BP shall collect at a minimum: a five (5) point composite sample and individual grab samples from any area that is wet, discolored or showing other evidence of a release and analyze for BTEX, TPH and chlorides. The testing methods for those constituents are as follows;

Constituents	Testing Method	Release Verification	Sample
	95 bbl BGT	(mg/Kg)	results
Benzene	US EPA Method SW-846 8021B or 8260B	0.2	ND
Total BTEX	US EPA Method SW-846 8021B or 8260B	50	ND
TPH	US EPA Method SW-846 418.1	100	ND
Chlorides	US EPA Method 300.0 or 4500B	250 or background	ND

Constituents	Testing Method	Release Verification	Sample
	21 bbl BGT	(mg/Kg)	results
Benzene	US EPA Method SW-846 8021B or 8260B	0.2	ND
Total BTEX	US EPA Method SW-846 8021B or 8260B	50	ND
TPH	US EPA Method SW-846 418.1	100	ND
Chlorides	US EPA Method 300.0 or 4500B	250 or background	ND

Notes: mg/Kg = milligram per kilogram, BTEX = benzene, toluene, ethylbenzene, and total xylenes, TPH = total petroleum hydrocarbons. Other EPA methods that the division approves may be applied to all constituents listed. Chloride closure standards will be determined by which ever concentration level is greatest. Soil under the BGT's was sampled and TPH, BTEX and chloride levels were below the stated limits. Sampling data is attached.

- 7. BP shall notify the division District III office of its results on form C-141. C-141 is attached.
- 8. If it is determined that a release has occurred, then BP will comply with 19.15.30 NMAC and 19.15.29 NMAC, as appropriate.

 Sampling results indicate no release occurred.
- 9. If the sampling demonstrates that a release has not occurred or that any release does not exceed the concentrations specified above, then BP shall backfill the excavation, with compacted, non-waste containing, earthen material; construct a division-prescribed soil cover, re-contour and re-vegetate the location. The location will be reclaimed if it is not with in the active process area

The area under the BGT's was backfilled with clean soil. The area over the 95 bbl BGT is covered by the raised compressor pad. The area over the 21 bbl BGT is still within the active well area.

10. BP shall reclaim the BGT location and all areas associated with the BGT including associated access roads to a safe and stable condition that blends with the surrounding undisturbed area. BP shall substantially restore the impacted surface area to the condition that existed prior to oil and gas operations by placement of the soil cover as provided in Subsection H of 19.15.17.13 NMAC, re-contour the location and associated areas to a contour that approximates the original contour and blends with the surrounding topography and re-vegetate according to Subsection I of 19.15.17.13 NMAC.

The area over the 95 bbl BGT is covered by the raised compressor pad. The area over the 21 bbl BGT is still within the active well area. This area will be reclaimed when the well is plugged and abandoned as part of final reclamation.

11. The soil cover for closures where the BGT has been removed or remediated to the NMOCD's satisfaction shall consist of the background thickness of topsoil or one foot of suitable material to establish vegetation at the site, whichever is greater. The soil cover will be constructed to the site's existing grade and all practicable efforts will be made to prevent ponding of water and erosion of the cover material.

The area over the 95 bbl BGT is covered by the raised compressor pad. The area over the 21 bbl BGT is still within the active well area. This area will be reclaimed when the well is plugged and abandoned as part of final reclamation.

12. BP shall seed the disturbed area the first growing season after closure of the BGT. Seeding will be accomplished by drilling on the contour whenever practical or by other

division-approved methods. Vegetative cover will be, at a minimum, 70% of the native perennial vegetative cover (un-impacted by overgrazing, fire or other intrusion damaging to native vegetation), consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintenance of that cover through two successive growing seasons. During the two growing seasons that prove viability, there shall be no artificial irrigation of the vegetation.

The area over the 95 bbl BGT is covered by the raised compressor pad. The area over the 21 bbl BGT is still within the active well area. This area will be reclaimed when the well is plugged and abandoned as part of final reclamation.

13. BP shall seed, plant and re-seed pursuant to Paragraph (3) of Subsection I of 19.15.17.13 NMAC, until the location successfully achieves the required vegetative cover.

BP will seed the area when the well is plugged and abandoned.

14. Pursuant to Paragraph (5) of Subsection I of 19.15.17.13 NMAC, BP shall notify the NMOCD when it has seeded or planted and when it successfully achieves revegetation.

BP will notify NMOCD when re-vegetation is successful.

- 15. Within 60 days of closure completion, BP shall submit a closure report on NMOCD's form C-144, and will include the following:
 - a. proof of closure notification (surface owner and NMOCD)
 - b. sampling analytical reports; information required by 19.15.17 NMAC;
 - c. disposal facility name and permit number
 - d. details on back-filling, capping, covering, and where applicable re-vegetation application rates and seeding techniques and
 - e. site reclamation, photo documentation.

Closure report on C-144 form is included.

16. BP shall certify that all information in the report and attachments is accurate, truthful, and compliant with all applicable closure requirements and conditions specified in the approved closure plan.

Certification section of C-144 has been completed.