

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

RECEIVED

MAR 05 2014

FORM APPROVED  
OMB No. 1004-0137  
Expires: October 31, 2014**SUNDRY NOTICES AND REPORTS ON WELLS**  
**Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.**

5. Lease Serial No.

6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 2.

7. If Unit of CA/Agreement, Name and/or No.

## 1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other8. Well Name and No.  
see attached list2. Name of Operator  
Logos Operating, LLC9. API Well No.  
33a. Address  
4001 North Butler Avenue, Building 7101  
Farmington, NM 874013b. Phone No. (include area code)  
505-330-9333

10. Field and Pool or Exploratory Area

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

11. County or Parish, State

## 12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other <u>Water Source</u>
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.)

Logos requests to recycle produced water from the attached locations. The recycled water will be used for the fracture stimulation on the Roadrunner 4G and Roadrunner 7F. Please also see the attached water analysis reports for the currently producing wells which will assist in serving as a baseline for water quality and the NMOCD notice for 'No OCD Permit Required for Re-use of Produced Water'. Logos plans to use 100% recycled water for fracture stimulation whenever possible.

Any excess water will be hauled to Basin Disposal.

Authorized per Oashore Order #7, Part G  
"Other Methods of Disposal"

RCVD MAR 14 '14

OIL CONS. DIV.  
DIST. 3

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed)

Tamra Sessions

Title Operations Technician

Signature

Date 03/04/2014

## THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Petr. Eng.

Date

3/12/14

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

NMOCD

Producing Location								
Well Name	Well Number	Type	Lease	API #	Section	Township	Range	OCD Unit Letter
LOGOS	#601H	Oil	Jicarilla	30-043-21182	5	22N	05W	D
JICARILLA O	#003E	Oil	Jicarilla	30-043-21165	10	22N	03W	O
ROADRUNNER	#002X	Oil	State	30-045-35494	2	24N	08W	H
LOGOS	#012	Oil	Jicarilla	30-043-21160	6	22N	05W	J
LOGOS	#011	Oil	Jicarilla	30-043-21159	6	22N	05W	K
LOGOS	#010	Oil	Jicarilla	30-043-21158	6	22N	05W	L
LOGOS	#009	Oil	Jicarilla	30-043-21157	5	22N	05W	H
LOGOS	#008	Oil	Jicarilla	30-043-21156	5	22N	05W	G
LOGOS	#007	Oil	Jicarilla	30-043-21155	5	22N	05W	E
NCRA STATE	#008P	Oil	State	30-039-31195	16	24N	06W	P
ENCHILADA	#002X	Oil	State	30-039-31194	16	23N	06W	H
NCRA STATE	#007A	Oil	State	30-039-31181	16	24N	06W	A
NCRA STATE	#006F	Oil	State	30-039-31180	16	24N	06W	F
LOGOS	#006	Gas	Federal	30-045-35422	8	23N	08W	G
LOGOS	#005	Gas	Federal	30-045-35423	4	23N	08W	P
LOGOS	#003	Oil	Federal	30-043-21135	5	22N	06W	P
LOGOS	#002	Oil	Jicarilla	30-043-21120	6	22N	05W	I
LOGOS	#001	Oil	Jicarilla	30-043-21119	5	22N	05W	F

Logos Resources			
County: Sandoval	Field: Jicarilla		
State: NM	Location: Logos #1		
Sampled at: WH	Formation:		
Date: Feb. 21, 2013	Depth: 0'		

## H & M Precision Water Analysis Report

Sum +	mg/L	meq/L		Sum -	mg/L	meq/L
Potassium	0.0	0.00		Sulfate	11.0	0.23
Sodium	15,003.0	652.59		Chloride	24,000.0	676.95
Calcium	225.0	11.23		Carbonate	0.0	0.00
Magnesium	94.5	7.77		Bicarbonate	330.0	5.41
Iron	17.4	0.93		Hydroxide	0.0	0.00
Barium	4.0	0.06			0.0	0.00
Strontium	0.0	0.00			0.0	0.00
<b>CATIONS</b>	<b>15,343.9</b>	<b>672.58</b>		<b>ANIONS</b>	<b>24,341.0</b>	<b>682.59</b>

### System Parameters

Total Dissolved Solids @180C	39,685 mg/L
Sample Temperature, °F	70 F
Sample pH, standard units	6.94 Units
Dissolved Oxygen	0.0 ppm
Carbon Dioxide	0.0 mg/L
Total Sulfide, (TS)	0.0 mg/L
Sulfide Ion, (S)	0 mg/L
Dissolved Hydrogen Sulfide, (TS-S)	0 mg/L
Specific Gravity	1.0283
Resistivity, measured	0 ohm/m³
Ionic strength	0.687
Sulfate Reducing Bacteria	nd
Aerobic Bacteria	nd
Manganese Level	4 mg/L

### Scaling Tendency

CACO <sub>3</sub> Stiff Davis			CASO <sub>4</sub> SOLUBILITY				
Temp F	Index	A Index	Temp F	Actual	Calculated	S Index	A Index
32	-1.25	-619	50	0.23	68.06	-67.83	-1617
50	-1.12	-505	68	0.23	68.31	-68.08	-1623
68	-0.97	-396	86	0.23	68.56	-68.33	-1629
77	-0.89	-343	104	0.23	68.66	-68.43	-1631
86	-0.78	-278	122	0.23	68.61	-68.38	-1630
104	-0.56	-172	140	0.23	67.65	-67.42	-1607
122	-0.29	-77	158	0.23	66.67	-66.45	-1584
140	0.02	6	176	0.23	65.69	-65.46	-1560
158	0.34	63					
176	0.69	106					

**BASO<sub>4</sub> SCALE POSSIBLE**

NO

Water Analysis Pattern

NOTE: Stiff Davis Index


- indicates undersaturation. Scale formation negative.
- 0 indicates the water is at saturation point. Scale unlikely.
- + indicates supersaturation. A positive scaling condition exists.

NOTE: Skillman Method Calcium Sulfate 'S' Index

- indicates undersaturation. Scale formation negative.
- 0 indicates the water is at saturation point. Scale unlikely.
- + indicates supersaturation. A positive scaling condition exists.

NOTE: A Index; worst possible case. Assumes 100% precipitation.

- Units = pounds of scale produced / 1000 bbls. of water.
- A Index = < 0 Scale formation negative.
- A Index > 0 Scale formation positive.



Approved: Zech Schaff  
02/25/13 v4.01

## Logos Resources

County: Sandoval  
 State: NM  
 Sampled at: WH  
 Date: Jan.22,2013  
 H & M Precision Water Analysis Report

Field: Jicarilla  
 Location: Logos #2  
 Formation:  
 Depth: 0

Sum +	mg/L	meq/L
Potassium	0	0
Sodium	15569.2	677.22
Calcium	324.5	16.19
Magnesium	136.2	11.2
Iron	14.4	0.77
Barium	0	0
Strontium	0	0
CATIONS	16044.3	705.38

Analysis

Balanced

Sum -	mg/L	meq/L
Sulfate	0	0
Chloride	25000	705.16
Carbonate	0	0
Bicarbonat	810	13.27
Hydroxide	0	0
-	0	0
-	0	0
ANIONS	25810	718.43

## System Parameters

Total Dissolved Solids @180C	41854.3 mg/L
Sample Temperature, 'F	70 F
Sample pH, standard units	7.1 Units
Dissolved Oxygen	0 ppm
Carbon Dioxide	0 mg/L
Total Sulfide, (TS)	0 mg/L
Sulfide Ion, (S)	0 mg/L
Dissolved Hydrogen Sulfide, (TS-S)	0 mg/L
Specific Gravity	1.0296
Resistivity, measured	0 ohm/m^3
Ionic strength	0.726
Sulfate Reducing Bacteria	nd
Aerobic Bacteria	nd
Manganese Level	0 mg/L

## Scaling Tendency

CACO3			CASO4			
Temp F	Stiff Davis Index	A index	Temp F	SOLUBILITY Actual	S Calculatec Index	A Index
32	-0.55715	-320	50	0 67.27646	-67.2765	-1603.53
50	-0.42668	-225	68	0 67.52018	-67.5202	-1609.34
68	-0.2821	-135	86	0 67.76313	-67.7631	-1615.13
77	-0.19977	-91	104	0 67.84894	-67.8489	-1617.18
86	-0.0877	-37	122	0 67.77816	-67.7782	-1615.49
104	0.133054	50	140	0 66.81607	-66.8161	-1592.56
122	0.397505	127	158	0 65.84147	-65.8415	-1569.33
140	0.716725	191	176	0 64.85385	-64.8539	-1545.79
158	1.035621	231				
176	1.381819	257				

BASO4 SCALE POSSIBLE NO

## Water Analysis Patern

NOTE: Stiff Davis Index

- indicates undersaturation. Scale formation negative.
- 0 indicates the water is at saturation point. Scale unlikely.
- + indicates supersaturation. A positive scaling condition exists.


NOTE: Skillman Method Calcium Sulfate 'S Index'

- indicates undersaturation. Scale formation negative.
- 0 indicates the water is at saturation point. Scale unlikely.
- + indicates supersaturation. A positive scaling condition exists.

NOTE: A Index; worst possible case. Assumes 100% precipitation.

- Units = pounds of scale produced / 1000 bbls. of water.
- A Index =< 0 Scale formation negative.
- A Index > 0 Scale formation positive.

40 30 20 10 10 20 30 40

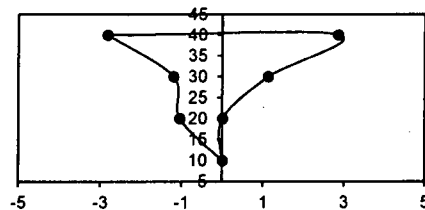

Approved: Zech Schaff

41298.7 v4.01

# Logos Resources

County: Sandoval  
State: NM  
Sampled at: WH  
Date: May 16, 2013

Field: Jicarilla  
Location: Logos #3  
Formation:  
Depth: 0

## H & M Precision

## Water Analysis Report

Sum +	mg/L	meq/L
Potassium	0.0	0.00
Sodium	12,563.4	546.48
Calcium	406.1	20.26
Magnesium	170.5	14.03
Iron	43.2	2.32
Barium	0.0	0.00
Strontium	0.0	0.00
<b>CATIONS</b>	<b>13,183.2</b>	<b>583.09</b>

Analysis  
Balanced

Sum -	mg/L	meq/L
Sulfate	0.0	0.00
Chloride	20,500.0	578.23
Carbonate	0.0	0.00
Bicarbonate	830.0	13.60
Hydroxide	0.0	0.00
-	0.0	0.00
-	0.0	0.00
<b>ANIONS</b>	<b>21,330.0</b>	<b>591.83</b>

### System Parameters

Total Dissolved Solids @180C  
Sample Temperature, °F  
Sample pH, standard units  
Dissolved Oxygen  
Carbon Dioxide  
Total Sulfide, (TS)  
Sulfide Ion, (S)  
Dissolved Hydrogen Sulfide, (TS-S)

34,513 mg/L  
70 F  
7.27 Units  
0.0 ppm  
0.0 mg/L  
0.0 mg/L  
0 mg/L  
0 mg/L

Specific Gravity  
Resistivity, measured  
Ionic strength  
Sulfate Reducing Bacteria  
Aerobic Bacteria  
Manganese Level

1.0246  
0 ohm/m<sup>3</sup>  
0.605  
nd  
nd  
0 mg/L

### Scaling Tendency

Temp F	CACO3 Stiff Davis Index	A index
32	-0.22	-119
50	-0.09	-44
68	0.07	29
77	0.15	63
86	0.26	105
104	0.48	172
122	0.75	231
140	1.05	279
158	1.37	311
176	1.71	332

Temp F	Actual	CASO4 SOLUBILITY Calculated	S Index	A Index
50	0.00	60.31	-60.31	-1438
68	0.00	60.57	-60.57	-1444
86	0.00	60.83	-60.83	-1450
104	0.00	60.96	-60.96	-1453
122	0.00	60.96	-60.96	-1453
140	0.00	60.01	-60.01	-1430
158	0.00	59.05	-59.05	-1407
176	0.00	58.08	-58.08	-1384

### BASO4 SCALE POSSIBLE

NO

NOTE: Stiff Davis Index

- indicates undersaturation. Scale formation negative.
- 0 indicates the water is at saturation point. Scale unlikely.
- + indicates supersaturation. A positive scaling condition exists.


NOTE: Skillman Method Calcium Sulfate 'S' Index

- indicates undersaturation. Scale formation negative.
- 0 indicates the water is at saturation point. Scale unlikely.
- + indicates supersaturation. A positive scaling condition exists.

NOTE: A Index; worst possible case. Assumes 100% precipitation.

- Units = pounds of scale produced / 1000 bbls. of water.
- A Index < 0 Scale formation negative.
- A Index > 0 Scale formation positive.

### Water Analysis Pattern

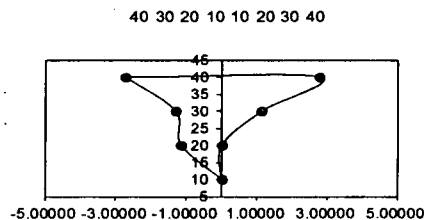

Approved: Zech Schaff  
05/24/13

v4.01

off lease ... ok per Brandon 10/7

## NOTICE

### NO OCD PERMIT REQUIRED FOR RE-USE OF PRODUCED WATER

#### AT OIL AND GAS OPERATIONS

The Oil Conservation Division (OCD) has the authority in Section 70-2-12 NMSA 1978 (2004) to regulate "the disposition of water produced or used in connection with the drilling for or producing of oil or gas or both and to direct surface or subsurface disposal of the water, including disposition by use in drilling for or production of oil and gas ... in a manner that will afford reasonable protection against contamination of fresh water supplies designated by the state engineer." The Oil Conservation Commission has enacted a rule ~~19.15.34~~ NMAC, which regulates the transportation and disposition of produced water. Rule ~~19.15.34.12~~ NMAC allows the disposition of produced water for use as a drilling or completion fluid at a drilling site or disposition under other Division authorization.

The Energy, Minerals and Natural Resources Department and OCD Director support the growing interest in the re-use of produced water for oil and gas operations. The Director notes that there is some confusion about the applicability of OCC rules to re-use produced water and whether prior authorization from OCD is needed for re-use of produced water.

~~No OCD permit or authorization is required for the re-use of produced water, drilling fluids or other oil field liquids as a drilling or completion fluid or other type of oil field fluid, including makeup water, fracturing fluid or drilling mud, at a permitted drilling, production or plugging operation. However, the re-use of produced water is NOT permitted for any use which involves contact with fresh water zones. No permit is required for the delivery of produced water to, permitted salt water disposal facilities, secondary recovery, pressure maintenance or EOR projects, surface waste management facilities, or to well sites for use in drilling, completion, or plugging operations. Produced water must be stored and re-used in a manner that protects fresh water, public health, and the environment. Produced water, brine makeup water, or frac flowback water can be stored in permanent pits or in temporary multi-well fluid management pits when used only on wells identified in the multi-well fluid management pit permit.~~

#### Multi-well Fluid Management Pits. Rule 19.15.17 NMAC

To request approval to construct a multi-well fluid management pit, an operator must file an application form C-144 with required attachments, including a list of wells with approved APDs associated with the pit, to the appropriate division district office. A form C-102 must also be provided showing the proposed pit location. These pits may be used for the storage, treatment and recycling of stimulation fluids and flow-back water during the drilling and completion of multiple wells, and may not be used for disposal of drilling, completion or other waste. Multi-well fluid management pits must be closed within 6 months from the date all stimulation operations on all wells identified in the permit cease.

Permanent Pits, Rule 19.15.17 NMAC

To request approval to construct a permanent pit, an operator or commercial entity must file an application Form C-144 with required attachments to the OCD Environment Bureau in Santa Fe and submit a copy to the appropriate OCD District Office. Fluids stored in a permanent pit can include produced water from different wells, different leases, or from deep saline aquifers. Permanent pits must be closed within 60 days of cessation of operation of the pit.

Other Re-use of Produced Water

Any other re-use of produced water that is regulated by OCD requires an authorization or permit from OCD issued on a case by case basis. An Application for Re-Use of Produced Water, form C-147, must be submitted to the appropriate OCD District Office. The Application can be found on the OCD Forms webpage (<http://www.emnrd.state.nm.us/OCD/forms.html>).

Transportation of Produced Water, Rule 19.15.34 NMAC

Approval (with form C-133) is still required to transport produced water or other liquid oil field waste.

All applicable law and OCD rules must be complied with in connection with the re-use of produced water. OCD retains the authority to limit or condition the re-use of produced water that may adversely impact fresh water, public health, safety or the environment.

**TITLE 19      NATURAL RESOURCES AND WILDLIFE**  
**CHAPTER 15    OIL AND GAS**  
**PART 34      PRODUCED WATER**

**19.15.34.1      ISSUING AGENCY:** Energy, Minerals and Natural Resources Department, Oil Conservation Division.  
[19.15.34.1 NMAC - N, 12/1/08]

**19.15.34.2      SCOPE:** 19.15.34 NMAC applies to persons engaged in transporting produced water, drilling fluids or other oil liquid oil field waste or having them transported or in disposing of produced water or oil field waste within New Mexico.  
[19.15.34.2 NMAC - N, 12/1/08]

**19.15.34.3      STATUTORY AUTHORITY:** 19.15.34 NMAC is adopted pursuant to the Oil and Gas Act, NMSA 1978, Section 70-2-12, which authorizes the division to regulate the disposition of water produced or used in connection with the drilling for or producing of oil or gas and to direct surface or subsurface disposal of the water.  
[19.15.34.3 NMAC - N, 12/1/08]

**19.15.34.4      DURATION:** Permanent.  
[19.15.34.4 NMAC - N, 12/1/08]

**19.15.34.5      EFFECTIVE DATE:** December 1, 2008, unless a later date is cited at the end of a section.  
[19.15.34.5 NMAC - N, 12/1/08]

**19.15.34.6      OBJECTIVE:** To establish procedures by which persons may transport produced water, drilling fluids and other liquid oil field waste and dispose of produced water or other oil field waste.  
[19.15.34.6 NMAC - N, 12/1/08]

**19.15.34.7      DEFINITIONS:** [RESERVED]  
[See 19.15.2.7 NMAC for definitions.]

**19.15.34.8      TRANSPORTATION OF PRODUCED WATER, DRILLING FLUIDS AND OTHER LIQUID OIL FIELD WASTE:**

**A.** A person shall not transport produced water, drilling fluids or other liquid oil field waste, including drilling fluids and residual liquids in oil field equipment, except for small samples removed for analysis, by motor vehicle from a lease, central tank battery or other facility without an approved form C-133, authorization to move liquid waste. The transporter shall maintain a photocopy of the approved form C-133 in the transporting vehicle.

**B.** A person may apply for authorization to move produced water, drilling fluids or other liquid oil field waste by filing a complete form C-133 with the division's Santa Fe office. Authorization is granted upon the division's approval of form C-133.

**C.** An owner or operator shall not permit produced water, drilling fluids or other liquid oil field waste to be removed from its leases or field facilities, except for small samples removed for analysis, by motor vehicle except by a person possessing an approved form C-133. The division shall post a list of currently approved form C-133s, authorization to move liquid waste, on its website. The list of form C-133s posted on the division's website on the first business day of each month shall be deemed notice of valid form C-133s for the remainder of that month.  
[19.15.34.8 NMAC - Rp, 19.15.2.51 NMAC, 12/1/08]

**19.15.34.9      DENIAL OF A FORM C-133:** The division may deny approval of a form C-133 if:

**A.** the applicant is a corporation or limited liability company, and is not registered with the public regulation commission to do business in New Mexico;

**B.** the applicant is a limited partnership, and is not registered with the New Mexico secretary of state to do business in New Mexico;

**C.** the applicant does not possess a carrier permit under the single state registration system the public regulation commission administers, if it is required to have such a permit under applicable statutes or rules; or

**D.** the applicant or an officer, director or partner in the applicant, or a person with an interest in the applicant exceeding 25 percent, is or was within the past five years an officer, director, partner or person with an interest exceeding 25 percent in another entity that possesses or has possessed an approved form C-133 that has been cancelled or suspended, has a history of violating division rules or other state or federal environmental laws; is subject to a commission or division order, issued after notice and hearing, finding such entity to be in violation of an order requiring corrective action; or has a penalty assessment for violation of division or commission rules or orders that is unpaid more than 70 days after issuance of the order assessing the penalty.  
[19.15.34.9 NMAC - Rp, 19.15.2.51 NMAC, 12/1/08]

**19.15.34.10      CANCELLATION OR SUSPENSION OF AUTHORIZATION TO MOVE LIQUID WASTES:** A transporter's vehicular movement or disposition of produced water, drilling fluids or other liquid oil field wastes in a manner contrary to division rules is a ground for denial of approval of form C-133 in addition to the those specified in Subsection D of 19.15.34.9 NMAC. It is also cause, after notice and an opportunity for hearing, for the division to cancel or suspend a transporter's authorization to move liquid wastes.



#### 19.15.34 NMAC

[19.15.34.10 NMAC - Rp, 19.15.2.51 NMAC, 12/1/08]

**19.15.34.11 DISPOSITION OF PRODUCED WATER AND OTHER OIL FIELD WASTE:** Except as authorized by 19.15.30 NMAC, 19.15.17 NMAC, 19.15.36 NMAC, 19.15.29 NMAC or 19.15.26.8 NMAC, persons, including transporters, shall not dispose of produced water or other oil field waste:

- (1) on or below the surface of the ground; in a pit; or in a pond, lake, depression or watercourse;
- (2) in another place or in a manner that may constitute a hazard to fresh water, public health, safety or the environment; or
- (3) in a permitted pit or registered or permitted surface waste management facility without the permission of the owner or operator of the pit or facility.

[19.15.34.11 NMAC - Rp, 19.15.2.52 NMAC, 12/1/08]

**19.15.34.12 METHODS FOR DISPOSAL OF PRODUCED WATER:** Persons disposing of produced water shall use one of the following disposition methods:

- A. disposition in a manner that does not constitute a hazard to fresh water, public health, safety or the environment; ~~delivery to a permitted salt water disposal well or facility, secondary recovery or pressure maintenance injection facility, surface waste management facility or permanent pit permitted pursuant to 19.15.17 NMAC; or to a drill site for use in drilling fluid; or~~
- B. use in accordance with a division-issued use permit or other division authorization.

[19.15.34.12 NMAC - Rp, 19.15.2.52 NMAC, 12/1/08]

**19.15.34.13 METHODS FOR DISPOSAL OF OTHER OIL FIELD WASTE:** Persons shall dispose of other oil field waste by transfer to an appropriate permitted or registered surface waste management facility or injection facility or applied to a division-authorized beneficial use. Persons may ~~transport recovered drilling fluids to other drill sites~~ for reuse provided that such fluids are transported and stored in a manner that does not constitute a hazard to fresh water, public health, safety or the environment.

[19.15.34.13 NMAC - Rp, 19.15.2.52 NMAC, 12/1/08]

#### **HISTORY of 19.15.34 NMAC:**

**History of Repealed Material:** 19.15.2 NMAC, General Operating Practices, Wastes Arising from Exploration and Production (filed 04/21/2004) repealed 12/1/08.

#### **NMAC History:**

Those applicable portions of 19.15.2 NMAC, General Operating Practices, Wastes Arising from Exploration and Production (Sections 51 and 52) (filed 01/24/2007) were replaced by 19.15.34 NMAC, Produced Water, effective 12/1/08.