District I 1625 N. French' Dr., Hobbs, NM 88240 District II 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

☐ Alternate. Please specify

Form C-144

Four foot height, four strands of barbed wire evenly spaced between one and four feet

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe NM 87505

Form C-144 Revised June 6, 2013

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office. For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

	Danta Te, Tivi 0750		the appropriate NWO	District Office.
12279 <u>Proposed Alternative</u>	Pit, Below-Grade Ta e Method Permit or		n Application	
Type of action: ☐ Below grade tall ☐ Permit of a pit ☐ ☐ Closure of a pit ☐ Modification to	nk registration	hod osed alternative i tration	RCUD OIL C	DCT 14'14 ONS. DIV. IST. 3 w-grade tank,
Instructions: Please submit one applica	tion (Form C-144) per individ	lual pit, below-g <mark>r</mark> a	de tank or alternative	request
Please be advised that approval of this request does not relieve the environment. Nor does approval relieve the operator of its response.	ne operator of liability should op	erations result in po	llution of surface water,	ground water or the
1.		——————————————————————————————————————		
Operator: XTO Energy Inc				
Address: <u>382 Road 3100 Aztec, NM 87410</u>			 .	
Facility or well name: State Gas COM BJ #4				
API Number:				
U/L or Qtr/Qtr: <u>M</u> Section <u>2</u>	Township: 30N	_ Range:13	W County:	San Juan
Center of Proposed Design: Latitude 36.83655	Longitude	-108.17990	NAD: [∐ 1927 ⊠ 1983
Surface Owner: Federal State Private Tribal 7	rust or Indian Allotment			
2.				
Pit: Subsection F, G or J of 19.15.17.11 NMAC				
Temporary: Drilling Workover				
☐ Permanent ☐ Emergency ☐ Cavitation ☐ P&A ☐	Multi-Well Fluid Management	Low (Chloride Drilling Fluid	yes no
Lined Unlined Liner type: Thickness	mil LLDPE HDPE	☐ PVC ☐ Other		
☐ String-Reinforced				
Liner Seams: Welded Factory Other	Volume: _	bbl D	imensions: Lx	Wx D
3.				
Below-grade tank: Subsection I of 19.15.17.11 NMA	،C			
Volume: 95 bbl Type of fluid:	Produced Wa	iter		
Tank Construction material: Steel				-
Secondary containment with leak detection Visible	e sidewalls, liner, 6-inch lift ar	d automatic overfl	ow shut-off	
☐ Visible sidewalls and liner ☒ Visible sidewalls only		•		
Liner type: Thickness mil				
4.				
Submittal of an exception request is required. Exceptions i	must be submitted to the Santa	Fe Environmental	Bureau office for cons	ideration of approval.
5.				
Fencing: Subsection D of 19.15.17.11 NMAC (Applies to	permanent pits, temporary pits	. and below-grade	tanks)	
Chain link, six feet in height, two strands of barbed wire institution or church)	at top (Required if located wi	thin 1000 feet of a	permanent residence, s	chool, hospital,

Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other	
☐ Monthly inspections (If netting or screening is not physically feasible)	
7. Signs: Subsection C of 19.15.17.11 NMAC 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers Signed in compliance with 19.15.16.8 NMAC	
Variances and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Variance(s): Requests must be submitted to the appropriate division district for consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	
9. Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptate are provided below. Siting criteria does not apply to drying pads or above-grade tanks.	otable source
General siting	
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank. - □ NM Office of the State Engineer - iWATERS database search; □ USGS; □ Data obtained from nearby wells	Yes No
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within the area overlying a subsurface mine. (Does not apply to below grade tanks) - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
 Within an unstable area. (Does not apply to below grade tanks) Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	☐ Yes ☐ No
Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map	Yes No
Below Grade Tanks	
Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption; - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)	
Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial application.	☐ Yes ☐ No
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No

William Control of the Control of th									
Within 100 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	Yes No								
Temporary Pit Non-low chloride drilling fluid									
Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No								
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Yes No								
Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site									
Within 300 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No								
Permanent Pit or Multi-Well Fluid Management Pit									
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No								
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No								
Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No								
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No								
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 N Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the doc attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19. and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:	NMAC 15.17.9 NMAC								
11.									
Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC A List of wells with approved application for permit to drill associated with the pit. Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC									
Previously Approved Design (attach copy of design) API Number: or Permit Number:									

10	
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the	documents are
## Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.10 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.11 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.	
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-well Fl	luid Management Pit
☐ Alternative Proposed Closure Method: ☐ Waste Excavation and Removal ☐ Waste Removal (Closed-loop systems only) ☐ On-site Closure Method (Only for temporary pits and closed-loop systems) ☐ In-place Burial ☐ On-site Trench Burial ☐ Alternative Closure Method	
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be a closure plan. Please indicate, by a check mark in the box, that the documents are attached. □ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC □ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC □ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) □ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	
15. Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. P. 19.15.17.10 NMAC for guidance.	
Ground water is less than 25 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	Yes No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	

adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No							
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	Yes No							
 Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 								
Within a 100-year floodplain.								
	Yes No							
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.17. Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	11 NMAC 15.17.11 NMAC							
Operator Application Certification: I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and beli	ef.							
Name (Print): Title:								
Signature: Date:								
e-mail address:								
18. OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature: Approval Date: 1/100 OCD Permit Number:	/2014							
19. Closure Report (required within 60 days of closure completion): 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not section of the form until an approved closure plan has been obtained and the closure activities have been completed. Closure Completion Date: May 5, 2009								
20. Closure Method: Waste Excavation and Removal ☐ On-Site Closure Method ☐ Alternative Closure Method ☐ Waste Removal (Closed-lo ☐ If different from approved plan, please explain.	op systems only)							
Closure Report Attachment Checklist: Instructions: Each of the following items must be attached to the closure report. Please incomark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division)	dicate, by a check							

Form C-144 Oil Conservation Division Page 5 of 6

Operator Closure Certification:	
I hereby certify that the information and attachments submitted with this closure belief. I also certify that the closure complies with all applicable closure requires	
Name (Print):	Title: EHS Supervisor
	10/10/14
Signature:	Date: 10/10/19
e-mail address: James McDaniel@xtoenergy.com	Telephone: (505) 333-3701

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Revised August 8, 2011

Attached

Form C-141

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 Submit 1 Copy to appropriate District Office in accordance with 19.15.29 NMAC.

Release Notification and Corrective Action																	
						OPERATOR ☐ Initial Report ☒											
Name of Co	mpany: X	TO Energy	Inc.			Contact: James McDaniel											
		100, Aztec, N		ico 87410		Telephone No.: (505) 333-3701											
Facility Nar	ne: State	Gas COM B	J #4			Facility Typ	e: Gas Well (F	ruitlan	d Coal)								
Surface Ow	ner: State			Mineral C	wner				API No	. 30-045-32	2274						
				LOCA	TIO	N OF REI	LEASE										
Unit Letter	Section	Township	Range	Feet from the	North	/South Line	Feet from the		est Line								
<u>M</u>	2	30N	13W	660	L	FSL	1000	F	WL	San Juan							
Latitude: N 36.83655 Longitude: W -108.17990 NATURE OF RELEASE																	
Type of Rele						Volume of				Recovered:							
Source of Re	lease: N/A					1	lour of Occurrenc	e:		Hour of Dis	covery	:					
Was Immedia	ate Notice (Given?				N/A If VES To	Whom?		N/A								
was mineur	ne rouce c		Yes 🗌	No 🛛 Not Re	equired	If YES, To Whom?											
By Whom?						Date and I-	lour										
Was a Water	course Read					If YES, Vo	lume Impacting t	he Wate	rcourse.			1111					
		Ш	Yes 🛚	No													
		pacted, Descr															
The below gr beneath the lo 8021, and for	ade tank was ocation of the total chlori	ne on-site BG' ides. The sam	f service at	the State Gas CO mitted for laborat	ory ana ne 'Pit I	lysis for TPH	ne to the P&A of to via USEPA Methorismation standard	nod 418.	I, Benzene	and BTEX	via US	SEPA Method					
		and Cleanup A		en.*													
		firmed for this		is true and comp	lete to t	he best of my	knowledge and u	nderstan	d that purs	suant to NM0	OCD r	ules and					
I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to NMOCD rules and regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger public health or the environment. The acceptance of a C-141 report by the NMOCD marked as "Final Report" does not relieve the operator of liability should their operations have failed to adequately investigate and remediate contamination that pose a threat to ground water, surface water, human health or the environment. In addition, NMOCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, or local laws appear or regulations.									ndanger f liability man health								
Signature:	//	1/1	2/				OIL CON	SERV	ATION	DIVISIO	N						
Printed Name	: James M	cDaniel				Approved by	Environmental S	pecialist	:								
Title: EHS S	upervisor					Approval Dat	e:	E	Expiration	Date:							

Conditions of Approval:

Phone: 505-333-3701

E-mail Address: James_McDaniel@xtoenergy.com

^{*} Attach Additional Sheets If Necessary

XTO Energy Inc. San Juan Basin Below Grade Tank Closure Report

Lease Name: State Gas COM BJ #4

API No.: 30-045-32274

Description: Unit M, Section 2, Township 30N, Range 13W, San Juan County

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure requirements of below-grade tanks on XTO Energy Inc. (XTO) locations. This is XTO's standard procedure for all below-grade tanks. A separate plan will be submitted for any below-grade tank which does not conform to this plan.

General Plan

1. XTO will close below-grade tanks within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the division requires because of imminent danger to fresh water, public health or the environment.

Closure Date is May 5, 2009

- 2. XTO will close a below-grade tank that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC.
 - Closure Date is May 5, 2009
- 3. XTO will close a permitted below-grade tank within 60 days of cessation of the below-grade tank's operation or as required by the transitional provisions of Subsection B of 19.15.17.17 NMAC in accordance with a closure plan that the appropriate division district office approves. The closure report will be filed on form C-144.
 - Required C-144 Form is attached to this document.
- 4. XTO will remove liquids and sludge from below-grade tanks prior to implementing a closure method and will dispose of the liquids and sludge in a division-approved facility. Approved facilities and waste streams include:

Envirotech Permit No. NM01-0011 and IEI Permit No. NM 01-0010B

Soil contaminated by exempt petroleum hydrocarbons

Produced sand, pit sludge and contaminated bottoms from storage of exempt wastes

Basin Disposal Permit No. NM01-005 Produced water

All liquids and sludge were removed from the tank prior to closure activities.

5. XTO will remove the below-grade tank and dispose of it in a division approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.

XTO has removed the below grade tank, and will dispose of it at a division approved facility, or recycle, reclaim or reuse it in a manner that is approved by the division.

6. XTO will remove any on-site equipment associated with a below-grade tank unless the equipment is required for some other purpose.

All equipment has been removed due to the plugging and abandoning of the State Gas COM BJ #4 well site.

7. XTO will test the soils beneath the below-grade tank to determine whether a release has occurred. At a minimum 5 point composite sample will be collected along with individual grab samples from any area that is wet, discolored or showing other evidence of a release. Samples will be analyzed for BTEX, TPH and chlorides to demonstrate that the benzene concentration, as determined by EPA SW-846 methods 8021B or 8260B or EPA method that the division approves, does not exceed 0.2 mg/kg; total BTEX concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 50 mg/kg; the TPH concentration, as determined by EPA method 418.1 or other EPA method that the division approves, does not exceed 100mg/kg; and the chloride concentration, as determined by EPA method 300.1 or other EPA method that the division approves, does not exceed 250 mg/kg, or the background concentration, whichever is greater. XTO will notify the division of its results on form C-141.

A five point composite sample was taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached).

Components	Test Method	Limit (mg/Kg)	Results
Benzene	EPA SW-846 8021B or 8260B	0.2	0.12 mg/kg
BTEX	EPA SW-846 8021B or 8260B	50	< 0.25 mg/kg
ТРН	EPA SW-846 418.1	100	< 20 mg/kg
Chlorides	EPA 300.1	250 or background	12 mg/kg

8. If XTO or the division determines that a release has occurred, XTO will comply with 19.15.3.116 NMAC and 19.15.1.19NMAC as appropriate.

No release has been confirmed at this location

9. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Paragraph (4) of Subsection E of 19.15.17.13 NMAC, XTO will backfill the excavation with compacted, non-waste containing, earthen material; construct a division prescribed soil cover; recontour and re-vegetate the site.

The pit cellar was backfilled using compacted, non-waste containing earthen material, with a division prescribed soil cover.

10. Notice of Closure operations will be given to the Aztec Division District III office between 72 hours and one week prior to the start of closure activities via email or verbally.

The notification will include the following:

- i. Operator's name
- ii. Well Name and API Number
- ii. Location by Unit Letter, Section, Township, and Range

Due to a misunderstanding regarding the 'pit rule' in 2008-2009, the proper notifications were not made prior to the beginning of closure activities. This misunderstanding has been corrected, and proper notifications are made currently.

The surface owner shall be notified of XTO's proposal to close the BGT as per the approved closure plan using certified mail, return receipt requested.

Due to a misunderstanding regarding the 'pit rule' in 2008-2009, the proper notifications were not made prior to the beginning of closure activities. This misunderstanding has been corrected, and proper notifications are made currently.

11. Re-contouring of location will match fit, shape, line, form and texture of the surrounding area. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be placed in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The location has been recontoured to match the above specifications.

12. A minimum of 4 feet of cover shall be achieved and the cover shall include 1 foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.

The site has been backfilled to match these specifications.

13. XTO will seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will be used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

The site has been reclaimed pursuant to the BLM MOU.

- 14. All closure activities will include proper documentation and be available for review upon request and will be submitted in closure report form to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on form C-144 and incorporate the following:
 - i. Proof of closure notice to division and surface owner; **Not made**
 - ii. Details on capping and covering, where applicable; per OCD Specifications
 - iii. Inspection reports; attached
 - iv. Confirmation sampling analytical results; attached
 - v. Disposal facility name(s) and permit number(s); see above
 - vi. Soil backfilling and cover installation; per OCD Specifications
 - vii. Re-vegetation application rates and seeding techniques, (or approved alternative to re-vegetation requirements if applicable); **BLM MOU**
 - viii. Photo documentation of the site reclamation. attached
- 15. This closure report is being submitted after the 60 day deadline required by the 'Pit Rule' due to a misunderstanding of the 'Pit Rule' in 2008-2009



COVER LETTER

Tuesday, May 05, 2009

Martin Nee XTO Energy 382 County Road 3100 Aztec, NM 87410

TEL: (505) 333-3100 FAX (505) 333-3280

RE: BGT Cellar Samples

Dear Martin Nee:

Order No.: 0904395

Hall Environmental Analysis Laboratory, Inc. received 1 sample(s) on 4/24/2009 for the analyses presented in the following report.

These were analyzed according to EPA procedures or equivalent. Below is a list of our accreditations. To access our accredited tests please go to www.hallenvironmental.com or the state specific web sites.

Reporting limits are determined by EPA methodology. No determination of compounds below these (denoted by the ND or < sign) has been made.

Please don't hesitate to contact HEAL for any additional information or clarifications.

Sincerely,

Andy Freeman, Business Manager Nancy McDuffie, Laboratory Manager

NM Lab # NM9425 AZ license # AZ0682 ORELAP Lab # NM100001 Texas Lab# T104704424-08-TX



Hall Environmental Analysis Laboratory, Inc.

Date: 05-May-09

CLIENT:

XTO Energy

Lab Order:

0904395

Project:

BGT Cellar Samples

Lab ID:

0904395-01

Client Sample ID: State GC BJ #4 BGT Cellar

Collection Date: 4/22/2009 2:30:00 PM

Date Received: 4/24/2009

Matrix: SOIL

Analyses	Result	PQL	Qual Units	DF	Date Analyzed
EPA METHOD 8021B: VOLATILES		****	· · · · · · · · · · · · · · · · · · ·		Analyst: DAM
Benzene	0.12	0.050	mg/Kg	1	4/30/2009 12:21:35 AM
Toluene	ND	0.050	mg/Kg	1	4/30/2009 12:21:35 AM
Ethylbenzene	ND	0.050	mg/Kg	1	4/30/2009 12:21:35 AM
Xylenes, Total	ND	0.10	mg/Kg	1	4/30/2009 12:21:35 AM
Surr: 4-Bromofluorobenzene	109	66.8-139	%REC	1 .	4/30/2009 12:21:35 AM
EPA METHOD 300.0: ANIONS					Analyst: TES
Chloride	12	0.30	mg/Kg	1	5/1/2009 3:13:18 AM
EPA METHOD 418.1: TPH					Analyst: LRW
Petroleum Hydrocarbons, TR	ND	20	mg/Kg	1	5/1/2009

- Value exceeds Maximum Contaminant Level
- E Estimated value
- J Analyte detected below quantitation limits
- ND Not Detected at the Reporting Limit
- S Spike recovery outside accepted recovery limits
- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- MCL Maximum Contaminant Level
 - RL Reporting Limit

Date: 05-May-09

QA/QC SUMMARY REPORT

Client:

XTO Energy

Project: Be

BGT Cellar Samples

Work Order:

0904395

			·					7 N O I WEIT 0 9 0 4 3 9 3
Analyte	Result	Units	PQL	%Rec	LowLimit	HighLimit	%RPD	RPDLimit Qual
Method: EPA Method 300.0:	Anions							
Sample ID: MB-18983		MBLK			Batch	ID: 18983	Analysis Date	e: 4/30/2009 5:17:19 AM
Chloride	· ND	mg/Kg	0.30					
Sample ID: LCS-18983		LCS			Batch	ID: 18983	Analysis Date	e: 4/30/2009 5:34:44 AN
Chloride	14.71	mg/Kg	0.30	98.0	90	110		
Method: EPA Method 418.1: 1	r P H							
Sample ID: MB-19003		MBLK			Batch	ID: 19003	Analysis Date	5/1/2009
Petroleum Hydrocarbons, TR	ND	mg/Kg	20					
Sample ID: LCS-19003		LCS			Batch	ID: 19003	Analysis Date	e: 5/1/2009
Petroleum Hydrocarbons, TR	95.28	mg/Kg	20	95.3	82	114		
Sample ID: LCSD-19003		LCSD			Batch	ID: 19003	Analysis Date	e: 5/1/2009
Petroleum Hydrocarbons, TR	94.12	mg/Kg	20	94.1	82	114	1.22	20
Method: EPA Method 8021B:	Volatiles							
Sample ID: MB-18938		MBLK			Batch	ID: 18938	Analysis Date	: 4/29/2009 6:25:18 AM
Benzene	ND	mg/Kg	0.050					
Toluene	ND	mg/Kg	0.050					
Ethylbenzene	ND	mg/Kg	0.050					•
Xylenes, Total	ND	mg/Kg	0.10					
Sample ID: LCS-18938		LCS			Batch	ID: 18938	Analysis Date	: 4/29/2009 5:24:04 AM
Benzene	0.9906	mg/Kg	0.050	96.0	78.8	132		
Toluene	1.016	mg/Kg	0.050	98.3	78.9	112		
Ethylbenzene	1.047	mg/Kg	0.050	105	69.3	125		
Xylenes, Total	3.145	mg/Kg	0.10	105	73	128		
Sample ID: LCSD-18938		LCSD			Batch	ID: 18938	Analysis Date	: 4/29/2009 5:54:42 AM
Benzene	1.021	mg/Kg	0.050	99.1	78.8	132	3.05	27
Toluene	1.042	mg/Kg	0.050	101	78.9	112	2.51	19
Ethylbenzene	1.113	mg/Kg	0.050	111	69.3	125	6.15	10
Xylenes, Total	3.350	mg/Kg	0.10	112	73	128	6.31	13

Qualifiers:

E Estimated value

J Analyte detected below quantitation limits

R RPD outside accepted recovery limits

H Holding times for preparation or analysis exceeded

ND Not Detected at the Reporting Limit

S Spike recovery outside accepted recovery limits

Hall Environmental Analysis Laboratory, Inc.

Sample Receipt Checklist

Client Name XTO ENERGY	Date Receive	d:	4/24/2009			
Work Order Number 0904395	Received by	: ARS	KS			
Checklist completed by:		4/2 Date	405	bels checked	by: Initials	
Matrix: Carrier name:	Fed	<u>Ex</u>				
Shipping container/cooler in good condition?	Yes	V	No 🗆	Not Present		
Custody seals intact on shipping container/cooler?	Yes	V	No 🗌	Not Present	Not Shipped	
Custody seals intact on sample bottles?	Yes		No 🗌	N/A	\checkmark	
Chain of custody present?	Yes	\checkmark	No 🗆			
Chain of custody signed when relinquished and received?	Yes	V	No 🗌			
Chain of custody agrees with sample labels?	Yes	V	No 🗌			
Samples in proper container/bottle?	Yes	\checkmark	No 🗌		·	
Sample containers intact?	Yes	V	No 🗀			
Sufficient sample volume for indicated test?	Yes	V	No 🗌			
All samples received within holding time?	Yes	\checkmark	No 🗀			
Water - VOA vials have zero headspace? No VOA vials subn	nitted	\checkmark	Yes 🗌	No 🗆		
Water - Preservation labels on bottle and cap match?	Yes		No 🗔	N/A 🗹		
Water - pH acceptable upon receipt?	Yes		No 🗆	N/A 🗹		
Container/Temp Blank temperature?		4°	<6° C Acceptabl			
COMMENTS:			If given sufficient	time to cool.		
·						
		•				
Client contacted Date contacted:			Pers	on contacted		
Contacted by: Regarding:		•				
. Regarding.						
Comments:						
: '						
<u> </u>						
· · · · · · · · · · · · · · · · · · ·						
		·····				
Corrective Action						

	ain-of-	Custody Record	Turn-Around Time:						1	Ai		FR	IV	TR	0	N A	a e	NIT	rai	
Client:	XTO	ENERGY	Standard	□ Rush		-	63	_											OR	
		\	Project Name): :			į ė	£ .			halle				,					•
Address:	382	ROAD 3100	TR.G.T	CELLI	AR SAMPLES	Ì	490	01 H:	awkii				٠,				'109			
		NM 87410	Project #:		RE SAMPLES BJ * 4	1			5-34				-	505-						
Phone #:		333-3207	STATE (TOS COM T	RT * 4													10 Mer.		
email or			Project Mana	ger:			1. (200) 12 S												1	
QA/QC Pa	ackage:			. 4		TMB/6 (8021)	IS OF	(Gas/Diesel)	}				1,SC	PCB's						
☐ Stand	ard	□ Level 4 (Full Validation)	vel 4 (Full Validation) MARTIN NEE Sampler: Kuet		9	9	3as/		1	1		8				Q				
			Sampler:	Kuet			핕) B(-	\exists	9	\Rightarrow	8	808			300.0			(Z
	(Type)		On ice	X Yes	ENO.	§ }	+	901	418	504	8	PA	g	es/		OA)	5			ŏ
			Sample steam	perauma propri		4	ITB	PO DO	pod	pod		Aor	$\frac{1}{2}$	ticia	OA)	ni-V	当			88
Date	Time	Sample Request ID	Container	Preservative	"HEAL No.	1	+	Met	₩	Met	Me	MA.	S (F	Pes	3)	Ser	OP			yqq
Date	Time	Cample Frequest 15	Type and #	Туре	0904395	BTEX + WTBE	BTEX + MTBE + TPH (Gas only)	TPH Method 8015B	TPH (Method 418.1)	EDB (Method 504.1)	EDC (Method 8260)	8310 (PNA or PAH)	Anions (F,CI,NO3,NO2,PO4,SO4)	8081 Pesticides / 8082	8260B (VOA)	8270 (Semi-VOA)	CHLORINES			Air Bubbles (Y or N)
4/22	2:30	STATE GC 85#4 BGT CEWAR	121402 JAR	ON ICE	09/04/5-15	X	 		<u> </u>	╨┼	"		-		- 8	82			\sqcap^{\dagger}	+
1/22	12,30	BAN CELLAR	(S) 102 - 14C	105		 			~	-+	\dashv	_				-	$-\sim$	٠,	-	-
	 	 		<u></u>						-	+	-								+-
	 	 			<u> </u>	<u> </u>			-		+						· _			+
	 					-				-	+	\dashv							\vdash	
	 	<u> </u>	 			 	-			\dashv	\rightarrow								\vdash	-
	 	 		·		<u> </u>				_	\dashv	4								
	 		<u> </u>	<u> </u>		 				\dashv	_	_							\vdash	\rightarrow
	<u> </u>		<u> </u>			<u> </u>			_	\rightarrow	_	_								
				-		<u> </u>			_	1				"			<u> </u>			
	<u> </u>												:			· · ·				
					·					\bot	\perp					<u> </u>	<u> </u>			
		11/1		10					1		\perp									
Date:	Time:	Relinquished by/		Redeived by	and Ind		narks		-											
4-23	8:∞	Reinquished by:	<u> </u>	Boograda	9:20 4/24/09	E	-M1	とし	K	ىكك	كاتك	F	ָ ס	~		٠ .	•			
Date:	Time:	пеницияней ру.		Received by:		1 /	-Mi vet m	ν Ή	OEK	3 74	28				· · .					
						K	m	UH	M.M	pL	' N'	• .**	•			· · · · .		٠.		



Well Below Tank Inspection Report

RouteName	StopName	Pumper	Foreman WellName		APIWellNumber		Section	Range	Township		
Below Grade Pit Forms (Temp.) State Gas Com BJ #4		Blackburn, Shawn	Unassigned	STATE GC BJ 004 (PA)			3004532274		2	13W	30N
InspectorName Inspection Date	n Inspection Visible Time LinerTea	VisibleTankLeak s Overflow	Collection OfSurfaceRun	Visible LayerOil	Visible Leak	Freeboard EstFT	PitLocation	PitType	Notes		
Shane Durham 08/13/20	08 11:32 No	No	No	Yes	No	1					
Joseph Maestas 09/14/20	08 12:17 No	No	No	Yes	No	3					•
Joseph Maestas 10/16/20	08 14:25 N o	No	No	Yes	No	3	Well Water Pit	Below Ground			
Joseph Maestas 11/02/20	08 12:59 No	No	No	Yes	No	4	Well Water Pit	Below Ground			
Joseph Maestas 12/16/20	08 09:00 N o	No	No	Yes	No	4	Well Water Pit	Below Ground			
Joseph Maestas 02/03/20	9 08:41 No	No	No	Yes	No	4	Well Water Pit	Below Ground			

XTO Energy Inc. State Gas COM BJ #4 (30-045-32274) Section 2 (M), Township 30N, Range 13W

Closure Date: May 5, 2009

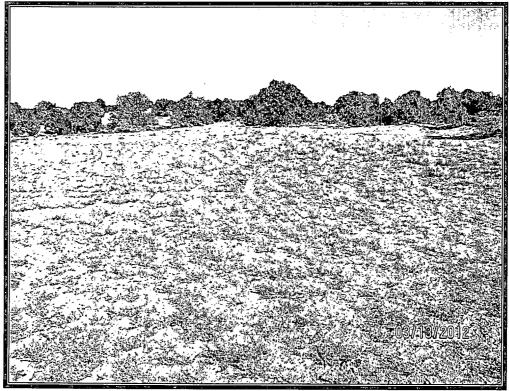


Photo 1: State Gas COM BJ #4 After Reclamation

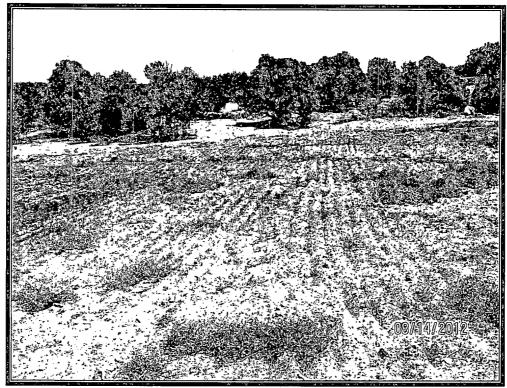


Photo 2: State Gas COM BJ #4 After Reclamation