District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505	State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505	Form C-144 Revised June 6, 2013 For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office. For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.
רראכו Proposed Alter	<u>Pit, Below-Grade Tank, or</u> native Method Permit or Closure I	Plan Applications, DIV DIST. 3
Type of action: Below g 45-08413 Permit of Closure or proposed alternative methor Instructions: Please submit one Please be advised that approval of this request does not	grade tank registration of a pit or proposed alternative method of a pit, below-grade tank, or proposed alternat ation to an existing permit/or registration plan only submitted for an existing permitted or	DEC 2 3 2014 ive method r non-permitted pit, below-grade tank, -grade tank or alternative request in pollution of surface water, ground water or the
Derator: BP America Production Company	/ OGRID #:	778
Address:200 Energy Court, Farmington,	NM 87401	
Facility or well name:Bruington Gas Com	B 1	
API Number:3004508413	OCD Permit Number:	
U/L or Qtr/QtrASection15	Township29NRange12W	County:San Juan
Center of Proposed Design: Latitude36.73	149Longitude108.08006	NAD: □1927 ⊠ 1983
Surface Owner: 🗌 Federal 🗌 State 🖾 Private 🗋	Tribal Trust or Indian Allotment	
Lined Unlined Liner type: Thickness	AC &A [] Multi-Well Fluid Management La mil [] LLDPE [] HDPE [] PVC [] Ot Volume:bbl	ther
3.		
Below-grade tank: Subsection I of 19.15.17.1		
	of fluid:Produced water	
Tank Construction material:Steel		
	Visible sidewalls, liner, 6-inch lift and automatic ov	
	□ HDPE □ PVC □ Other	· · · · · · · · · · · · · · · · · · ·
<u>A.</u> <u>Alternative Method</u> :		
Submittal of an exception request is required. Exce	eptions must be submitted to the Santa Fe Environme	ntal Bureau office for consideration of approval.

.

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)

Chain link, six feet in height, two strands of barbed wire at top (*Required if located within 1000 feet of a permanent residence, school, hospital, institution or church*)

Four foot height, four strands of barbed wire evenly spaced between one and four feet

Alternate. Please specify_

V 5.

Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)

Screen Netting Other

Monthly inspections (If netting or screening is not physically feasible)

Signs: Subsection C of 19.15.17.11 NMAC

12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers

Signed in compliance with 19.15.16.8 NMAC

Variances and Exceptions:

Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.

Please check a box if one or more of the following is requested, if not leave blank:

Variance(s): Requests must be submitted to the appropriate division district for consideration of approval.

Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Siting Criteria (regarding permitting): 19.15.17.10 NMAC

Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Siting criteria does not apply to drying pads or above-grade tanks.

General siting								
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank. - DNM Office of the State Engineer - iWATERS database search; DUSGS; Data obtained from nearby wells								
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells								
 Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) Written confirmation or verification from the municipality; Written approval obtained from the municipality 	🗌 Yes 🗌 No							
 Within the area overlying a subsurface mine. (Does not apply to below grade tanks) Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division 	🗌 Yes 🗌 No							
 Within an unstable area. (Does not apply to below grade tanks) Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	🗌 Yes 🗍 No							
Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map	Yes No							
Below Grade Tanks								
Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	🗌 Yes 🗌 No							
Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	🗌 Yes 🗌 No							
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)								
 Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) Topographic map; Visual inspection (certification) of the proposed site 	🗌 Yes 🗍 No							

Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes N
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ N
 Within 100 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site 	Yes 🗌 N
Temporary Pit Non-low chloride drilling fluid	
 Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site 	□ Yes □ N
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	 □ Yes □ N
Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	Yes 🗌 No
Within 300 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	Yes No
Permanent Pit or Multi-Well Fluid Management Pit	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa	
 Iake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 N
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Yes 🗌 N
Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	🗌 Yes 🗍 N
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	🗌 Yes 🗌 N
10. Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 N Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the doc	
 Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC 	NMAC
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19. and 19:15.17.13 NMAC	
Previously Approved Design (attach copy of design) API Number: or Permit Number:	
1. Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the doc Instructed.	cuments are
 Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC A List of wells with approved application for permit to drill associated with the pit. 	
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 and 19.15.17.13 NMAC Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC	.15.17.9 NMAC
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC	
Previously Approved Design (attach copy of design) API Number: or Permit Number:	

÷

Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC	
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, the	at the documents are
attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC	
 Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC 	
 Deak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan 	
 Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H₂S, Prevention Plan 	
 Emergency Response Plan Oil Field Waste Stream Characterization 	
 Monitoring and Inspection Plan Erosion Control Plan Closure Plan Closure Plan 	
Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC	
13. Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.	
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-v	vell Fluid Management Pit
Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only)	
On-site Closure Method (Only for temporary pits and closed-loop systems)	
In-place Burial Don-site Trench Burial	
14.	
 Closure plan. Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC 	
is. Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable	e source material are
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC	
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalent	
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalen 19.15.17.10 NMAC for guidance.	cy. Please refer to
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalent 19.15.17.10 NMAC for guidance. Ground water is less than 25 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 25-50 feet below the bottom of the buried waste	Image: Please refer to Image: Please refer
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalent 19.15.17.10 NMAC for guidance. Ground water is less than 25 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste.	Image: Please refer to Image: Please refer
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalent provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalent provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalent provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalent provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalent provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalent provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalent provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalent provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalent provided below. The provided below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. - - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 100 feet of a continuously flowing watercourse, or 200 feet of any other sign	Image: Please refer to Image: Please refer
 Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalent 19.15.17.10 NMAC for guidance. Ground water is less than 25 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 25-50 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or play ake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site 	Image: Please refer to Image: Yes No Image: No Na Image: Yes No Image: Na Yes Image: Yes No Image: Na Yes Image: Yes No Image: Yes No Image: Yes No Image: Yes No
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalent provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalent provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalent provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalent provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalent provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalent provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalent provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalent [9.15.17.10 NMAC for guidance. Ground water is less than 25 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Stound water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or play ake (measured from the ordinary high-water mark). 	Image: Please refer to Image: Yes No Image: Na No Image: Yes No Image: Na Yes Image: Yes No Image: Na Yes Image: Yes No Image: Na Yes Image: Na Na Image: Na
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalent 19.15.17.10 NMAC for guidance. Instructions: Each siting criteria requires a demonstration of the buried require justifications and/or demonstrations of equivalent 19.15.17.10 NMAC for guidance. Ground water is less than 25 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. - 'NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or play ake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image<	Image: Please refer to Image: Yes No Image: Na No Image: Yes No Image: Na Yes Image: Yes No Image: Na Yes Image: Yes No

. .

adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	Yes No								
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division									
Within an unstable area Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map									
Within a 100-year floodplain.									
- FEMA map									
 On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.17.11 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved) Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC 									
 17. Operator Application Certification: I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and believed and believed by the set of my knowledge and b	ef.								
Name (Print): Title:									
Signature: Date:									
e-mail address: Telephone:									
18. OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature: OCD - //// Approval Date: 1/5/0 Title: OCD Permit Number:	815								
19. Closure Report (required within 60 days of closure completion): 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed. Closure Completion Date:11/22/2011									
 20. Closure Method: Waste Excavation and Removal On-Site Closure Method Alternative Closure Method Waste Removal (Closed-loo If different from approved plan, please explain. 	op systems only)								
 21. <u>Closure Report Attachment Checklist</u>: Instructions: Each of the following items must be attached to the closure report. Please ind mark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division) Proof of Deed Notice (required for on-site closure for private land only) Plot Plan (for on-site closures and temporary pits) Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (required for on-site closure) Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation) 	licate, by a check 7 ⊠ 1983								

♦ 1

.

	•	
•	Operator Closure Certification:	
	I hereby certify that the information and attachments submitted with this close	
	belief. I also certify that the closure complies with all applicable closure requ	irements and conditions specified in the approved closure plan.
	Name (Print):Jeff Peace	Title: Field Environmental Coordinator
	Signature: off Peace	Date:December 18, 2014
	e-mail address: peace.jeffrey@bp.com	Telephone: (505) 326-9479

T

BP AMERICA PRODUCTION COMPANY SAN JUAN BASIN, NORTHWEST NEW MEXICO

BELOW-GRADE TANK CLOSURE PLAN

Bruington Gas Com B 1 BGT Tank B (95 bbl) <u>API No. 3004508413</u> <u>Unit Letter A, Section 15, T29N, R12W</u>

This plan will address the standard protocols and procedures for closure of below-grade tanks (BGTs) on BP America Production Company (BP) well sites. As stipulated in Paragraph A of 19.15.17.13 NMAC, BP shall close a BGT within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the New Mexico Oil Conservation Division (NMOCD) requires because of imminent danger to fresh water, public health, safety or the environment. If deviations from this plan are necessary, any specific changes will be included on form C-144 and approved by the NMOCD. BP shall close an existing BGT that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008, if not retrofit with a BGT that complies with the BP NMOCD approved BGT design attached to the BP Design and Construction Plan. BP shall close an existing BGT that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC, if not previously retrofitted to comply with the BP NMOCD approve BGT Design attached to the BP Design and Construction Plan, prior to any sale or change in operator pursuant to 19.15.9.9 NMAC. BP shall close the permitted BGT within 60 days of cessation of the BGTs operation or as required by the transitional provisions of Subsection B, D, or E of 19.15.17.17 NMAC.

General Closure Plan

- 1. BP shall notify the surface owner by certified mail that it plans to close a BGT. Evidence of mailing of the notice to the address of the surface owner shown in the county tax records demonstrates compliance with this requirement. **Notice is attached.**
- 2. BP shall notify the division District III office verbally or by other means at least 72 hours, but not more than one (1) week, prior to any closure operation. The notice shall include the operator's name, and the location to be closed by unit letter, section, township and range. If the BGT closure is associated with a particular well, then the notice shall also include the well's name, number and API number. **Notice is attached.**
- 3. BP shall remove liquids and sludge from the BGT prior to implementing a closure method and dispose of the liquids and sludge in a NMOCD's division-approved facility. The facilities to be used are:
 - a. BP Crouch Mesa Landfarm, Permit NM-02-003 (Solids)
 - b. JFJ Landfarm, Permit NM-01-010(B) (Solids and Sludge)
 - c. Basin Disposal, Permit NM-01-0005 (Liquids)
 - d. Envirotech Inc Soil Remediation Facility, Permit NM-01-0011 (Solids and Sludge)
 - e. BP Operated E.E. Elliott SWD #1, API 30-045-27799 (Liquids)

- f. BP Operated 13 GCU SWD #1, API 30-045-28601 (Liquids)
- g. BP Operated GCU 259 SWD, API 30-045-20006 (Liquids)

ł

- h. BP Operated GCU 306 SWD, API 30-045-24286 (Liquids)
- i. BP Operated GCU 307 SWD, API 30-045-24248 (Liquids)
- j. BP Operated GCU 328 SWD, API 30-045-24735 (Liquids)
- k. BP Operated Pritchard SWD #1, API 30-045-28351 (Liquids)

All liquids and sludge in the BGT were removed and sent to one of the above NMOCD approved facilities for disposal.

4. BP shall remove the BGT and dispose of it in a NMOCD approved facility or recycle, reuse, or reclaim it in a manner that the NMOCD approves. If a liner is present and must be disposed of it will be cleaned by scraping any soils or other attached materials on the liner to a de minimus amount and disposed at a permitted solid waste facility, pursuant to Subparagraph (m) of Paragraph (1) of Subsection C of 19.15.35.8 NMAC. Documentation as to the final disposition of the removed BGT will be provided in the final closure report.

The BGT was transported to a storage area for sale and re-use.

5. BP shall remove any on-site equipment associated with a BGT unless the equipment is required for well production.

All equipment associated with the BGT has been removed.

6. BP shall test the soils beneath the BGT to determine whether a release has occurred. BP shall collect at a minimum: a five (5) point composite sample and individual grab samples from any area that is wet, discolored or showing other evidence of a release and analyze for BTEX, TPH and chlorides. The testing methods for those constituents are as follows;

Constituents	Testing Method	Release Verification	Sample
	95 bbl BGT, Tank B	(mg/Kg)	results
Benzene	US EPA Method SW-846 8021B or 8260B	0.2	ND
Total BTEX	US EPA Method SW-846 8021B or 8260B	50	ND
TPH	US EPA Method SW-846 418.1	100	30
Chlorides	US EPA Method 300.0 or 4500B	250 or background	12

Notes: mg/Kg = milligram per kilogram, BTEX = benzene, toluene, ethylbenzene, and total xylenes, TPH = total petroleum hydrocarbons. Other EPA methods that the division approves may be applied to all constituents listed. Chloride closure standards will be determined by which ever concentration level is greatest.

Soil under the BGT was sampled and TPH, BTEX and chloride levels were below the stated limits. Sampling data is attached.

BP shall notify the division District III office of its results on form C-141.
 C-141 is attached.

- If it is determined that a release has occurred, then BP will comply with 19.15.30 NMAC and 19.15.29 NMAC, as appropriate.
 Sampling results indicate no release occurred.
- 9. If the sampling demonstrates that a release has not occurred or that any release does not exceed the concentrations specified above, then BP shall backfill the excavation, with compacted, non-waste containing, earthen material; construct a division-prescribed soil cover, re-contour and re-vegetate the location. The location will be reclaimed if it is not with in the active process area

The area under the BGT was backfilled with clean soil and is still within the active well area.

10. BP shall reclaim the BGT location and all areas associated with the BGT including associated access roads to a safe and stable condition that blends with the surrounding undisturbed area. BP shall substantially restore the impacted surface area to the condition that existed prior to oil and gas operations by placement of the soil cover as provided in Subsection H of 19.15.17.13 NMAC, re-contour the location and associated areas to a contour that approximates the original contour and blends with the surrounding topography and re-vegetate according to Subsection I of 19.15.17.13 NMAC.

The area over the BGT is still within the active well area. This area will be reclaimed when the well is plugged and abandoned as part of final reclamation.

11. The soil cover for closures where the BGT has been removed or remediated to the NMOCD's satisfaction shall consist of the background thickness of topsoil or one foot of suitable material to establish vegetation at the site, whichever is greater. The soil cover will be constructed to the site's existing grade and all practicable efforts will be made to prevent ponding of water and erosion of the cover material.

The area over the BGT is still within the active well area. This area will be reclaimed when the well is plugged and abandoned as part of final reclamation.

12. BP shall seed the disturbed area the first growing season after closure of the BGT. Seeding will be accomplished by drilling on the contour whenever practical or by other division-approved methods. Vegetative cover will be, at a minimum, 70% of the native perennial vegetative cover (un-impacted by overgrazing, fire or other intrusion damaging to native vegetation), consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintenance of that cover through two successive growing seasons. During the two growing seasons that prove viability, there shall be no artificial irrigation of the vegetation.

The area over the BGT is still within the active well area. This area will be reclaimed when the well is plugged and abandoned as part of final reclamation.

13. BP shall seed, plant and re-seed pursuant to Paragraph (3) of Subsection I of 19.15.17.13 NMAC, until the location successfully achieves the required vegetative cover.

BP will seed the area when the well is plugged and abandoned as part of final reclamation.

14. Pursuant to Paragraph (5) of Subsection I of 19.15.17.13 NMAC, BP shall notify the NMOCD when it has seeded or planted and when it successfully achieves revegetation.

BP will notify NMOCD when re-vegetation is successful.

- 15. Within 60 days of closure completion, BP shall submit a closure report on NMOCD's form C-144, and will include the following;
 - a. proof of closure notification (surface owner and NMOCD)
 - b. sampling analytical reports; information required by 19.15.17 NMAC;
 - c. disposal facility name and permit number
 - d. details on back-filling, capping, covering, and where applicable re-vegetation application rates and seeding techniques and
 - e. site reclamation, photo documentation. Closure report on C-144 form is included.
- 16. BP shall certify that all information in the report and attachments is accurate, truthful, and compliant with all applicable closure requirements and conditions specified in the approved closure plan.

Certification section of C-144 has been completed.

÷

Ю

٠ . •

Form C-141 Revised August 8, 2011

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

Submit 1 Copy to appropriate District Office in accordance with 19.15.29 NMAC.

			Rel	ease Notifi	catior	n and Co	orrective A	ction	······································						
						OPERA	ГOR	🔲 Initia	🗌 Initial Report 🛛 Final Repor						
Name of Company: BP						Contact: Jeff Peace									
		Court, Farm		M 87401		Telephone 1	No.: 505-326-94	79							
Facility Na	me: Bruin	gton Gas Co	m B 1			Facility Typ	e: Natural gas v	vell							
Surface Ow	vner: Priva	te		Mineral (Dwner: l	Private		API No	. 3004508413						
LOCATI						N OF REJ	LEASE								
Unit Letter ASection 15Township 29NRange 12WFeet from the 790North/South Line NorthFeet from the 840East/West Line EastCounty: San Juan							County: San Juan								
		Lat	itude_3	6.73149	ł .	_ Longitud	e108.08006_	t							
				NAT	TURE	OF RELI	EASE								
Type of Rele							Release: N/A		ecovered: N/A						
		w grade tank -	– 95 bbl, T	ank B			our of Occurrence	e: Date and	Hour of Discovery:						
Was Immedi	ate Notice (]Yes 🗌] No 🛛 Not R	equired	If YES, To	Whom?								
By Whom?						Date and Hour									
Was a Water	course Rea] Yes 🗵	1 No.		If YES, Volume Impacting the Watercourse.									
		Ĺ		1 100											
Describe Are	ea Affected	and Cleanup .	Action Tal	and chloride belo en.* BGT was re active well area.					ne excavated area was						
,															
regulations a public health should their o or the enviro	Il operators or the envi operations h nment. In a	are required t ronment. The nave failed to	to report and e acceptance adequately DCD accept	nd/or file certain r ce of a C-141 repo investigate and r	elease no ort by the emediate	otifications ar NMOCD ma contaminati	nd perform correct arked as "Final R on that pose a thr	tive actions for rele eport" does not reli eat to ground water	uant to NMOCD rules and eases which may endanger eve the operator of liability , surface water, human health ompliance with any other						
Signature:	Joff	Pace	٩			OIL CONSERVATION DIVISION									
Printed Nam	e: Jeff Peac	e				Approved by	Environmental S	pecialist:	. <u></u>						
Title: Field E	Environmen	tal Coordinate	or		/	Approval Dat	e:	Expiration I	Date:						
E-mail Addr	ess: peace.je	effrey@bp.co	m		(Conditions of	Approval:		Attached						
Date: Decen	nber 18, 20	14	Pho	ne: 505-326-9479)										

Date: December 18, 2014 * Attach Additional Sheets If Necessary

	API #: 3004508413								
	P.O. BOX 87, BLOOMFIELD, NM 87413 (505) 632-1199	TANK ID (if applicble):							
FIELD REPORT:	PAGE #: 1 of 1								
SITE INFORMATION	DATE STARTED: 11/07/11								
QUAD/UNIT: A SEC: 15 TWP:	29N RNG: 12W PM: NM CNTY: SJ ST: NM	DATE FINISHED:							
1/4 -1/4/FOOTAGE:	NE/NE LEASE TYPE: FEDERAL/ STATE / FEE / INDIAN	ENVIRONMENTAL							
	PROD. FORMATION: DK CONTRACTOR: MBF - C. MCINESS	SPECIALIST(S): JCB							
REFERENCE POINT									
1) 95 BGT (DW/DB) - B		RING FROM W.H.: 126', S46E							
2)	GPS COORD.: 36.73123 X 108.08032 DISTANCE/BEA	RING FROM W.H.: 158', S2E							
3)		RING FROM W.H.:							
		OVM							
SAMPLING DATA.	CHAIN OF CUSTODY RECORD(S) # OR LAB USED: HALL	READING (ppm)							
1) SAMPLE ID: 95 BGT 5-pt. @									
2) SAMPLE ID:									
I. Contraction of the second se	SAMPLE DATE:SAMPLE TIME: LAB ANALYSIS:								
SOIL DESCRIPTION	ER BEDROCK SANDSTONE								
SOIL COLOR:	Y COHESIVE / COHESIVE / HIGHLY COHESIVE PLASTICITY (CLAYS): NON PLASTIC / SLIGHTLY PLASTIC / C	<u>@ 95 BGT.</u> OHESIVE / MEDIUM PLASTIC / HIGHLY PLASTIC							
CONSISTENCY (NON COHESIVE SOILS): LC	DOSE / FIRM / DENSE / VERY DENSE DENSITY (COHESIVE CLAYS & SILTS): SOFT								
MOISTURE: DRY <u>SLIGHTLY MOIST</u> MOIST / WE SAMPLE TYPE: GRAB (COMPOSITE]#		ANATION							
DISCOLORATION/STAINING OBSERVED									
1		· · · ·							
ANY AREAS DISPLAYING WETNESS: YES NO	EXPLANATION	MPLED SOILS IMMEDIATELY							
BELOW LINE									
SOIL IMPACT DIMENSION ESTIMATION:	NA ft. X NA ft. X NA ft. EXCAVATION EST	IMATION (Cubic Yards) : NA							
		D TPH CLOSURE STD: <u>5,000</u> ppm							
SITE SKETCH	PLOT PLAN circle: attached	CALIB. READ. = ppm PE - 0.52							
	well	CALIB. READ. =ppm RF = 0.52 CALIB. GAS =ppm							
i	HEAD ITME	am/pm DATE:							
		MISCELL. NOTES							
х.	95 BBL BGT N	1390292							
	$\widehat{\mathbf{x}}$								
		SCHWLLBGT							
		SCHWLLBGT							
		SCHWLLBGT Permit date: 06/14/10							
		SCHWLLBGT Permit date: 06/14/10							
NOTES: , BGT = BELOW-GRADE TANK; E.D. = EXCAVATIO	X - S.P.D. M DEPRESSION; B.G. = BELOW GRADE; B = BELOW, T.H. = TEST HOLE; ~ = APPROX; W.H. = WELL HEAD;	SCHWLLBGT Permit date: 06/14/10 BCT Sidewallo Visible: Y / N/ NA BGT Sidewalls Visible: Y / N) NA							
T.B. = TANK BOTTOM; PBGTL = PREVIOUS BEL	X - S.P.D. M DEPRESSION; B.G. = BELOW GRADE; B = BELOW, T.H. = TEST HOLE; ~ = APPROX; W.H. = WELL HEAD;	SCHWLLBGT Permit date: 06/14/10							

Date:	22-Nov-11
Analy	tical Report

CLIENT:	Blagg Engineering			Client	Sample ID:	45 BGT 5-	-pt @ 6'			
Lab Order:	1111528			Colle	: 11/7/2011 1:02:00 PM					
Project:	Bruington GC B #1			Dat	e Received:	11/11/201	1			
Lab ID:	1111528-01				Matrix:	SOIL				
Analyses		Result	PQL	Qual U	Jnits	DF	Date Analyzed			
EPA METHOD	8015B: DIESEL RANGE	ORGANICS	·····				Analyst: JB			
Diesel Range C	Organics (DRO)	ND	9.8	r	ng/Kg	1	11/13/2011 10:32:18 PM			
Surr: DNOP		93.9	73.4-123	9	6REC	1	11/13/2011 10:32:18 PM			
EPA METHOD	8015B: GASOLINE RANG	GE					Analyst: RAA			
Gasoline Range	e Organics (GRO)	ND	4.6	ň	ng/Kg	1	11/15/2011 2:34:47 AM			
Surr: BFB		107	75.2-136	%	6REC	1	11/15/2011 2:34:47 AM			
EPA METHOD	8021B: VOLATILES						Analyst: RAA			
Benzene		ND	0.046	'n	ng/Kg	1	11/15/2011 2:34:47 AM			
Toluene		ND	0.046	n	ng/Kg	1	11/15/2011 2:34:47 AM			
Ethylbenzene		ND	0.046	n	ng/Kg	1	11/15/2011 2:34:47 AM			
Xylenes, Total		ND	0.093	n	ig/Kg	1	11/15/2011 2:34:47 AM			
Surr: 4-Brom	ofluorobenzene	97.0	80-120	%	REC	1	11/15/2011 2:34:47 AM			
EPA METHOD	300.0: ANIONS						Analyst: BRM			
Chloride		12	1.5	п	ng/Kg	1	11/18/2011 6:37:30 PM			
EPA METHOD	418.1: TPH						Analyst: JB			
Petroleum Hydr	rocarbons, TR	30	20	n	ng/Kg	1	11/15/2011			

Hall Environmental Analysis Laboratory, Inc.

Qualifiers:

1

.

۲

* Value exceeds Maximum Contaminant Level

E Estimated value

- J Analyte detected below quantitation limits
- NC Non-Chlorinated
- PQL Practical Quantitation Limit

- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded

MCL Maximum Contaminant Level

ND Not Detected at the Reporting Limit

S Spike recovery outside accepted recovery limits

Page 1 of 2

			stody Record	Turn-Around	Time:					•	· B)		. 8.				~	ai a	AE	N 5 T	- 4 5	
Client:	BLAG	LEN	IGINEERING INC.	X Standard 🗆 Rush					ANALYSIS LABORATORY													
	RP	A-MER		Project Name:			www.hallenvironmental.com															
Mailing	BP AMERICA Mailing Address: P.O., Box 87			BRUING	ton GC	B#1		4901 Hawkins NE - Albuquerque, NM 87109														
Ĩ	BLOOMFIELD, NM 87413			Project #:	· · · · · · · · · · · ·			Tel. 505-345-3975 Fax 505-345-4107														
Phone #: 505-632-1199								Analysis Request											5			
email or				Project Mana	ger:																	
QA/QC F	-		□ Level 4 (Full Validation)	JE				That s (8021)	(Gas o	Bas/Die					, PO4, S	2 PCB's						
Accredi				Sampler: 5					Ηd	9) B	,	,			Q [™]	/ 8082						Î
		□ Othe	۲	On Ice	Xiest	No		141	+	3015	418.1)	504	PAH)	s	çõ.	es /		(A)	12			o
	(Type)_			Sample Tem	perature			Ē	ITBE	bo	pou	pou	ଚ	Aeta	5	licide	(A)	-i -i	240			s (γ
Date	Time	Matrix	Sample Request ID	Container Type and #	Preservative Type	HEAD HEAD	No 44 2 2 4	BTEX + MTBE	BTEX + MTBE + TPH (Gas only)	TPH Method 8015B (Gas/Diesel)	TPH (Method	EDB (Method 504.1)	8310 (PNA	RCRA 8 Metals	Anions (F,Cl,NO ₃ ,NO ₂ ,PO ₄ ,SO ₄)	8081 Pesticides	8260B (VOA)	8270 (Semi-VOA)	CHLORIDE			Air Bubbles (Y or N)
1/2/2011	130Z	SOIL	45 B67 5-Pt @ 6	402×1	COUL		- [X			X	-1		-+					X	-		
W/10/2011	1035		-945-Bet		+(-2-	X		x		_	-						$\overline{\mathbf{x}}$	-†		
													-†	-						+	-+	
											†	-+	-	-+					\rightarrow			
			·	· · · · · · · · · · · · · · · · · · ·		· · · · · · · · · · · · · · · · · · ·						-+								-		
				1 .	ļ	<u>+</u>				┝──┦		$-\dagger$	$-\dagger$						-+	\neg		
				<u> </u>		<u> </u>						-†	-+									
											-1		-+	$-\dagger$								
				<u> </u>		<u> </u>						-+	-+							-+-	-+-	+
						†———					1		-†			·						
• <u>-</u>						†		-				{	-+		-1						-	
						†					{	-									-+-	
	Time: 1205	Relinquish	ed by: 1 Blacg	Received by: Mustine	thetes	Date 11/10/2all	Time 1205	$ \omega $	ORK	2.02	DER	2: /	VI	39	ΟZ	297	2	vi 5	3		I	
Date.	Time:	Relinquish	ed by:	Received by:	/ /	Date	Time	P3	AFF	:ex	; 2	25	CH	ωĹ	LB.	GT	-					
1/10/11 1440 Marster Weller			[/ he	mi-h	MUIN	1018	Ce	1201	Ae7		Je	2ff	F	eac	e	•						

If necessary, samples submitted to Hall Environmental may be subcontracted to other accredited laboratories. This serves as notice of this possibility. Any sub-contracted data will be clearly notated on the analytical report.

QA/QC SUMMARY REPORT

Client:	Blagg Engin	eering										
Project:	Bruington G	C B #1								Work	Order:	1111528
Analyte		Result	Units	PQL	SPK Va	SPK ref	%Rec L	owLimit Hi	ghLimit	%RPD	RPDLimi	t Qual
	hod 300.0: An	nions										
Sample ID: MB-294	39		MBLK				Batch ID:	29439	Analys	sis Date:	11/18/2011	6:02:40 PM
Chloride		ND	mg/Kg	1.5								
Sample ID: LCS-294	139		LCS				Batch ID:	29439	Analys	is Date:	11/18/2011	6:20:05 PM
Chloride		14.08	mg/Kg	1.5	15	0	93.8	90	110			
Method: EPA Meth	nod 418.1: TP	Ч										_
Sample ID: MB-293	39		MBLK				Batch ID:	29339	Analys	is Date:		11/15/2011
Petroleum Hydrocarbo	ons, TR	ND	mg/Kg	20								
Sample ID: LCS-293	339		LCS				Batch ID:	29339	Analys	is Date:		11/15/2011
Petroleum Hydrocarbo	ons, TR	97.56	mg/ Kg	20	100	0	97.6	87.8	115			
Sample ID: LCSD-2	9339		LCSD				Batch ID:	29339	Analys	is Date:		11/15/2011
Petroleum Hydrocarbo	ons, TR	101.3	mg/Kg	20	100	0	101	87.8	115	3.76	8.04	
Method: EPA Meth	no d 8015B: D	iesel Range	Organics									
Sample ID: MB-293		iooon nunge	MBLK				Batch ID:	29331	Analys	is Date:	11/13/2011	4:05:57 PM
Diesel Range Organic		ND	mg/Kg	10					,			1.00.07 1 10
Sample ID: LCS-293		112	LCS	10			Batch ID:	29331	Analys	is Date:	11/13/2011	4:35:26 PM
Diesel Range Organic		54.00	mg/Kg	10	50	0	108	66.7	119		1110,2011	4.00.201 M
	nod 8015B: G	aeolino Par							<u> </u>			
Sample ID: MB-2933			MBLK				Batch ID:	29330	Analys	is Date:	11/14/2011	1:18:35 PM
Gasoline Range Organ		ND	mg/Kg	5.0								
Sample ID: LCS-293		110	LCS	0.0			Batch ID:	29330	Analys	is Date:	11/14/2011 1	12-18-36 PM
Gasoline Range Organ		29.51	mg/Kg	5.0	25	0	118	86.4	132			
Method: EPA Meth	od 8021B: V	niatilas										
Sample ID: MB-2933		Ulduies.	MBLK				Batch ID:	29330	Analys	is Date:	11/14/2011	1:18:35 PM
Benzene		ND	mg/Kg	0.050								
Toluene		ND	mg/Kg	0.050								
Ethylbenzene		ND	mg/Kg	0.050								
Xylenes, Total		ND	mg/Kg	0.10								
Sample ID: LCS-293	30		LCS				Batch ID:	29330	Analys	is Date:	11/14/2011 1	2:48:38 PM
Benzene		1.013	mg/Kg	0.050	1	0.0185	99.5	83.3	107			
Toluene		0.9863	mg/Kg	0.050	1	0	98.6	74.3	115			
Ethylbenzene		1.101	mg/Kg	0.050	1	0	110	80.9	122			
Xylenes, Total		3.380	mg/Kg	0.10	3	0	113	85.2	123			

ب بر ب

.

.

Qualifiers:

E Estimated value

J Analyte detected below quantitation limits

ND Not Detected at the Reporting Limit

H Holding times for preparation or analysis exceeded

NC Non-Chlorinated

R RPD outside accepted recovery limits

Page 1

Hall Environmental Analysis Laboratory, Inc.

₹. •

111

	Sample	Rec	eipt	Checklist				
Client Name BLAGG	\cap			Date Receive	d:		11/11/2011	
Work Order Number 1111528				Received by	: A1	-	A	
	h			Sample ID la	abels chec	ked by:(#	-
Checklist completed by:			Di				Thilials 8	
	•	-						
Matrix:	Carrier name	Cou	Irier					
Shipping container/cooler in good condition?		Yes	V	Νο	Not Pres	ent 🗌		
Custody seals intact on shipping container/coc	oler?	Yes	\checkmark	No 🗆	Not Pres	ent 🗌	Not Shipped	
Custody seals intact on sample bottles?		Yes		No 🗌	N/A			
Chain of custody present?		Yes	✓	No 🗌				
Chain of custody signed when relinquished and	d received?	Yes	\checkmark	No 🗍				
Chain of custody agrees with sample labels?		Yes	\checkmark	No 🗔				
Samples in proper container/bottle?		Yes	\checkmark	No 🗀				
Sample containers intact?		Yes	\checkmark	No 🗌				
Sufficient sample volume for indicated test?	,	Yes		No 🗔				
All samples received within holding time?		Yes						f preserved
Water - VOA vials have zero headspace?	No VOA vials subr	nitted	\checkmark	Yes 🗌	No		botties ch pH:	ecked for
Water - Preservation labels on bottle and cap r	match?	Yes		No 🗔	N/A			
Water - pH acceptable upon receipt?		Yes		No 🗌	N/A		<2 >12 uni below.	less noted
Container/Temp Blank temperature?					<6° C Acceptable			
COMMENTS:				If given sufficient	time to co	ol.		
1								
- - -								
Dient contacted Date contacted:				Pers				
Contacted by:	Regarding:							
Comments:								
1		•					. <u></u>	
				a				
Corrective Action								
					······			



BP America Production Company 200 Energy Court Farmington, NM 87401 Phone: (505) 326-9200

October 13, 2011

Animas Valley Land and Water PO Box 5580 Farmington, NM 87499

VIA CERTIFIED MAIL – RETURN RECEIPT REQUESTED

Re: Notification of plans to close/remove a below grade tank Well Name: BRUINGTON GAS COM B 001-DK

Dear Animas Valley Land and Water,

As part of the NM "Pit Rule": 19.15.17.13 Closure Requirements, Paragraph J. BP America Production Company (BP) is required to notify the surface owner of BP's plans to close/remove a below grade tank. BP wishes to inform you of our plans to close/remove the below grade tank on its well pad located on your surface. BP plans to commence this work on or about October 12, 2011. If there aren't any unforeseen problems, the work should be completed within 10 working days.

As a point of clarification, BP will be closing the below grade tank and either operating without one or replacing it with an above ground tank, the well site will continue to operate.

Unless you have questions about this notice, there is no need to respond to this letter. If you do have any questions or concerns, please contact me at 505-326-9214

Sincerely,

9 D Van Rei

Jerry Van Riper Surface Coordinator/Business Security Representative BP America Production Company

BP America Production Company 200 Energy Court Farmington, NM 87401 Phone: (505) 326-9200

SENT VIA E-MAIL TO: BRANDON.POWELL@STATE.NM.US

September 29, 2011

New Mexico Oil Conservation Division 1000 Rio Brazos Road Aztec, New Mexico 87410

RE: Notice of Proposed Below-Grade Tank (BGT) Closure

BRUINGTON GC B 001-DK API 30-045-08413 (M) Section 15 – T29N – R12W San Juan County, New Mexico

Dear Mr. Brandon Powell:


In regards to the captioned subject and requirements of the NMOCD pit rule, this letter is notification that BP is planning to close a 95 bbl. BGT that will no longer be operational at this well site.

Should you have any questions, please feel free to contact BP at our Farmington office.

Sincerely,

Buddy Shaw BP Environmental Advisor

(505) 320-0401

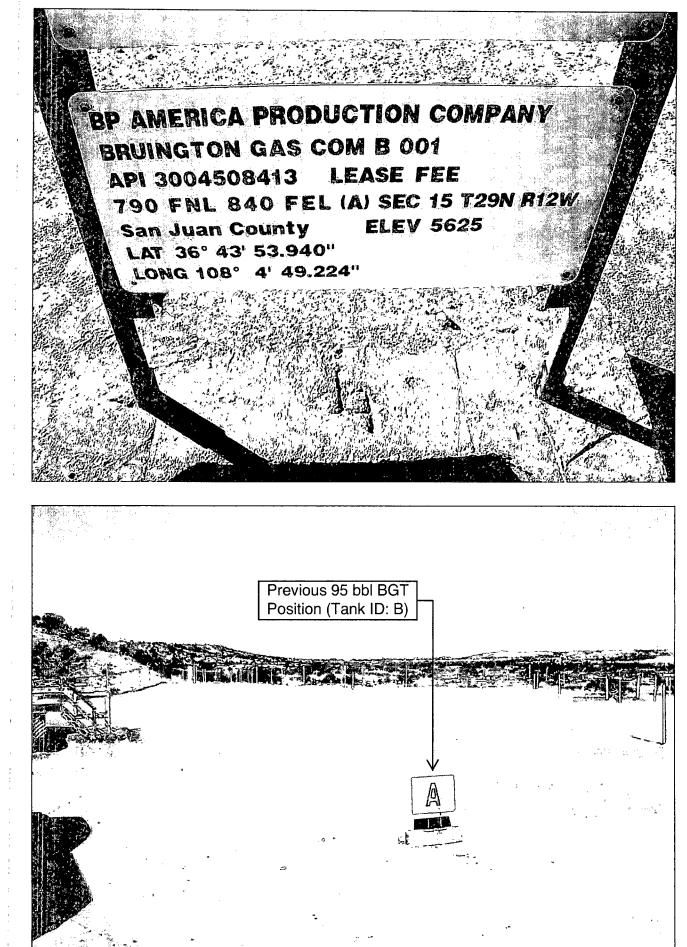

• •

-