PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME: | Mewbourne Oil Co

LEASE NO.: NM105560

WELL NAME & NO.: | 20H – Red Hills West Unit

SURFACE HOLE FOOTAGE: 200'/S & 1205'/W **BOTTOM HOLE FOOTAGE** 330'/N & 1650'/W

LOCATION: | Section 8, T. 26 S., R. 32 E., NMPM

COUNTY: Lea County, New Mexico

 \mathbf{COA}

H2S	• Yes	C No	
Potash	• None	C Secretary	C R-111-P
Cave/Karst Potential	CLow	↑ Medium	6 High
Variance	C None	• Flex Hose	COther
Wellhead	C Conventional	Multibowl	C Both
Other	□ 4 String Area	Capitan Reef	WIPP

Unit Wells

The well sign for a unit well shall include the unit number in addition to the surface and bottom hole lease numbers. This also applies to participating area numbers. If a participating area has not been established, the operator can use the general unit designation, but will replace the unit number with the participating area number when the sign is replaced.

A. Hydrogen Sulfide

A Hydrogen Sulfide (H2S) Drilling Plan shall be activated 500 feet prior to drilling into the **DELAWARE** formation. As a result, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING

- 1. The 13-3/8 inch surface casing shall be set at approximately 1084 feet (a minimum of 25 feet into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after

- completing the cement job.
- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8** hours or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
- d. If cement falls back, remedial cementing will be done prior to drilling out that string.
- 2. The minimum required fill of cement behind the 9-5/8 inch intermediate casing is:
 - Cement to surface. If cement does not circulate see B.1.a, c-d above. Additional cement may be required. Excess calculates to be 24%.
 - ❖ In <u>High Cave/Karst Areas</u> if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.
- 3. The minimum required fill of cement behind the 7 inch production casing is:
 - Cement should tie-back at least 200 feet into previous casing string. Operator shall provide method of verification. Additional cement may be required. Excess calculates to be -17%.
- 4. The minimum required fill of cement behind the 4-1/2 inch production liner is:
 - Cement should tie-back 100' into the previous casing. Operator shall provide method of verification.

C. PRESSURE CONTROL

- 1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).
- 2. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **2000 (2M)** psi.
- 3. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the 9-5/8 intermediate casing shoe shall be 10,000 (10M) psi.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
 - c. BOPE tests (minimum of 4 hours)
 - ✓ Lea CountyCall the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)393-3612
- 1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
- 2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
- 3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

- 1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
- 2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing intergrity test can be done (prior to the cement setting up) immediately after bumping the plug.
- 3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing intergrity test can be done (prior to the cement setting up) immediately after bumping the plug.
- 4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
- 5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
- 6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
- 7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
- 8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

- 1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
- 2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
- 3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
- 4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
- 5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including

lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).
- c. The tests shall be done by an independent service company utilizing a test plug. The results of the test shall be reported to the appropriate BLM office.
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- f. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes. This test shall be performed prior to the test at full stack pressure.
- g. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production easing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

Waste Minimization Plan (WMP)

In the interest of resource development, submission of additional well gas capture development plan information is deferred but may be required by the BLM Authorized Officer at a later date.

ZS 121517

Page 7 of 7

PECOS DISTRICT SURFACE USE CONDITIONS OF APPROVAL

OPERATOR'S NAME: Mewbourne Oil Co
LEASE NO.: NM105560
WELL NAME & NO.: 20H - Red Hills West Unit
SURFACE HOLE FOOTAGE: 200'/S & 1205'/W
BOTTOM HOLE FOOTAGE 330'/N & 1650'/W
LOCATION: Section 8, T. 26 S., R. 32 E., NMPM
COUNTY: Lea County, New Mexico

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

☐ General Provisions	
Permit Expiration	
Archaeology, Paleontology, and Historical Sit	es
Noxious Weeds	
Special Requirements	
Cave/Karst	
Construction	
Notification	
Topsoil	
Closed Loop System	
Federal Mineral Material Pits	
Well Pads	
Roads	
Road Section Diagram	
☑ Production (Post Drilling)	
Well Structures & Facilities	
Pipelines	
☐ Interim Reclamation	
Final Abandonment & Reclamation	

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

Page 2 of 16

V. SPECIAL REQUIREMENT(S)

Cave and Karst Conditions of Approval for APDs

** Depending on location, additional Drilling, Casing, and Cementing procedures may be required by engineering to protect critical karst groundwater recharge areas.

Cave/Karst Surface Mitigation

The following stipulations will be applied to minimize impacts during construction, drilling and production:

Construction:

In the advent that any underground voids are opened up during construction activities, construction activities will be halted and the BLM will be notified immediately.

No Blasting:

No blasting will be utilized for pad construction. The pad will be constructed and leveled by adding the necessary fill and caliche.

Pad Berming:

- The entire perimeter of the well pad will be bermed to prevent oil, salt, and other chemical contaminants from leaving the well pad.
- The compacted berm shall be constructed at a minimum of 12 inches high with impermeable mineral material (e.g., caliche).
- No water flow from the uphill side(s) of the pad shall be allowed to enter the well pad.
- The topsoil stockpile shall be located outside the bermed well pad.
- Topsoil, either from the well pad or surrounding area, shall not be used to construct the berm.
- No storm drains, tubing or openings shall be placed in the berm.
- If fluid collects within the bermed area, the fluid must be vacuumed into a safe container and disposed of properly at a state approved facility.
- The integrity of the berm shall be maintained around the surfaced pad throughout the life of the well and around the downsized pad after interim reclamation has been completed.
- Any access road entering the well pad shall be constructed so that the integrity of the berm height surrounding the well pad is not compromised. (Any access road crossing the berm cannot be lower than the berm height.)
- Following a rain event, all fluids will vacuumed off of the pad and hauled off-site and disposed at a proper disposal facility.

Tank Battery Liners and Berms:

Tank battery locations and all facilities will be lined and bermed. A 20 mil permanent liner will be installed with a 4 oz. felt backing, or equivalent, to prevent tears or punctures. Tank battery berms must be large enough to contain $1 \frac{1}{2}$ times the content of the largest tank.

Leak Detection System:

A method of detecting leaks is required. The method could incorporate gauges to measure loss, situating values and lines so they can be visually inspected, or installing electronic sensors to alarm when a leak is present. Leak detection plan will be submitted to BLM for approval.

Automatic Shut-off Systems:

Automatic shut off, check values, or similar systems will be installed for pipelines and tanks to minimize the effects of catastrophic line failures used in production or drilling.

Cave/Karst Subsurface Mitigation

The following stipulations will be applied to protect cave/karst and ground water concerns:

Rotary Drilling with Fresh Water:

Fresh water will be used as a circulating medium in zones where caves or karst features are expected. SEE ALSO: Drilling COAs for this well.

Directional Drilling:

Kick off for directional drilling will occur at least 100 feet below the bottom of the cave occurrence zone. SEE ALSO: Drilling COAs for this well.

Lost Circulation:

ALL lost circulation zones from the surface to the base of the cave occurrence zone will be logged and reported in the drilling report.

Regardless of the type of drilling machinery used, if a void of four feet or more and circulation losses greater than 70 percent occur simultaneously while drilling in any cave-bearing zone, the BLM will be notified immediately by the operator. The BLM will assess the situation and work with the operator on corrective actions to resolve the problem.

Page 4 of 16

Abandonment Cementing:

Upon well abandonment in cave karst areas additional plugging conditions of approval may be required. The BLM will assess the situation and work with the operator to ensure proper plugging of the wellbore.

Pressure Testing:

Annual pressure monitoring will be performed by the operator on all casing annuli and reported in a sundry notice. If the test results indicated a casing failure has occurred, remedial action will be undertaken to correct the problem to the BLM's approval.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS

Road Width

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Page 6 of 16

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outsloping and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch



All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

400 foot road with 4% road slope: $\frac{400'}{4\%} + 100' = 200'$ lead-off ditch interval

Page 7 of 16

Cattle guards

An appropriately sized cattle guard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattle guards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattle guards that are in place and are utilized during lease operations.

Fence Requirement

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Page 8 of 16

Construction Steps

- 1. Salvage topsoil
- 3. Redistribute topsoil
- 2. Construct road
- 4. Revegetate slopes

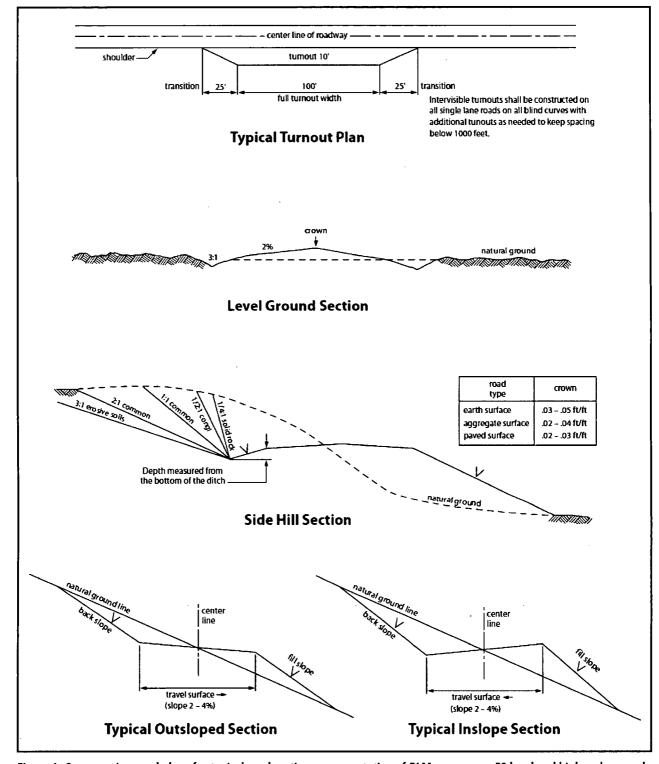


Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

VII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

B. PIPELINES

STANDARD STIPULATIONS FOR SURFACE INSTALLED PIPELINES

A copy of the application (Grant, Sundry Notice, APD) and attachments, including stipulations, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

- 1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
- 2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR, Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
- 3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to activity of the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third

Page 11 of 16

parties.

- 4. The holder shall be liable for damage or injury to the United States to the extent provided by 43 CFR Sec. 2883.1-4. The holder shall be held to a standard of strict liability for damage or injury to the United States resulting from pipe rupture, fire, or spills caused or substantially aggravated by any of the following within the right-of-way or permit area:
 - a. Activities of the holder including, but not limited to construction, operation, maintenance, and termination of the facility.
 - b. Activities of other parties including, but not limited to:
 - (1) Land clearing.
 - (2) Earth-disturbing and earth-moving work.
 - (3) Blasting.
 - (4) Vandalism and sabotage.
 - c. Acts of God.

The maximum limitation for such strict liability damages shall not exceed one million dollars (\$1,000,000) for any one event, and any liability in excess of such amount shall be determined by the ordinary rules of negligence of the jurisdiction in which the damage or injury occurred.

This section shall not impose strict liability for damage or injury resulting primarily from an act of war or from the negligent acts or omissions of the United States.

- 5. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil, salt water, or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil, salt water, or other pollutant, wherever found, shall be the responsibility of the holder, regardless of fault. Upon failure of the holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he deems necessary to control and clean up the discharge and restore the area, including, where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of the holder. Such action by the Authorized Officer shall not relieve the holder of any responsibility as provided herein.
- 6. All construction and maintenance activity will be confined to the authorized right-of-way width of _______ feet. If the pipeline route follows an existing road or buried pipeline right-of-way, the surface pipeline must be installed no farther than 10 feet from the edge of the road or buried pipeline right-of-way. If existing surface pipelines prevent this distance, the proposed surface pipeline must be installed immediately adjacent to the outer surface pipeline. All construction and maintenance activity will be confined to existing roads or right-of-ways.
- 7. No blading or clearing of any vegetation will be allowed unless approved in writing

Page 12 of 16

by the Authorized Officer.

- 8. The holder shall install the pipeline on the surface in such a manner that will minimize suspension of the pipeline across low areas in the terrain. In hummocky of duney areas, the pipeline will be "snaked" around hummocks and dunes rather then suspended across these features.
- 9. The pipeline shall be buried with a minimum of 24 inches under all roads, "two-tracks," and trails. Burial of the pipe will continue for 20 feet on each side of each crossing. The condition of the road, upon completion of construction, shall be returned to at least its former state with no bumps or dips remaining in the road surface.
- 10. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.
- 11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.
- 12. Excluding the pipe, all above-ground structures not subject to safety requirement shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be a color which simulates "Standard Environmental Colors" **Shale Green**, Munsell Soil Color No. 5Y 4/2; designated by the Rocky Mountain Five State Interagency Committee.
- 13. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. Signs will be maintained in a legible condition for the life of the pipeline.
- 14. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway.
- 15. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the authorized officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the authorized officer. An evaluation of the discovery will be made by the

authorized officer to determine appropriate cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the authorized officer after consulting with the holder.

- 16. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, powerline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.
- 17. Surface pipelines must be less than or equal to 4 inches and a working pressure below 125 psi.

VIII. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

IX. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Page 14 of 16

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well.

Seed Mixture 2, for Sandy Sites

The holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be <u>no</u> primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed will be done in accordance with State law (s) and within nine (9) months prior to purchase. Commercial seed will be either certified or registered seed. The seed container will be tagged in accordance with State law(s) and available for inspection by the authorized officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). The holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. The seeding will be repeated until a satisfactory stand is established as determined by the authorized officer. Evaluation of growth will not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

Species	l <u>b/acre</u>
Sand dropseed (Sporobolus cryptandrus)	1.0
Sand love grass (Eragrostis trichodes)	1.0
Plains bristlegrass (Setaria macrostachya)	2.0

^{*}Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Operator Certification Data Report 02/22/2018

Operator Certification

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

NAME: Bradley Bishop

Signed on: 09/27/2017

Title: Regulatory

Street Address: PO Box 5270

City: Hobbs

State: NM

Zip: 88240

Phone: (575)393-5905

Email address: bbishop@mewbourne.com

Field Representative

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Application Data Report

APD ID: 10400022615

Submission Date: 09/28/2017

Highlighted data

Operator Name: MEWBOURNE OIL COMPANY

reflects the most recent changes

Well Name: RED HILLS WEST UNIT

Well Number: 020H

Show Final Text

Well Type: CONVENTIONAL GAS WELL

Well Work Type: Drill

Section 1 - General

APD ID:

10400022615

Tie to previous NOS?

Submission Date: 09/28/2017

BLM Office: CARLSBAD

User: Bradley Bishop

Title: Regulatory

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM 105560

Lease Acres: 200

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? YES

Permitting Agent? NO

APD Operator: MEWBOURNE OIL COMPANY

Operator letter of designation:

RedHillsWestUnit020H operatorletterofdesignation 20170927063543.pdf

Operator Info

Operator Organization Name: MEWBOURNE OIL COMPANY

Operator Address: PO Box 5270

Zip: 88240

Operator PO Box:

Operator City: Hobbs

State: NM

Operator Phone: (575)393-5905

Operator Internet Address:

Section 2 - Well Information

Well in Master Development Plan? NO

Mater Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: RED HILLS WEST UNIT

Well Number: 020H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: WILDCAT

Pool Name: WOLFCAMP

Is the proposed well in an area containing other mineral resources? USEABLE WATER, NATURAL GAS, OIL

Operator Name: MEWBOURNE OIL COMPANY

Well Name: RED HILLS WEST UNIT

Well Number: 020H

Describe other minerals:

Is the proposed well in a Helium production area? N Use Existing Well Pad? NO

New surface disturbance?

Type of Well Pad: SINGLE WELL

Multiple Well Pad Name:

Number:

Well Class: HORIZONTAL

Number of Legs: 1

Well Work Type: Drill

Well Type: CONVENTIONAL GAS WELL

Describe Well Type:

Well sub-Type: APPRAISAL

Describe sub-type:

Distance to town: 30 Miles

Distance to nearest well: 50 FT

Distance to lease line: 150 FT

Reservoir well spacing assigned acres Measurement: 320 Acres

Well plat:

RedHillsWestUnit020H wellplat 20170927063903.pdf

Well work start Date: 11/24/2017

Duration: 60 DAYS

Section 3 - Well Location Table

Survey Type: RECTANGULAR

Describe Survey Type:

Datum: NAD83

Vertical Datum: NAVD88

Survey number:

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
SHL	200	FSL	120	FWL	26S	32E	8	Aliquot	32.05075		LEA		' ' — ' '	F	NMNM	319	0	0 .
Leg			5					sws	78	103.7019		MEXI			105560	7		
#1								W		54		СО	СО					
KOP	200	FSL	120	FWL	26S	32E	8	Aliquot	32.05075	-	LEA	NEW	NEW	F	NMNM	-	112	112
Leg			5					sws	78	103.7019		MEXI	MEXI		105560	808	81	81
#1								w		54		co	co			4		
PPP	330	FSL	165	FWL	26S	32E	8	Aliquot	32.05131	-	LEA	NEW	NEW	F	NMNM	 -	113	112
Leg			0					sws	8	103.7021		MEXI	MEXI		105560	808	00	81
#1								w	l 	3		СО	СО			4		

Operator Name: MEWBOURNE OIL COMPANY

Well Name: RED HILLS WEST UNIT

Well Number: 020H

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
PPP	267	FNL	165	FWL	26S	32E	8	Aliquot	32.05736	-	LEA	NEW	NEW	F	NMNM	-	143	118
Leg	3	'	0				ļ	SWN	7	103.7015		MEXI			128927	865	00	54
#1								w		34		СО	CO .			7		
EXIT	330	FNL	165	FWL	26S	32E	8	Aliquot	32.06399	-	LEA	NEW	NEW	F	NMNM	-	166	118
Leg			0					NWN	89	103.7004		MEXI	MEXI		128927	865	31	54
#1								w		887		co	СО			7		
BHL	330	FNL	165	FWL	26S	32E	8	Aliquot	32.06399	-	LEA	NEW	NEW	F	NMNM	-	166	118
Leg			0					NWN	89	103.7004		MEXI			128927	865	31	54
#1								W	1	887		СО	СО			7	1	

$\mathcal{O}_{1}(T, \mathcal{T}_{1})$

United States Department of the Interior Bureau of Land Management Roswell Field Office 2909 West Second Street Roswell, New Mexico 88201-1287

Statement Accepting Responsibility for Operations

Operator Name:

Mewbourne Oil Company

Street or Box:

P.O. Box 5270

City, State:

Hobbs, New Mexico

Zip Code:

88241

The undersigned accepts all applicable terms, conditions, stipulations, and restrictions concerning operations conducted of the leased land or portion thereof, as described below.

Lease Number:

NMNM 105560 & NMNM 128927

Legal Description of Land:

Section 8, T-26S, R-32E Lea County, New Mexico.

Approved by:

Location @ 200'FSL & 1205' FWL.

Formation (if applicable):

Wolfcamp Gas

Bond Coverage:

\$150,000

BLM Bond File:

NM1693 Nationwide, NMB 000919

Authorized Signature:

Name: Robin Terrell Title: District Manager

Date: 9-25-2017 .

Hydrogen Sulfide Drilling Operations Plan Mewbourne Oil Company

1. General Requirements

Rule 118 does not apply to this well because MOC has researched this area and no high concentrations of H2S were found. MOC will have on location and working all H2S safety equipment before the Delaware formation for purposes of safety and insurance requirements.

2. Hydrogen Sulfide Training

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will have received training from a qualified instructor in the following areas prior to entering the drilling pad area of the well:

- 1. The hazards and characteristics of hydrogen sulfide gas.
- 2. The proper use of personal protective equipment and life support systems.
- 3. The proper use of hydrogen sulfide detectors, alarms, warning systems, briefing areas, evacuation procedures.
- 4. The proper techniques for first aid and rescue operations.

Additionally, supervisory personnel will be trained in the following areas:

- The effects of hydrogen sulfide on metal components. If high tensile tubular systems are utilized, supervisory personnel will be trained in their special maintenance requirements.
- 2 Corrective action and shut in procedures, blowout prevention, and well control procedures while drilling a well.
- The contents of the Hydrogen Sulfide Drilling Operations Plan.

There will be an initial training session prior to encountering a know hydrogen sulfide source. The initial training session shall include a review of the site specific Hydrogen Sulfide Drilling Operations Plan.

3. Hydrogen Sulfide Safety Equipment and Systems

All hydrogen sulfide safety equipment and systems will be installed, tested, and operational prior to drilling below the 9 5/8" intermediate casing.

1. Well Control Equipment

- A. Choke manifold with minimum of one adjustable choke/remote choke.
- B. Blowout preventers equipped with blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit
- C. Auxiliary equipment including annular type blowout preventer.
- 2. Protective Equipment for Essential Personnel

Thirty minute self contained work unit located in the dog house and at briefing areas.

Additionally: If H2S is encountered in concentrations less than 10 ppm, fans will be placed in work areas to prevent the accumulation of hazardous amounts of poisonous gas. If higher concentrations of H2S are detected the well will be shut in and a rotating head, mud/gas separator, remote choke and flare line with igniter will be installed.

Mewbourne Oil Company, Red Hills West Unit #020H Sec 8, T26S, R32E

SL: 200' FSL & 1205' FWL BHL: 330' FNL & 1650' FWL

Casing Program

Hole	Hole Casing Interval		Csg.	Weight	Grade	Conn.	SF	SF	SF Jt	SF Body
Size	From	To	Size	(lbs)	İ		Collapse	Burst	Tension	Tension
17.5"	0'	1055'	13.375"	48	H40	STC	1.56	3.50	6.36	10.68
12.25"	0'	3453'	9.625"	36	J55	LTC	1.13	1.96	2.87	4.54
12.25"	3453'	4290'	9.625"	40	J55	LTC	1.15	1.77	15.53	18.82
8.75"	0'	12199'	7"	26	HCP110	LTC	1.33	1.70	2.03	2.62
6.125"	11281'	16631'	4.5"	13.5	P110	LTC	1.33	1.55	5.41	6.75
-	•	•		BL	M Minimu	m Safety	1.125	1	1.6 Dry	1.6 Dry
						Factor			1.8 Wet	1.8 Wet

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h Must have table for contingency casing

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef? Is well within the designated 4 string boundary.	
Is well located in SOPA but not in R-111-P? If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	N
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	Y
If yes, are there two strings cemented to surface?	Y
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

3. Hydrogen Sulfide Protection and Monitoring Equipment

Two portable hydrogen sulfide monitors positioned on location for optimum coverage and detection. The units shall have audible sirens to notify personnel when hydrogen sulfide levels exceed 20 PPM.

4. <u>Visual Warning Systems</u>

- A. Wind direction indicators as indicated on the wellsite diagram.
- B. Caution signs shall be posted on roads providing access to location. Signs shall be painted a high visibility color with lettering of sufficient size to be readable at reasonable distances from potentially contaminated areas.

4. Mud Program

The mud program has been designed to minimize the amount of hydrogen sulfide entrained in the mud system. Proper mud weight, safe drilling practices, and the use of hydrogen sulfide scavengers will minimize hazards while drilling the well.

5. Metallurgy

All tubular systems, wellheads, blowout preventers, drilling spools, kill lines, choke manifolds, and valves shall be suitable for service in a hydrogen sulfide environment when chemically treated.

6. Communications

State & County Officials phone numbers are posted on rig floor and supervisors trailer. Communications in company vehicles and toolpushers are either two way radios or cellular phones.

7. Well Testing

Drill stem testing is not an anticipated requirement for evaluation of this well. If a drill stem test is required, it will be conducted with a minimum number of personnel in the immediate vicinity. The test will be conducted during daylight hours only.

8. Emergency Phone Numbers

Eddy County Sheriff's Office	911 or 575-887-7551
Ambulance Service	911 or 575-885-2111
Carlsbad Fire Dept	911 or 575-885-2111
Loco Hills Volunteer Fire Dept.	911 or 575-677-3266
Closest Medical Facility - Columbia Medical	Center of Carlsbad 575-492-5000

Mewbourne Oil Company	Hobbs District Office	575-393-5905
-	Fax	575-397-6252
	2 nd Fax	575-393-7259
District Manager	Robin Terrell	575-390-4816
Drilling Superintendent	Frosty Lathan	575-390-4103
	Bradley Bishop	575-390-6838
Drilling Foreman	Wesley Noseff	575-441-0729

Mewbourne Oil Company

Lea County, New Mexico NAD 83 Red Hills West Unit #020H Sec 8, T26S, R32E

SL: 200' FSL & 1205' FWL BHL: 330' FNL & 1650' FWL

Plan: Design #1

Standard Planning Report

27 September, 2017

Hobbs Database: Site Red Hills West Unit #020H Local Co-ordinate Reference: Company: Mewbourne Oil Company WELL @ 3224.0usft (Original Well Elev) TVD Reference: Lea County, New Mexico NAD 83 Project: MD Reference: WELL @ 3224.0usft (Original Well Elev) Red Hills West Unit #020H Site: Grid North Reference: Sec 8, T26S, R32E Well: **Survey Calculation Method:** Minimum Curvature Wellbore: BHL: 330' FNL & 1650' FWL Design: Design #1

Project Lea County, New Mexico NAD 83

Map System: US State Plane 1983 System Datum: Mean Sea Level

Geo Datum: North American Datum 1983

Map Zone: New Mexico Eastern Zone

Site Red Hills West Unit #020H Northing: 382,776.00 usft 32° 3' 2.732 N Site Position: Latitude: Мар Easting: 736,951.00 usft 103° 42' 7.039 W From: Longitude: **Position Uncertainty:** 0.0 usft Slot Radius: 13-3/16 " **Grid Convergence:** 0.34

Well Sec 8, T26S, R32E Well Position +N/-S 0.0 usft Northing: 382,776.00 usft Latitude: 32° 3' 2.732 N +E/-W 0.0 usft Easting: 736,951.00 usft Longitude: 103° 42' 7.039 W Position Uncertainty 0.0 usft Wellhead Elevation: 3,224.0 usft Ground Level: 3,197.0 usft

BHL: 330' FNL & 1650' FWL Wellbore Model Name Sample Date Declination Dip Angle Field Strength Magnetics (°) (°) (nT) IGRF2010 9/27/2017 6.86 59.85 47,872

Design Design #1 Audit Notes: Version: Phase: **PROTOTYPE** Tie On Depth: 0.0 Vertical Section: Depth From (TVD) +N/-S +E/-W Direction (usft) (usft) (usft) (°) 0.0 0.0 0.0 5.05

Plan Sections Measured Vertical Dogleg Build Turn Depth Inclination Azimuth Depth +N/-S +E/-W Rate Rate Rate TFO (°/100usft) (usft) (usft) (usft) (usft) (°) (°/100usft) (°/100usft) Target (°) 0.0 0.00 0.00 0.0 0.0 0.0 0.00 0.00 0.00 0.00

Database: Company: Hobbs

Project:

Mewbourne Oil Company Lea County, New Mexico NAD 83

Site: Well: Red Hills West Unit #020H

Wellbore:

Sec 8, T26S, R32E

Design:

BHL: 330' FNL & 1650' FWL

Design #1

Local Co-ordinate Reference:

TVD Reference:

MD Reference: North Reference:

Survey Calculation Method:

Site Red Hills West Unit #020H

WELL @ 3224.0usft (Original Well Elev)

WELL @ 3224.0usft (Original Well Elev)

Grid

Minimum Curvature

Measured			Vertical			Vertical	Dogleg	Build	Turn
Depth	Inclination	Azimuth	Depth	+N/-S	+E/-W	Section	Rate	Rate	Rate
(usft)	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(°/100usft)	(°/100usft)	(°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
	& 1205' FWL								
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
. 200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	0.008	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
1,600.0	0.00	0.00	1,600.0	0.0	0.0	0.0	0.00	0.00	0.00
1,700.0	0.00	0.00	1,700.0	0.0	0.0	0.0	0.00	0.00	0.00
1,800.0	0.00	0.00	1,800.0	0.0	0.0	0.0	0.00	0.00	0.00
1,900.0	0.00	0.00	1,900.0	0.0	0.0	0.0	0.00	0.00	0.00
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.0	0.00	0.00	0.00
2,100.0	0.00	0.00	2,100.0	0.0	0.0	0.0	0.00	0.00	0.00
2,200.0	0.00	0.00	2,200.0	0.0	0.0	0.0	0.00	0.00	0.00
2,300.0	0.00	0.00	2,300.0	0.0	0.0	0.0	0.00	0.00	0.00
2,400.0	0.00	0.00	2,400.0	0.0	0.0	0.0	0.00	0.00	0.00
2,500.0	0.00	0.00	2,500.0	0.0	0.0	0.0	0.00	0.00	0.00
2,600.0	0.00	0.00	2,600.0	0.0	0.0	0.0	0.00	0.00	0.00
2,700.0	0.00	0.00	2,700.0	0.0	0.0	0.0	0.00	0.00	0.00
2,800.0	0.00	0.00	2,800.0	0.0	0.0	0.0	0.00	0.00	0.00
2,900.0	0.00	0.00	2,900.0	0.0	0.0	0.0	0.00	0.00	0.00
3,000,0	0.00	0.00	3,000.0	0.0	0.0	0.0	0.00	0.00	0.00
3,100.0	0.00	0.00	3,100.0	0.0	0.0	0.0	0.00	0.00	0.00
3,200.0	0.00	0.00	3,200.0	0.0	0.0	0.0	0.00	0.00	0.00
3,300.0	0.00	0.00	3,300.0	0.0	0.0	0.0	0.00	0.00	0.00
3,400.0	0.00	0.00	3,400.0	0.0	0.0	0.0	0.00	0.00	0.00
3,500.0	0.00	0.00	3,500.0	0.0	0.0	0.0	0.00	0.00	0.00
3,600.0	0.00	0.00	3,600.0	0.0	0.0	0.0	0.00	0.00	0.00
3,700.0	0.00	0.00	3,700.0	0.0	0.0	0.0	0.00	0.00	0.00
3,800.0	0.00	0.00	3,800.0	0.0	0.0	0.0	0.00	0.00	0.00
3,900.0	0.00	0.00	3,900.0	0.0	0.0	0.0	0.00	0.00	0.00
4,000.0	0.00	0.00	4,000.0	0.0	0.0	0.0	0.00	0.00	
4,100.0	0.00	0.00	4,000.0 4.100.0	0.0	0.0	0.0	0.00	0.00	0.00
4,100.0	0.00	0.00	4,100.0	0.0					.0.00
4,200.0 4,300.0	0.00	0.00	4,200.0	0.0	0.0	0.0	0.00	0.00	0.00
					0.0	0.0	0.00	0.00	0.00
4,370.0	0.00	0.00	4,370.0	0.0	0.0	0.0	0.00	0.00	0.00
4,400.0	0.60	111.93	4,400.0	-0.1	0.1	0.0	2.00	2.00	0.00
4,500.0	2.60	111.93	4,500.0	-1.1	2.7	-0.9	2.00	2.00	0.00
4,582.6	4.25	111.93	4,582.4	-2.9	7.3	-2.3	2.00	2.00	0.00
4,600.0	4.25	111.93	4,599.8	-3.4	8.5	-2.7	0.00	0.00	0.00
4,700.0	4.25	111.93	4,699.5	-6.2	15.4	-4.8	0.00	0.00	0.00
4,800.0	4.25	111.93	4,799.2	-9.0	22.3	-7.0	0.00	0.00	0.00
4,900.0	4,25	111.93	4,898.9	-11.7	29.1	-7.0 -9.1	0.00	0.00	0.00
5,000.0	4.25	111.93	4,000.5	-14.5	36.0	-11.3	0.00	0.00	0.00

5,000.0

4.25

111.93

4,998.7

-14.5

36.0

-11.3

0.00

0.00

0.00

Database: Company: Hobbs

Project:

Mewbourne Oil Company

Lea County, New Mexico NAD 83 Red Hills West Unit #020H

Site: Well:

Sec 8, T26S, R32E

Wellbore:

BHL: 330' FNL & 1650' FWL

Local Co-ordinate Reference:

TVD Reference:

MD Reference: North Reference:

Survey Calculation Method:

Site Red Hills West Unit #020H

WELL @ 3224.0usft (Original Well Elev)

WELL @ 3224.0usft (Original Well Elev)

Minimum Curvature

sign:	Design #1										
nned Survey											
Measured , Depth (usft)	Inclination (°)	Azimuth	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)		
		(°)		(usit)	(usit)	(4511)			(71000310)		
5,100.0	4.25	111.93	5,098.4	-17.3	42.9	-13,4	0.00	0.00	0.00		
5,200.0	4.25	111.93	5,198.1	-20.0	49.8	-15.6	0.00	0.00	0.00		
5,300.0	4.25	111.93	5,297.8	-22.8	56.7	-17.7	0.00	0.00	0.00		
5,400.0	4.25	111.93	5,397.6	-25.6	63.5	-19.9	0.00	0.00	0.00		
5,500.0	4,25	111.93	5,497.3	-28.3	70.4	-22.0	0.00	0.00	0.00		
5,600.0	4.25	111.93	5,597.0	-31.1	77,3	-24.2	0.00	0.00	0.00		
5,700.0	4.25	111.93	5,696.7	-31.1	84.2	-24.2	0.00	0.00	0.00		
5,700.0	4.23	111.53	5,090.7	-33.9	04.2	-20.3	0.00	0.00	0.00		
5,800.0	4.25	111.93	5,796.5	-36.7	91.1	-28.5	0.00	0.00	0.00		
5,900.0	4.25	111.93	5,896.2	-39.4	97.9	-30.6	0.00	0.00	0.00		
6,000.0	4.25	111.93	5,995.9	-42.2	104.8	-32.8	0.00	0.00	0.00		
6,100.0	4.25	111.93	6,095.6	-45 .0	111.7	-35.0	0.00	0.00	0.00		
6,200.0	4.25	111.93	6,195.4	-47.7	118.6	-37.1	0.00	0.00	0.00		
6,300.0	4.25	111.93	6,295.1	-50.5	125.4	-39.3	0.00	0.00	0.00		
6,400.0	4.25	111.93	6,394.8	-53.3	132.3	-41.4	0.00	0.00	0.00		
6,500.0	4.25	111.93	6,494.5	-56.0	139.2	-43.6	0.00	0.00	0.00		
6,600.0	4.25	111,93	6,594.3	-58.8	146.1	-45.7	0.00	0.00	0.00		
6,700.0	4.25	111,93	6,694.0	-61.6	153.0	-47.9	0.00	0.00	0.00		
6,800.0	4.25	111.93	6,793.7	-64,3	159,8	-50.0	0.00	0.00	0.00		
6,900.0	4.25	111,93	6,893.4	-67.1	166.7	-50.0 -52.2	0.00	0.00	0.00		
7,000.0	4.25	111.93	6,993.2	-69.9	173.6	-54.3	0.00	0.00	0.00		
7,100.0	4.25	111.93	7,092.9	-72.7	180.5	-56.5	0.00	0.00	0.00		
7,200.0	4.25	111.93	7,192.6	-75.4	187.3	-58.6	0.00	0.00	0.00		
7,300.0	4.25	111.93	7,292.3	-78.2	194.2	-60.8	0.00	0.00	0.00		
7,400.0	4.25	111,93	7,392.0	-81.0	201.1	-62.9	0.00	0.00	0.00		
7,500.0	4.25	111.93	7,491.8	-83.7	208.0	-65.1	0.00	0.00	0.00		
7,600.0	4.25	111.93	7,591.5	-86.5	214.9	-67.2	0.00	0.00	0.00		
7,700.0	4.25	111.93	7,691.2	-89.3	221.7	-69.4	0.00	0.00	0.00		
•											
7,800.0	4.25	111.93	7,790.9	-92.0	228.6	-71.6	0.00	0.00	0.00		
7,900.0	4.25	111.93	7,890.7	-94.8	235.5	-73.7	0.00	0.00	0.00		
8,000.0	4.25	111.93	7,990.4	-97.6	242.4	-75.9	0.00	0.00	0.00		
8,100.0	4.25	111.93	8,090.1	-100.3	249.3	-78.0	0.00	0.00	0.00		
8,200.0	4.25	111.93	8,189.8	-103.1	256.1	-80.2	0.00	0.00	0.00		
0.000.0	4.05	444.00	0.000.0	405.0	000.0	00.0	0.00	0.00	0.00		
8,300.0	4.25	111.93	8,289.6	-105.9	263.0	-82.3	0.00	0.00	0.00		
8,400.0	4.25	111.93	8,389.3	-108.7	269.9	-84.5	0.00	0.00	0.00		
8,500.0	4.25	111.93	8,489.0	-111.4 114.2	276.8	-86.6	0.00	. 0.00	0.00		
8,600.0	4.25	111.93	8,588.7	-114.2	283.6	-88.8	0.00	0.00	0.00		
8,700.0	4.25	111.93	8,688.5	-117.0	290.5	-90.9	0.00	0.00	0.00		
8,800.0	4.25	111.93	8,788.2	-119.7	297.4	-93.1	0.00	0.00	0.00		
8,900.0	4.25	111.93	8,887.9	-122.5	304.3	-95.2	0.00	0.00	0.00		
9,000.0	4.25	111.93	8,987.6	-125.3	311.2	-97.4	0.00	0.00	0.00		
9,100.0	4.25	111.93	9,087.4	-128.0	318.0	-99.5	0.00	0.00	0.00		
9,200.0	4.25	111.93	9,187.1	-130.8	324.9	-101.7	0.00	0.00	0.00		
9,300.0	4.25	111.93	9,286.8	-133.6	331.8	-103.8	0.00	0.00	0.00		
9,400.0	4.25	111.93	9,386.5	-136.3	338.7	-106.0	0.00	0.00	0.00		
9,500.0	4.25	111.93	9,486.3	-139.1	345.5	-108.1	0.00	0.00	0.00		
9,600.0	4.25	111.93	9,586.0	-141.9	352.4	-110.3	0.00	0.00	0.00		
9,700.0	4.25	111.93	9,685.7	-144.7	359.3	-112.5	0.00	0.00	0.00		
9,800.0	4.25	111.93	9,785.4	-147.4	366.2	-114.6	0.00	0.00	0.00		
9,900.0	4.25	111.93	9,885.2	-150.2	373.1	-116.8	0.00	0.00	0.00		
10,000.0	4.25	111.93	9,984.9	-153.0	379.9	-118.9	0.00	0.00	0.00		
10,100.0	4.25	111.93	10,084.6	-155.7	386.8	-121.1	0.00	0.00	0.00		
10,200.0	4.25	111.93	10,184.3	-158.5	393.7	-123.2	0.00	0.00	0.00		
10,300.0	4.25	111.93	10,284.1	-161.3	400.6	-125.4	0.00	0.00	0.00		
10 400 0	175	111 03	10 383 8	-164.0	407.5	-127.5	0.00	ለ በለ	0.00		

10,400.0

4.25

111.93

10,383.8

407.5

-127.5

0.00

0.00

0.00

Database: Company: Hobbs

Mewbourne Oil Company

Project:

Lea County, New Mexico NAD 83

Site:

Red Hills West Unit #020H

Well: Wellbore:

Sec 8, T26S, R32E BHL: 330' FNL & 1650' FWL

Design:

Local Co-ordinate Reference:

TVD Reference:

MD Reference: North Reference:

Survey Calculation Method:

Site Red Hills West Unit #020H

WELL @ 3224.0usft (Original Well Elev) WELL @ 3224.0usft (Original Well Elev)

Grid

Minimum Curvature

Planned Survey

Design #1

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
10,500.0	4.25	111.93	10,483.5	-166.8	414.3	-129.7	0.00	0.00	0.00
10,600.0	4.25	111.93	10,583.2	-169.6	421.2	-131.8	0.00	0.00	0.00
10,700.0	4.25	111.93	10,683.0	-172.3	428.1	-134.0	0.00	0.00	0.00
10,800.0	4.25	111.93	10,782.7	-175.1	435.0	-136.1	0.00	0.00	0.00
10,900.0	4.25	111.93	10,882.4	-177.9	441.8	-138.3	0.00	0.00	0.00
11,000.0	4.25	111.93	10,982.1	-180.7	448.7	-140.4	0.00	0.00	0.00
11,086.7	4.25	111.93	11,068.6	-183.1	454.7	-142.3	0.00	0.00	0.00
11,100.0	3.99	111.93	11,081.9	-183.4	455.6	-142.6	2.00	-2.00	0.00
11,200.0	1,99	111.93	11,181.7	-185.4	460.4	-144.1	2.00	-2.00	0.00
11,299.3	0.00	0.00	11,281.0	-186.0	462.0	-144.6	2.00	-2.00	0.00
KOP @ 1128		0.00	,20110	,00.0	102.0	,,,,,	2.00	2.00	0.00
11,300.0	0.07	359.59	11,281.7	-186.0	462.0	-144.6	10.00	10.00	0.00
11,400.0	10.07	359.59	11,381.2	-177.2	461.9	-135.8	10.00	10.00	0.00
11,500.0	20.07	359.59	11,477.6	-151.2	461.7	-110.0	10.00	10.00	0.00
11,600.0	30.07	359.59	11,568.1	-108.9	461.4	-67.8	10.00	10.00	0.00
11,700.0	40.07	359.59	11,649.8	-51.5	461.0	-10.7	10.00	10.00	0.00
11,800.0	50.07	359.59	11,720.4	19.2	460.5	59.7	10.00	10.00	0.00
11,900.0	60.07	359.59	11,777.6	101.1	459.9 450.7	141.2	10.00	10.00	0.00
11,932.8	63.35	359.59	11,793.1	130.0	459.7	170.0	10.00	10,00	0.00
FIP: 330 FS	L & 1650' FWL								
12,000.0	70.07	359,59	11,819.7	191.6	459.3	231.3	10.00	10.00	0.00
12,100.0	80.06	359.59	11,845.4	288.1	458.6	327.4	10.00	10.00	0.00
12,199.4	90.00	359.59	11,854.0	387.0	457.9	425.8	10.00	10.00	0.00
LP: 587' FSL	. & 1650' FWL			•					
12,200.0	90.00	359.59	11,854.0	387.6	457.9	426.4	0.00	0.00	0.00
12,300.0	90.00	359.59	11,854.0	487.6	457.2	526.0	0.00	0.00	0.00
12,400.0	90.00	359.59	11,854.0	587.6	456.4	625.5	0.00	0.00	0.00
12,500.0	90.00	359.59		687.6	455.7	725.1	0.00	0.00	0.00
12,600.0	90.00	359.59	11,854.0	787.6	455:0	824.6	0.00	0.00	0.00
12,700.0	90.00	359.59	11,854.0	887.6	454.3	924.2	0.00	0.00	0.00
12,800.0	90.00	359.59	11,854.0	987.6	453.6	1,023.7	0.00	0.00	0.00
12,900.0	90.00	359.59	11,854.0	1,087.6	452.8	1,123.3	0.00	0.00	0.00
13,000.0	90.00	359.59	11,854.0	1,187.6	452.1	1,222.8	0.00	0.00	0.00
13,100.0	90.00	359.59	11,854.0	1,287.6	451.4	1,322.3	0.00	0.00	0.00
13,200.0	90.00	359.59	11,854.0	1,387.6	450.7	1,421.9	0.00	0.00	0.00
13,300.0	90.00	359.59	11,854.0	1,487.6	450.0	1,521.4	0.00	0.00	0.00
13,400.0	90.00	359.59	11,854.0	1,587.6	449.2	1,621.0	0.00	0.00	0.00
13,400.0	90.00	359.59	11,854.0	1,587.6	449.2 448.5	1,720.5	0.00	0.00	0.00
13,600.0	90.00	359.59	11,854.0	1,787.6	447.8	1,820.1	0.00	0.00	0.00
13,700.0	90.00	359.59	11,854.0	1,887.6	447.1	1,919.6	0.00	0.00	0.00
13,800.0	90.00	359.59	11,854.0	1,987.6	446.4	2,019.2	0.00	0.00	0.00
·									
13,900.0	90.00	359.59	11,854.0	2,087.6	445.6	2,118.7	0.00	0.00	0.00
14,000.0	90.00	359.59	11,854.0	2,187.6	444.9	2,218.3	0.00	0.00	0.00
14,100.0	90.00	359.59	11,854.0	2,287.6	444.2	2,317.8	0.00	0.00	0.00
14,200.0	90.00	359.59	11,854.0	2,387.6	443.5	2,417.4	0.00	0.00	0.00
14,300.0	90.00	359.59	11,854.0	2,487.6	442.8	2,516.9	0.00	0.00	0.00
14,400.0	90.00	359,59	11,854.0	2,587.6	442.1	2,616.4	0.00	0.00	0.00
14,500.0	90.00	359.59	11,854.0	2,687.6	441.3	2,716.0	0.00	0.00	0.00
14,600.0	90.00	359.59	11,854.0	2,787.6	440.6	2,815.5	0.00	0.00	0.00
14,700.0	90.00	359.59	11,854.0	2,887.6	439.9	2,915.1	0.00	0.00	0.00
14,800.0	90.00	359.59	11,854.0	2,987.6	439.2	3,014.6	0.00	0.00	0.00
14,900.0	90.00	359.59	11,854.0	3,087.6	438.5	3,114.2	0.00	0.00	0.00
15,000.0	90.00	359.59	11,854.0	3,187.6	437.7	3,213.7	0.00	0.00	0.00

Database: Company: Hobbs

Mewbourne Oil Company

Project:

Lea County, New Mexico NAD 83

Site:

Red Hills West Unit #020H

Well:

Sec 8, T26S, R32E

Wellbore:

BHL: 330' FNL & 1650' FWL

Local Co-ordinate Reference:

TVD Reference:

MD Reference:

North Reference: **Survey Calculation Method:** Site Red Hills West Unit #020H

WELL @ 3224.0usft (Original Well Elev)

WELL @ 3224.0usft (Original Well Elev)

Grid

Minimum Curvature

Design: Design #1 **Planned Survey**

Measured			Vertical			Vertical Section (usft)	Dogleg	Bulld Rate (°/100usft)	Turn Rate (°/100usft)
Depth (usft)	Inclination (°)	Azimuth (°)	Depth (usft)	+N/-S (usft)	+E/-W (usft)		Rate (°/100usft)		
15,100.0	90.00	359.59	11,854.0	3,287.5	437.0	3,313.3	0.00	0.00	0.00
15,200.0	90.00	359.59	11,854.0	3,387.5	436.3	3,412.8	0.00	0.00	0.00
15,300.0	90.00	359.59	11,854.0	3,487.5	435.6	3,512.4	0.00	0.00	0.00
15,400.0	90.00	359.59	11,854.0	3,587.5	434.9	3,611.9	0.00	0.00	0.00
15,500.0	90.00	359.59	11,854.0	3,687.5	434.1	3,711.4	0.00	0.00	0.00
15,600.0	90.00	359.59	11,854.0	3,787.5	433.4	3,811.0	0.00	0.00	0.00
15,700.0	90.00	359,59	11,854.0	3,887.5	432.7	3,910.5	0.00	0.00	0.00
15,800.0	90.00	359.59	11,854.0	3,987.5	432.0	4,010.1	0.00	0.00	0.00
15,900.0	90.00	359.59	11,854.0	4,087.5	431.3	4,109.6	0.00	0.00	0.00
16,000.0	90.00	359.59	11,854.0	4,187.5	430.5	4,209.2	0.00	0.00	0.00
16,100.0	90.00	359.59	11,854.0	4,287.5	429.8	4,308.7	0.00	0.00	0.00
16,200.0	90.00	359.59	11,854.0	4,387.5	429.1	4,408.3	0.00	0.00	0.00
16,300.0	90.00	359.59	11,854.0	4,487.5	428.4	4,507.8	0.00	0.00	0.00
16,400.0	90.00	359.59	11,854.0	4,587.5	427.7	4,607.4	0.00	0.00	0.00
16,500.0	90.00	359.59	11,854.0	4,687.5	426.9	4,706.9	0.00	0.00	0.00
16,600.0	90.00	359.59	11,854.0	4,787.5	426.2	4,806.4	0.00	0.00	0.00
16,631.5	90.00	359.59	11,854.0	4,819.0	426.0	4,837.8	0.00	0.00	0.00

Design Targets .									
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
SL: 200' FSL & 1205' FV - plan hits target cente - Point	0.00 er	0.00	0.0	0.0	0.0	382,776.00	736,951.00	32° 3' 2.732 N	103° 42' 7.039 W
KOP @ 11281' - plan hits target cente - Point	0.00 er	0.00	11,281.0	-186.0	462.0	382,590.00	737,413.00	32° 3' 0.864 N	103° 42' 1.684 W
FTP: 330' FSL & 1650' F - plan hits target cente - Point	0.00 er	0.00	11,793.1	130.0	459.7	382,906.00	737,410.72	32° 3' 3.991 N	103° 42′ 1.689 W
BHL: 330' FNL & 1650' F - plan hits target cente - Point	0.00 er	0.00	11,854.0	4,819.0	426.0	387,595.00	737,377.00	32° 3′ 50.394 N	103° 42′ 1.761 W
LP: 587' FSL & 1650' FV - plan hits target cente - Point	0.00 er	0.00	11,854.0	387.0	457.9	383,162.98	737,408.88	32° 3' 6.535 N	103° 42′ 1.693 W

