 <u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 <u>District II</u> 811 S. First St., Artesia, NM 88210 <u>District III</u> 1000 Rio Brazos Road, Aztec, NM 87410 <u>District IV</u> 1220 S. St. Francis Dr., Santa Fe, NM 87505 	State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505	OIL CONS. DIV DIST. 3 Form C-144 Revised June 6, 2013 JAN 0 5 2015 For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office. For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.
D 1.41/	Pit, Below-Grade Tank, or	
10.9.9	native Method Permit or Closure I	Plan Application
Modific	grade tank registration of a pit or proposed alternative method of a pit, below-grade tank, or proposed alternati ation to an existing permit/or registration plan only submitted for an existing permitted or	
or proposed alternative metho		non permited pit, below grade tank,
Instructions: Please submit one Please be advised that approval of this request does not a environment. Nor does approval relieve the operator of		n pollution of surface water, ground water or the
1. Operator: BP America Production Company	OGRID #:	770
	NM 87401	
	OCD Permit Number:	
	Township31NRange10WC	
	5988Longitude107.909154	NAD: ∐1927 ⊠ 1983
Surface Owner: 🗌 Federal 🗌 State 🖾 Private 🗌	Tribal Trust or Indian Allotment	
2. Pit: Subsection F, G or J of 19.15.17.11 NMA	AC	
Temporary: Drilling Workover		
	&A 🗌 Multi-Well Fluid Management Le	
	mil LLDPE HDPE PVC Ot	her
☐ String-Reinforced	Volume:bbl	Dimensional v W v D
Liner Seams. Werded Factory Outer	volumebbi	Dimensions: L X W X D
3. Below-grade tank: Subsection I of 19.15.17.1	1 NMAC Tank A	
	of fluid:Produced water	
Tank Construction material:Steel		
	Visible sidewalls, liner, 6-inch lift and automatic ov	verflow shut-off
	ls only □ Other _Single walled/double botto	
	□ HDPE □ PVC □ Other	
4.		
Alternative Method:		

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

し、 [*]				
 s. Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet Alternate. Please specify	hospital,			
 6. Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other Monthly inspections (If netting or screening is not physically feasible) 				
 7. Subsection C of 19.15.17.11 NMAC 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers Signed in compliance with 19.15.16.8 NMAC 				
 8. <u>Variances and Exceptions</u>: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. <i>Please check a box if one or more of the following is requested, if not leave blank:</i> Variance(s): Requests must be submitted to the appropriate division district for consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. 				
9. Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Siting criteria does not apply to drying pads or above-grade tanks.	ptable source			
General siting				
<u>Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank.</u> - □ NM Office of the State Engineer - iWATERS database search; □ USGS; □ Data obtained from nearby wells	□ Yes □ No □ NA			
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA			
 Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) Written confirmation or verification from the municipality; Written approval obtained from the municipality 	🗌 Yes 🗌 No			
 Within the area overlying a subsurface mine. (Does not apply to below grade tanks) Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division 	Yes No			
Within an unstable area. (Does not apply to below grade tanks) - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society: Topographic map				
Society; Topographic map Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map				
Below Grade Tanks				
 Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site 				
 Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No			
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)				

Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or plava lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.)	
or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.)	Yes No
- Topographic map; Visual inspection (certification) of the proposed site	

Form C-144

Ť

*	Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial	Yes No					
	 application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 						
	Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site						
 Within 100 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site 							
	Temporary Pit Non-low chloride drilling fluid						
	 Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No					
	 Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 	Yes No					
	 Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No					
	 Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No					
	Permanent Pit or Multi-Well Fluid Management Pit						
	 Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No					
	 Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 						
	Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of						
	 initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No					
	 Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site 	Yes No					
	^{10.} <u>Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist</u> : Subsection B of 19.15.17.9 N <i>Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the do attached.</i>						
	 Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19. and 19.15.17.13 NMAC 						
	Previously Approved Design (attach copy of design) API Number: or Permit Number:						
ſ	II. Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the do attached. □ Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC □ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC □ A List of wells with approved application for permit to drill associated with the pit. □ Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 and 19.15.17.13 NMAC						
	 Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC 						
	Previously Approved Design (attach copy of design) API Number: or Permit Number:						

``

Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the orattached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Gil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of 19.15.17.9 NMAC and 19.15.17.13 NMAC	locuments are				
13. <u>Proposed Closure</u> : 19.15.17.13 NMAC <i>Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.</i>					
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-well Fl Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method	uid Management Pit				
 ^{14.} <u>Waste Excavation and Removal Closure Plan Checklist</u>: (19.15.17.13 NMAC) <i>Instructions: Each of the following items must be a closure plan. Please indicate, by a check mark in the box, that the documents are attached.</i> Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC 	nttached to the				
15. <u>Siting Criteria (regarding on-site closure methods only)</u> : 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. P. 19.15.17.10 NMAC for guidance.					
Ground water is less than 25 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA				
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA				
Ground water is more than 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells					
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark) Topographic map; Visual inspection (certification) of the proposed site					
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image					
 Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site 	Yes No				
Written confirmation or verification from the municipality; Written approval obtained from the municipality	Yes No				
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	🗌 Yes 🗌 No				
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance					

adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	🗌 Yes 🗌 No				
 Within the area overlying a subsurface mine. Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division 	🗌 Yes 🗌 No				
 Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map Within a 100-year floodplain. FEMA map 	□ Yes □ No □ Yes □ No				
 ^{16.} <u>On-Site Closure Plan Checklist</u>: (19.15.17.13 NMAC) <i>Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.</i> Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.17.11 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan - based upon the appropriate requirements of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved) Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC 					
<u>Operator Application Certification</u> : I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and beli					
Name (Print): Title:					
Signature: Date:					
e-mail address: Telephone:					
18. OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature: Over the second sec	8/2215				
18. OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature: ONATO. Kelly Approval Date: 1/25 Title: Compliance OCD Permit Number: OCD Permit Number:	8/2015				
18. OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature: Over the second sec					
18. OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature: Oracle Image: Closure Plan (only) OCD Conditions (see attachment) Title: Oracle Image: Closure Plan (only) OCD Conditions (see attachment) 19. OCD Permit Number: Image: Closure Report (required within 60 days of closure completion): 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not section of the form until an approved closure plan has been obtained and the closure activities have been completed.	complete this				

.

Operator Closure Certification:	
	with this closure report is true, accurate and complete to the best of my knowledge and closure requirements and conditions specified in the approved closure plan.
Name (Print):Jeff Peace	Title: Field Environmental Coordinator
Signature: Joff Pare	Date:December 31, 2014
e-mail address: peace.jeffrey@bp.com	Telephone: (505) 326-9479

• V

.

BP AMERICA PRODUCTION COMPANY SAN JUAN BASIN, NORTHWEST NEW MEXICO

BELOW-GRADE TANK CLOSURE PLAN

Boyd Gas Com 1A BGT Tank A (95 bbl) API No. 3004522132 Unit Letter C, Section 8, T31N, R10W

This plan will address the standard protocols and procedures for closure of below-grade tanks (BGTs) on BP America Production Company (BP) well sites. As stipulated in Paragraph A of 19.15.17.13 NMAC, BP shall close a BGT within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the New Mexico Oil Conservation Division (NMOCD) requires because of imminent danger to fresh water, public health, safety or the environment. If deviations from this plan are necessary, any specific changes will be included on form C-144 and approved by the NMOCD. BP shall close an existing BGT that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008, if not retrofit with a BGT that complies with the BP NMOCD approved BGT design attached to the BP Design and Construction Plan. BP shall close an existing BGT that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC, if not previously retrofitted to comply with the BP NMOCD approve BGT Design attached to the BP Design and Construction Plan, prior to any sale or change in operator pursuant to 19.15.9.9 NMAC. BP shall close the permitted BGT within 60 days of cessation of the BGTs operation or as required by the transitional provisions of Subsection B, D, or E of 19.15.17.17 NMAC.

General Closure Plan

- BP shall notify the surface owner by certified mail that it plans to close a BGT. Evidence of mailing of the notice to the address of the surface owner shown in the county tax records demonstrates compliance with this requirement. Notice is attached.
- 2. BP shall notify the division District III office verbally or by other means at least 72 hours, but not more than one (1) week, prior to any closure operation. The notice shall include the operator's name, and the location to be closed by unit letter, section, township and range. If the BGT closure is associated with a particular well, then the notice shall also include the well's name, number and API number. **Notice is attached.**
- 3. BP shall remove liquids and sludge from the BGT prior to implementing a closure method and dispose of the liquids and sludge in a NMOCD's division-approved facility. The facilities to be used are:
 - a. BP Crouch Mesa Landfarm, Permit NM-02-003 (Solids)
 - b. JFJ Landfarm, Permit NM-01-010(B) (Solids and Sludge)
 - c. Basin Disposal, Permit NM-01-0005 (Liquids)
 - d. Envirotech Inc Soil Remediation Facility, Permit NM-01-0011 (Solids and Sludge)
 - e. BP Operated E.E. Elliott SWD #1, API 30-045-27799 (Liquids)

- f. BP Operated 13 GCU SWD #1, API 30-045-28601 (Liquids)
- g. BP Operated GCU 259 SWD, API 30-045-20006 (Liquids)

U

- h. BP Operated GCU 306 SWD, API 30-045-24286 (Liquids)
- i. BP Operated GCU 307 SWD, API 30-045-24248 (Liquids)
- j. BP Operated GCU 328 SWD, API 30-045-24735 (Liquids)
- k. BP Operated Pritchard SWD #1, API 30-045-28351 (Liquids)

All liquids and sludge in the BGT were removed and sent to one of the above NMOCD approved facilities for disposal.

4. BP shall remove the BGT and dispose of it in a NMOCD approved facility or recycle, reuse, or reclaim it in a manner that the NMOCD approves. If a liner is present and must be disposed of it will be cleaned by scraping any soils or other attached materials on the liner to a de minimus amount and disposed at a permitted solid waste facility, pursuant to Subparagraph (m) of Paragraph (1) of Subsection C of 19.15.35.8 NMAC. Documentation as to the final disposition of the removed BGT will be provided in the final closure report.

The BGT was transported to a storage area for sale and re-use.

5. BP shall remove any on-site equipment associated with a BGT unless the equipment is required for well production.

All equipment associated with the BGT has been removed.

6. BP shall test the soils beneath the BGT to determine whether a release has occurred. BP shall collect at a minimum: a five (5) point composite sample and individual grab samples from any area that is wet, discolored or showing other evidence of a release and analyze for BTEX, TPH and chlorides. The testing methods for those constituents are as follows;

Constituents	Testing Method	Release Verification	Sample
	95 bbl BGT, Tank A	(mg/Kg)	results
Benzene	US EPA Method SW-846 8021B or 8260B	0.2	ND
Total BTEX	US EPA Method SW-846 8021B or 8260B	50	ND
TPH	US EPA Method SW-846 418.1	100	ND
Chlorides	US EPA Method 300.0 or 4500B	250 or background	11

Notes: mg/Kg = milligram per kilogram, BTEX = benzene, toluene, ethylbenzene, and total xylenes, TPH = total petroleum hydrocarbons. Other EPA methods that the division approves may be applied to all constituents listed. Chloride closure standards will be determined by which ever concentration level is greatest.

Soil under the BGT was sampled and TPH, BTEX and chloride levels were below the stated limits. Sampling data is attached.

BP shall notify the division District III office of its results on form C-141.
 C-141 is attached.

 If it is determined that a release has occurred, then BP will comply with 19.15.30 NMAC and 19.15.29 NMAC, as appropriate.
 Sampling results indicate no release occurred.

0.

9. If the sampling demonstrates that a release has not occurred or that any release does not exceed the concentrations specified above, then BP shall backfill the excavation, with compacted, non-waste containing, earthen material; construct a division-prescribed soil cover, re-contour and re-vegetate the location. The location will be reclaimed if it is not with in the active process area

The area under the BGT was backfilled with clean soil and is still within the active well area.

10. BP shall reclaim the BGT location and all areas associated with the BGT including associated access roads to a safe and stable condition that blends with the surrounding undisturbed area. BP shall substantially restore the impacted surface area to the condition that existed prior to oil and gas operations by placement of the soil cover as provided in Subsection H of 19.15.17.13 NMAC, re-contour the location and associated areas to a contour that approximates the original contour and blends with the surrounding topography and re-vegetate according to Subsection I of 19.15.17.13 NMAC.

The area over the BGT is still within the active well area. This area will be reclaimed when the well is plugged and abandoned as part of final reclamation.

11. The soil cover for closures where the BGT has been removed or remediated to the NMOCD's satisfaction shall consist of the background thickness of topsoil or one foot of suitable material to establish vegetation at the site, whichever is greater. The soil cover will be constructed to the site's existing grade and all practicable efforts will be made to prevent ponding of water and erosion of the cover material.

The area over the BGT is still within the active well area. This area will be reclaimed when the well is plugged and abandoned as part of final reclamation.

12. BP shall seed the disturbed area the first growing season after closure of the BGT. Seeding will be accomplished by drilling on the contour whenever practical or by other division-approved methods. Vegetative cover will be, at a minimum, 70% of the native perennial vegetative cover (un-impacted by overgrazing, fire or other intrusion damaging to native vegetation), consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintenance of that cover through two successive growing seasons. During the two growing seasons that prove viability, there shall be no artificial irrigation of the vegetation.

The area over the BGT is still within the active well area. This area will be reclaimed when the well is plugged and abandoned as part of final reclamation.

13. BP shall seed, plant and re-seed pursuant to Paragraph (3) of Subsection I of 19.15.17.13 NMAC, until the location successfully achieves the required vegetative cover.

BP will seed the area when the well is plugged and abandoned as part of final reclamation.

14. Pursuant to Paragraph (5) of Subsection I of 19.15.17.13 NMAC, BP shall notify the NMOCD when it has seeded or planted and when it successfully achieves revegetation.

BP will notify NMOCD when re-vegetation is successful.

.

- 15. Within 60 days of closure completion, BP shall submit a closure report on NMOCD's form C-144, and will include the following;
 - a. proof of closure notification (surface owner and NMOCD)
 - b. sampling analytical reports; information required by 19.15.17 NMAC;
 - c. disposal facility name and permit number
 - d. details on back-filling, capping, covering, and where applicable re-vegetation application rates and seeding techniques and
 - e. site reclamation, photo documentation. Closure report on C-144 form is included.
- 16. BP shall certify that all information in the report and attachments is accurate, truthful, and compliant with all applicable closure requirements and conditions specified in the approved closure plan.

Certification section of C-144 has been completed.

-

Form C-141 Revised August 8, 2011

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 Submit 1 Copy to appropriate District Office in accordance with 19.15.29 NMAC.

			-	28	inta Fe	e, NM 875	05					
			Rel	ease Notific	atior	n and Co	orrective A	ction				
						OPERAT			Initia	al Report	\boxtimes	Final Report
Name of Co						Contact: Jeff Peace						
		Court, Farmi		M 87401			No.: 505-326-94					
		Gas Com 1A					e: Natural gas v					
Surface Own	ner: Privat	ie		Mineral O)wner: J	Private		AJ	PI No.	. 30045221	132	
				LOCA	IOITA	N OF REI	LEASE					
Unit Letter C	Section 8	Township 31N	Range 10W									
		Latit	tude_36				e_107.909154					
				NAI	URE	OF RELI						
Type of Relea		1	071117				Release: N/A			lecovered: N		
		w grade tank –	95 bbi, 1	ank A			Iour of Occurrenc	e: Date	e and F	Hour of Disc	covery:	
Was Immedia	te Notice C		Yes [] No 🛛 Not Re	equired	If YES, To	Whom?					
By Whom?						Date and H						
Was a Waterc	ourse Reac] Yes 🛛] No		If YES, Vo	blume Impacting t	the Watercour	rse.			
If a Watercou	irse was Im	pacted, Descri	ibe Fully.	*								
				n Taken.* Samplir and chloride belov					noval to	o ensure no	soil imp	pacts from
backfilled and	d compacted	ed and is still w	within the	ken.* BGT was rer active well area.								
regulations all public health should their o or the environ	Il operators or the envir operations h nment. In a	are required to ronment. The nave failed to a	to report an e acceptanc adequately OCD accep	e is true and compl nd/or file certain re ce of a C-141 repo y investigate and re ptance of a C-141 r	elease no ort by the emediate	otifications ar e NMOCD ma e contaminatio	nd perform correc arked as "Final R on that pose a thr	ctive actions f eport" does n reat to ground	for relea tot relie water,	eases which eve the oper , surface wa	may end rator of l ater, hum	danger liability nan health
Signature:							OIL CON	SERVATI	[ON]	DIVISIC	DN	
Printed Name					1	Approved by	Environmental S	pecialist:				
Title: Field E	nvironment	tal Coordinato	or			Approval Dat	e:	Expir	ation D	Date:		
E-mail Addre	ss: peace.je	effrey@bp.con	m	Conditions of Approval: Attached								
Date: Decem Attach Addit		14 ets If Necessa		one: 505-326-9479								
1 Keepen	101.00	100										

0			
CLIENT: BP	BLAGG ENGINEERIN P.O. BOX 87, BLOOMFIEL (505) 632-1199	D, NM 87413	API #: 3004522132 TANK ID (if applicble): A & B
FIELD REPORT:	(circle one): BGT CONFIRMATION / RELEASE INVESTIG	ATION / OTHER:	PAGE #: 1 of 1
	31N RNG: 10W PM: NM CNTY		DATE STARTED: 01/19/12 DATE FINISHED:
1/4 -1/4/FOOTAGE: 1,170'N / 1,64	EL EL	STATE <u>(fee (</u> indian Khorn BF - G. Cleaver	ENVIRONMENTAL SPECIALIST(S): JCB
REFERENCE POINT 1) 95 BGT (SW/DB) - A 2)	WELL HEAD (W.H.) GPS COORD.: 36.916988 X 107. GPS COORD.: 36.917178 X 107.	909044 DISTANCE/BE	GL ELEV.: 6,420' ARING FROM W.H.: 91', S18E ARING FROM W.H.: 110.5', S81.5W ARING FROM W.H.: ARING FROM W.H.:
SAMPLING DATA: 1) SAMPLE ID:95 BGT (A) 5-pt.	CHAIN OF CUSTODY RECORD(S) # OR LAB USED:	HALL 1130 LAB ANALYSIS: 418.1/8	OVM READING (ppm) 0.015B/8021/B/300.0 (CI)
 2) SAMPLE ID:	SAMPLE DATE:SAMPLE TIME:	1284 Lab analysis: 418.1/9 Lab analysis:	015B/8021/B/300.0 (GI) 0.0
SOIL DESCRIPTION SOIL COLOR: DARK YEL COHESION (ALL OTHERS): NON COHESIVE SLIGHTLY CONSISTENCY (NON COHESIVE SOILS): LC MOISTURE: DRY (SLIGHTLY MOIST / MOIST / W SAMPLE TYPE: GRAB / COMPOSITE - # OF PTS. DISCOLORATION/STAINING OBSERVED	OWISH BROWN PLASTICITY (CL COHESIVE COHESIVE / HIGHLY COHESIVE PLASTICITY (CL OSE FIRM DENSE / VERY DENSE DENSITY (CL T / SATURATED / SUPER SATURATED HC ODOR 5	AYS): NON PLASTIC / SLIGHTLY PLASTIC / (COHESIVE / MEDIUM PLASTIC / HIGHLY PLASTIC / FIRM / STIFF / VERY STIFF / HARD
	NT EVIDENCE OF A RELEASE FROM EITHER BGT		
	EAREST WATER SOURCE: <a> <a> <a> <a>	E WATER: <1,000' NMOC	TIMATION (Cubic Yards) : <u>NA</u> CD TPH CLOSURE STD: <u>100</u> ppm
SITE SKETCH	⊕ ₩ELL HEAD		CALIB. READ. = <u>52.1</u> ppm CALIB. GAS = <u>100</u> ppm <u>12:10</u> arr(pm) DATE: <u>01/19/12</u> MISCELL. NOTES VO - N1465217
	(95)-A PBGTL X X X X X X WOODEN	Ē	PO - 61560 PK - ZSCHWLLBGT PJ - Z2-00690-C
T.B. = TANK BOTTOM; PBGTL = PREVIOUS	R.W. ATION DEPRESSION; B.G. = BELOW GRADE; B = BELOW; T.H. = TES BELOW-GRADE TANK LOCATION; SPD = SAMPLE POINT DESIGNAT SW- SINGLE WALL; DW - DOUBLE WALL; SB - SINGLE BOTTOM; D	ION; R.W. = RETAINING WALL;	
TRAVEL NOTES: CALLOUT:	ONSITE:	01/19/12	

*

+

Analytical Report				
Lab Order 1201599				
Date Reported: 1/26/2012				

Hall Environmental Analysis Laboratory, Inc.

CLIENT: Blagg Engineering Client Sample ID: 95 BGT (A) 5-pt @6' **Project:** Boyd GC 1A Collection Date: 1/19/2012 11:30:00 AM 1201599-001 Lab ID: Received Date: 1/20/2012 9:00:00 AM Matrix: SOIL Analyses Result **RL** Qual Units DF **Date Analyzed** EPA METHOD 8015B: DIESEL RANGE ORGANICS Analyst: JMP Diesel Range Organics (DRO) ND 1/23/2012 3:44:39 PM 9.8 1 mg/Kg Surr: DNOP 109 77.4-131 %REC 1 1/23/2012 3:44:39 PM

EPA METHOD 8015B: GASOLINE RANGE					Analyst: RAA
Gasoline Range Organics (GRO)	ND	5.0	mg/Kg	1	1/23/2012 6:26:59 PM
Sum: BFB	93.3	69.7-121	%REC	1	1/23/2012 6:26:59 PM
EPA METHOD 8021B: VOLATILES					Analyst: RAA
Benzene	ND	0.050	mg/Kg	1	1/23/2012 6:26:59 PM
Toluene	ND	0.050	mg/Kg	1	1/23/2012 6:26:59 PM
Ethylbenzene	ND	0.050	mg/Kg	1	1/23/2012 6:26:59 PM
Xylenes, Total	ND	0.099	mg/Kg	1	1/23/2012 6:26:59 PM
Surr: 4-Bromofluorobenzene	99.3	85.3-139	%REC	1	1/23/2012 6:26:59 PM
EPA METHOD 300.0: ANIONS					Analyst: SRM
Chloride	11	7.5	mg/Kg	5	1/23/2012 3:57:37 PM
EPA METHOD 418.1: TPH					Analyst: JMP
Petroleum Hydrocarbons, TR	ND	20	mg/Kg	1	1/23/2012

Qualifiers:

*/X Value exceeds Maximum Contaminant Level.

E Value above quantitation range

J Analyte detected below quantitation limits

R RPD outside accepted recovery limits

S Spike Recovery outside accepted recovery limits

- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded

ND Not Detected at the Reporting Limit

RL Reporting Detection Limit

Page 1 of 8

1
1

Hall Environmental Analysis Laboratory, Inc.

Client: Blagg Engineering **Project:**

Boyd GC 1A

Sample ID: MB-391	SampType:	MBLK	Tes	tCode: EF	PA Method	300.0: Anion	5					
Client ID: PB\$	Batch ID:	391	F	RunNo: 53	30							
Prep Date: 1/23/2012	Analysis Date:	1/23/2012	5	SeqNo: 1	5436	Units: mg/K	g					
Analyte	Result PQ	L SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual			
Chloride	ND 1.5											
Sample ID: LCS-391	SampType:	LCS	Tes	tCode: EF	A Method	300.0: Anion	5					
Client ID: LCSS	nt ID: LCSS Batch ID: 391 RunNo: 530											
Prep Date: 1/23/2012	Analysis Date:	1/23/2012	5	SeqNo: 1	5437	Units: mg/K	g					
Analyte	Result PG	L SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual			
Chloride	14 1	.5 15.00	0	94.1	90	110						
Sample ID: 1201626-002AMS	SampType:	MS	Tes	tCode: EF	A Method	300.0: Anion	5	ur alitik r				
Client ID: BatchQC	Batch ID:	391	F	RunNo: 53	30							
Prep Date: 1/23/2012	Analysis Date:	1/23/2012	5	SeqNo: 1	5440	Units: mg/K	g					
Analyte	Result PQ	L SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual			
Chloride	38	30 15.00	31.65	40.4	74.6	118			S			
Sample ID: 1201626-002AMSI	SampType:	MSD	Tes	tCode: EF	A Method	300.0: Anion	5					
Client ID: BatchQC	t ID: BatchQC Batch ID: 391 RunNo: 530											
Prep Date: 1/23/2012	Analysis Date:	1/23/2012	S	SeqNo: 1	5441	Units: mg/K	g					
Analyte	te Result PQL SPK value SPK Ref Val %REC LowLimit HighLimit %RPD							RPDLimit	Qual			
Chloride	42	30 15.00	31.65	67.0	74.6	118	10.1	20	S			

Qualifiers:

*/X Value exceeds Maximum Contaminant Level.

Value above quantitation range E

- Analyte detected below quantitation limits J
- R RPD outside accepted recovery limits

- Analyte detected in the associated Method Blank В
- Holding times for preparation or analysis exceeded H

ND Not Detected at the Reporting Limit

RL Reporting Detection Limit

Page 3 of 8

1201599

26-Jan-12

WO#:

Client: Blagg Engineering Project: Boyd GC 1A

P

Sample ID: MB-375	SampType: MBLK	TestCode: EPA Method	418.1: TPH							
Client ID: PBS	Batch ID: 375	RunNo: 509								
Prep Date: 1/20/2012	Analysis Date: 1/23/2012	SeqNo: 14436	Units: mg/Kg							
Analyte	Result PQL SPK value	SPK Ref Val %REC LowLimit	HighLimit %RPD	RPDLimit Qual						
Petroleum Hydrocarbons, TR	ND 20									
Sample ID: LCS-375	le ID: LCS-375 SampType: LCS TestCode: EPA Method 418.1: TPH									
Client ID: LCSS	Batch ID: 375	RunNo: 509								
Prep Date: 1/20/2012	Analysis Date: 1/23/2012	SeqNo: 14437	Units: mg/Kg							
Analyte	Result PQL SPK value	SPK Ref Val %REC LowLimit	HighLimit %RPD	RPDLimit Qual						
Petroleum Hydrocarbons, TR	100 20 100.0	0 101 87.8	115							
Sample ID: LCSD-375	SampType: LCSD	TestCode: EPA Method	418.1: TPH							
Client ID: LCSS02	Batch ID: 375	RunNo: 509								
Prep Date: 1/20/2012	Analysis Date: 1/23/2012	SeqNo: 14439	Units: mg/Kg							
Analyte	Result PQL SPK value	SPK Ref Val %REC LowLimit	HighLimit %RPD	RPDLimit Qual						
Petroleum Hydrocarbons, TR	100 20 100.0	0 104 87.8	115 2.24	8.04						

Qualifiers:

*/X Value exceeds Maximum Contaminant Level.

E Value above quantitation range

- J Analyte detected below quantitation limits
- R RPD outside accepted recovery limits

- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
 - RL Reporting Detection Limit

Page 4 of 8

1201599 26-Jan-12

WO#:

QC SUMMARY REPORT

Client:	Blagg En	gineering									
Project:	NS Batch ID: 373 RunNo: 517 /20/2012 Analysis Date: 1/23/2012 SeqNo: 14910 Units: mg/Kg Result PQL SPK value SPK Ref Val %REC LowLimit HighLimit % nics (DR0) ND 10 10.00 104 77.4 131 S-373 SampType: LCS TestCode: EPA Method 8015B: Diesel Ref SS Batch ID: 373 RunNo: 517 /20/2012 Analysis Date: 1/23/2012 SeqNo: 14913 Units: mg/Kg mics (DR0) 43 10 50.00 0 85.5 62.7 139 6.1 5.000 122 77.4 131 01584-001AMS SampType: MS TestCode: EPA Method 8015B: Diesel Ref tchQC Batch ID: 373 RunNo: 517 20/2012 Analysis Date: 1/24/2012 SeqNo: 15102 Units: mg/Kg mics (DRO										
Sample ID: MB	3-373	SampT	ype: MI	BLK	Tes	tCode: El	PA Method	8015B: Dies	el Range (Organics	
Client ID: PB	S	Batch	n ID: 37	3	F	RunNo: 5	17				
Prep Date: 1/	20/2012	Analysis D	Date: 1	/23/2012	5	SeqNo: 1	4910	Units: mg/k	(g		
Analyte		Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Diesel Range Organ	nics (DRO)	ND	10								
Surr: DNOP		10		10.00		104	77.4	131			
Sample ID: LC:	S-373	SampT	ype: LC	s	Tes	tCode: El	PA Method	8015B: Dies	el Range (Organics	
Client ID: LC	SS	Batch	1 ID: 37	3	F	RunNo: 5	17				
Prep Date: 1/	1/20/2012 Analysis Date: 1/23/2012 SeqNo: 14913 Units: mg/K										
Analyte		Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Diesel Range Organ	nics (DRO)	43	10	50.00	0	85.5	62.7	139			
Surr: DNOP		6.1		5.000		122	77.4	131			_
Sample ID: 120	01584-001AMS	SampT	ype: Ms	6	Tes	Code: El	PA Method	8015B: Dies	el Range C	Organics	
Client ID: Bat	tchQC	Batch	1D: 37	3	F	RunNo: 5	17				
Prep Date: 1/	20/2012	Analysis D	ate: 1/	24/2012	5	eqNo: 1	5102	Units: mg/M	(g		
Analyte		Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Diesel Range Organ	nics (DRO)	38	9.9	49.65	0	75.9	57.2	146			
Surr: DNOP		7.2		4.965		145	77.4	131			S
Sample ID: 120	1584-001AMSE) SampT	ype: MS	SD	Tes	Code: El	PA Method	8015B: Diese	el Range C	Organics	
Client ID: Bat	tchQC	Batch	ID: 37	3	F	unNo: 5	17				
Prep Date: 1/2	20/2012	Analysis D	ate: 1/	24/2012	S	eqNo: 1	5200	Units: mg/K	(g		
Analyte		Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Diesel Range Organ	nics (DRO)	43	10	50.00	0	86.9	57.2	146	14.2	26.7	

Hall Environmental Analysis Laboratory, Inc.

7.5

Result

Result

8.7

11

SampType: MBLK

Batch ID: 409

SampType: LCS

Batch ID: 409

Analysis Date: 1/25/2012

PQL

Analysis Date: 1/25/2012

PQL

5.000

10.00

5.000

Qualifiers:

Surr: DNOP

Analyte

Analyte

Sun: DNOP

Sur: DNOP

Sample ID: MB-409

Prep Date: 1/24/2012

Sample ID: LCS-409

Prep Date: 1/24/2012

Client ID: LCSS

Client ID: PBS

*/X Value exceeds Maximum Contaminant Level.

E Value above quantitation range

J Analyte detected below quantitation limits

- R RPD outside accepted recovery limits
- B Analyte detected in the associated Method Blank

H Holding times for preparation or analysis exceeded

ND Not Detected at the Reporting LimitRL Reporting Detection Limit

151

RunNo: 517 SeqNo: 16212

114

RunNo: 517 SeqNo: 16213

174

SPK value SPK Ref Val %REC LowLimit

SPK value SPK Ref Val %REC

77.4

77.4

LowLimit

77.4

Page 5 of 8

0

%RPD RPDLimit

RPDLimit

%RPD

131

Units: %REC

131

Units: %REC

131

HighLimit

HighLimit

TestCode: EPA Method 8015B: Diesel Range Organics

TestCode: EPA Method 8015B: Diesel Range Organics

0

S

Qual

Qual

S

26-Jan-12

WO#:

1201599

QC SUMMARY REPORT

WO#: 1201599

26-Jan-12

Hall Environmental Analysis Laboratory, Inc.	Hall	Environmental	Analysis	Labo	oratory, In	IC.
--	------	---------------	----------	------	-------------	-----

Client: Blagg Engineering Project: Boyd GC 1A

.

A CONTRACTOR OF A CONTRACTOR O					the second distance in								
Sample ID: 1201639-004AMS	SampType: MS	5	Test	tCode: E	PA Method	8015B: Diese	I Range C	rganics					
Client ID: BatchQC	Batch ID: 409	Э	R	tunNo:	517								
Prep Date: 1/24/2012	Analysis Date: 1/2	25/2012	S	eqNo: 1	6249	Units: %REC							
Analyte	Result PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual				
Sun: DNOP	8.5	5.118		166	77.4	131			S				
Sample ID: 1201639-004AMS	D SampType: MS	D	Test	tCode: E	PA Method	8015B: Diese	l Range C)rganics					
Client ID: BatchQC	Batch ID: 409	9	R										
Prep Date: 1/24/2012	Analysis Date: 1/2	25/2012	S	eqNo: 1	6251	Units: %REC	;						
Prep Date: 1/24/2012 Analyte	Analysis Date: 1/2 Result PQL		S SPK Ref Val	,		Units: %REC HighLimit	%RPD	RPDLimit	Qual				

Qualifiers:

- */X Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- R RPD outside accepted recovery limits

- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- RL Reporting Detection Limit

Page 6 of 8

QC SUMMARY REPORT

Client: E	lagg Engineering												
Project: B	oyd GC 1A		5001							8			
Sample ID: MB-370	Samp	Type: M	BLK	Tes	tCode: El	PA Method	8015B: Gaso	oline Rang	e				
Client ID: PBS	Bato	h ID: 37	0	F	RunNo: 5	22							
Prep Date: 1/20/201	2 Analysis	Date: 1	/23/2012	S	SeqNo: 1	5530	Units: mg/Kg						
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual			
Gasoline Range Organics (Surr: BFB	GRO) ND 940	5.0	1,000		93.9	69.7	121		0.0.1.1.1.0.0000.00				
Sample ID: LCS-370	ble ID: LCS-370 SampType: LCS TestCode: EPA Method 8015B: Gasoline Range												
Client ID: LCSS	Bato	Batch ID: 370 RunNo: 522											
Prep Date: 1/20/201	2 Analysis I	Date: 1	/23/2012	S	SeqNo: 1	5534	Units: mg/Kg						
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual			
Gasoline Range Organics (,	5.0	25.00	0	116	86.4	132						
Sur: BFB	990		1,000		99.4	69.7	121						
Sample ID: 1201584-0	01AMS Samp	Type: M	3	Tes	tCode: El	PA Method	8015B: Gasc	line Rang	e				
Client ID: BatchQC	Bato	h ID: 37	0	F	RunNo: 5	22							
Prep Date: 1/20/201	2 Analysis I	Date: 1/	23/2012	S	eqNo: 1	5535	Units: mg/M	(g					
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual			
Gasoline Range Organics (C	(RO) 26	4.8	23.97	0	110	72.4	149						
Surr: BFB	970		958.8		101	69.7	121						
Sample ID: 1201584-0	01AMSD Samp	Туре: М	SD	Tes	tCode: EF	A Method	8015B: Gaso	line Rang	0				
			-	-									

Hall Environmental Analysis Laboratory, Inc.

Batch ID: 370 Client ID: BatchQC RunNo: 522 Prep Date: 1/20/2012 Analysis Date: 1/23/2012 SeqNo: 15536 Units: mg/Kg SPK value SPK Ref Val %REC %RPD Analyte Result PQL LowLimit HighLimit RPDLimit Qual 27 4.9 0 19.2 Gasoline Range Organics (GRO) 24.27 113 86 149 4.02 Sun: BFB 990 970.9 102 69.7 121 0 0

Qualifiers:

*/X Value exceeds Maximum Contaminant Level.

Value above quantitation range E

- Analyte detected below quantitation limits J
- R RPD outside accepted recovery limits

- B Analyte detected in the associated Method Blank
- Holding times for preparation or analysis exceeded Η

ND Not Detected at the Reporting Limit

RL Reporting Detection Limit Page 7 of 8

1201599

WO#:

26-Jan-12

Hall Environmental Analysis Laboratory, Inc.

Client: **Blagg** Engineering **Project:**

٤

Boyd GC 1A

Sample ID: MB-370	Samp	Type: MI	BLK	Tes	tCode: El	PA Method	8021B: Volat	tiles		
Client ID: PBS	Batc	h ID: 37	0	F	RunNo: 5	22				
Prep Date: 1/20/2012	Analysis I	Date: 1/	23/2012	5	SeqNo: 1	5549	Units: mg/K	(g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	ND	0.050				Contract Manufacture		a 16 a 1		
Toluene	ND	0.050								
thylbenzene	ND	0.050								
(ylenes, Total	ND	0.10								
Surr: 4-Bromofluorobenzene	1.0		1.000		100	85.3	139			
Sample ID: LCS-370	Samp	Type: LC	s	Tes	tCode: E	PA Method	8021B: Volat	tiles		
Client ID: LCSS	Batc	h ID: 37	0	F	RunNo: 5	22				
Prep Date: 1/20/2012	e: 1/20/2012 Analysis Date: 1/23/2012 SeqNo: 15553 Units: mg/Kg									
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	0.98	0.050	1.000	0	98.2	83.3	107			
oluene	1.0	0.050	1.000	0	101	74.3	115			
thylbenzene	1.0	0.050	1.000	0	101	80.9	122			
ylenes, Total	3.0	0.10	3.000	0	101	85.2	123			
Surr: 4-Bromofluorobenzene	1.0		1.000		102	85.3	139			
Sample ID: 1201598-001AMS	Samp	Type: MS	;	Tes	tCode: El	PA Method	8021B: Volat	tiles		
Client ID: BatchQC	Batc	h ID: 37	D	F	RunNo: 5	22				
Prep Date: 1/20/2012	Analysis [Date: 1/	23/2012	5	SeqNo: 1	5554	Units: mg/K	g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	0.95	0.050	0.9921	0	96.1	67.2	113			
oluene	0.95	0.050	0.9921	0	95.4	62.1	116			
thylbenzene	0.95	0.050	0.9921	0	96.1	67.9	127			
lylenes, Total	2.8	0.099	2.976	0	95.6	60.6	134			
Surr: 4-Bromofluorobenzene	1.0		0.9921		102	85.3	139			
Sample ID: 1201598-001AMS	D Samp	Type: MS	D	Tes	tCode: El	PA Method	8021B: Volat	tiles		
	BatchQC Batch ID: 370 RunNo: 522									
Client ID: BatchQC	Batc		0	F	RunNo: 5	22				
	Batc Analysis [h ID: 37			RunNo: 5 SeqNo: 1		Units: mg/M	(g		
	Analysis I Result	h ID: 370 Date: 1/ PQL	23/2012 SPK value	SPK Ref Val	SeqNo: 1 %REC	5555 LowLimit	HighLimit	(g %RPD	RPDLimit	Qual
Prep Date: 1/20/2012	Analysis [h ID: 37 Date: 1/	23/2012	5	SeqNo: 1	5555			RPDLimit 14.3	Qual
Prep Date: 1/20/2012 Analyte	Analysis I Result	h ID: 370 Date: 1/ PQL	23/2012 SPK value	SPK Ref Val	SeqNo: 1 %REC	5555 LowLimit	HighLimit	%RPD		Qual
Prep Date: 1/20/2012 Analyte enzene oluene	Analysis I Result 0.91	h ID: 370 Date: 1/ PQL 0.050	23/2012 SPK value 0.9990	SPK Ref Val	SeqNo: 1 %REC 91.2	5555 LowLimit 67.2	HighLimit 113	%RPD 4.55	14.3	Qual
Prep Date: 1/20/2012 Analyte lenzene	Analysis I Result 0.91 0.93	h ID: 370 Date: 1/ PQL 0.050 0.050	23/2012 SPK value 0.9990 0.9990	SPK Ref Val 0 0	SeqNo: 1 %REC 91.2 93.0	5555 LowLimit 67.2 62.1	HighLimit 113 116	%RPD 4.55 1.86	14.3 15.9	Qual
Prep Date: 1/20/2012 Analyte enzene oluene thylbenzene	Analysis I Result 0.91 0.93 0.95	h ID: 370 Date: 1/ PQL 0.050 0.050 0.050	23/2012 SPK value 0.9990 0.9990 0.9990	SPK Ref Val 0 0 0	SeqNo: 1 %REC 91.2 93.0 95.2	55555 LowLimit 67.2 62.1 67.9	HighLimit 113 116 127	%RPD 4.55 1.86 0.325	14.3 15.9 14.4	Qual

- Qualifiers:
- */X Value exceeds Maximum Contaminant Level.

E Value above quantitation range

J Analyte detected below quantitation limits

R RPD outside accepted recovery limits

- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded

ND Not Detected at the Reporting Limit

Page 8 of 8

RL Reporting Detection Limit

1201599

WO#:

26-Jan-12

HALL ENVIRONMENTAL
ANALYSIS LABORATORY

, '

Hall Environmental Analysis Laboratory 4901 Hawkins NE Albuquerque, NM 87105 TEL: 505-345-3975 FAX: 505-345-410; Website: www.hallenvironmental.con

Sample Log-In Check List

and share the state of the stat	NAME AND ADDRESS OF TAXABLE PARTY.	A REAL PROPERTY AND A REAL						
Clier	nt Name:	BLAGG	W	ork On	der No	umbe	er: 1	201599
Logg	jed by:	Ashley Gallegos	1/20/2012 9:00:00 AM			0	A	F
Com	pleted By:	Ashley Gallegos	1/20/2012 12:04:53 PM			6	A	F
Revi	ewed By:	AS	(20/12					0
Cha	in of Cust	ody						·····
1.	Were seals i	ntact?		Yes		No [Not Present 🗹
2.	Is Chain of C	custody complete?		Yes	V	No		Not Present
		sample delivered?		FedE	x			
Log	In							
		present? (see 19. for co	ooler specific information)	Yes		No		
5.	Was an atter	npt made to cool the sa	amples?	Yes	V	No [
6.	Were all sam	nples received at a tem	perature of >0° C to 6.0°C	Yes	V	No [
7.	Sample(s) in	proper container(s)?		Yes	V	No		
8.	Sufficient sar	mple volume for indicat	ed test(s)?	Yes	\checkmark	No		
9.	Are samples	(except VOA and ONG	b) properly preserved?	Yes	\checkmark	No [
10.	Was preserv	ative added to bottles?		Yes		No 🛛	\checkmark	NA 🗆
11.	Is the heads	pace in the VOA vials le	ess than 1/4 inch or 6 mm?	Yes		No [No VOA Vials 🖌
12.	Were any sa	mple containers receive	ed broken?	Yes		No	\checkmark	
		ork match bottle labels bancies on chain of cus		Yes	\checkmark	No		# of preserved bottles checked for pH:
14.	Are matrices	correctly identified on	Chain of Custody?	Yes	\checkmark	No		(<2 or >12 unless noted)
15.	Is it clear what	at analyses were reque	sted?	Yes	\checkmark	No [Adjusted?
		ling times able to be m customer for authorizat		Yes	\checkmark	No [Checked by:
Spe	cial Handl	ing (if applicable)						
		otified of all discrepanc		Yes		No [NA 🗹
	Person	Notified:	Date:					
	By Who	om:	Via:	eMa	il 🗌	Pho	one	Fax In Person
	Regard	ing:						
	Client In	nstructions:	and exactly subgraphing and the same of the same states	Ann and a state		and the Plantest	No. And and Add	an and a second s

18. Additional remarks:

19. Cooler Information

ł	Cooler No	Temp °C	Condition	Seal Intact	Seal No	Seal Date	Signed By
ſ	1	1.0	Good	Yes			

C	hain	-of-Cu	istody Record	Turn-Around	Time:										/TE	20	P		NT		
Client:	BLAG	6 ENGI	NEERWE INC.	Standard	□ Rush	1		10													_
	P.0.	Box 0	7	Project Name					1992							tal.co					
Mailing	Address	BINM	FIELD, NM 87413	Boy	d GC	1A		49	∩1 H									7109			
7	RPA	+MERIC	A	Project #:		11.20gar, 1	1		el. 50							-345					
			2-1199	1							0.00	and the second second		and the second	Contraction of the	ues	Conception of the	,			
email o				Project Mana	ger:			(ylı	sel)			1)4)							
QA/QC	Package:			J_1	BLAGG		(8021)	IS OF	Dies					4,SC	PCB's						
Stan	Idard		□ Level 4 (Full Validation)				's (8	(Ga	3as/					PO	2 PC						
Accredi				COLORADO DE COL	BLAGG		TMB 's	TPH (Gas only)	TPH Method 8015B (Gas/Diesel)	÷.	,	Î		Anions (F,CI,NO ₃ ,NO ₂ ,PO ₄ ,SO ₄)	8081 Pesticides / 8082			14			Î
		L Othe	۲		V Yes		1 #		3015	TPH (Method 418.1)	504.1)	8310 (PNA or PAH)	s	NO ₃ ,	es /		8270 (Semi-VOA)	CHURUD			Air Bubbles (Y or N)
	(Type)			sample 1 em	perature: 7.7	0		ITBE	po	hod	pou	A or	leta	CI,N	icide	(AC	ni-V	100			s (Y
Data	Time	Matrix	Sample Deguest ID	Container	Preservative	HEAL No.	BTEX + MTBE	BTEX + MTBE +	deth	Met	(Method	PN.	RCRA 8 Metals	s (F	Pest	8260B (VOA)	Ser	U			bble
Date	Time	Matrix	Sample Request ID	Type and #	Туре	同能品品 。	LEX	Х Ш	H)H	EDB (10	CRA	ion	118	60E	70 (Bu
ital			95 BLT (A)			1201597	B	B		F	Ш	83	Ř	Ar	80	82	82		\rightarrow	+	Ai
19/2012	1130	SOIL	95 BGT (A) 5-Pt C, 6	402×1	COUL	-1	X		X	X	_							X		\perp	
<u> </u>	1204	1/	95 BW (B) / 5-P6 @ 3		1(2	×		×	X								X	-		
																			-		
																				+	-
											+	-							-	+	
												-+	\neg		_				+	+	+
										\rightarrow	+	-		-	_					+	-
									-		-		-						+		
									-+				-+							+	+
											_		-						\rightarrow	+	_
Date:	Time:	Relinquishe	ed by:	Received by:		Date Time	Ron	narks			1	Dor		0.1	0	015					
1/19/2012			Blata	AL. I	()	1/19/2012 1365										5					
Date:	1305 Time:	Relinguishe	ed by:	Received by:	halter	Date Time	PA	a-ke	t:	24	SCH1	in	B67	-17							
Vializ				nii	ala		LOA	120	: +	J	efc	F	Par	P							
11/12	HEOZ	1(mi	ster Wallers	1/ Juhil	lipar:	1/20/120900								~]

*

If necessary, samples submitted to Hall Environmental may be subcontracted to other accredited laboratories. This serves as notice of this possibility. Any sub-contracted data will be clearly notated on the analytical report.

bp

, *



BP America Production Company 200 Energy Court Farmington, NM 87401 Phone: (505) 326-9200

January 17, 2012

Charles Gaines 16817 US 550 Aztec, NM 87410

VIA CERTIFIED MAIL - RETURN RECEIPT REUESTED

Re: Notification of plans to close/remove a below grade tank Well Name: BOYD GAS COM 001A

Dear Mr. Gaines,

As part of the NM "Pit Rule": 19.15.17.13 Closure Requirements, Paragraph J. BP America Production Company (BP) is required to notify the surface owner of BP's plans to close/remove a below grade tank. BP wishes to inform you of our plans to close/remove the below grade tank on its well pad located on your surface. BP plans to commence this work on or about January 17, 2012. If there aren't any unforeseen problems, the work should be completed within 10 working days.

As a point of clarification, BP will be closing the below grade tank and either operating without one or replacing it with an above ground tank, the well site will continue to operate.

Unless you have questions about this notice, there is no need to respond to this letter. If you do have any questions or concerns, please contact me at 505-326-9214

Sincerely,

ADUC

Jerry Van Riper Surface Coordinator/Business Security Representative BP America Production Company

BP America Production Company 200 Energy Court Farmington, NM 87401 Phone: (505) 326-9200

SENT VIA E-MAIL TO: BRANDON.POWELL@STATE.NM.US

January 19, 2012

*

New Mexico Oil Conservation Division 1000 Rio Brazos Road Aztec, New Mexico 87410

RE: Notice of Proposed Below-Grade Tank (BGT) Closure

BOYD GAS COM 001A API 30-045-22132 (M) Section 08 – T31N – R10W San Juan County, New Mexico

Dear Mr. Brandon Powell:


In regards to the captioned subject and requirements of the NMOCD pit rule, this letter is notification that BP is planning to close a 95 bbl BGT that will no longer be operational at this well site.

Should you have any questions, please feel free to contact BP at our Farmington office.

Sincerely,

Buddy Shaw BP Environmental Advisor

(505) 320-0401

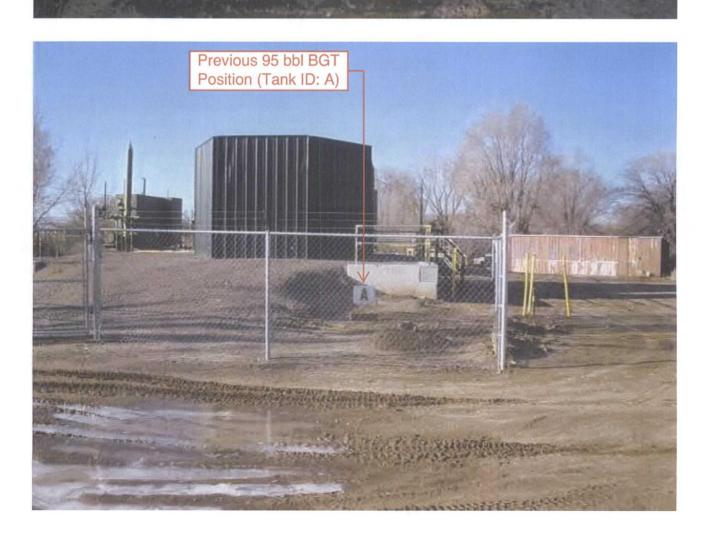

BAMERICA PRODUCTION COMPANY BOYD GAS COM 001A API 3004522132 LEASE FEE 170 FNL 1640 FWL (C) SEC 8 T31N R10W SAN JUAN COUNTY ELEY 5812 LAT 36° 55' 2.136" JONG 107° 54" 33.660"

503-34/-3300