

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

HOBBS OCD
AUG 06 2018
RECEIVED

OPERATOR'S NAME:	Devon Energy Production Company, L.P.
LEASE NO.:	NMNM-018848
WELL NAME & NO.:	Alley Cat 17 Fed Com 211H
• SURFACE HOLE FOOTAGE:	0251' FNL & 0821' FWL
BOTTOM HOLE FOOTAGE	0330' FSL & 0400' FWL
LOCATION:	Section 17, T. 23 S., R 32 E., NMPM
COUNTY:	County, New Mexico

Communitization Agreement

The operator will submit a Communitization Agreement to the Carlsbad Field Office, 620 E Greene St. Carlsbad, New Mexico 88220, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.

If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.

In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

A. DRILLING OPERATIONS REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- Spudding well (minimum of 24 hours)
- Setting and/or Cementing of all casing strings (minimum of 4 hours)
- BOPE tests (minimum of 4 hours)

☐ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240,
(575) 3933612

- A Hydrogen Sulfide (H₂S) Drilling Plan shall be activated 500 feet prior to drilling into the Delaware formation. **As a result, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public**

protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

2. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval. **If the drilling rig is removed without approval – an Incident of Non-Compliance will be written and will be a “Major” violation.**
3. Option – Setting surface casing with Spudder Rig
 - a. Notify the BLM when removing the Spudder Rig.
 - b. Notify the BLM when moving in the H&P Flex Rig. Rig to be moved in within 60 days of notification that Ashton Oilfield Services Rig has left the location. Failure to notify or have rig on location within 60 days will result in an Incident of Non-Compliance.
 - c. Once the H&P Flex Rig is on location, it shall not be removed from over the hole without prior approval unless the production casing has been run and cemented or the well has been properly plugged. **If the drilling rig is removed without approval – an Incident of Non-Compliance will be written and will be a “Major” violation.**
 - d. BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as H&P Flex Rig is rigged up on well. CIT for the surface casing shall be performed and results recorded on subsequent sundry – pressure to be 1200 psi.
4. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works is located, this does not include the dog house or stairway area.
5. **The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.**

B. CASING

Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.

Centralizers required on surface casing per Onshore Order 2.III.B.1.f.

Wait on cement (WOC) for Water Basin:

After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements.

Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.

No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.

Possible water flows in the Salado and Castile.

Possible lost circulation in the Red Beds, Rustler, and Delaware.

1. The 13-3/8 inch surface casing shall be set at approximately 1071 feet (a minimum of 25 feet into the Rustler Anhydrite and above the salt) and cemented to the surface. If salt is encountered, set casing at least 25 feet above the salt. Excess calculates to 22% - Additional cement may be required.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry.
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength,

whichever is greater.

- d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Intermediate casing shall be kept fluid filled while running into hole to meet BLM minimum collapse requirements.

2. The minimum required fill of cement behind the 9-5/8 inch intermediate casing is:

☐ Cement to surface. If cement does not circulate see B.1.a, c-d above.

Centralizers required on horizontal leg, must be type for horizontal service and a minimum of one every other joint.

3. The minimum required fill of cement behind the 5-1/2 inch production casing is:

☐ Cement should tie-back at least 200 feet into previous casing string. Operator shall provide method of verification.

4. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

C. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API 53.
2. Variance approved to use flex line from BOP to choke manifold. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. **Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.** If the BLM inspector questions the straightness of the hose, a BLM engineer will be contacted and will review in the field or via picture supplied by inspector to determine if changes are required (operator shall expect delays if this occurs).
3. **Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of**

the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be psi.

- a. **Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.**
 - b. **If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.**
 - c. **Manufacturer representative shall install the test plug for the initial BOP test.**
 - d. **Operator shall perform the intermediate casing integrity test to 70% of the casing burst. This will test the multi-bowl seals.**
 - e. **If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.**
4. The appropriate BLM office shall be notified a minimum of hours in advance for a representative to witness the tests.
- a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - a. The tests shall be done by an independent service company utilizing a test plug **not a cup or J-packer.**
 - b. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
 - c. The results of the test shall be reported to the appropriate BLM office.
 - d. All tests are required to be recorded on a calibrated test chart. **A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.**
 - e. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test

plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.

D. DRILL STEM TEST

If drill stem tests are performed, Onshore Order 2.III.D shall be followed.

E. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

JAM 071018

PECOS DISTRICT SURFACE USE CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Devon Energy Production Company LP
LEASE NO.:	NMNM018848
WELL NAME & NO.:	Alley Cat 17 Fed Com 211H
SURFACE HOLE FOOTAGE:	251'N & 821'W
BOTTOM HOLE FOOTAGE:	330'S & 400'W
LOCATION:	Section 17, T.23 S., R.32 E., NMPM
COUNTY:	Lea County, New Mexico

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- ☐ **General Provisions**
- ☐ **Permit Expiration**
- ☐ **Archaeology, Paleontology, and Historical Sites**
- ☐ **Noxious Weeds**
- ☒ **Special Requirements**
 - Lesser Prairie-Chicken Timing Stipulations
 - Ground-level Abandoned Well Marker
 - VRM
 - Range
 - Watershed & Surface/Groundwater Quality
 - Tank Battery
- ☐ **Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- ☐ **Road Section Diagram**
- ☐ **Production (Post Drilling)**
 - Well Structures & Facilities
 - Pipelines
 - Electric Lines
- ☐ **Interim Reclamation**
- ☐ **Final Abandonment & Reclamation**

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

Timing Limitation Stipulation / Condition of Approval for lesser prairie-chicken:

Oil and gas activities including 3-D geophysical exploration, and drilling will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Additionally, no new drilling will be allowed within up to 200 meters of leaks known at the time of permitting. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 feet from the source of the noise.

Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well. For more installation details, contact the Carlsbad Field Office at 575-234-5972.

This authorization is subject to your Certificate of Participation and/or Certificate of Inclusion under the New Mexico Candidate Conservation Agreement. Because it involves surface disturbing activities covered under your Certificate, your Habitat Conservation Fund Account with the Center of Excellence for Hazardous Materials Management (CEHMM) will be debited according to Exhibit B Part 2 of the Certificate of Participation.

Power lines shall be constructed and designed in accordance to standards outlined in "Suggested Practices for Avian Protection on Power lines: The State of the Art in 2006" Edison Electric Institute, APLIC, and the California Energy Commission 2006. The holder shall assume the burden and expense of proving that pole designs not shown in the above publication deter raptor perching, roosting, and nesting. Such proof shall be provided by a raptor expert approved by the Authorized Officer. The BLM reserves the right to require modification or additions to all power line structures placed on this right-of-way, should they be necessary to ensure the safety of large perching birds. The holder without liability or expense shall make such modifications and/or additions to the United States.

Raptor Nest Mitigation

- A BLM Wildlife Biologist must be contacted by the operator prior to construction activities to determine if the raptor nests/burrows are active.
- Raptor nests on special, natural habitat features, such as trees, large brush, cliff faces and escarpments, will be protected by not allowing surface disturbance within up to 200 meters of nests or by delaying activity for up to 90 days, or a combination of both. Exceptions to this requirement for raptor nests will be

considered if the nests expected to be disturbed are inactive, the proposed activity is of short duration (e.g. habitat enhancement projects, fences, pipelines), and will not result in continuing activity in proximity to the nest.

- Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 ft. from the source of the noise.

Watershed

- The entire well pad will be bermed to prevent oil, salt, and other chemical contaminants from leaving the well pad. Topsoil shall not be used to construct the berm. No water flow from the uphill side(s) of the pad shall be allowed to enter the well pad. The berm shall be maintained through the life of the well and after interim reclamation has been completed.
- Any water erosion that may occur due to the construction of the well pad and CTB pad during the life of the well and CTB will be corrected within two weeks and proper measures will be taken to prevent future erosion.
- Tank battery locations will be lined and bermed. A 20 mil permanent liner will be installed with a 4 oz. felt backing to prevent tears or punctures. Tank battery berms must be large enough to contain 1 ½ times the content of the largest tank.
- Automatic shut off, check valves, or similar systems will be installed for tanks to minimize the effects of catastrophic line failures used in production or drilling.
- Stockpiling of topsoil is required. The top soil shall be stockpiled in an appropriate location to prevent loss of soil due to water or wind erosion and not used for berming or erosion control.

Range

Temporary Fence Crossing Requirement

Where entry is granted across a fence line, the fence must be braced and tied off on both sides of the passageway with H-braces prior to cutting. Once the work is completed, the fence will be restored to its prior condition, or better. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

Livestock Watering Requirement

Devon, in an agreement with the grazing allotment holder, would relocate a water pipeline and trough affected by several proposed actions. See Table 12 above.

Devon must contact the allotment holder prior to construction to identify the location of the pipelines. Devon must take measures to protect the pipelines from compression or other damages. If the pipelines are damaged or compromised in any way near the proposed project as a result of oil and gas activity, Devon is responsible for repairing the pipelines immediately. Devon must notify the BLM office (575-234-5972) and the private surface landowner or the grazing allotment holder if any damage occurs to structures that provide water to livestock.

During construction, Devon shall minimize disturbance to existing fences, water lines, troughs, windmills, and other improvements on public lands. Devon is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the grazing permittee/allottee prior to disturbing any range improvement projects. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

Temporary Fencing Requirement

For the proposed Todd Apache 2 Pad 7-1, the BLM would require temporary fencing be installed before construction begins. This fencing would stay in place and be maintained throughout construction activities to protect nearby dune land habitat from harm.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS**Road Width**

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outslowing and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch

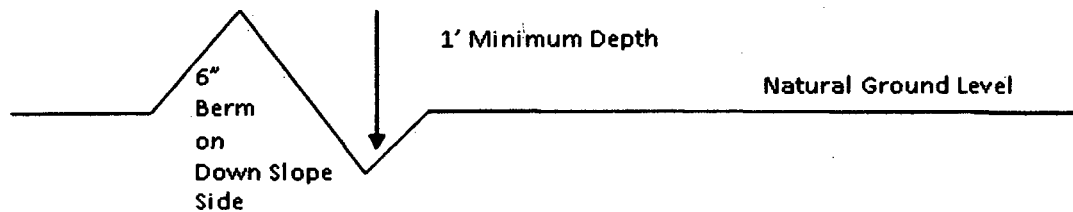

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Cattle guards

An appropriately sized cattle guard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattle guards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattle guards that are in place and are utilized during lease operations.

Fence Requirement

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Construction Steps

1. Salvage topsoil
2. Construct road

3. Redistribute topsoil
4. Revegetate slopes

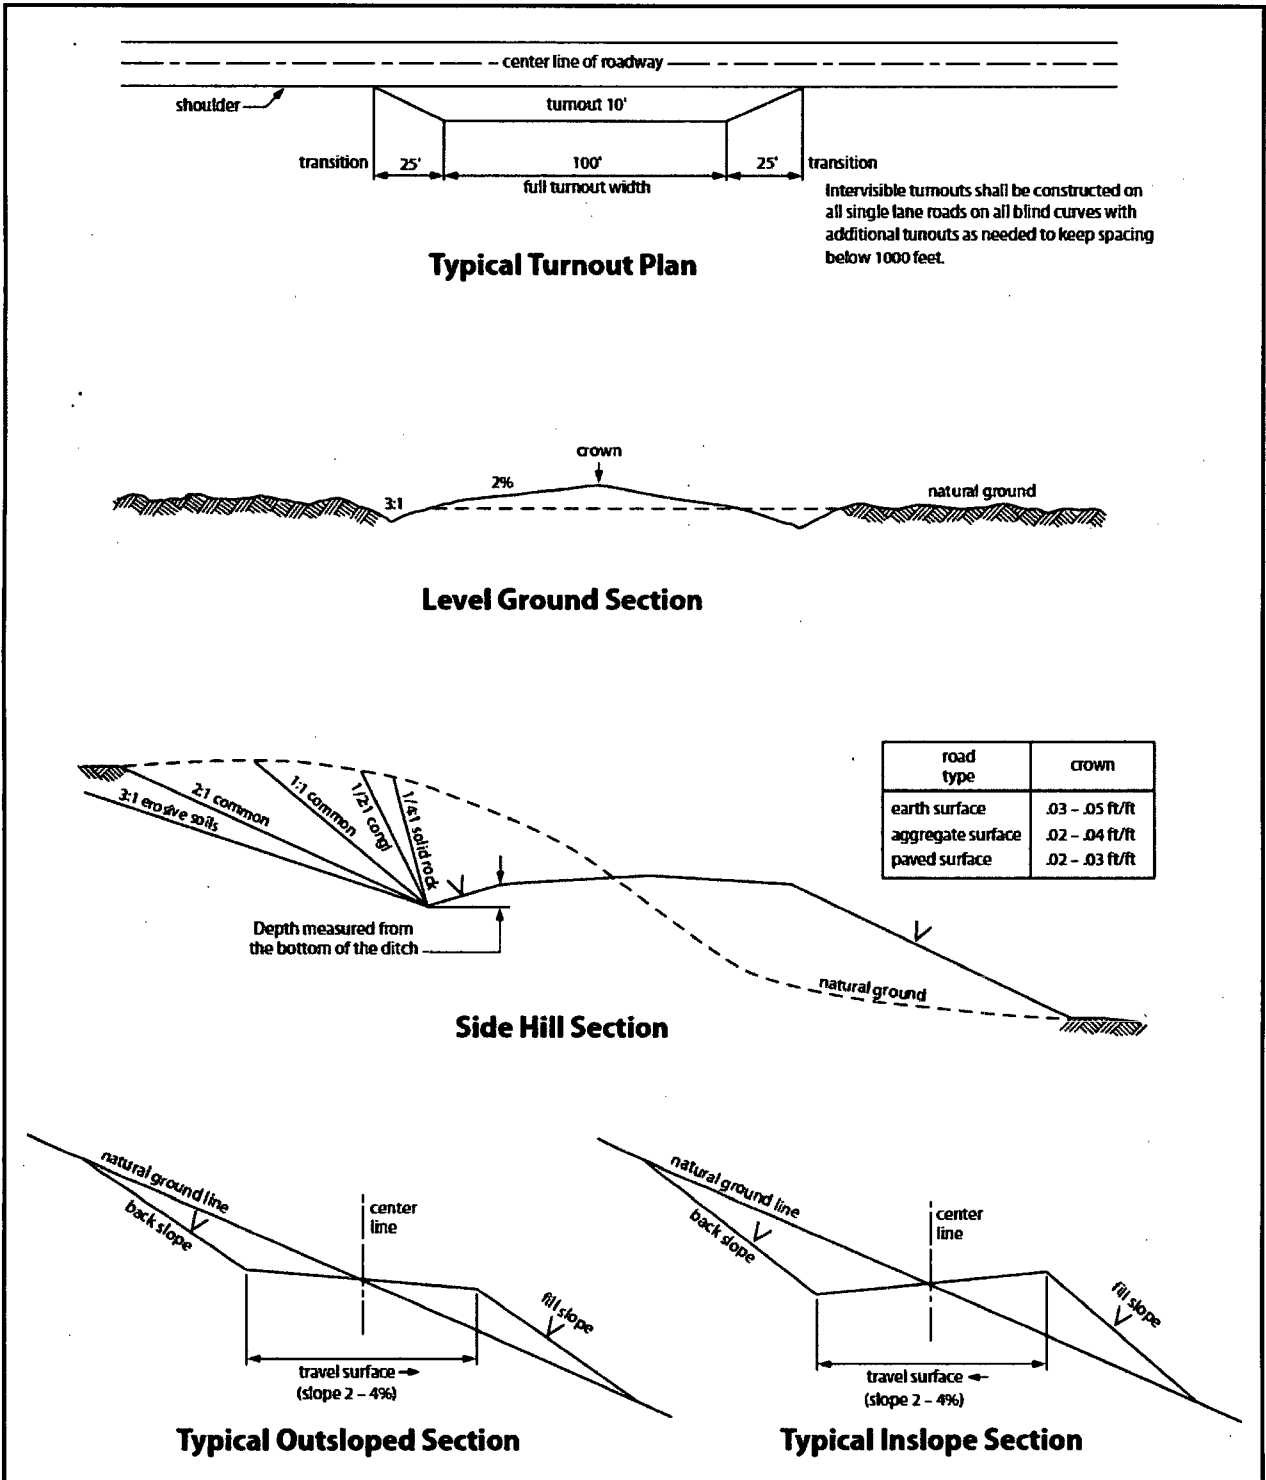


Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

VII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

VRM Facility Requirement

There are no mitigation measures for this project as currently proposed.

B. PIPELINES**BURIED PIPELINE STIPULATIONS**

A copy of the application (Grant, APD, or Sundry Notice) and attachments, including conditions of approval, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The Holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The Holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way.

This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

4. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil or other pollutant, wherever found, shall be the responsibility of holder, regardless of fault. Upon failure of holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he deems necessary to control and clean up the discharge and restore the area, including where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of the holder. Such action by the Authorized Officer shall not relieve holder of any responsibility as provided herein.

5. All construction and maintenance activity will be confined to the authorized right-of-way.
6. The pipeline will be buried with a minimum cover of 36 inches between the top of the pipe and ground level.
7. The maximum allowable disturbance for construction in this right-of-way will be 30 feet:
- Blading of vegetation within the right-of-way will be allowed: maximum width of blading operations will not exceed 20 feet. The trench is included in this area. (*Blading is defined as the complete removal of brush and ground vegetation.*)
 - Clearing of brush species within the right-of-way will be allowed: maximum width of clearing operations will not exceed 30 feet. The trench and bladed area are included in this area. (*Clearing is defined as the removal of brush while leaving ground vegetation (grasses, weeds, etc.) intact. Clearing is best accomplished by holding the blade 4 to 6 inches above the ground surface.*)
 - The remaining area of the right-of-way (if any) shall only be disturbed by compressing the vegetation. (*Compressing can be caused by vehicle tires, placement of equipment, etc.*)
8. The holder shall stockpile an adequate amount of topsoil where blading is allowed. The topsoil to be stripped is approximately 6 inches in depth. The topsoil will be segregated from other spoil piles from trench construction. The topsoil will be evenly distributed over the bladed area for the preparation of seeding.
9. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.
10. Vegetation, soil, and rocks left as a result of construction or maintenance activity will be randomly scattered on this right-of-way and will not be left in rows, piles, or berms, unless otherwise approved by the Authorized Officer. The entire right-of-way shall be recontoured to match the surrounding landscape. The backfilled soil shall be compacted and a 6 inch berm will be left over the ditch line to allow for settling back to grade.
11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.

12. The holder will reseed all disturbed areas. Seeding will be done according to the attached seeding requirements, using the following seed mix.

- | | |
|--|--|
| <input type="checkbox"/> seed mixture 1 | <input type="checkbox"/> seed mixture 3 |
| <input type="checkbox"/> seed mixture 2 | <input type="checkbox"/> seed mixture 4 |
| <input checked="" type="checkbox"/> seed mixture 2/LPC | <input type="checkbox"/> Aplomado Falcon Mixture |

13. All above-ground structures not subject to safety requirements shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be color which simulates "Standard Environmental Colors" – **Shale Green**, Munsell Soil Color No. 5Y 4/2.

14. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. All signs and information thereon will be posted in a permanent, conspicuous manner, and will be maintained in a legible condition for the life of the pipeline.

15. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder before maintenance begins. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway. As determined necessary during the life of the pipeline, the Authorized Officer may ask the holder to construct temporary deterrence structures.

16. Any cultural and/or paleontological resources (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

17. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes associated roads, pipeline corridor and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

18. Escape Ramps - The operator will construct and maintain pipeline/utility trenches that are not otherwise fenced, screened, or netted to prevent livestock, wildlife, and humans from becoming entrapped. At a minimum, the operator will construct and maintain escape ramps, ladders, or

other methods of avian and terrestrial wildlife escape in the trenches according to the following criteria:

- a. Any trench left open for eight (8) hours or less is not required to have escape ramps; however, before the trench is backfilled, the contractor/operator shall inspect the trench for wildlife, remove all trapped wildlife, and release them at least 100 yards from the trench.
- b. For trenches left open for eight (8) hours or more, earthen escape ramps (built at no more than a 30 degree slope and spaced no more than 500 feet apart) shall be placed in the trench.

19. Special Stipulations:

Lesser Prairie-Chicken

Oil and gas activities will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, geophysical exploration other than 3-D operations, and pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 ft. from the source of the noise.

This authorization is subject to your Certificate of Participation and/or Certificate of Inclusion under the New Mexico Candidate Conservation Agreement. Because it involves surface disturbing activities covered under your Certificate, your Habitat Conservation Fund Account with the Center of Excellence for Hazardous Materials Management (CEHMM) will be debited according to Exhibit B Part 2 of the Certificate of Participation.

STANDARD STIPULATIONS FOR SURFACE INSTALLED PIPELINES

A copy of the application (Grant, Sundry Notice, APD) and attachments, including stipulations, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 *et seq.* (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR, Part 702-799 and

especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.

3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to activity of the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

4. The holder shall be liable for damage or injury to the United States to the extent provided by 43 CFR Sec. 2883.1-4. The holder shall be held to a standard of strict liability for damage or injury to the United States resulting from pipe rupture, fire, or spills caused or substantially aggravated by any of the following within the right-of-way or permit area:

- a. Activities of the holder including, but not limited to construction, operation, maintenance, and termination of the facility.
- b. Activities of other parties including, but not limited to:
 - (1) Land clearing.
 - (2) Earth-disturbing and earth-moving work.
 - (3) Blasting.
 - (4) Vandalism and sabotage.
- c. Acts of God.

The maximum limitation for such strict liability damages shall not exceed one million dollars (\$1,000,000) for any one event, and any liability in excess of such amount shall be determined by the ordinary rules of negligence of the jurisdiction in which the damage or injury occurred.

This section shall not impose strict liability for damage or injury resulting primarily from an act of war or from the negligent acts or omissions of the United States.

5. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil, salt water, or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil, salt water, or other pollutant, wherever found, shall be the responsibility of

the holder, regardless of fault. Upon failure of the holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he deems necessary to control and clean up the discharge and restore the area, including, where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of the holder. Such action by the Authorized Officer shall not relieve the holder of any responsibility as provided herein.

6. All construction and maintenance activity will be confined to the authorized right-of-way width of 20 feet. If the pipeline route follows an existing road or buried pipeline right-of-way, the surface pipeline must be installed no farther than 10 feet from the edge of the road or buried pipeline right-of-way. If existing surface pipelines prevent this distance, the proposed surface pipeline must be installed immediately adjacent to the outer surface pipeline. All construction and maintenance activity will be confined to existing roads or right-of-ways.

7. No blading or clearing of any vegetation will be allowed unless approved in writing by the Authorized Officer.

8. The holder shall install the pipeline on the surface in such a manner that will minimize suspension of the pipeline across low areas in the terrain. In hummocky or dune areas, the pipeline will be "snaked" around hummocks and dunes rather than suspended across these features.

9. The pipeline shall be buried with a minimum of 24 inches under all roads, "two-tracks," and trails. Burial of the pipe will continue for 20 feet on each side of each crossing. The condition of the road, upon completion of construction, shall be returned to at least its former state with no bumps or dips remaining in the road surface.

10. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.

12. Excluding the pipe, all above-ground structures not subject to safety requirement shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be a color which simulates "Standard Environmental Colors" – **Shale Green**, Munsell Soil Color No. 5Y 4/2; designated by the Rocky Mountain Five State

Interagency Committee.

13. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. Signs will be maintained in a legible condition for the life of the pipeline.

14. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway.

15. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the authorized officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the authorized officer. An evaluation of the discovery will be made by the authorized officer to determine appropriate cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the authorized officer after consulting with the holder.

16. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, powerline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

17. Surface pipelines must be less than or equal to 4 inches and a working pressure below 125 psi.

18. Special Stipulations:

- a. **Lesser Prairie-Chicken:** Oil and gas activities will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities and pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Normal vehicle use on existing roads will not be restricted.
- b. This authorization is subject to your Certificate of Participation and/or Certificate of Inclusion under the New Mexico Candidate Conservation Agreement. Because it involves surface disturbing activities covered under your Certificate, your Habitat Conservation Fund Account with the Center of Excellence for Hazardous

Materials Management (CEHMM) will be debited according to Exhibit B Part 2 of the Certificate of Participation.

C. ELECTRIC LINES

STANDARD STIPULATIONS FOR OVERHEAD ELECTRIC DISTRIBUTION LINES

A copy of the grant and attachments, including stipulations, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR, Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.
4. There will be no clearing or blading of the right-of-way unless otherwise agreed to in writing by the Authorized Officer.
5. Power lines shall be constructed and designed in accordance to standards outlined in "Suggested Practices for Avian Protection on Power lines: The State of the Art in 2006" Edison Electric Institute, APLIC, and the California Energy Commission 2006 . The holder shall assume the burden and expense of proving that pole designs not shown in the

above publication deter raptor perching, roosting, and nesting. Such proof shall be provided by a raptor expert approved by the Authorized Officer. The BLM reserves the right to require modification or additions to all powerline structures placed on this right-of-way, should they be necessary to ensure the safety of large perching birds. Such modifications and/or additions shall be made by the holder without liability or expense to the United States.

Raptor deterrence will consist of but not limited to the following: triangle perch discouragers shall be placed on each side of the cross arms and a nonconductive perching deterrence shall be placed on all vertical poles that extend past the cross arms.

6. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

7. The BLM serial number assigned to this authorization shall be posted in a permanent, conspicuous manner where the power line crosses roads and at all serviced facilities. Numbers will be at least two inches high and will be affixed to the pole nearest the road crossing and at the facilities served.

8. Upon cancellation, relinquishment, or expiration of this grant, the holder shall comply with those abandonment procedures as prescribed by the Authorized Officer.

9. All surface structures (poles, lines, transformers, etc.) shall be removed within 180 days of abandonment, relinquishment, or termination of use of the serviced facility or facilities or within 180 days of abandonment, relinquishment, cancellation, or expiration of this grant, whichever comes first. This will not apply where the power line extends service to an active, adjoining facility or facilities.

10. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

11. Special Stipulations:

- For reclamation remove poles, lines, transformer, etc. and dispose of properly.
- Fill in any holes from the poles removed.

Timing Limitation Stipulation/Condition of Approval for Lesser Prairie-Chicken:

Oil and gas activities including 3-D geophysical exploration, and drilling will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, geophysical exploration other than 3-D operations, and pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Additionally, no new drilling will be allowed within up to 200 meters of leks known at the time of permitting. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 ft. from the source of the noise.

This authorization is subject to your Certificate of Participation and/or Certificate of Inclusion under the New Mexico Candidate Conservation Agreement. Because it involves surface disturbing activities covered under your Certificate, your Habitat Conservation Fund Account with the Center of Excellence for Hazardous Materials Management (CEHMM) will be debited according to Exhibit B Part 2 of the Certificate of Participation.

VIII. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

IX. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well.

Seed Mixture for LPC Sand/Shinnery Sites

Holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed shall be done in accordance with State law(s) and within nine (9) months prior to purchase. Commercial seed shall be either certified or registered seed. The seed container shall be tagged in accordance with State law(s) and available for inspection by the Authorized Officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). Holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. Seeding shall be repeated until a satisfactory stand is established as determined by the Authorized Officer. Evaluation of growth may not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

<u>Species</u>	<u>lb/acre</u>
Plains Bristlegrass	5lbs/A
Sand Bluestem	5lbs/A
Little Bluestem	3lbs/A
Big Bluestem	6lbs/A
Plains Coreopsis	2lbs/A
Sand Dropseed	1lbs/A

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed

**PECOS DISTRICT
SURFACE USE
CONDITIONS OF APPROVAL**

OPERATOR'S NAME:	Devon Energy Production Company LP
LEASE NO.:	NMNM018848
WELL NAME & NO.:	Alley Cat 17 Fed Com 211H
SURFACE HOLE FOOTAGE:	251'/N & 821'/W
BOTTOM HOLE FOOTAGE:	330'/S & 400'/W
LOCATION:	Section 17, T.23 S., R.32 E., NMPM
COUNTY:	Lea County, New Mexico

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- ☐ **General Provisions**
- ☐ **Permit Expiration**
- ☐ **Archaeology, Paleontology, and Historical Sites**
- ☐ **Noxious Weeds**
- ☒ **Special Requirements**
 - Lesser Prairie-Chicken Timing Stipulations
 - Ground-level Abandoned Well Marker
 - VRM
 - Range
 - Watershed & Surface/Groundwater Quality
 - Tank Battery
- ☐ **Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- ☐ **Road Section Diagram**
- ☐ **Production (Post Drilling)**
 - Well Structures & Facilities
 - Pipelines
 - Electric Lines
- ☐ **Interim Reclamation**
- ☐ **Final Abandonment & Reclamation**

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

Timing Limitation Stipulation / Condition of Approval for lesser prairie-chicken:

Oil and gas activities including 3-D geophysical exploration, and drilling will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period.

Additionally, no new drilling will be allowed within up to 200 meters of leks known at the time of permitting. Normal vehicle use on existing roads will not be restricted.

Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 feet from the source of the noise.

Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well. For more installation details, contact the Carlsbad Field Office at 575-234-5972.

This authorization is subject to your Certificate of Participation and/or Certificate of Inclusion under the New Mexico Candidate Conservation Agreement. Because it involves surface disturbing activities covered under your Certificate, your Habitat Conservation Fund Account with the Center of Excellence for Hazardous Materials Management (CEHMM) will be debited according to Exhibit B Part 2 of the Certificate of Participation.

Power lines shall be constructed and designed in accordance to standards outlined in "Suggested Practices for Avian Protection on Power lines: The State of the Art in 2006" Edison Electric Institute, APLIC, and the California Energy Commission 2006. The holder shall assume the burden and expense of proving that pole designs not shown in the above publication deter raptor perching, roosting, and nesting. Such proof shall be provided by a raptor expert approved by the Authorized Officer. The BLM reserves the right to require modification or additions to all power line structures placed on this right-of-way, should they be necessary to ensure the safety of large perching birds. The holder without liability or expense shall make such modifications and/or additions to the United States.

Raptor Nest Mitigation

- A BLM Wildlife Biologist must be contacted by the operator prior to construction activities to determine if the raptor nests/burrows are active.
- Raptor nests on special, natural habitat features, such as trees, large brush, cliff faces and escarpments, will be protected by not allowing surface disturbance within up to 200 meters of nests or by delaying activity for up to 90 days, or a combination of both. Exceptions to this requirement for raptor nests will be

considered if the nests expected to be disturbed are inactive, the proposed activity is of short duration (e.g. habitat enhancement projects, fences, pipelines), and will not result in continuing activity in proximity to the nest.

- Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 ft. from the source of the noise.

Watershed

- The entire well pad will be bermed to prevent oil, salt, and other chemical contaminants from leaving the well pad. Topsoil shall not be used to construct the berm. No water flow from the uphill side(s) of the pad shall be allowed to enter the well pad. The berm shall be maintained through the life of the well and after interim reclamation has been completed.
- Any water erosion that may occur due to the construction of the well pad and CTB pad during the life of the well and CTB will be corrected within two weeks and proper measures will be taken to prevent future erosion.
- Tank battery locations will be lined and bermed. A 20 mil permanent liner will be installed with a 4 oz. felt backing to prevent tears or punctures. Tank battery berms must be large enough to contain 1 ½ times the content of the largest tank.
- Automatic shut off, check valves, or similar systems will be installed for tanks to minimize the effects of catastrophic line failures used in production or drilling.
- Stockpiling of topsoil is required. The top soil shall be stockpiled in an appropriate location to prevent loss of soil due to water or wind erosion and not used for berming or erosion control.

Range

Temporary Fence Crossing Requirement

Where entry is granted across a fence line, the fence must be braced and tied off on both sides of the passageway with H-braces prior to cutting. Once the work is completed, the fence will be restored to its prior condition, or better. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

Livestock Watering Requirement

Devon, in an agreement with the grazing allotment holder, would relocate a water pipeline and trough affected by several proposed actions. See Table 12 above.

Devon must contact the allotment holder prior to construction to identify the location of the pipelines. Devon must take measures to protect the pipelines from compression or other damages. If the pipelines are damaged or compromised in any way near the proposed project as a result of oil and gas activity, Devon is responsible for repairing the pipelines immediately. Devon must notify the BLM office (575-234-5972) and the private surface landowner or the grazing allotment holder if any damage occurs to structures that provide water to livestock.

During construction, Devon shall minimize disturbance to existing fences, water lines, troughs, windmills, and other improvements on public lands. Devon is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the grazing permittee/allottee prior to disturbing any range improvement projects. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

Temporary Fencing Requirement

For the proposed Todd Apache 2 Pad 7-1, the BLM would require temporary fencing be installed before construction begins. This fencing would stay in place and be maintained throughout construction activities to protect nearby dune land habitat from harm.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS**Road Width**

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill out sloping and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch

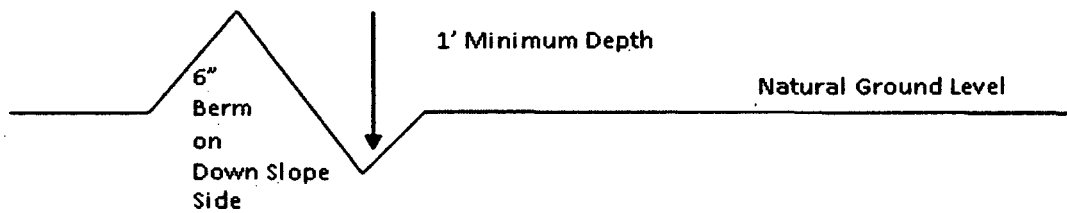

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Cattle guards

An appropriately sized cattle guard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattle guards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattle guards that are in place and are utilized during lease operations.

Fence Requirement

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Construction Steps

1. Salvage topsoil
2. Construct road

3. Redistribute topsoil
4. Revegetate slopes

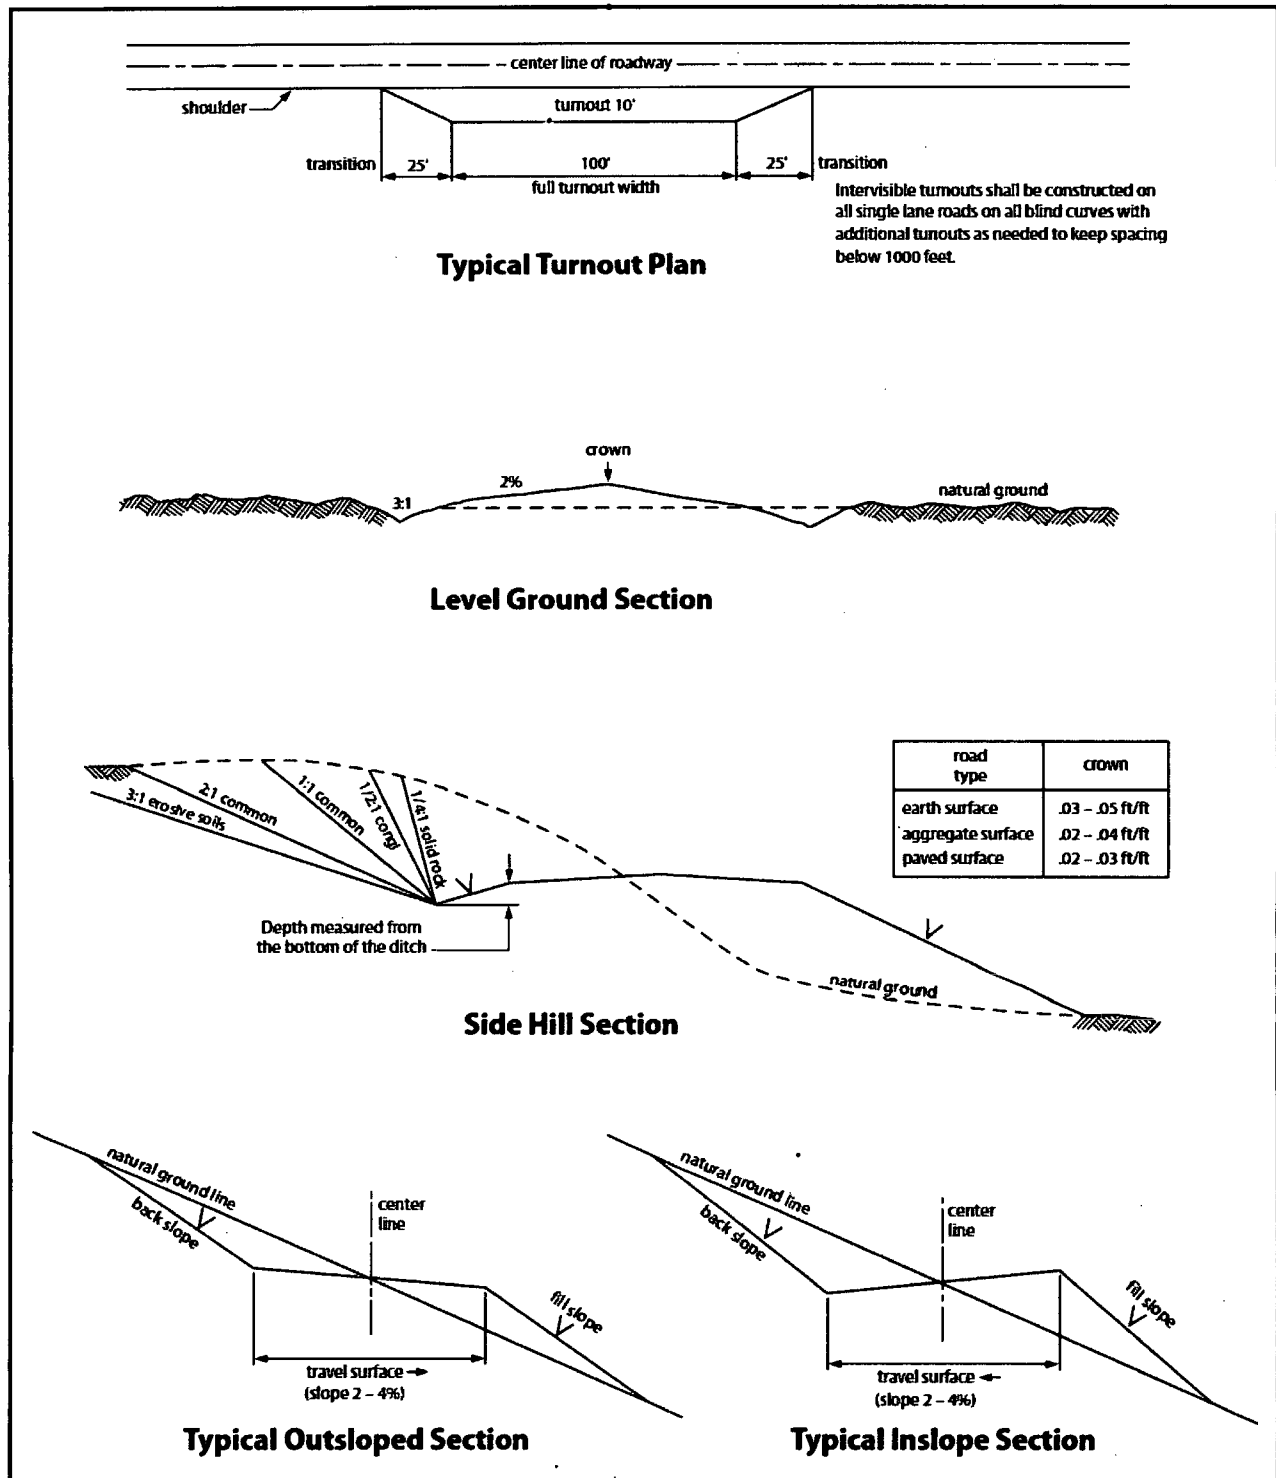


Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

VII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

VRM Facility Requirement

There are no mitigation measures for this project as currently proposed.

B. PIPELINES**BURIED PIPELINE STIPULATIONS**

A copy of the application (Grant, APD, or Sundry Notice) and attachments, including conditions of approval, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The Holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The Holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way.

This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

4. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil or other pollutant, wherever found, shall be the responsibility of holder, regardless of fault. Upon failure of holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he deems necessary to control and clean up the discharge and restore the area, including where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of the holder. Such action by the Authorized Officer shall not relieve holder of any responsibility as provided herein.

5. All construction and maintenance activity will be confined to the authorized right-of-way.
6. The pipeline will be buried with a minimum cover of 36 inches between the top of the pipe and ground level.
7. The maximum allowable disturbance for construction in this right-of-way will be 30 feet:
- Blading of vegetation within the right-of-way will be allowed: maximum width of blading operations will not exceed 20 feet. The trench is included in this area. (*Blading is defined as the complete removal of brush and ground vegetation.*)
 - Clearing of brush species within the right-of-way will be allowed: maximum width of clearing operations will not exceed 30 feet. The trench and bladed area are included in this area. (*Clearing is defined as the removal of brush while leaving ground vegetation (grasses, weeds, etc.) intact. Clearing is best accomplished by holding the blade 4 to 6 inches above the ground surface.*)
 - The remaining area of the right-of-way (if any) shall only be disturbed by compressing the vegetation. (*Compressing can be caused by vehicle tires, placement of equipment, etc.*)
8. The holder shall stockpile an adequate amount of topsoil where blading is allowed. The topsoil to be stripped is approximately 6 inches in depth. The topsoil will be segregated from other spoil piles from trench construction. The topsoil will be evenly distributed over the bladed area for the preparation of seeding.
9. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.
10. Vegetation, soil, and rocks left as a result of construction or maintenance activity will be randomly scattered on this right-of-way and will not be left in rows, piles, or berms, unless otherwise approved by the Authorized Officer. The entire right-of-way shall be recontoured to match the surrounding landscape. The backfilled soil shall be compacted and a 6 inch berm will be left over the ditch line to allow for settling back to grade.
11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.

- 12. The holder will reseed all disturbed areas. Seeding will be done according to the attached seeding requirements, using the following seed mix.

() seed mixture 1 () seed mixture 3
() seed mixture 2 () seed mixture 4
(X) seed mixture 2/LPC () Aplomado Falcon Mixture

13. All above-ground structures not subject to safety requirements shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be color which simulates "Standard Environmental Colors" – **Shale Green**, Munsell Soil Color No. 5Y 4/2.

14. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. All signs and information thereon will be posted in a permanent, conspicuous manner, and will be maintained in a legible condition for the life of the pipeline.

15. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder before maintenance begins. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway. As determined necessary during the life of the pipeline, the Authorized Officer may ask the holder to construct temporary deterrence structures.

16. Any cultural and/or paleontological resources (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

17. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes associated roads, pipeline corridor and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

18. Escape Ramps - The operator will construct and maintain pipeline/utility trenches that are not otherwise fenced, screened, or netted to prevent livestock, wildlife, and humans from becoming entrapped. At a minimum, the operator will construct and maintain escape ramps, ladders, or

other methods of avian and terrestrial wildlife escape in the trenches according to the following criteria:

- a. Any trench left open for eight (8) hours or less is not required to have escape ramps; however, before the trench is backfilled, the contractor/operator shall inspect the trench for wildlife, remove all trapped wildlife, and release them at least 100 yards from the trench.
- b. For trenches left open for eight (8) hours or more, earthen escape ramps (built at no more than a 30 degree slope and spaced no more than 500 feet apart) shall be placed in the trench.

19. Special Stipulations:

Lesser Prairie-Chicken

Oil and gas activities will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, geophysical exploration other than 3-D operations, and pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 ft. from the source of the noise.

This authorization is subject to your Certificate of Participation and/or Certificate of Inclusion under the New Mexico Candidate Conservation Agreement. Because it involves surface disturbing activities covered under your Certificate, your Habitat Conservation Fund Account with the Center of Excellence for Hazardous Materials Management (CEHMM) will be debited according to Exhibit B Part 2 of the Certificate of Participation.

STANDARD STIPULATIONS FOR SURFACE INSTALLED PIPELINES

A copy of the application (Grant, Sundry Notice, APD) and attachments, including stipulations, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 *et seq.* (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR, Part 702-799 and

especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.

3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to activity of the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

4. The holder shall be liable for damage or injury to the United States to the extent provided by 43 CFR Sec. 2883.1-4. The holder shall be held to a standard of strict liability for damage or injury to the United States resulting from pipe rupture, fire, or spills caused or substantially aggravated by any of the following within the right-of-way or permit area:

- a. Activities of the holder including, but not limited to construction, operation, maintenance, and termination of the facility.
- b. Activities of other parties including, but not limited to:
 - (1) Land clearing.
 - (2) Earth-disturbing and earth-moving work.
 - (3) Blasting.
 - (4) Vandalism and sabotage.
- c. Acts of God.

The maximum limitation for such strict liability damages shall not exceed one million dollars (\$1,000,000) for any one event, and any liability in excess of such amount shall be determined by the ordinary rules of negligence of the jurisdiction in which the damage or injury occurred.

This section shall not impose strict liability for damage or injury resulting primarily from an act of war or from the negligent acts or omissions of the United States.

5. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil, salt water, or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil, salt water, or other pollutant, wherever found, shall be the responsibility of

the holder, regardless of fault. Upon failure of the holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he deems necessary to control and clean up the discharge and restore the area, including, where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of the holder. Such action by the Authorized Officer shall not relieve the holder of any responsibility as provided herein.

6. All construction and maintenance activity will be confined to the authorized right-of-way width of 20 feet. If the pipeline route follows an existing road or buried pipeline right-of-way, the surface pipeline must be installed no farther than 10 feet from the edge of the road or buried pipeline right-of-way. If existing surface pipelines prevent this distance, the proposed surface pipeline must be installed immediately adjacent to the outer surface pipeline. All construction and maintenance activity will be confined to existing roads or right-of-ways.

7. No blading or clearing of any vegetation will be allowed unless approved in writing by the Authorized Officer.

8. The holder shall install the pipeline on the surface in such a manner that will minimize suspension of the pipeline across low areas in the terrain. In hummocky or dune areas, the pipeline will be "snaked" around hummocks and dunes rather than suspended across these features.

9. The pipeline shall be buried with a minimum of 24 inches under all roads, "two-tracks," and trails. Burial of the pipe will continue for 20 feet on each side of each crossing. The condition of the road, upon completion of construction, shall be returned to at least its former state with no bumps or dips remaining in the road surface.

10. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.

12. Excluding the pipe, all above-ground structures not subject to safety requirement shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be a color which simulates "Standard Environmental Colors" – **Shale Green**, Munsell Soil Color No. 5Y 4/2; designated by the Rocky Mountain Five State

Interagency Committee.

13. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. Signs will be maintained in a legible condition for the life of the pipeline.

14. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway.

15. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the authorized officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the authorized officer. An evaluation of the discovery will be made by the authorized officer to determine appropriate cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the authorized officer after consulting with the holder.

16. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, powerline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

17. Surface pipelines must be less than or equal to 4 inches and a working pressure below 125 psi.

18. Special Stipulations:

- a. **Lesser Prairie-Chicken:** Oil and gas activities will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities and pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Normal vehicle use on existing roads will not be restricted.
- b. This authorization is subject to your Certificate of Participation and/or Certificate of Inclusion under the New Mexico Candidate Conservation Agreement. Because it involves surface disturbing activities covered under your Certificate, your Habitat Conservation Fund Account with the Center of Excellence for Hazardous

Materials Management (CEHMM) will be debited according to Exhibit B Part 2 of the Certificate of Participation.

C. ELECTRIC LINES

STANDARD STIPULATIONS FOR OVERHEAD ELECTRIC DISTRIBUTION LINES

A copy of the grant and attachments, including stipulations, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR, Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.
4. There will be no clearing or blading of the right-of-way unless otherwise agreed to in writing by the Authorized Officer.
5. Power lines shall be constructed and designed in accordance to standards outlined in "Suggested Practices for Avian Protection on Power lines: The State of the Art in 2006" Edison Electric Institute, APLIC, and the California Energy Commission 2006 . The holder shall assume the burden and expense of proving that pole designs not shown in the

above publication deter raptor perching, roosting, and nesting. Such proof shall be provided by a raptor expert approved by the Authorized Officer. The BLM reserves the right to require modification or additions to all powerline structures placed on this right-of-way, should they be necessary to ensure the safety of large perching birds. Such modifications and/or additions shall be made by the holder without liability or expense to the United States.

Raptor deterrence will consist of but not limited to the following: triangle perch discouragers shall be placed on each side of the cross arms and a nonconductive perching deterrence shall be placed on all vertical poles that extend past the cross arms.

6. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

7. The BLM serial number assigned to this authorization shall be posted in a permanent, conspicuous manner where the power line crosses roads and at all serviced facilities. Numbers will be at least two inches high and will be affixed to the pole nearest the road crossing and at the facilities served.

8. Upon cancellation, relinquishment, or expiration of this grant, the holder shall comply with those abandonment procedures as prescribed by the Authorized Officer.

9. All surface structures (poles, lines, transformers, etc.) shall be removed within 180 days of abandonment, relinquishment, or termination of use of the serviced facility or facilities or within 180 days of abandonment, relinquishment, cancellation, or expiration of this grant, whichever comes first. This will not apply where the power line extends service to an active, adjoining facility or facilities.

10. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

11. Special Stipulations:

- For reclamation remove poles, lines, transformer, etc. and dispose of properly.
- Fill in any holes from the poles removed.

Timing Limitation Stipulation/Condition of Approval for Lesser Prairie-Chicken:

Oil and gas activities including 3-D geophysical exploration, and drilling will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, geophysical exploration other than 3-D operations, and pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Additionally, no new drilling will be allowed within up to 200 meters of leks known at the time of permitting. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 ft. from the source of the noise.

This authorization is subject to your Certificate of Participation and/or Certificate of Inclusion under the New Mexico Candidate Conservation Agreement. Because it involves surface disturbing activities covered under your Certificate, your Habitat Conservation Fund Account with the Center of Excellence for Hazardous Materials Management (CEHMM) will be debited according to Exhibit B Part 2 of the Certificate of Participation.

VIII. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

IX. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well.

Seed Mixture for LPC Sand/Shinnery Sites

Holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed shall be done in accordance with State law(s) and within nine (9) months prior to purchase. Commercial seed shall be either certified or registered seed. The seed container shall be tagged in accordance with State law(s) and available for inspection by the Authorized Officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). Holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. Seeding shall be repeated until a satisfactory stand is established as determined by the Authorized Officer. Evaluation of growth may not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

<u>Species</u>	<u>lb/acre</u>
Plains Bristlegrass	5lbs/A
Sand Bluestem	5lbs/A
Little Bluestem	3lbs/A
Big Bluestem	6lbs/A
Plains Coreopsis	2lbs/A
Sand Dropseed	1lbs/A

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed



**Devon Energy Center
333 West Sheridan Avenue
Oklahoma City, Oklahoma 73102-5015**

Hydrogen Sulfide (H₂S) Contingency Plan

For



Alley Cat 17 Fed Com 211H

**Sec-17 T-23S R-32E
251' FNL & 821' FWL
LAT. = 32.3110939' N (NAD83)
LONG = 103.7025639' W**

Lea County NM

Alley Cat 17 Fed Com 211H

This is an open drilling site. H₂S monitoring equipment and emergency response equipment will be used within 500' of zones known to contain H₂S, including warning signs, wind indicators and H₂S monitor.

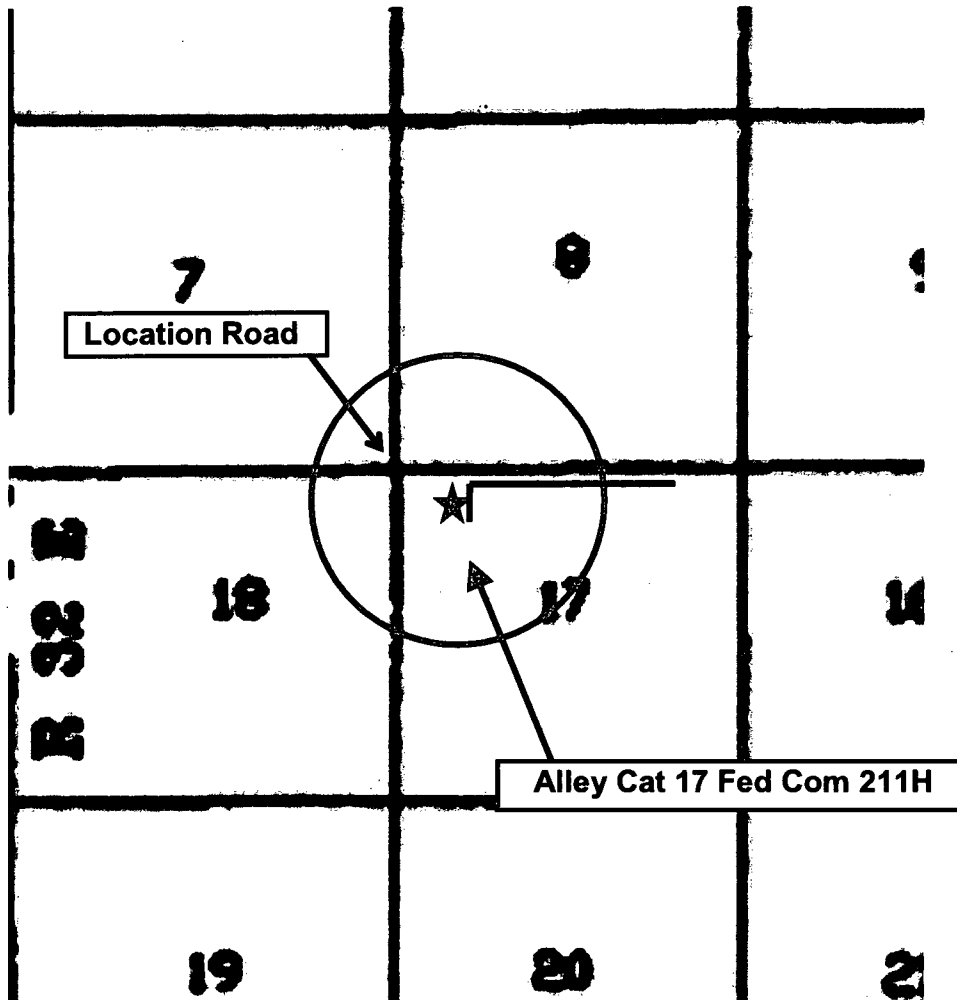

Assumed 100 ppm ROE = 3000' (Radius of Exposure)
100 ppm H₂S concentration shall trigger activation of this plan.

Escape

Crews shall escape upwind of escaping gas in the event of an emergency release of gas. Escape can be facilitated from the location entrance road. Crews should then block the entrance to the location from the lease road so as not to allow anyone traversing into a hazardous area. The blockade should be at a safe distance outside of the ROE. There are no homes or buildings in or near the ROE.

Assumed 100 ppm ROE = 3000'

100 ppm H₂S concentration shall trigger activation of this plan.

Emergency Procedures

In the event of a release of gas containing H₂S, the first responder(s) must

- **Isolate the area and prevent entry by other persons into the 100 ppm ROE.**
- **Evacuate any public places encompassed by the 100 ppm ROE.**
- **Be equipped with H₂S monitors and air packs in order to control the release.**
- **Use the "buddy system" to ensure no injuries occur during the response**
- **Take precautions to avoid personal injury during this operation.**
- **Contact operator and/or local officials to aid in operation. See list of phone numbers attached.**
- **Have received training in the**
 - **Detection of H₂S, and**
 - **Measures for protection against the gas,**
 - **Equipment used for protection and emergency response.**

Ignition of Gas Source

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO₂). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever there is an ignition of the gas

Characteristics of H₂S and SO₂

Common Name	Chemical Formula	Specific Gravity	Threshold Limit	Hazardous Limit	Lethal Concentration
Hydrogen Sulfide	H₂S	1.189 Air = 1	10 ppm	100 ppm/hr	600 ppm
Sulfur Dioxide	SO₂	2.21 Air = 1	2 ppm	N/A	1000 ppm

Contacting Authorities

Devon Energy Corp. personnel must liaison with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available. The following call list of essential and potential responders has been prepared for use during a release. Devon Energy Corp. Company response must be in coordination with the State of New Mexico's 'Hazardous Materials Emergency Response Plan' (HMER)

Hydrogen Sulfide Drilling Operation Plan

I. HYDROGEN SULFIDE (H₂S) TRAINING

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

1. The hazards and characteristics of hydrogen sulfide (H₂S)
2. The proper use and maintenance of personal protective equipment and life support systems.
3. The proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
4. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

1. The effects of H₂S metal components. If high tensile tubulars are to be used, personnel will be trained in their special maintenance requirements.
2. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
3. The contents and requirements of the H₂S Drilling Operations Plan and Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H₂S zone (within 3 days or 500 feet) and weekly H₂S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H₂S Drilling Operations Plan and the Public Protection Plan.

II. HYDROGEN SULFIDE TRAINING

Note: All H₂S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonably expected to contain H₂S.

1. Well Control Equipment

- A. Flare line
- B. Choke manifold – Remotely Operated
- C. Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit
- D. Auxiliary equipment may include if applicable: annular preventer and rotating head.
- E. Mud/Gas Separator

2. Protective equipment for essential personnel:

30-minute SCBA units located at briefing areas, as indicated on well site diagram, with escape units available in the top doghouse. As it may be difficult to communicate audibly while wearing these units, hand signals shall be utilized.

3. H₂S detection and monitoring equipment:

Portable H₂S monitors positioned on location for best coverage and response. These units have warning lights which activate when H₂S levels reach 10 ppm and audible sirens which activate at 15 ppm. Sensor locations:

- Bell nipple
- Possum Belly/Shale shaker
- Rig floor
- Choke manifold
- Cellar

Visual warning systems:

- A. Wind direction indicators as shown on well site diagram
- B. Caution/ Danger signs shall be posted on roads providing direct access to locations. Signs will be painted a high visibility yellow with black lettering of sufficient size to be reasonable distance from the immediate location. Bilingual signs will be used when appropriate.

4. Mud program:

The mud program has been designed to minimize the volume of H₂S circulated to surface. Proper mud weight, safe drilling practices and the use of H₂S scavengers will minimize hazards when penetrating H₂S bearing zones.

5. Metallurgy:

- A. All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold lines, and valves shall be H₂S trim.
- B. All elastomers used for packing and seals shall be H₂S trim.

6. Communication:

- A. Company personnel have/use cellular telephones in the field.
- B. Land line (telephone) communications at Office

7. Well testing:


- A. Drill stem testing will be performed with a minimum number of personnel in the immediate vicinity, which are necessary to safety and adequately conduct the test. The drill stem testing will be conducted during daylight hours and formation fluids will not be flowed to the surface. All drill-stem-testing operations conducted in an H₂S environment will use the closed chamber method of testing.
- B. There will be no drill stem testing.

Devon Energy Corp. Company Call List		
Drilling Supervisor – Basin – Mark Kramer		405-823-4796
EHS Professional – Laura Wright		405-439-8129
Agency Call List		
Lea County (575)	Hobbs	
	Lea County Communication Authority	393-3981
	State Police	392-5588
	City Police	397-9265
	Sheriff's Office	393-2515
	Ambulance	911
	Fire Department	397-9308
	LEPC (Local Emergency Planning Committee)	393-2870
	NMOCD	393-6161
	US Bureau of Land Management	393-3612
Eddy County (575)	Carlsbad	
	State Police	885-3137
	City Police	885-2111
	Sheriff's Office	887-7551
	Ambulance	911
	Fire Department	885-3125
	LEPC (Local Emergency Planning Committee)	887-3798
	US Bureau of Land Management	887-6544
	NM Emergency Response Commission (Santa Fe)	(505) 476-9600
	24 HR	(505) 827-9126
	National Emergency Response Center	(800) 424-8802
	National Pollution Control Center: Direct	(703) 872-6000
	For Oil Spills	(800) 280-7118
	Emergency Services	
	Wild Well Control	(281) 784-4700
	Cudd Pressure Control	(915) 699-0139 (915) 563-3356
	Halliburton	(575) 746-2757
	B. J. Services	(575) 746-3569
	Native Air – Emergency Helicopter – Hobbs	(575) 392-6429
Give GPS position:	Flight For Life - Lubbock, TX	(806) 743-9911
	Aerocare - Lubbock, TX	(806) 747-8923
	Med Flight Air Amb - Albuquerque, NM	(575) 842-4433
	Lifeguard Air Med Svc. Albuquerque, NM	(800) 222-1222
	Poison Control (24/7)	(575) 272-3115
	Oil & Gas Pipeline 24 Hour Service	(800) 364-4366
	NOAA – Website - www.nhc.noaa.gov	

Prepared in conjunction with
Dave Small



Devon Energy - Well Pad Rig Location Layout Safety Equipment Location

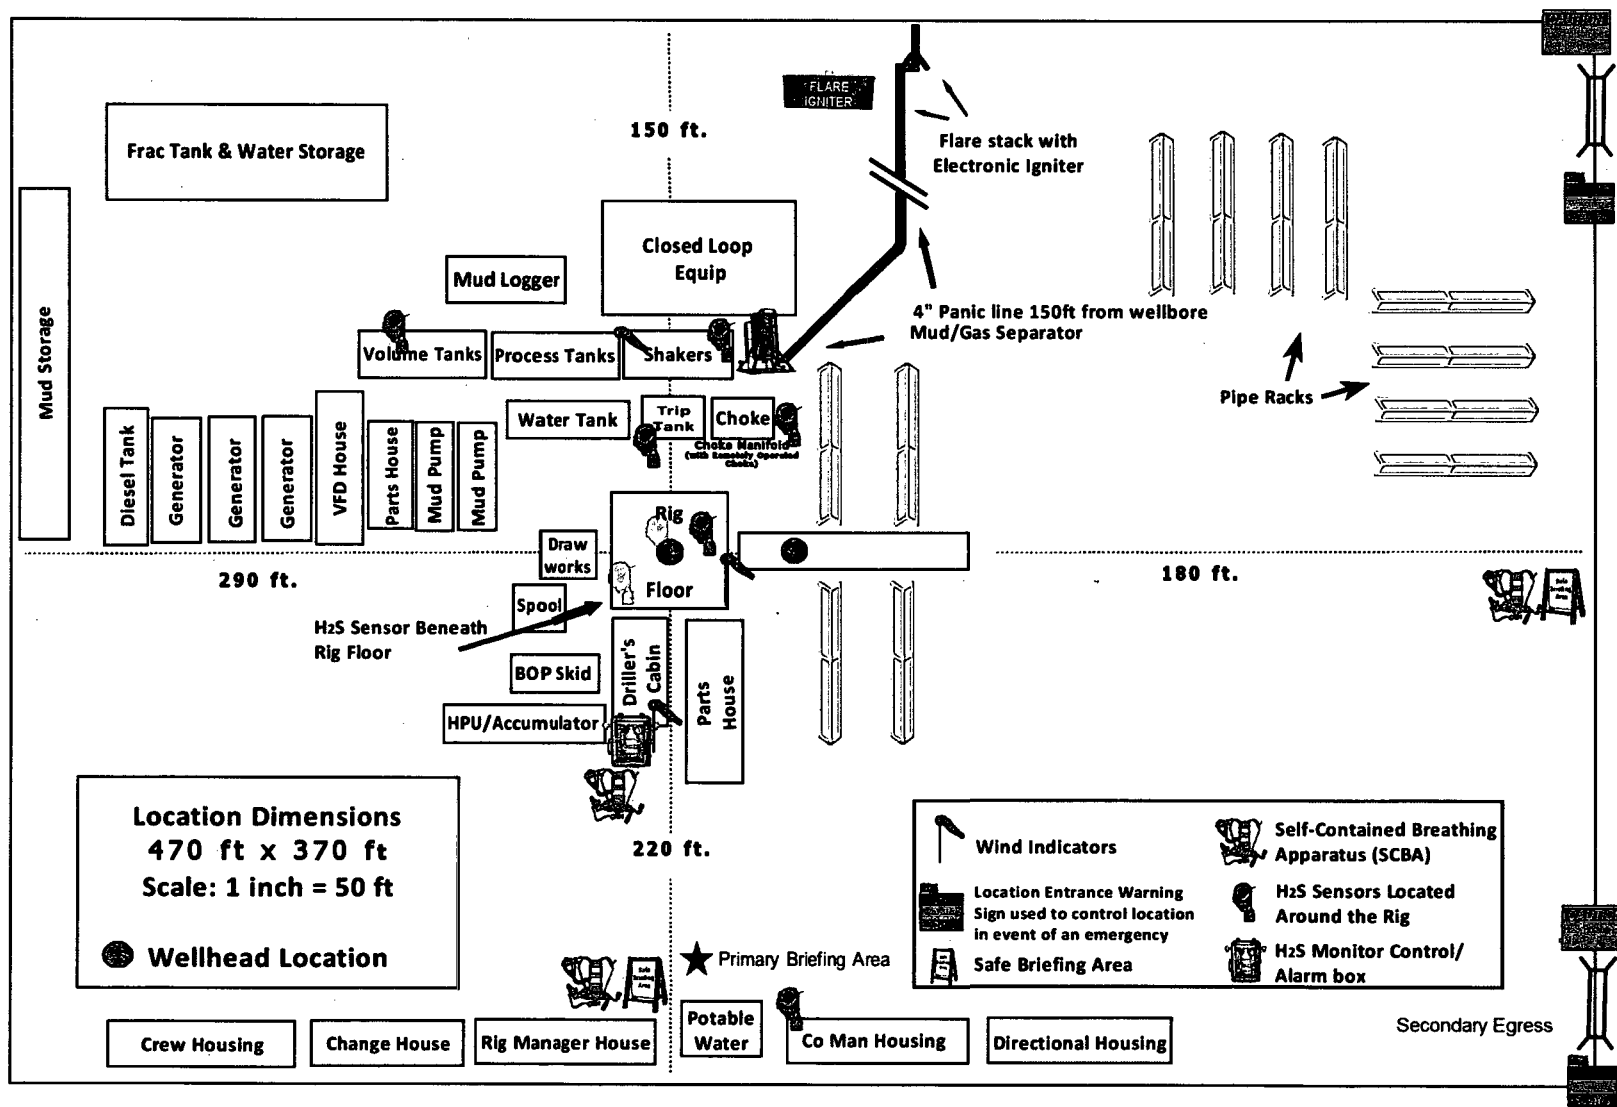

**5D Anti-Collision Report****Devon Energy****Field Name:** *Lea Co, NM Nad 83 NMEZ***Site Name:** *Alley Cat 17 Fed Com Pad***Well Name:** *Alley Cat 17 Fed Com 211H*

23 September 2017





Alley Cat 17 Fed Com 211H

Field Name: Lea Co, NM Nad 83 NMEZ	Map Units: US ft		Company Name: Devon Energy	
	Vertical Reference Datum (VRD): Mean Sea Level			
	Projected Coordinate System: NAD83 / New Mexico East (ftUS)			
	Comment:			
Site: Alley Cat 17 Fed Com Pad	Units: US ft	North Reference: Grid	Convergence Angle: 0.34	
	Position:	Northing: 477481.70 US ft	Latitude: 32° 18' 39.94"	
		Easting: 736207.13 US ft	Longitude: -103° 42' 9.23"	
	Elevation above MSL: 3602.10 US ft		Comment:	
Slot: Alley Cat 17 Fed Com 211H	Position (Relative to Site Centre)			
	+N/-S: 0.00 US ft	Northing: 477481.70 US ft	Latitude: 32°18'39.94"	
	+E/-W: 0.00 US ft	Easting: 736207.13 US ft	Longitude: -103°42'9.23"	
	Slot TVD Reference: Ground Elevation			
	Elevation above MSL: 3602.10 US ft			
Well: Alley Cat 17 Fed Com 211H	Type: Main well		UWI:	Plan: Working Plan
	File Number:	Comment:		
	Closure Distance: 4717.76 US ft		Closure Azimuth: 184.74°	
	Vertical Section: Position of Origin (Relative to Slot centre)			
	+N/-S: -0.00 US ft	+E/-W: -0.00 US ft	Az: 179.62°	
	Magnetic Parameters:			
	Model: bggm2017	Field Strength: 47982.0nT	Declination: 7.02°	Dip: 60.09° Date: 01/Mar/2018

Drill floor: Plan: Working Plan

Rig Height (Drill Floor): 23.90us ft	Elevation above MSL: 3626.00us ft	Inclination: 0.00°	Azimuth: 0.00°
--	---	---------------------------	-----------------------

Collision / Uncertainty Analysis

Primary Well	Start MD (USFt)	End MD (USFt)	Collision Risk Interval	No. of Std. Deviations in Error Computation
Alley Cat 17 Fed Com 211H (p)	0.00	30000.00	100.00	2

Secondary Well Names:

Alley Cat 17 Fed Com 212H (p)

Anti-Collision Report Terminology

S.Minor, S.Major: Radii of the ellipse of uncertainty at the current location as seen in the along hole direction.**PHI:** Angle between high-side vector and semi-minor axis**TVD Spread:** Total TVD range of the ellipsoid of uncertainty at the current location.**ES:** Distance between the primary and secondary uncertainty ellipsoids in the direction Cr-Cr.**T.Face to Sec:** Angle between the Hi-Side vector of the primary well at the current location and line of closest approach between the two wells.

5D Anti-Collision Report

AC Filter Info: Applied filter(s): Depth Range.**Default Survey Tool: MWD**

Separation factors calculated using Vector Separation (Independent Uncertainty). Surface Uncertainty (S.U.) Not Applied. Wellpath created using minimum curvature.

Anti-Collision Summary (TVD relative to Drill Floor)

SF							
Pri MD (US ft)	TVD (US ft)	Secondary Well Name	Sec MD (US ft)	CC (US ft)	ES (US ft)	SF	Risk
3525.59	3525.59	Alley Cat 17 Fed Com 212H (p)	3545.35	30.15	13.76	1.84	SF(Lo)
CC							
Pri MD (US ft)	TVD (US ft)	Secondary Well Name	Sec MD (US ft)	CC (US ft)	ES (US ft)	SF	Risk
0.00	0.00	Alley Cat 17 Fed Com 212H (p)	20.00	29.97	29.22	39.79	CC (Lo)

Primary Well: Alley Cat 17 Fed Com 211H (p)(TVD relative to Drill Floor)(All Azimuth Relative to GRID NORTH)

MD (US ft)	TVD (US ft)	T.Face to Sec (°)	S.Major (US ft)	S.Minor (US ft)	TVD Spread (US ft)	Nearst Well	ES (US ft)	CC (US ft)	SF	Survey Tool	Risk
0.00	0.00	89.41	0.00	0.00	0.00	Alley Cat 17 Fed Com 212H (p)	29.22	29.97	39.79	MWD	CC (Lo)
100.00	100.00	89.41	0.11	0.11	4.60	Alley Cat 17 Fed Com 212H (p)	28.97	29.97	30.00	MWD	CC (Lo)
200.00	200.00	89.41	0.34	0.34	4.62	Alley Cat 17 Fed Com 212H (p)	28.52	29.97	20.69	MWD	CC (Lo)
300.00	300.00	89.41	0.56	0.56	4.65	Alley Cat 17 Fed Com 212H (p)	28.07	29.97	15.79	MWD	CC (Lo)
400.00	400.00	89.41	0.79	0.79	4.70	Alley Cat 17 Fed Com 212H (p)	27.62	29.97	12.77	MWD	CC (Lo)
500.00	500.00	89.41	1.01	1.01	4.75	Alley Cat 17 Fed Com 212H (p)	27.17	29.97	10.71	MWD	CC (Lo)
600.00	600.00	89.41	1.24	1.24	4.82	Alley Cat 17 Fed Com 212H (p)	26.72	29.97	9.23	MWD	CC (Lo)
700.00	700.00	89.41	1.46	1.46	4.89	Alley Cat 17 Fed Com 212H (p)	26.28	29.97	8.11	MWD	CC (Lo)
800.00	800.00	89.41	1.69	1.69	4.98	Alley Cat 17 Fed Com 212H (p)	25.83	29.97	7.23	MWD	CC (Lo)
900.00	900.00	89.41	1.91	1.91	5.07	Alley Cat 17 Fed Com 212H (p)	25.38	29.97	6.52	MWD	CC (Lo)
1000.00	1000.00	89.41	2.14	2.14	5.17	Alley Cat 17 Fed Com 212H (p)	24.93	29.97	5.94	MWD	CC (Lo)
1100.00	1100.00	89.41	2.36	2.36	5.28	Alley Cat 17 Fed Com 212H (p)	24.48	29.97	5.45	MWD	CC (Lo)
1200.00	1200.00	89.41	2.59	2.59	5.40	Alley Cat 17 Fed Com 212H (p)	24.03	29.97	5.04	MWD	CC (Lo)
1300.00	1300.00	89.41	2.81	2.81	5.52	Alley Cat 17 Fed Com 212H (p)	23.58	29.97	4.69	MWD	CC (Lo)
1400.00	1400.00	89.41	3.03	3.03	5.64	Alley Cat 17 Fed Com 212H (p)	23.13	29.97	4.38	MWD	CC (Lo)
1500.00	1500.00	89.41	3.26	3.26	5.77	Alley Cat 17 Fed Com 212H (p)	22.68	29.97	4.11	MWD	CC (Lo)
1600.00	1600.00	89.41	3.48	3.48	5.91	Alley Cat 17 Fed Com 212H (p)	22.23	29.97	3.87	MWD	CC (Lo)
1700.00	1700.00	89.41	3.71	3.71	6.05	Alley Cat 17 Fed Com 212H (p)	21.78	29.97	3.66	MWD	CC (Lo)

5D Anti-Collision Report

Primary Well: Alley Cat 17 Fed Com 211H (p)(TVD relative to Drill Floor)(All Azimuth Relative to GRID NORTH)											
MD (US ft)	TVD (US ft)	T Face to Sec (°)	S.Major (US ft)	S.Minor (US ft)	TVD Spread (US ft)	Nearest Well	ES (US ft)	CC (US ft)	SF	Survey Tool	Risk
1800.00	1800.00	89.41	3.93	3.93	6.19	Alley Cat 17 Fed Com 212H (p)	21.33	29.97	3.47	MWD	CC (Lo)
1900.00	1900.00	89.41	4.16	4.16	6.34	Alley Cat 17 Fed Com 212H (p)	20.88	29.97	3.30	MWD	CC (Lo)
2000.00	2000.00	89.41	4.38	4.38	6.49	Alley Cat 17 Fed Com 212H (p)	20.43	29.97	3.14	MWD	CC (Lo)
2100.00	2100.00	89.41	4.61	4.61	6.65	Alley Cat 17 Fed Com 212H (p)	19.98	29.97	3.00	MWD	CC (Lo)
2200.00	2200.00	89.41	4.83	4.83	6.80	Alley Cat 17 Fed Com 212H (p)	19.53	29.97	2.87	MWD	CC (Lo)
2300.00	2300.00	89.41	5.06	5.06	6.96	Alley Cat 17 Fed Com 212H (p)	19.08	29.97	2.75	MWD	CC (Lo)
2400.00	2400.00	89.41	5.28	5.28	7.13	Alley Cat 17 Fed Com 212H (p)	18.63	29.97	2.64	MWD	CC (Lo)
2500.00	2500.00	89.41	5.51	5.51	7.29	Alley Cat 17 Fed Com 212H (p)	18.18	29.97	2.54	MWD	CC (Lo)
2600.00	2600.00	89.41	5.73	5.73	7.46	Alley Cat 17 Fed Com 212H (p)	17.73	29.97	2.45	MWD	SF(Lo); CC (Lo)
2700.00	2700.00	89.41	5.96	5.96	7.63	Alley Cat 17 Fed Com 212H (p)	17.28	29.97	2.36	MWD	SF(Lo); CC (Lo)
2800.00	2800.00	89.41	6.18	6.18	7.81	Alley Cat 17 Fed Com 212H (p)	16.83	29.97	2.28	MWD	SF(Lo); CC (Lo)
2900.00	2900.00	89.41	6.41	6.41	7.98	Alley Cat 17 Fed Com 212H (p)	16.38	29.97	2.21	MWD	SF(Lo); CC (Lo)
3000.00	3000.00	89.41	6.63	6.63	8.16	Alley Cat 17 Fed Com 212H (p)	15.94	29.97	2.14	MWD	SF(Lo); CC (Lo)
3100.00	3100.00	89.41	6.86	6.86	8.34	Alley Cat 17 Fed Com 212H (p)	15.49	29.97	2.07	MWD	SF(Lo); CC (Lo)
3200.00	3200.00	89.41	7.08	7.08	8.52	Alley Cat 17 Fed Com 212H (p)	15.04	29.97	2.01	MWD	SF(Lo); CC (Lo)
3300.00	3300.00	89.41	7.31	7.31	8.71	Alley Cat 17 Fed Com 212H (p)	14.59	29.97	1.95	MWD	SF(Lo); CC (Lo)
3400.00	3400.00	89.41	7.53	7.53	8.90	Alley Cat 17 Fed Com 212H (p)	14.14	29.97	1.89	MWD	SF(Lo); CC (Lo)
3500.00	3500.00	89.41	7.76	7.76	9.09	Alley Cat 17 Fed Com 212H (p)	13.73	30.01	1.84	MWD	SF(Lo)
3600.00	3600.00	89.43	7.98	7.98	9.28	Alley Cat 17 Fed Com 212H (p)	14.52	31.22	1.87	MWD	SF(Lo)
3700.00	3700.00	89.48	8.20	8.20	9.48	Alley Cat 17 Fed Com 212H (p)	17.06	34.17	2.00	MWD	SF(Lo)
3800.00	3800.00	89.54	8.43	8.43	9.67	Alley Cat 17 Fed Com 212H (p)	21.35	38.85	2.22	MWD	SF(Lo)
3900.00	3900.00	89.61	8.65	8.65	9.88	Alley Cat 17 Fed Com 212H (p)	27.38	45.26	2.53	MWD	
4000.00	4000.00	89.67	8.88	8.88	10.08	Alley Cat 17 Fed Com 212H (p)	35.15	53.40	2.93	MWD	
4100.00	4100.00	89.72	9.10	9.10	10.29	Alley Cat 17 Fed Com 212H (p)	44.64	63.25	3.40	MWD	
4200.00	4200.00	89.76	9.33	9.33	10.50	Alley Cat 17 Fed Com 212H (p)	55.84	74.80	3.95	MWD	
4300.00	4300.00	89.80	9.55	9.55	10.71		68.76	88.05	4.56	MWD	

5D Anti-Collision Report

Primary Well: Alley Cat 17 Fed Com 212H (p)(TVD relative to Drill Floor)(All Azimuth Relative to GRID NORTH)											
MD (US ft)	TVD (US ft)	T.Face to Sec (°)	S.Major (US ft)	S.Minor (US ft)	TVD Spread (US ft)	Nearest Well	ES (US ft)	CC (US ft)	SF	Survey Tool	Risk
						Alley Cat 17 Fed Com 212H (p)					
4400.00	4400.00	89.83	9.78	9.78	10.92	Alley Cat 17 Fed Com 212H (p)	83.17	102.83	5.23	MWD	
4500.00	4500.00	89.85	10.00	10.00	11.14	Alley Cat 17 Fed Com 212H (p)	97.79	117.87	5.87	MWD	
4600.00	4600.00	179.87	10.22	10.22	11.36	Alley Cat 17 Fed Com 212H (p)	112.90	133.40	6.51	MWD	
4700.00	4699.97	179.88	10.41	10.41	11.59	Alley Cat 17 Fed Com 212H (p)	129.69	150.60	7.20	MWD	
4800.00	4799.89	179.89	10.61	10.60	11.82	Alley Cat 17 Fed Com 212H (p)	148.20	169.52	7.95	MWD	
4900.00	4899.73	179.90	10.82	10.79	12.05	Alley Cat 17 Fed Com 212H (p)	168.41	190.14	8.75	MWD	
5000.00	4999.46	179.91	11.02	10.98	12.28	Alley Cat 17 Fed Com 212H (p)	190.34	212.47	9.60	MWD	
5100.00	5099.11	179.92	11.23	11.18	12.52	Alley Cat 17 Fed Com 212H (p)	213.11	235.65	10.45	MWD	
5200.00	5198.77	179.93	11.44	11.38	12.76	Alley Cat 17 Fed Com 212H (p)	235.88	258.83	11.28	MWD	
5300.00	5298.43	179.94	11.66	11.59	13.01	Alley Cat 17 Fed Com 212H (p)	258.65	282.01	12.07	MWD	
5400.00	5398.08	179.94	11.87	11.79	13.26	Alley Cat 17 Fed Com 212H (p)	281.41	305.19	12.84	MWD	
5500.00	5497.74	179.94	12.09	12.00	13.51	Alley Cat 17 Fed Com 212H (p)	304.18	328.37	13.57	MWD	
5600.00	5597.40	179.95	12.31	12.20	13.77	Alley Cat 17 Fed Com 212H (p)	326.94	351.55	14.28	MWD	
5700.00	5697.05	179.95	12.54	12.41	14.03	Alley Cat 17 Fed Com 212H (p)	349.70	374.73	14.97	MWD	
5800.00	5796.71	179.95	12.76	12.62	14.30	Alley Cat 17 Fed Com 212H (p)	372.46	397.91	15.63	MWD	
5900.00	5896.37	179.96	12.99	12.83	14.57	Alley Cat 17 Fed Com 212H (p)	395.22	421.09	16.27	MWD	
6000.00	5996.02	179.96	13.22	13.04	14.84	Alley Cat 17 Fed Com 212H (p)	417.97	444.27	16.89	MWD	
6100.00	6095.68	179.96	13.45	13.25	15.12	Alley Cat 17 Fed Com 212H (p)	440.73	467.45	17.49	MWD	
6200.00	6195.34	179.96	13.68	13.46	15.41	Alley Cat 17 Fed Com 212H (p)	463.48	490.63	18.07	MWD	
6300.00	6294.99	179.96	13.91	13.67	15.69	Alley Cat 17 Fed Com 212H (p)	486.23	513.81	18.63	MWD	
6400.00	6394.65	179.97	14.14	13.88	15.99	Alley Cat 17 Fed Com 212H (p)	508.98	536.99	19.17	MWD	
6500.00	6494.30	179.97	14.38	14.09	16.28	Alley Cat 17 Fed Com 212H (p)	531.72	560.17	19.69	MWD	
6600.00	6593.96	179.97	14.61	14.31	16.59	Alley Cat 17 Fed Com 212H (p)	554.47	583.35	20.20	MWD	
6700.00	6693.62	179.97	14.85	14.52	16.89	Alley Cat 17 Fed Com 212H (p)	577.21	606.53	20.69	MWD	
6800.00	6793.27	179.97	15.09	14.74	17.20		599.96	629.71	21.16	MWD	

5D Anti-Collision Report

Primary Well: Alley Cat 17 Fed Com 211H (p)(TVD relative to Drill Floor)(All Azimuth Relative to GRID NORTH)											
MD (US ft)	TVD (US ft)	T:Face to Sec (°)	S.Major (US ft)	S.Minor (US ft)	TVD Spread (US ft)	Nearest Well	ES (US ft)	CC (US ft)	SF	Survey Tool	Risk
						Alley Cat 17 Fed Com 212H (p)					
6900.00	6892.93	179.97	15.33	14.95	17.52	Alley Cat 17 Fed Com 212H (p)	622.70	652.89	21.62	MWD	
7000.00	6992.59	179.97	15.57	15.17	17.84	Alley Cat 17 Fed Com 212H (p)	645.44	676.07	22.07	MWD	
7100.00	7092.24	179.97	15.81	15.38	18.17	Alley Cat 17 Fed Com 212H (p)	668.18	699.25	22.50	MWD	
7200.00	7191.90	179.97	16.06	15.60	18.50	Alley Cat 17 Fed Com 212H (p)	690.91	722.43	22.92	MWD	
7300.00	7291.56	179.98	16.30	15.82	18.84	Alley Cat 17 Fed Com 212H (p)	713.65	745.61	23.33	MWD	
7400.00	7391.21	179.98	16.54	16.04	19.18	Alley Cat 17 Fed Com 212H (p)	736.39	768.79	23.72	MWD	
7500.00	7490.87	179.98	16.79	16.25	19.53	Alley Cat 17 Fed Com 212H (p)	759.12	791.97	24.11	MWD	
7600.00	7590.53	179.98	17.03	16.47	19.88	Alley Cat 17 Fed Com 212H (p)	781.85	815.15	24.48	MWD	
7700.00	7690.18	179.98	17.28	16.69	20.23	Alley Cat 17 Fed Com 212H (p)	804.58	838.33	24.84	MWD	
7800.00	7789.84	179.98	17.53	16.91	20.60	Alley Cat 17 Fed Com 212H (p)	827.32	861.51	25.19	MWD	
7900.00	7889.50	179.98	17.78	17.13	20.96	Alley Cat 17 Fed Com 212H (p)	850.05	884.69	25.53	MWD	
8000.00	7989.15	179.98	18.03	17.35	21.34	Alley Cat 17 Fed Com 212H (p)	872.78	907.87	25.87	MWD	
8100.00	8088.81	179.98	18.27	17.57	21.72	Alley Cat 17 Fed Com 212H (p)	895.50	931.05	26.19	MWD	
8200.00	8188.47	179.98	18.52	17.79	22.10	Alley Cat 17 Fed Com 212H (p)	918.23	954.23	26.50	MWD	
8300.00	8288.12	179.98	18.77	18.01	22.49	Alley Cat 17 Fed Com 212H (p)	940.96	977.41	26.81	MWD	
8400.00	8387.78	179.98	19.03	18.23	22.88	Alley Cat 17 Fed Com 212H (p)	963.68	1000.59	27.11	MWD	
8500.00	8487.44	179.98	19.28	18.45	23.28	Alley Cat 17 Fed Com 212H (p)	986.41	1023.77	27.40	MWD	
8600.00	8587.09	179.98	19.53	18.67	23.69	Alley Cat 17 Fed Com 212H (p)	1009.13	1046.95	27.68	MWD	
8700.00	8686.75	179.98	19.78	18.90	24.10	Alley Cat 17 Fed Com 212H (p)	1031.86	1070.13	27.96	MWD	
8800.00	8786.41	179.98	20.04	19.12	24.52	Alley Cat 17 Fed Com 212H (p)	1054.58	1093.31	28.22	MWD	
8900.00	8886.06	179.98	20.29	19.34	24.94	Alley Cat 17 Fed Com 212H (p)	1077.30	1116.49	28.49	MWD	
9000.00	8985.72	179.98	20.54	19.56	25.37	Alley Cat 17 Fed Com 212H (p)	1100.02	1139.67	28.74	MWD	
9100.00	9085.38	179.98	20.80	19.78	25.80	Alley Cat 17 Fed Com 212H (p)	1122.74	1162.85	28.99	MWD	
9200.00	9185.03	179.98	21.05	20.01	26.24	Alley Cat 17 Fed Com 212H (p)	1145.46	1186.04	29.23	MWD	
9300.00	9284.69	179.98	21.31	20.23	26.69		1168.18	1209.22	29.47	MWD	

5D Anti-Collision Report

Primary Well: Alley Cat 17 Fed Com 211H (p)(TVD relative to Drill Floor)(All Azimuth Relative to GRID NORTH)											
MD (US ft)	TVD (US ft)	T.Face to Sec (°)	S.Major (US ft)	S.Minor (US ft)	TVD Spread (US ft)	Nearest Well	ES (US ft)	CC (US ft)	SF	Survey Tool	Risk
9400.00	9384.35	179.99	21.56	20.45	27.14	Alley Cat 17 Fed Com 212H (p)	1190.89	1232.39	29.69	MWD	
9500.00	9484.00	179.99	21.82	20.68	27.60	Alley Cat 17 Fed Com 212H (p)	1212.31	1254.43	29.78	MWD	
9600.00	9583.66	179.99	22.07	20.90	28.06	Alley Cat 17 Fed Com 212H (p)	1231.63	1274.33	29.84	MWD	
9700.00	9683.37	179.99	22.31	21.12	28.53	Alley Cat 17 Fed Com 212H (p)	1248.11	1291.35	29.87	MWD	
9800.00	9783.20	179.99	22.51	21.31	29.00	Alley Cat 17 Fed Com 212H (p)	1260.72	1304.45	29.83	MWD	
9900.00	9883.12	179.99	22.70	21.50	29.48	Alley Cat 17 Fed Com 212H (p)	1269.40	1313.59	29.72	MWD	
10000.00	9983.09	179.99	22.89	21.69	29.97	Alley Cat 17 Fed Com 212H (p)	1274.11	1318.73	29.55	MWD	
10100.00	10083.08	270.38	23.06	21.87	30.46	Alley Cat 17 Fed Com 212H (p)	1274.95	1319.97	29.32	MWD	
10200.00	10182.29	270.45	22.96	22.06	30.95	Alley Cat 17 Fed Com 212H (p)	1274.60	1319.98	29.08	MWD	
10300.00	10278.00	270.50	22.49	22.23	31.40	Alley Cat 17 Fed Com 212H (p)	1274.24	1319.99	28.85	MWD	
10400.00	10367.30	270.54	22.45	21.67	31.81	Alley Cat 17 Fed Com 212H (p)	1273.87	1320.00	28.61	MWD	
10500.00	10447.47	270.56	22.68	20.61	32.16	Alley Cat 17 Fed Com 212H (p)	1273.43	1320.00	28.34	MWD	
10600.00	10516.09	270.57	22.98	19.44	32.47	Alley Cat 17 Fed Com 212H (p)	1272.88	1320.00	28.02	MWD	
10700.00	10571.06	270.56	23.36	18.30	32.75	Alley Cat 17 Fed Com 212H (p)	1272.20	1319.99	27.62	MWD	
10800.00	10610.72	270.53	23.85	17.37	33.02	Alley Cat 17 Fed Com 212H (p)	1271.35	1319.98	27.14	MWD	
10900.00	10633.86	270.48	24.47	16.82	33.30	Alley Cat 17 Fed Com 212H (p)	1270.33	1319.97	26.59	MWD	
11000.00	10640.00	270.43	25.19	16.77	33.60	Alley Cat 17 Fed Com 212H (p)	1269.16	1319.95	25.99	MWD	
11100.00	10640.00	270.43	26.00	16.94	33.95	Alley Cat 17 Fed Com 212H (p)	1267.81	1319.95	25.32	MWD	
11200.00	10640.00	270.43	26.91	17.14	34.36	Alley Cat 17 Fed Com 212H (p)	1266.29	1319.94	24.60	MWD	
11300.00	10640.00	270.43	27.92	17.37	34.82	Alley Cat 17 Fed Com 212H (p)	1264.62	1319.94	23.86	MWD	
11400.00	10640.00	270.43	29.00	17.63	35.35	Alley Cat 17 Fed Com 212H (p)	1262.79	1319.93	23.10	MWD	
11500.00	10640.00	270.43	30.15	17.91	35.92	Alley Cat 17 Fed Com 212H (p)	1260.83	1319.93	22.34	MWD	
11600.00	10640.00	270.43	31.37	18.23	36.54	Alley Cat 17 Fed Com 212H (p)	1258.75	1319.92	21.58	MWD	
11700.00	10640.00	270.43	32.65	18.56	37.21	Alley Cat 17 Fed Com 212H (p)	1256.56	1319.92	20.83	MWD	
11800.00	10640.00	270.43	33.97	18.92	37.93		1254.28	1319.91	20.11	MWD	

5D Anti-Collision Report

Primary Well: Alley Cat 17 Fed Com 211H (p)(TVD relative to Drill Floor)(All Azimuth Relative to GRID NORTH)											
MD (US ft)	TVD (US ft)	T.Face to Sec (°)	S.Major (US ft)	S.Minor (US ft)	TVD Spread (US ft)	Nearest Well	ES (US ft)	CC (US ft)	SF	Survey Tool	Risk
11900.00	10640.00	270.43	35.34	19.30	38.69	Alley Cat 17 Fed Com 212H (p)	1251.90	1319.91	19.41	MWD	
12000.00	10640.00	270.43	36.75	19.70	39.49	Alley Cat 17 Fed Com 212H (p)	1249.44	1319.90	18.73	MWD	
12100.00	10640.00	270.43	38.20	20.12	40.32	Alley Cat 17 Fed Com 212H (p)	1246.91	1319.90	18.08	MWD	
12200.00	10640.00	270.43	39.68	20.55	41.19	Alley Cat 17 Fed Com 212H (p)	1244.31	1319.89	17.46	MWD	
12300.00	10640.00	270.43	41.18	21.00	42.10	Alley Cat 17 Fed Com 212H (p)	1241.66	1319.89	16.87	MWD	
12400.00	10640.00	270.43	42.72	21.47	43.03	Alley Cat 17 Fed Com 212H (p)	1238.95	1319.88	16.31	MWD	
12500.00	10640.00	270.43	44.27	21.96	44.00	Alley Cat 17 Fed Com 212H (p)	1236.19	1319.88	15.77	MWD	
12600.00	10640.00	270.43	45.84	22.45	44.99	Alley Cat 17 Fed Com 212H (p)	1233.39	1319.87	15.26	MWD	
12700.00	10640.00	270.43	47.44	22.96	46.00	Alley Cat 17 Fed Com 212H (p)	1230.55	1319.87	14.78	MWD	
12800.00	10640.00	270.43	49.05	23.48	47.04	Alley Cat 17 Fed Com 212H (p)	1227.67	1319.86	14.32	MWD	
12900.00	10640.00	270.43	50.67	24.01	48.11	Alley Cat 17 Fed Com 212H (p)	1224.76	1319.86	13.88	MWD	
13000.00	10640.00	270.43	52.31	24.56	49.19	Alley Cat 17 Fed Com 212H (p)	1221.82	1319.85	13.46	MWD	
13100.00	10640.00	270.43	53.96	25.11	50.29	Alley Cat 17 Fed Com 212H (p)	1218.85	1319.85	13.07	MWD	
13200.00	10640.00	270.43	55.62	25.67	51.42	Alley Cat 17 Fed Com 212H (p)	1215.86	1319.84	12.69	MWD	
13300.00	10640.00	270.43	57.29	26.24	52.55	Alley Cat 17 Fed Com 212H (p)	1212.84	1319.84	12.34	MWD	
13400.00	10640.00	270.43	58.97	26.82	53.71	Alley Cat 17 Fed Com 212H (p)	1209.80	1319.83	12.00	MWD	
13500.00	10640.00	270.43	60.66	27.40	54.88	Alley Cat 17 Fed Com 212H (p)	1206.74	1319.83	11.67	MWD	
13600.00	10640.00	270.43	62.36	28.00	56.06	Alley Cat 17 Fed Com 212H (p)	1203.66	1319.82	11.36	MWD	
13700.00	10640.00	270.43	64.07	28.59	57.26	Alley Cat 17 Fed Com 212H (p)	1200.57	1319.82	11.07	MWD	
13800.00	10640.00	270.43	65.78	29.20	58.46	Alley Cat 17 Fed Com 212H (p)	1197.45	1319.81	10.79	MWD	
13900.00	10640.00	270.43	67.50	29.81	59.68	Alley Cat 17 Fed Com 212H (p)	1194.33	1319.81	10.52	MWD	
14000.00	10640.00	270.43	69.22	30.43	60.92	Alley Cat 17 Fed Com 212H (p)	1191.18	1319.80	10.26	MWD	
14100.00	10640.00	270.43	70.95	31.05	62.16	Alley Cat 17 Fed Com 212H (p)	1188.03	1319.80	10.02	MWD	
14200.00	10640.00	270.43	72.68	31.67	63.41	Alley Cat 17 Fed Com 212H (p)	1184.86	1319.79	9.78	MWD	
14300.00	10640.00	270.43	74.42	32.30	64.67		1181.67	1319.79	9.56	MWD	

5D Anti-Collision Report

Primary Well: Alley Cat 17 Fed Com 211H (p)(TVD relative to Drill Floor)(All Azimuth Relative to GRID NORTH)											
MD (US ft)	TVD (US ft)	T.Face to Sec (°)	S.Major (US ft)	S.Minor (US ft)	TVD Spread (US ft)	Nearest Well	ES (US ft)	CC (US ft)	SF	Survey Tool	Risk
						Alley Cat 17 Fed Com 212H (p)					
14400.00	10640.00	270.43	76.16	32.94	65.94	Alley Cat 17 Fed Com 212H (p)	1178.48	1319.78	9.34	MWD	
14500.00	10640.00	270.43	77.91	33.58	67.21	Alley Cat 17 Fed Com 212H (p)	1175.28	1319.78	9.13	MWD	
14600.00	10640.00	270.43	79.66	34.22	68.50	Alley Cat 17 Fed Com 212H (p)	1172.06	1319.77	8.93	MWD	
14700.00	10640.00	270.43	81.41	34.87	69.79	Alley Cat 17 Fed Com 212H (p)	1168.84	1319.77	8.74	MWD	
14800.00	10640.00	270.43	83.17	35.52	71.09	Alley Cat 17 Fed Com 212H (p)	1165.60	1319.76	8.56	MWD	
14900.00	10640.00	270.43	84.93	36.17	72.39	Alley Cat 17 Fed Com 212H (p)	1162.36	1319.76	8.38	MWD	
15000.00	10640.00	270.43	86.69	36.83	73.70	Alley Cat 17 Fed Com 212H (p)	1159.11	1319.75	8.22	MWD	
15100.00	10640.00	270.43	88.46	37.48	75.02	Alley Cat 17 Fed Com 212H (p)	1155.85	1319.75	8.05	MWD	
15112.72	10640.00	270.43	88.69	37.57	75.19	Alley Cat 17 Fed Com 212H (p)	1155.41	1319.75	8.03	MWD	

Secondary Well: Alley Cat 17 Fed Com 212H (p)(TVD relative to Drill Floor)(All Azimuth Relative to GRID NORTH)											
Pri MD (US ft)	TVD (US ft)	Sec MD (US ft)	T.Face to Sec (°)	S.Major (US ft)	S.Minor (US ft)	TVD Spread (US ft)	ES (US ft)	CC (US ft)	SF	Survey Tool	Risk
0.00	0.00	20.00	89.41	0.02	0.02	0.92	29.22	29.97	39.79	MWD	CC (Lo)
100.00	100.00	120.00	89.41	0.16	0.16	4.60	28.97	29.97	30.00	MWD	CC (Lo)
200.00	200.00	220.00	89.41	0.38	0.38	4.63	28.52	29.97	20.69	MWD	CC (Lo)
300.00	300.00	320.00	89.41	0.61	0.61	4.66	28.07	29.97	15.79	MWD	CC (Lo)
400.00	400.00	420.00	89.41	0.83	0.83	4.71	27.62	29.97	12.77	MWD	CC (Lo)
500.00	500.00	520.00	89.41	1.06	1.06	4.77	27.17	29.97	10.71	MWD	CC (Lo)
600.00	600.00	620.00	89.41	1.28	1.28	4.83	26.72	29.97	9.23	MWD	CC (Lo)
700.00	700.00	720.00	89.41	1.51	1.51	4.91	26.28	29.97	8.11	MWD	CC (Lo)
800.00	800.00	820.00	89.41	1.73	1.73	5.00	25.83	29.97	7.23	MWD	CC (Lo)
900.00	900.00	920.00	89.41	1.96	1.96	5.09	25.38	29.97	6.52	MWD	CC (Lo)
1000.00	1000.00	1020.00	89.41	2.18	2.18	5.20	24.93	29.97	5.94	MWD	CC (Lo)
1100.00	1100.00	1120.00	89.41	2.41	2.41	5.30	24.48	29.97	5.45	MWD	CC (Lo)
1200.00	1200.00	1220.00	89.41	2.63	2.63	5.42	24.03	29.97	5.04	MWD	CC (Lo)
1300.00	1300.00	1320.00	89.41	2.85	2.85	5.54	23.58	29.97	4.69	MWD	CC (Lo)
1400.00	1400.00	1420.00	89.41	3.08	3.08	5.67	23.13	29.97	4.38	MWD	CC (Lo)
1500.00	1500.00	1520.00	89.41	3.30	3.30	5.80	22.68	29.97	4.11	MWD	CC (Lo)
1600.00	1600.00	1620.00	89.41	3.53	3.53	5.94	22.23	29.97	3.87	MWD	CC (Lo)
1700.00	1700.00	1720.00	89.41	3.75	3.75	6.08	21.78	29.97	3.66	MWD	CC (Lo)
1800.00	1800.00	1820.00	89.41	3.98	3.98	6.22	21.33	29.97	3.47	MWD	CC (Lo)
1900.00	1900.00	1920.00	89.41	4.20	4.20	6.37	20.88	29.97	3.30	MWD	CC (Lo)
2000.00	2000.00	2020.00	89.41	4.43	4.43	6.53	20.43	29.97	3.14	MWD	CC (Lo)
2100.00	2100.00	2120.00	89.41	4.65	4.65	6.68	19.98	29.97	3.00	MWD	CC (Lo)
2200.00	2200.00	2220.00	89.41	4.88	4.88	6.84	19.53	29.97	2.87	MWD	CC (Lo)
2300.00	2300.00	2320.00	89.41	5.10	5.10	7.00	19.08	29.97	2.75	MWD	CC (Lo)
2400.00	2400.00	2420.00	89.41	5.33	5.33	7.16	18.63	29.97	2.64	MWD	CC (Lo)
2500.00	2500.00	2520.00	89.41	5.55	5.55	7.33	18.18	29.97	2.54	MWD	CC (Lo)
2600.00	2600.00	2620.00	89.41	5.78	5.78	7.50	17.73	29.97	2.45	MWD	SF(Lo); CC (Lo)
2700.00	2700.00	2720.00	89.41	6.00	6.00	7.67	17.28	29.97	2.36	MWD	SF(Lo); CC (Lo)
2800.00	2800.00	2820.00	89.41	6.23	6.23	7.84	16.83	29.97	2.28	MWD	SF(Lo); CC (Lo)

5D Anti-Collision Report

Secondary Well: Alley Cat 17 Fed Com 212H (p)(TVD relative to Drill Floor)(All Azimuth Relative to GRID NORTH)											
Pri MD (US ft)	TVD (US ft)	Sec MD (US ft)	T.Face to Sec (°)	S.Major (US ft)	S.Minor (US ft)	TVD Spread (US ft)	ES (US ft)	CC (US ft)	SF	Survey Tool	Risk
2900.00	2900.00	2920.00	89.41	6.45	6.45	8.02	16.38	29.97	2.21	MWD	SF(Lo); CC (Lo)
3000.00	3000.00	3020.00	89.41	6.68	6.68	8.20	15.94	29.97	2.14	MWD	SF(Lo); CC (Lo)
3100.00	3100.00	3120.00	89.41	6.90	6.90	8.38	15.49	29.97	2.07	MWD	SF(Lo); CC (Lo)
3200.00	3200.00	3220.00	89.41	7.13	7.13	8.56	15.04	29.97	2.01	MWD	SF(Lo); CC (Lo)
3300.00	3300.00	3320.00	89.41	7.35	7.35	8.75	14.59	29.97	1.95	MWD	SF(Lo); CC (Lo)
3400.00	3400.00	3420.00	89.41	7.58	7.58	8.94	14.14	29.97	1.89	MWD	SF(Lo); CC (Lo)
3500.00	3499.90	3519.90	89.41	7.80	7.80	9.13	13.73	30.01	1.84	MWD	SF(Lo)
3600.00	3599.35	3619.36	89.43	8.00	8.00	9.32	14.52	31.22	1.87	MWD	SF(Lo)
3700.00	3698.70	3718.75	89.48	8.20	8.19	9.51	17.06	34.17	2.00	MWD	SF(Lo)
3800.00	3797.84	3818.01	89.54	8.40	8.39	9.71	21.35	38.85	2.22	MWD	SF(Lo)
3900.00	3896.71	3917.08	89.61	8.60	8.58	9.90	27.38	45.26	2.53	MWD	
4000.00	3995.20	4015.90	89.67	8.81	8.77	10.10	35.15	53.40	2.93	MWD	
4100.00	4093.23	4114.41	89.72	9.02	8.96	10.30	44.64	63.25	3.40	MWD	
4200.00	4190.72	4212.56	89.76	9.24	9.14	10.50	55.84	74.80	3.95	MWD	
4300.00	4287.59	4310.29	89.80	9.46	9.33	10.71	68.76	88.05	4.56	MWD	
4400.00	4384.53	4408.30	89.83	9.70	9.53	10.91	83.17	102.83	5.23	MWD	
4500.00	4482.27	4507.17	89.85	9.94	9.73	11.13	97.79	117.87	5.87	MWD	
4600.00	4579.93	4605.95	179.87	10.19	9.94	11.35	112.90	133.40	6.51	MWD	
4700.00	4677.31	4704.46	179.88	10.45	10.15	11.57	129.69	150.60	7.20	MWD	
4800.00	4774.39	4802.65	179.89	10.71	10.36	11.80	148.20	169.52	7.95	MWD	
4900.00	4871.12	4900.50	179.90	10.97	10.57	12.02	168.41	190.14	8.75	MWD	
5000.00	4967.49	4997.98	179.91	11.24	10.78	12.25	190.34	212.47	9.60	MWD	
5100.00	5063.66	5095.25	179.92	11.51	11.00	12.49	213.11	235.65	10.45	MWD	
5200.00	5159.83	5192.53	179.93	11.78	11.21	12.72	235.88	258.83	11.28	MWD	
5300.00	5256.00	5289.80	179.94	12.06	11.42	12.96	258.65	282.01	12.07	MWD	
5400.00	5352.16	5387.08	179.94	12.34	11.64	13.21	281.41	305.19	12.84	MWD	
5500.00	5448.33	5484.36	179.94	12.63	11.86	13.46	304.18	328.37	13.57	MWD	
5600.00	5544.50	5581.63	179.95	12.92	12.08	13.71	326.94	351.55	14.28	MWD	
5700.00	5640.67	5678.91	179.95	13.21	12.29	13.96	349.70	374.73	14.97	MWD	
5800.00	5736.84	5776.19	179.95	13.50	12.51	14.22	372.46	397.91	15.63	MWD	
5900.00	5833.01	5873.46	179.96	13.80	12.73	14.49	395.22	421.09	16.27	MWD	
6000.00	5929.18	5970.74	179.96	14.09	12.96	14.76	417.97	444.27	16.89	MWD	
6100.00	6025.35	6068.02	179.96	14.39	13.18	15.03	440.73	467.45	17.49	MWD	
6200.00	6121.52	6165.29	179.96	14.69	13.40	15.30	463.48	490.63	18.07	MWD	
6300.00	6217.69	6262.57	179.96	15.00	13.62	15.58	486.23	513.81	18.63	MWD	
6400.00	6313.85	6359.84	179.97	15.30	13.85	15.87	508.98	536.99	19.17	MWD	
6500.00	6410.02	6457.12	179.97	15.61	14.07	16.16	531.72	560.17	19.69	MWD	
6600.00	6506.19	6554.40	179.97	15.92	14.30	16.45	554.47	583.35	20.20	MWD	
6700.00	6602.36	6651.67	179.97	16.23	14.52	16.75	577.21	606.53	20.69	MWD	
6800.00	6698.53	6748.95	179.97	16.54	14.75	17.05	599.96	629.71	21.16	MWD	
6900.00	6794.70	6846.23	179.97	16.85	14.98	17.35	622.70	652.89	21.62	MWD	
7000.00	6890.87	6943.50	179.97	17.17	15.20	17.66	645.44	676.07	22.07	MWD	
7100.00	6987.04	7040.78	179.97	17.48	15.43	17.98	668.18	699.25	22.50	MWD	
7200.00	7083.21	7138.06	179.97	17.80	15.66	18.30	690.91	722.43	22.92	MWD	
7300.00	7179.38	7235.33	179.98	18.12	15.89	18.62	713.65	745.61	23.33	MWD	
7400.00	7275.54	7332.61	179.98	18.43	16.12	18.95	736.39	768.79	23.72	MWD	
7500.00	7371.71	7429.88	179.98	18.75	16.35	19.29	759.12	791.97	24.11	MWD	
7600.00	7467.88	7527.16	179.98	19.07	16.58	19.63	781.85	815.15	24.48	MWD	
7700.00	7564.05	7624.44	179.98	19.39	16.81	19.97	804.58	838.33	24.84	MWD	
7800.00	7660.22	7721.71	179.98	19.72	17.04	20.32	827.32	861.51	25.19	MWD	
7900.00	7756.39	7818.99	179.98	20.04	17.27	20.67	850.05	884.69	25.53	MWD	
8000.00	7852.56	7916.27	179.98	20.36	17.50	21.03	872.78	907.87	25.87	MWD	
8100.00	7948.73	8013.54	179.98	20.69	17.73	21.39	895.50	931.05	26.19	MWD	
8200.00	8044.90	8110.82	179.98	21.01	17.96	21.76	918.23	954.23	26.50	MWD	

5D Anti-Collision Report

Secondary Well: Alley Cat 17 Fed Com 212H (p)(TVD relative to Drill Floor)(All Azimuth Relative to GRID NORTH)											
Pri MD (US ft)	TVD (US ft)	Sec MD (US ft)	T Face to Sec (°)	S Major (US ft)	S Minor (US ft)	TVD Spread (US ft)	ES (US ft)	CC (US ft)	SF	Survey Tool	Risk
8300.00	8141.07	8208.09	179.98	21.34	18.19	22.13	940.96	977.41	26.81	MWD	
8400.00	8237.24	8305.37	179.98	21.66	18.42	22.51	963.68	1000.59	27.11	MWD	
8500.00	8333.40	8402.65	179.98	21.99	18.66	22.89	986.41	1023.77	27.40	MWD	
8600.00	8429.57	8499.92	179.98	22.32	18.89	23.28	1009.13	1046.95	27.68	MWD	
8700.00	8525.74	8597.20	179.98	22.64	19.12	23.67	1031.86	1070.13	27.96	MWD	
8800.00	8621.91	8694.48	179.98	22.97	19.36	24.07	1054.58	1093.31	28.22	MWD	
8900.00	8718.08	8791.75	179.98	23.30	19.59	24.47	1077.30	1116.49	28.49	MWD	
9000.00	8814.25	8889.03	179.98	23.63	19.82	24.88	1100.02	1139.67	28.74	MWD	
9100.00	8910.42	8986.31	179.98	23.96	20.06	25.30	1122.74	1162.85	28.99	MWD	
9200.00	9006.59	9083.58	179.98	24.29	20.29	25.72	1145.46	1186.04	29.23	MWD	
9300.00	9102.76	9180.86	179.98	24.62	20.52	26.14	1168.18	1209.22	29.47	MWD	
9400.00	9200.00	9279.22	179.99	24.95	20.76	26.57	1190.89	1232.39	29.69	MWD	
9500.00	9323.37	9403.80	179.99	25.29	21.03	27.13	1212.31	1254.43	29.78	MWD	
9600.00	9448.26	9529.56	179.99	25.59	21.30	27.70	1231.63	1274.33	29.84	MWD	
9700.00	9574.65	9656.53	179.99	25.89	21.55	28.29	1248.11	1291.35	29.87	MWD	
9800.00	9702.48	9784.70	179.99	26.16	21.80	28.89	1260.72	1304.45	29.83	MWD	
9900.00	9831.38	9913.77	179.99	26.41	22.03	29.50	1269.40	1313.59	29.72	MWD	
10000.00	9960.98	10043.42	179.99	26.63	22.26	30.13	1274.11	1318.73	29.55	MWD	
10100.00	10082.69	10165.15	270.38	26.80	22.47	30.72	1274.95	1319.97	29.32	MWD	
10200.00	10180.09	10263.51	270.45	26.53	22.65	31.19	1274.60	1319.98	29.08	MWD	
10300.00	10273.66	10361.64	270.50	25.77	22.83	31.64	1274.24	1319.99	28.85	MWD	
10400.00	10360.74	10459.59	270.54	24.58	23.02	32.04	1273.87	1320.00	28.61	MWD	
10500.00	10438.89	10557.43	270.56	23.43	22.87	32.41	1273.43	1320.00	28.34	MWD	
10600.00	10505.89	10655.21	270.57	23.61	21.26	32.75	1272.88	1320.00	28.02	MWD	
10700.00	10559.85	10753.00	270.56	23.98	19.57	33.06	1272.20	1319.99	27.62	MWD	
10800.00	10599.23	10850.87	270.53	24.46	18.12	33.37	1271.35	1319.98	27.14	MWD	
10900.00	10622.85	10948.86	270.48	25.08	17.16	33.70	1270.33	1319.97	26.59	MWD	
11000.00	10630.00	11047.18	270.43	25.83	16.87	34.04	1269.16	1319.95	25.99	MWD	
11100.00	10630.00	11147.18	270.43	26.65	17.05	34.44	1267.81	1319.95	25.32	MWD	
11200.00	10630.00	11247.18	270.43	27.55	17.27	34.90	1266.29	1319.94	24.60	MWD	
11300.00	10630.00	11347.18	270.43	28.53	17.51	35.41	1264.62	1319.94	23.86	MWD	
11400.00	10630.00	11447.18	270.43	29.60	17.78	35.97	1262.79	1319.93	23.10	MWD	
11500.00	10630.00	11547.18	270.43	30.74	18.09	36.58	1260.83	1319.93	22.34	MWD	
11600.00	10630.00	11647.18	270.43	31.94	18.41	37.24	1258.75	1319.92	21.58	MWD	
11700.00	10630.00	11747.18	270.43	33.20	18.76	37.95	1256.56	1319.92	20.83	MWD	
11800.00	10630.00	11847.18	270.43	34.51	19.14	38.69	1254.28	1319.91	20.11	MWD	
11900.00	10630.00	11947.18	270.43	35.87	19.53	39.48	1251.90	1319.91	19.41	MWD	
12000.00	10630.00	12047.18	270.43	37.26	19.94	40.31	1249.44	1319.90	18.73	MWD	
12100.00	10630.00	12147.18	270.43	38.69	20.38	41.17	1246.91	1319.90	18.08	MWD	
12200.00	10630.00	12247.18	270.43	40.16	20.83	42.06	1244.31	1319.89	17.46	MWD	
12300.00	10630.00	12347.18	270.43	41.65	21.29	42.99	1241.66	1319.89	16.87	MWD	
12400.00	10630.00	12447.18	270.43	43.17	21.78	43.95	1238.95	1319.88	16.31	MWD	
12500.00	10630.00	12547.18	270.43	44.71	22.27	44.93	1236.19	1319.88	15.77	MWD	
12600.00	10630.00	12647.18	270.43	46.27	22.78	45.94	1233.39	1319.87	15.26	MWD	
12700.00	10630.00	12747.18	270.43	47.85	23.30	46.97	1230.55	1319.87	14.78	MWD	
12800.00	10630.00	12847.18	270.43	49.45	23.83	48.03	1227.67	1319.86	14.32	MWD	
12900.00	10630.00	12947.18	270.43	51.06	24.37	49.11	1224.76	1319.86	13.88	MWD	
13000.00	10630.00	13047.18	270.43	52.69	24.93	50.21	1221.82	1319.85	13.46	MWD	
13100.00	10630.00	13147.18	270.43	54.33	25.49	51.32	1218.85	1319.85	13.07	MWD	
13200.00	10630.00	13247.18	270.43	55.98	26.06	52.45	1215.86	1319.84	12.69	MWD	
13300.00	10630.00	13347.18	270.43	57.65	26.64	53.60	1212.84	1319.84	12.34	MWD	
13400.00	10630.00	13447.18	270.43	59.32	27.22	54.77	1209.80	1319.83	12.00	MWD	
13500.00	10630.00	13547.18	270.43	61.00	27.81	55.95	1206.74	1319.83	11.67	MWD	
13600.00	10630.00	13647.18	270.43	62.69	28.41	57.14	1203.66	1319.82	11.36	MWD	
13700.00	10630.00	13747.18	270.43	64.39	29.02	58.34	1200.57	1319.82	11.07	MWD	
13800.00	10630.00	13847.18	270.43	66.09	29.63	59.56	1197.45	1319.81	10.79	MWD	
13900.00	10630.00	13947.18	270.43	67.80	30.25	60.78	1194.33	1319.81	10.52	MWD	
14000.00	10630.00	14047.18	270.43	69.52	30.87	62.02	1191.18	1319.80	10.26	MWD	

5D Anti-Collision Report

Secondary Well: Alley Cat 17 Fed.Com 212H (p)(TVD relative to Drill Floor)(All Azimuth Relative to GRID NORTH)											
Pri MD (US ft)	TVD (US ft)	Sec MD (US ft)	T.Face to Sec (°)	S.Major (US ft)	S.Minor (US ft)	TVD Spread (US ft)	ES (US ft)	CC (US ft)	SF	Survey Tool	Risk
14100.00	10630.00	14147.18	270.43	71.24	31.50	63.27	1188.03	1319.80	10.02	MWD	
14200.00	10630.00	14247.18	270.43	72.97	32.13	64.53	1184.86	1319.79	9.78	MWD	
14300.00	10630.00	14347.18	270.43	74.71	32.76	65.79	1181.67	1319.79	9.56	MWD	
14400.00	10630.00	14447.18	270.43	76.44	33.40	67.07	1178.48	1319.78	9.34	MWD	
14500.00	10630.00	14547.18	270.43	78.19	34.04	68.35	1175.28	1319.78	9.13	MWD	
14600.00	10630.00	14647.18	270.43	79.93	34.69	69.63	1172.06	1319.77	8.93	MWD	
14700.00	10630.00	14747.18	270.43	81.68	35.34	70.93	1168.84	1319.77	8.74	MWD	
14800.00	10630.00	14847.18	270.43	83.43	35.99	72.23	1165.60	1319.76	8.56	MWD	
14900.00	10630.00	14947.18	270.43	85.19	36.65	73.54	1162.36	1319.76	8.38	MWD	
15000.00	10630.00	15047.18	270.43	86.95	37.31	74.86	1159.11	1319.75	8.22	MWD	
15100.00	10630.00	15147.18	270.43	88.71	37.97	76.17	1155.85	1319.75	8.05	MWD	
15112.72	10630.00	15156.96	270.43	88.88	38.04	76.30	1155.41	1319.75	8.03	MWD	

**5D Plan Report****Devon Energy**

Field Name: *Lea Co, NM Nad 83 NMEZ*
Site Name: *Alley Cat 17 Fed Com Pad*
Well Name: *Alley Cat 17 Fed Com 211H*
Plan: *P1:V2*

23 September 2017





Alley Cat 17 Fed Com 211H

Field Name: Lea Co, NM Nad 83 NMEZ	Map Units: US ft		Company Name: Devon Energy	
	Vertical Reference Datum (VRD): Mean Sea Level			
	Projected Coordinate System: NAD83 / New Mexico East (ftUS)			
	Comment:			
Site: Alley Cat 17 Fed Com Pad	Units: US ft	North Reference: Grid	Convergence Angle: 0.34	
	Position:	Northing: 477481.70 US ft	Latitude: 32° 18' 39.94"	
		Easting: 736207.13 US ft	Longitude: -103° 42' 9.23"	
	Elevation above MSL: 3602.10 US ft		Comment:	
Slot: Alley Cat 17 Fed Com 211H	Position (Relative to Site Centre)			
	+N/-S: 0.00 US ft	Northing: 477481.70 US ft	Latitude: 32° 18' 39.94"	
	+E/-W: 0.00 US ft	Easting: 736207.13 US ft	Longitude: -103° 42' 9.23"	
	Slot TVD Reference: Ground Elevation			
	Elevation above MSL: 3602.10 US ft			
Well: Alley Cat 17 Fed Com 211H	Type: Main well		UWI:	Plan: P1:V2
	File Number:	Comment:		
	Closure Distance: 4717.76 US ft		Closure Azimuth: 184.74°	
	Vertical Section: Position of Origin (Relative to Slot centre)			
	+N/-S: -0.00 US ft	+E/-W: -0.00 US ft	Az: 179.62°	
	Magnetic Parameters:			
	Model: bggm2017	Field Strength: 47982.0nT	Declination: 7.02°	Dip: 60.09° Date: 01/Mar/2018

Drill floor: Plan: P1:V2			
Rig Height (Drill Floor): 23.90us ft	Elevation above MSL: 3626.00us ft	Inclination: 0.00°	Azimuth: 0.00°

Target set: AC 17 FC 211H Comment:							
Target Name:	Shape:	TVD (US ft)	N.Offset (US ft)	E.Offset (US ft)	Northing (USft)	Easting (USft)	Comment
VP	Point	10067.04	0.00	-421.00	477481.70	735786.13	
PBHL 211H	Point	10640.00	-4701.62	-389.92	472780.08	735817.21	

Wellpath created using minimum curvature.

Tie Point:					
MD: 0.00USft	Inclination: 0.00°	Azimuth: 0.00°	TVD: 0.00USft	North Offset: - 0.00USft	East Offset: - 0.00USft

5D Plan Report

Salient Points: (Relative to Slot centre)(TVD relative to Drill Floor)										
MD (US ft)	Inc (°)	Az (°)	TVD (US ft)	VS (US ft)	N.Offset (US ft)	E.Offset (US ft)	Northing (US ft)	Easting (US ft)	DLS (%/100US ft)	Comment
0.00	0.00	0.00	0.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
4525.00	0.00	0.00	4525.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	Nudge @ 1° DLS
4999.98	4.75	270.00	4999.44	-0.13	-0.00	-19.68	477481.70	736187.45	1.00	Hold
9608.98	4.75	270.00	9592.60	-2.65	-0.00	-401.32	477481.70	735805.81	0.00	Drop @ 1° DLS
10083.96	0.00	0.00	10067.04	-2.78	0.00	-421.00	477481.70	735786.13	1.00	KOP-Build @ 10° DLS
10983.96	90.00	179.62	10640.00	570.17	-572.94	-417.21	476908.76	735789.92	10.00	Landing Pt
15112.72	90.00	179.62	10640.00	4698.94	-4701.62	-389.92	472780.08	735817.21	0.00	PBHL 211H

Interpolated Points: (Relative to Slot centre)(TVD relative to Drill Floor)										
MD (US ft)	Inc (°)	Az (°)	TVD (US ft)	VS (US ft)	N.Offset (US ft)	E.Offset (US ft)	Northing (US ft)	Easting (US ft)	DLS (%/100US ft)	Comment
0.00	0.00	0.00	0.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
100.00	0.00	0.00	100.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
200.00	0.00	0.00	200.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
300.00	0.00	0.00	300.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
400.00	0.00	0.00	400.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
500.00	0.00	0.00	500.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
600.00	0.00	0.00	600.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
700.00	0.00	0.00	700.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
800.00	0.00	0.00	800.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
900.00	0.00	0.00	900.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
1000.00	0.00	0.00	1000.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
1100.00	0.00	0.00	1100.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
1200.00	0.00	0.00	1200.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
1300.00	0.00	0.00	1300.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
1400.00	0.00	0.00	1400.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
1500.00	0.00	0.00	1500.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
1600.00	0.00	0.00	1600.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
1700.00	0.00	0.00	1700.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
1800.00	0.00	0.00	1800.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
1900.00	0.00	0.00	1900.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
2000.00	0.00	0.00	2000.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
2100.00	0.00	0.00	2100.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
2200.00	0.00	0.00	2200.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
2300.00	0.00	0.00	2300.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
2400.00	0.00	0.00	2400.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
2500.00	0.00	0.00	2500.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
2600.00	0.00	0.00	2600.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
2700.00	0.00	0.00	2700.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
2800.00	0.00	0.00	2800.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
2900.00	0.00	0.00	2900.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
3000.00	0.00	0.00	3000.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
3100.00	0.00	0.00	3100.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
3200.00	0.00	0.00	3200.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
3300.00	0.00	0.00	3300.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
3400.00	0.00	0.00	3400.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
3500.00	0.00	0.00	3500.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
3600.00	0.00	0.00	3600.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
3700.00	0.00	0.00	3700.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
3800.00	0.00	0.00	3800.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
3900.00	0.00	0.00	3900.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
4000.00	0.00	0.00	4000.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
4100.00	0.00	0.00	4100.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
4200.00	0.00	0.00	4200.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
4300.00	0.00	0.00	4300.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
4400.00	0.00	0.00	4400.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	
4500.00	0.00	0.00	4500.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	

5D Plan Report

Interpolated Points: (Relative to Slot centre)(TVD relative to Drill Floor)										
MD (US ft)	Inc (°)	Az (°)	TVD (US ft)	VS (US ft)	N.Offset (US ft)	E.Offset (US ft)	Northing (US ft)	Easting (US ft)	DLS (°/100US ft)	Comment
4525.00	0.00	0.00	4525.00	-0.00	-0.00	-0.00	477481.70	736207.13	0.00	Nudge @ 1° DLS
4600.00	0.75	270.00	4600.00	-0.00	-0.00	-0.49	477481.70	736206.64	1.00	
4700.00	1.75	270.00	4699.97	-0.02	-0.00	-2.67	477481.70	736204.46	1.00	Hold
4800.00	2.75	270.00	4799.89	-0.04	-0.00	-6.60	477481.70	736200.53	1.00	
4900.00	3.75	270.00	4899.73	-0.08	-0.00	-12.27	477481.70	736194.86	1.00	
4999.98	4.75	270.00	4999.44	-0.13	-0.00	-19.68	477481.70	736187.45	1.00	
5000.00	4.75	270.00	4999.46	-0.13	-0.00	-19.68	477481.70	736187.45	0.00	
5100.00	4.75	270.00	5099.11	-0.18	-0.00	-27.96	477481.70	736179.17	0.00	
5200.00	4.75	270.00	5198.77	-0.24	-0.00	-36.24	477481.70	736170.89	0.00	
5300.00	4.75	270.00	5298.43	-0.29	-0.00	-44.52	477481.70	736162.61	0.00	
5400.00	4.75	270.00	5398.08	-0.35	-0.00	-52.80	477481.70	736154.33	0.00	
5500.00	4.75	270.00	5497.74	-0.40	-0.00	-61.08	477481.70	736146.05	0.00	
5600.00	4.75	270.00	5597.40	-0.46	-0.00	-69.36	477481.70	736137.77	0.00	
5700.00	4.75	270.00	5697.05	-0.51	-0.00	-77.64	477481.70	736129.49	0.00	
5800.00	4.75	270.00	5796.71	-0.57	-0.00	-85.92	477481.70	736121.21	0.00	
5900.00	4.75	270.00	5896.37	-0.62	-0.00	-94.20	477481.70	736112.93	0.00	
6000.00	4.75	270.00	5996.02	-0.68	-0.00	-102.48	477481.70	736104.65	0.00	
6100.00	4.75	270.00	6095.68	-0.73	-0.00	-110.76	477481.70	736096.37	0.00	
6200.00	4.75	270.00	6195.34	-0.79	-0.00	-119.04	477481.70	736088.09	0.00	
6300.00	4.75	270.00	6294.99	-0.84	-0.00	-127.32	477481.70	736079.81	0.00	
6400.00	4.75	270.00	6394.65	-0.90	-0.00	-135.60	477481.70	736071.53	0.00	
6500.00	4.75	270.00	6494.30	-0.95	-0.00	-143.89	477481.70	736063.24	0.00	
6600.00	4.75	270.00	6593.96	-1.01	-0.00	-152.17	477481.70	736054.96	0.00	
6700.00	4.75	270.00	6693.62	-1.06	-0.00	-160.45	477481.70	736046.68	0.00	
6800.00	4.75	270.00	6793.27	-1.12	-0.00	-168.73	477481.70	736038.40	0.00	
6900.00	4.75	270.00	6892.93	-1.17	-0.00	-177.01	477481.70	736030.12	0.00	
7000.00	4.75	270.00	6992.59	-1.23	-0.00	-185.29	477481.70	736021.84	0.00	
7100.00	4.75	270.00	7092.24	-1.28	-0.00	-193.57	477481.70	736013.56	0.00	
7200.00	4.75	270.00	7191.90	-1.34	-0.00	-201.85	477481.70	736005.28	0.00	
7300.00	4.75	270.00	7291.56	-1.39	-0.00	-210.13	477481.70	735997.00	0.00	
7400.00	4.75	270.00	7391.21	-1.44	-0.00	-218.41	477481.70	735988.72	0.00	
7500.00	4.75	270.00	7490.87	-1.50	-0.00	-226.69	477481.70	735980.44	0.00	
7600.00	4.75	270.00	7590.53	-1.55	-0.00	-234.97	477481.70	735972.16	0.00	
7700.00	4.75	270.00	7690.18	-1.61	-0.00	-243.25	477481.70	735963.88	0.00	
7800.00	4.75	270.00	7789.84	-1.66	-0.00	-251.53	477481.70	735955.60	0.00	
7900.00	4.75	270.00	7889.50	-1.72	-0.00	-259.81	477481.70	735947.32	0.00	
8000.00	4.75	270.00	7989.15	-1.77	-0.00	-268.09	477481.70	735939.04	0.00	
8100.00	4.75	270.00	8088.81	-1.83	-0.00	-276.37	477481.70	735930.76	0.00	
8200.00	4.75	270.00	8188.47	-1.88	-0.00	-284.65	477481.70	735922.48	0.00	
8300.00	4.75	270.00	8288.12	-1.94	-0.00	-292.93	477481.70	735914.20	0.00	
8400.00	4.75	270.00	8387.78	-1.99	-0.00	-301.21	477481.70	735905.92	0.00	
8500.00	4.75	270.00	8487.44	-2.05	-0.00	-309.49	477481.70	735897.64	0.00	
8600.00	4.75	270.00	8587.09	-2.10	-0.00	-317.78	477481.70	735889.35	0.00	
8700.00	4.75	270.00	8686.75	-2.16	-0.00	-326.06	477481.70	735881.07	0.00	
8800.00	4.75	270.00	8786.41	-2.21	-0.00	-334.34	477481.70	735872.79	0.00	
8900.00	4.75	270.00	8886.06	-2.27	-0.00	-342.62	477481.70	735864.51	0.00	
9000.00	4.75	270.00	8985.72	-2.32	-0.00	-350.90	477481.70	735856.23	0.00	
9100.00	4.75	270.00	9085.38	-2.38	-0.00	-359.18	477481.70	735847.95	0.00	
9200.00	4.75	270.00	9185.03	-2.43	-0.00	-367.46	477481.70	735839.67	0.00	
9300.00	4.75	270.00	9284.69	-2.49	-0.00	-375.74	477481.70	735831.39	0.00	
9400.00	4.75	270.00	9384.35	-2.54	-0.00	-384.02	477481.70	735823.11	0.00	
9500.00	4.75	270.00	9484.00	-2.59	-0.00	-392.30	477481.70	735814.83	0.00	
9600.00	4.75	270.00	9583.66	-2.65	-0.00	-400.58	477481.70	735806.55	0.00	
9608.98	4.75	270.00	9592.60	-2.65	-0.00	-401.32	477481.70	735805.81	0.00	Drop @ 1° DLS
9700.00	3.84	270.00	9683.37	-2.70	-0.00	-408.14	477481.70	735798.99	1.00	
9800.00	2.84	270.00	9783.20	-2.74	-0.00	-413.97	477481.70	735793.16	1.00	
9900.00	1.84	270.00	9883.12	-2.77	-0.00	-418.05	477481.70	735789.08	1.00	

5D Plan Report

Interpolated Points: (Relative to Slot centre)(TVD relative to Drill Floor)										
MD (US ft)	Inc (°)	Az (°)	TVD (US ft)	VS (US ft)	N. Offset (US ft)	E. Offset (US ft)	Northing (US ft)	Easting (US ft)	DLS (°/100US ft)	Comment
10000.00	0.84	270.00	9983.09	-2.78	-0.00	-420.38	477481.70	735786.75	1.00	
10083.96	0.00	0.00	10067.04	-2.78	0.00	-421.00	477481.70	735786.13	1.00	KOP-Build @ 10° DIS
10100.00	1.60	179.62	10083.08	-2.56	-0.22	-421.00	477481.48	735786.13	10.00	
10200.00	11.60	179.62	10182.29	8.93	-11.71	-420.92	477469.99	735786.21	10.00	
10300.00	21.60	179.62	10278.00	37.47	-40.25	-420.73	477441.45	735786.40	10.00	
10400.00	31.60	179.62	10367.30	82.19	-84.98	-420.44	477396.72	735786.69	10.00	
10500.00	41.60	179.62	10447.47	141.75	-144.53	-420.04	477337.17	735787.09	10.00	
10600.00	51.60	179.62	10516.09	214.32	-217.10	-419.56	477264.60	735787.57	10.00	
10700.00	61.60	179.62	10571.06	297.70	-300.48	-419.01	477181.22	735788.12	10.00	
10800.00	71.60	179.62	10610.72	389.36	-392.14	-418.41	477089.56	735788.72	10.00	
10900.00	81.60	179.62	10633.86	486.52	-489.29	-417.77	476992.41	735789.36	10.00	
10983.96	90.00	179.62	10640.00	570.17	-572.94	-417.21	476908.76	735789.92	10.00	Landing Pt
11000.00	90.00	179.62	10640.00	586.22	-588.99	-417.11	476892.71	735790.02	0.00	
11100.00	90.00	179.62	10640.00	686.22	-688.99	-416.45	476792.71	735790.68	0.00	
11200.00	90.00	179.62	10640.00	786.22	-788.98	-415.78	476692.72	735791.35	0.00	
11300.00	90.00	179.62	10640.00	886.22	-888.98	-415.12	476592.72	735792.01	0.00	
11400.00	90.00	179.62	10640.00	986.22	-988.98	-414.46	476492.72	735792.67	0.00	
11500.00	90.00	179.62	10640.00	1086.22	-1088.98	-413.80	476392.72	735793.33	0.00	
11600.00	90.00	179.62	10640.00	1186.22	-1188.98	-413.14	476292.72	735793.99	0.00	
11700.00	90.00	179.62	10640.00	1286.22	-1288.97	-412.48	476192.73	735794.65	0.00	
11800.00	90.00	179.62	10640.00	1386.22	-1388.97	-411.82	476092.73	735795.31	0.00	
11900.00	90.00	179.62	10640.00	1486.22	-1488.97	-411.16	475992.73	735795.97	0.00	
12000.00	90.00	179.62	10640.00	1586.22	-1588.97	-410.50	475892.73	735796.63	0.00	
12100.00	90.00	179.62	10640.00	1686.22	-1688.96	-409.84	475792.74	735797.29	0.00	
12200.00	90.00	179.62	10640.00	1786.22	-1788.96	-409.17	475692.74	735797.96	0.00	
12300.00	90.00	179.62	10640.00	1886.22	-1888.96	-408.51	475592.74	735798.62	0.00	
12400.00	90.00	179.62	10640.00	1986.22	-1988.96	-407.85	475492.74	735799.28	0.00	
12500.00	90.00	179.62	10640.00	2086.22	-2088.96	-407.19	475392.74	735799.94	0.00	
12600.00	90.00	179.62	10640.00	2186.22	-2188.95	-406.53	475292.75	735800.60	0.00	
12700.00	90.00	179.62	10640.00	2286.22	-2288.95	-405.87	475192.75	735801.26	0.00	
12800.00	90.00	179.62	10640.00	2386.22	-2388.95	-405.21	475092.75	735801.92	0.00	
12900.00	90.00	179.62	10640.00	2486.22	-2488.95	-404.55	474992.75	735802.58	0.00	
13000.00	90.00	179.62	10640.00	2586.22	-2588.95	-403.89	474892.75	735803.24	0.00	
13100.00	90.00	179.62	10640.00	2686.22	-2688.94	-403.22	474792.76	735803.91	0.00	
13200.00	90.00	179.62	10640.00	2786.22	-2788.94	-402.56	474692.76	735804.57	0.00	
13300.00	90.00	179.62	10640.00	2886.22	-2888.94	-401.90	474592.76	735805.23	0.00	
13400.00	90.00	179.62	10640.00	2986.22	-2988.94	-401.24	474492.76	735805.89	0.00	
13500.00	90.00	179.62	10640.00	3086.22	-3088.93	-400.58	474392.77	735806.55	0.00	
13600.00	90.00	179.62	10640.00	3186.22	-3188.93	-399.92	474292.77	735807.21	0.00	
13700.00	90.00	179.62	10640.00	3286.22	-3288.93	-399.26	474192.77	735807.87	0.00	
13800.00	90.00	179.62	10640.00	3386.22	-3388.93	-398.60	474092.77	735808.53	0.00	
13900.00	90.00	179.62	10640.00	3486.22	-3488.93	-397.94	473992.77	735809.19	0.00	
14000.00	90.00	179.62	10640.00	3586.22	-3588.92	-397.28	473892.78	735809.85	0.00	
14100.00	90.00	179.62	10640.00	3686.22	-3688.92	-396.61	473792.78	735810.52	0.00	
14200.00	90.00	179.62	10640.00	3786.22	-3788.92	-395.95	473692.78	735811.18	0.00	
14300.00	90.00	179.62	10640.00	3886.22	-3888.92	-395.29	473592.78	735811.84	0.00	
14400.00	90.00	179.62	10640.00	3986.22	-3988.91	-394.63	473492.79	735812.50	0.00	
14500.00	90.00	179.62	10640.00	4086.22	-4088.91	-393.97	473392.79	735813.16	0.00	
14600.00	90.00	179.62	10640.00	4186.22	-4188.91	-393.31	473292.79	735813.82	0.00	
14700.00	90.00	179.62	10640.00	4286.22	-4288.91	-392.65	473192.79	735814.48	0.00	
14800.00	90.00	179.62	10640.00	4386.22	-4388.91	-391.99	473092.79	735815.14	0.00	
14900.00	90.00	179.62	10640.00	4486.22	-4488.90	-391.33	472992.80	735815.80	0.00	
15000.00	90.00	179.62	10640.00	4586.22	-4588.90	-390.67	472892.80	735816.46	0.00	
15100.00	90.00	179.62	10640.00	4686.22	-4688.90	-390.00	472792.80	735817.13	0.00	
15112.72	90.00	179.62	10640.00	4698.94	-4701.62	-389.92	472780.08	735817.21	0.00	PBHL 211H

5D Plan Report

Formation Points: (Relative to Slot centre)(TVD relative to Drill Floor)								
Name	MD (US ft)	Inc (°)	Az (°)	TVD (US ft)	N.Offset (US ft)	E.Offset (US ft)	Northing (US ft)	Easting (US ft)
Rustler	1016.00	0.00	0.00	1016.00	-0.00	-0.00	477481.70	736207.13
Salado	1371.00	0.00	0.00	1371.00	-0.00	-0.00	477481.70	736207.13
Delaware	4666.01	1.41	270.00	4666.00	-0.00	-1.74	477481.70	736205.39
Brushy Canyon L	8167.42	4.75	270.00	8156.00	-0.00	-281.96	477481.70	735925.17
1st BSPG Lime	8641.05	4.75	270.00	8628.00	-0.00	-321.17	477481.70	735885.96
1st BSPG Sand	9692.61	3.91	270.00	9676.00	-0.00	-407.64	477481.70	735799.49
2nd BSPG Lime	10022.91	0.61	270.00	10006.00	-0.00	-420.67	477481.70	735786.46
2nd BSPG Sand	10314.05	23.01	179.62	10291.00	-45.58	-420.70	477436.12	735786.43
2nd BSPG Sand U	10386.82	30.29	179.62	10356.00	-78.20	-420.48	477403.50	735786.65

devon

Devon Energy
Alley Cat 17 Fed Com 211H
Lea Co, NM
P1:V2



KB:3626.00'

GL:3602.10'

Plan Data for Alley Cat 17 Fed Com 211H

Plan Point Information:									
Dogleg Severity Unit: °/100.00ft									
MD	Inc	Az	TVD	+N/-S	+E/-W	Northing	Easting	VSec	DLS Comments
(USft)	(°)	(°)	(USft)	(USft)	(USft)	(USft)	(USft)	(USft)	(DLSU)
8.00	0.00	0.00	0.00	-0.00	-0.00	477481.70	736207.13	0.00	0.00
4525.00	0.00	0.00	4525.00	-0.00	-0.00	477481.70	736207.13	0.00	0.00 Nudge @ 1° DLS
4999.98	4.75	270.00	4999.44	-0.00	-19.68	477481.70	736187.45	-0.13	1.00 Hold
9608.98	4.75	270.00	9592.60	-0.00	-401.32	477481.70	735805.81	-2.65	0.00 Drop @ 1° DLS
10083.96	0.00	0.00	10067.04	0.00	-421.00	477481.70	735786.13	-2.78	1.00 KOP-Build @ 10° DLS
10983.96	90.00	179.62	10640.00	-572.94	-417.21	476988.76	735789.92	570.17	10.00 Landing Pt
15112.72	90.00	179.62	10640.00	-4701.62	-389.92	472780.08	735817.21	4698.94	0.00 PBHL 211H

Plan Data for Alley Cat 17 Fed Com 211H

Field: Lea Co, NM Nad 83 NMEZ
Map Unit: USFT Vertical Reference Datum (VRD): Mean Sea Level
Projected Coordinate System: NAD83 / New Mexico East (ftUS)

Site: Alley Cat 17 Fed Com Pad
Unit: USFeet TVD Reference:
Company Name: Devon Energy
Position: Northing: 477481.70USft Latitude: 32.311094°
Easting: 736207.13USft Longitude: -103.702564°
North Reference: Grid Grid Convergence: 0.34°
Elevation Above VRD: 3602.10USft

Slot: Alley Cat 17 Fed Com 211H
Position:
Offset is from Site centre
+N/-S: 0.00USft Northing: 477481.70USft Latitude: 32.311094°
+E/-W: 0.00USft Easting: 736207.13USft Longitude: -103.702564°
Elevation Above VRD: 3602.10USft

Well: Alley Cat 17 Fed Com 211H
Type: Main-Well
File Number:
Plan Folder: P1 Plan: P1:V2
Vertical Section: Position offset of origin from Slot centre:
+N/-S: -0.00USft Azimuth: 179.62°
+E/-W: -0.00USft
Magnetic Parameters:
Model: Field Strength: Declination: Dip: Date:
bggm2017 47982(nT) 7.02° 60.09° 2018-03-01

Plan Data for Alley Cat 17 Fed Com 211H

Target Set Information:
Name: AC 17 FC 211H
Position offsets from Slot centre
Name TVD Elevation +N/-S +E/-W Northing Easting
(USft) (USft) (USft) (USft) (USft) (USft)
VP 10067.04 -6441.04 0.00 -421.00 477481.70 735786.13
PBHL 211H 10640.00 -7014.00 -4701.62 -389.92 472780.08 735817.21


True Grid Mag

Grid Convergence: 0.34°
Mag Declination: 7.02°
Bearing:
True = Mag + 7.02°
Grid = True - 0.34°
Total Correction 6.68°


Drawing By: Lee Winchell Date: 23 September 2017
Office Name: Weatherford Drilling Services-Houston
Address: 12101 Cutten Road
Houston, TX 77066
Phone: 713.896.8194




Weatherford

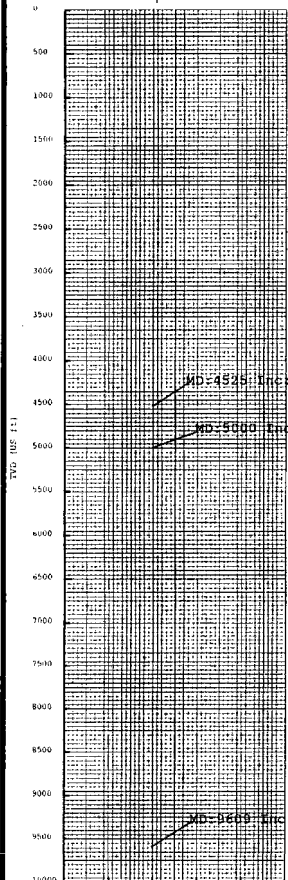

VS (US ft) (Bearing:179.62° Scale:500USft/in)




VS (US ft) (Bearing:179.62° Scale:200USft/in)

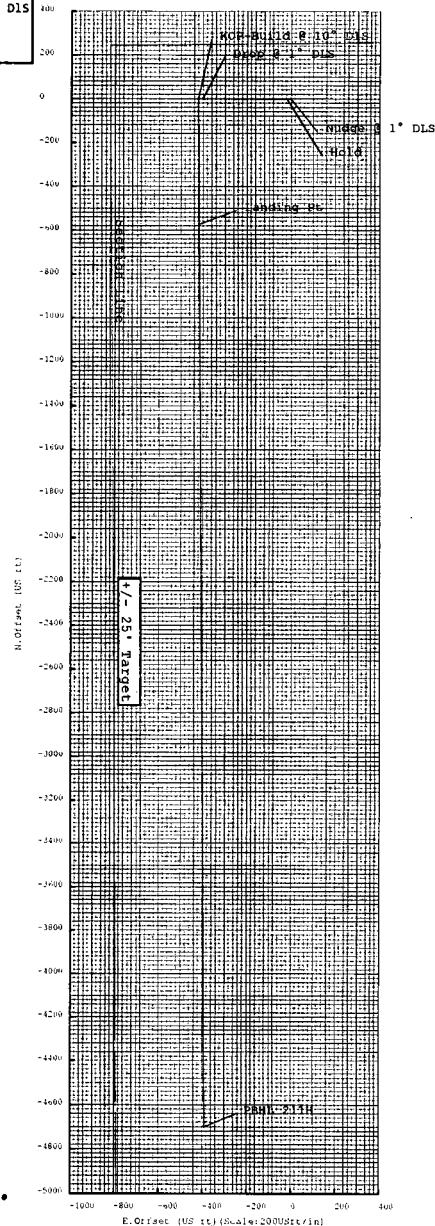



Commitment Runs Deep

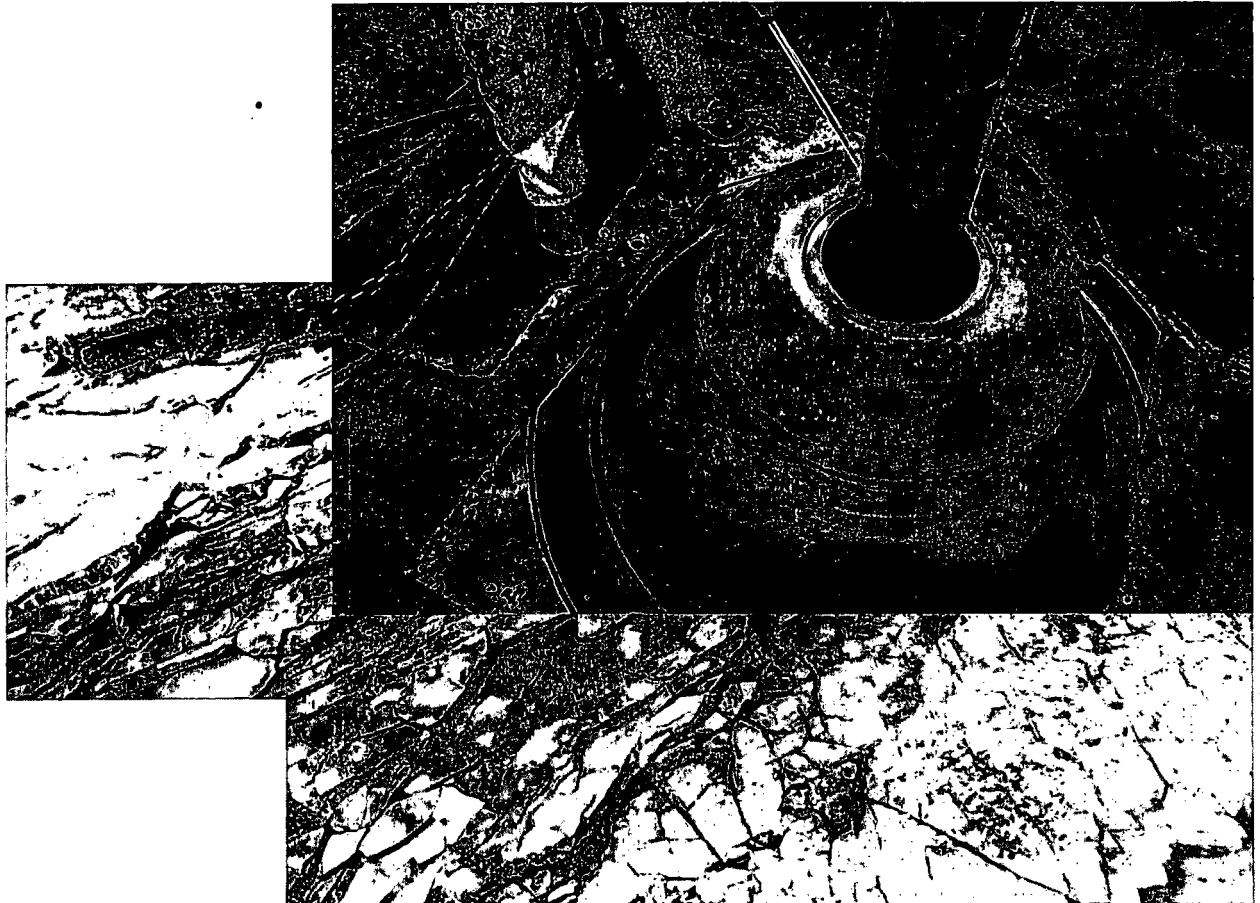

Design Plan
Operation and Maintenance Plan
Closure Plan

SENM - Closed Loop Systems
June 2010

Formation Points: (Relative to Slot centre)(TVD relative to Drill Floor)	Name	MD (US ft)	Inc (°)	TVL (US ft)	N. Offset (US ft)	E. Offset (US ft)	N. Offset (US ft)	E. Offset (US ft)	Formation Points: (Relative to Slot centre)(TVD relative to Drill Floor)
10500	10500	179.62	10447.47	141.75	-144.53	-420.04	477337.17	735787.09	10
10600	10600	179.62	10516.09	214.32	-217.1	-419.56	477264.6	735787.57	10
10700	10700	179.62	10571.06	297.7	-300.48	-419.01	477181.22	735788.12	10
10800	10800	179.62	10610.72	389.36	-392.14	-418.41	477099.56	735788.72	10
10900	10900	179.62	10633.86	486.52	-489.29	-417.77	476992.41	735789.36	10
10983.96	10983.96	179.62	10640	570.17	-572.94	-417.21	476908.76	735789.92	10
11000	11000	179.62	10640	586.99	-588.99	-416.45	476792.71	735790.02	0
11100	11100	179.62	10640	686.22	-688.99	-415.77	476692.71	735790.68	0
11200	11200	179.62	10640	786.22	-788.98	-415.78	476592.72	735791.35	0
11300	11300	179.62	10640	886.22	-888.98	-415.12	476492.72	735792.01	0
11400	11400	179.62	10640	986.22	-988.98	-414.46	476392.72	735792.67	0
11500	11500	179.62	10640	1086.22	-1088.98	-413.8	476292.72	735793.33	0
11600	11600	179.62	10640	1186.22	-1188.98	-413.14	476192.72	735793.99	0
11700	11700	179.62	10640	1286.22	-1288.97	-412.48	476092.73	735794.65	0
11800	11800	179.62	10640	1386.22	-1388.97	-411.82	475992.73	735795.31	0
11900	11900	179.62	10640	1486.22	-1488.97	-411.16	475892.73	735795.97	0
12000	12000	179.62	10640	1586.22	-1588.96	-410.5	475792.74	735796.63	0
12100	12100	179.62	10640	1686.22	-1688.96	-409.84	475692.74	735797.29	0
12200	12200	179.62	10640	1786.22	-1788.96	-409.17	475592.74	735797.96	0
12300	12300	179.62	10640	1886.22	-1888.96	-408.51	475492.74	735798.62	0
12400	12400	179.62	10640	1986.22	-1988.96	-407.85	475392.74	735799.28	0
12500	12500	179.62	10640	2086.22	-2088.96	-407.19	475292.75	735799.94	0
12600	12600	179.62	10640	2186.22	-2188.95	-406.53	475192.75	735800.6	0
12700	12700	179.62	10640	2286.22	-2288.95	-405.87	475092.75	735801.26	0
12800	12800	179.62	10640	2386.22	-2388.95	-405.21	474992.75	735801.92	0
12900	12900	179.62	10640	2486.22	-2488.95	-404.55	474892.75	735802.58	0
13000	13000	179.62	10640	2586.22	-2588.95	-403.89	474792.76	735803.24	0
13100	13100	179.62	10640	2686.22	-2688.94	-403.22	474692.76	735803.91	0
13200	13200	179.62	10640	2786.22	-2788.94	-402.56	474592.76	735804.57	0
13300	13300	179.62	10640	2886.22	-2888.94	-401.9	474492.76	735805.23	0
13400	13400	179.62	10640	2986.22	-2988.94	-401.24	474392.77	735805.89	0
13500	13500	179.62	10640	3086.22	-3088.93	-400.58	474292.77	735806.55	0
13600	13600	179.62	10640	3186.22	-3188.93	-399.92	474192.77	735807.21	0
13700	13700	179.62	10640	3286.22	-3288.93	-399.26	474092.77	735807.87	0
13800	13800	179.62	10640	3386.22	-3388.93	-398.6	473992.77	735808.53	0
13900	13900	179.62	10640	3486.22	-3488.93	-397.94	473892.78	735809.19	0
14000	14000	179.62	10640	3586.22	-3588.92	-397.28	473792.78	735809.85	0
14100	14100	179.62	10640	3686.22	-3688.92	-396.61	473692.78	735810.52	0
14200	14200	179.62	10640	3786.22	-3788.92	-395.95	473592.78	735811.18	0
14300	14300	179.62	10640	3886.22	-3888.92	-395.29	473492.79	735811.84	0
14400	14400	179.62	10640	3986.22	-3988.91	-394.63	473392.79	735812.5	0
14500	14500	179.62	10640	4086.22	-4088.91	-393.97	473292.79	735813.16	0
14600	14600	179.62	10640	4186.22	-4188.91	-393.31	473192.79	735813.82	0
14700	14700	179.62	10640	4286.22	-4288.91	-392.65	473092.79	735814.48	0
14800	14800	179.62	10640	4386.22	-4388.91	-391.99	472992.79	735815.14	0
14900	14900	179.62	10640	4486.22	-4488.9	-391.33	472892.8	735815.8	0
15000	15000	179.62	10640	4586.22	-4588.9	-390.67	472792.8	735816.46	0
15100	15100	179.62	10640	4686.22	-4688.9	-390	472692.8	735817.13	0
15112.72	15112.72	179.62	10640	4698.94	-4701.62	-389.92	472608.08	735817.21	0
2nd BSPG Sand U	10386.82	30.29	179.62	10356	-78.2	-420.48	477403.5	735786.65	2nd BSPG Sand U
2nd BSPG Sand	10314.05	23.01	179.62	10291	-45.58	-420.7	477436.12	735786.43	2nd BSPG Sand
2nd BSPG Line	10022.91	0.61	270	10006	0	-420.67	477481.7	735786.46	2nd BSPG Line
1st BSPG Sand	9692.61	3.91	270	9676	0	-407.64	477481.7	735799.49	1st BSPG Sand
1st BSPG Line	8641.05	4.75	270	8628	0	-321.17	477481.7	735885.96	1st BSPG Line
Brushy Canyon L	8167.42	4.75	270	8156	0	-281.96	477481.7	735925.17	Brushy Canyon L
Delaware	4666.01	1.41	270	4666	0	-1.74	477481.7	736205.39	Delaware
Salado	1371	0	0	1371	0	0	477481.7	736207.13	Salado
Rustler	1016	0	0	1016	0	0	477481.7	736207.13	Rustler
Inc	(°)	(US ft)	(US ft)	(US ft)	(US ft)	(US ft)	(US ft)	(US ft)	Inc
MD	(US ft)	(US ft)	(US ft)	(US ft)	(US ft)	(US ft)	(US ft)	(US ft)	MD
Formation Points: (Relative to Slot centre)(TVD relative to Drill Floor)	Name	MD (US ft)	Inc (°)	TVL (US ft)	N. Offset (US ft)	E. Offset (US ft)	N. Offset (US ft)	E. Offset (US ft)	Formation Points: (Relative to Slot centre)(TVD relative to Drill Floor)

Landing Pt

I. Design Plan

Devon uses MI SWACO closed loop system (CLS). The MI SWACO CLS is designed to maintain drill solids at or below 5%. The equipment is arranged to progressively remove solids from the largest to the smallest size. Drilling fluids can thus be reused and savings is realized on mud and disposal costs. Dewatering may be required with the centrifuges to insure removal of ultra fine solids.

The drilling location is constructed to allow storm water to flow to a central sump normally the cellar. This insures no contamination leaves the drilling pad in the event of a spill. Storm water is reused in the mud system or stored in a reserve fluid tank farm until it can be reused. All lubricants, oils, or chemicals are removed immediately from the ground to prevent the contamination of storm water. An oil trap is normally installed on the sump if an oil spill occurs during a storm.

A tank farm is utilized to store drilling fluids including fresh water and brine fluids. The tank farm is constructed on a 20 ml plastic lined, bermed pad to prevent the contamination of the drilling site during a spill. Fluids from other sites may be stored in these tanks for processing by the solids control equipment and reused in the mud system. At the end of the well the fluids are transported from the tank farm to an adjoining well or to the next well for the rig.

Prior to installing a closed-loop system on site, the topsoil, if present, will be stripped and stockpiled for use as the final cover or fill at the time of closure.

Signs will be posted on the fence surrounding the closed-loop system unless the closed-loop system is located on a site where there is an existing well, that is operated by Devon.


II. Operations and Maintenance Plan

Primary Shakers: The primary shakers make the first removal of drill solids from the drilling mud as it leaves the well bore. The shakers are sized to handle maximum drilling rate at optimal screen size. The shakers normally remove solids down to 74 microns.

Mud Cleaner: The Mud Cleaner cleans the fluid after it leaves the shakers. A set of hydrocyclones are sized to handle 1.25 to 1.5 times the maximum circulating rate. This ensures all the fluid is being processed to an average cut point of 25 microns. The wet discharged is dewatered on a shaker equipped with ultra fine mesh screens and generally cut at 40 microns.



Closed Loop Schematic

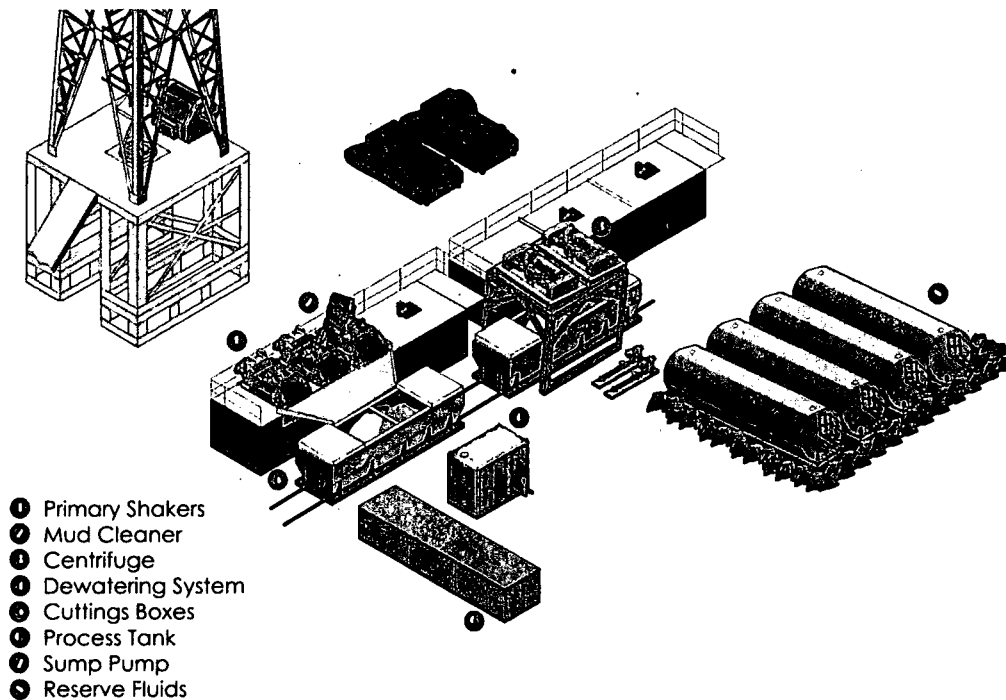

Mi SWACO

Centrifuges: The centrifuges can be one or two in number depending on the well geometry or depth of well. The centrifuges are sized to maintain low gravity solids at 5% or below. They may or may not need a dewatering system to enhance the removal rates. The centrifuges can make a cut point of 8-10 microns depending on bowl speed, feed rate, solids loading and other factors.

The centrifuge system is designed to work on the active system and be flexible to process incoming fluids from other locations. This set-up is also dependant on well factors.

Dewatering System: The dewatering system is a chemical mixing and dosing system designed to enhance the solids removal of the centrifuge. Not commonly used in shallow wells. It may contain pH adjustment, coagulant mixing and dosing, and polymer mixing and dosing. Chemical flocculation binds ultra fine solids into a mass that is within the centrifuge operating design. The

dewatering system improves the centrifuge cut point to infinity or allows for the return of clear water or brine fluid. This ability allows for the ultimate control of low gravity solids.

Cuttings Boxes: Cuttings boxes are utilized to capture drill solids that are discarded from the solids control equipment. These boxes are set upon a rail system that allows for the removal and replacement of a full box of cuttings with an empty one. They are equipped with a cover that insures no product is spilled into the environment during the transportation phase.

Process Tank: (Optional) The process tank allows for the holding and process of fluids that are being transferred into the mud system. Additionally, during times of lost circulation the process tank may hold active fluids that are removed for additional treatment. It can further be used as a mixing tank during well control conditions.

Sump and Sump Pump: The sump is used to collect storm water and the pump is used to transfer this fluid to the active system or to the tank for to hold in reserve. It can also be used to collect fluids that may escape during spills. The location contains drainage ditches that allow the location fluids to drain to the sump.

Reserve Fluids (Tank Farm): A series of frac tanks are used to replace the reserve pit. These are steel tanks that are equipped with a manifold system and a transfer pump. These tanks can contain any number of fluids used during the drilling process. These can include fresh water, cut brine, and saturated salt fluid. The fluid can be from the active well or reclaimed fluid from other locations. A 20 ml liner and berm system is employed to ensure the fluids do not migrate to the environment during a spill.

If a leak develops, the appropriate division district office will be notified within 48 hours of the discovery and the leak will be addressed. Spill prevention is accomplished by maintaining pump packing, hoses, and pipe fittings to insure no leaks are occurring. During an upset condition the source of the spill is isolated and repaired as soon as it is discovered. Free liquid is removed by a diaphragm pump and returned to the mud system. Loose topsoil may be used to stabilize the spill and the contaminated soil is excavated and placed in the cuttings boxes. After the well is finished and the rig has moved, the entire location is scrapped and testing will be performed to determine if a release has occurred.

All trash is kept in a wire mesh enclosure and removed to an approved landfill when full. All spent motor oils are kept in separate containers and they are removed and sent to an approved recycling center. Any spilled lubricants, pipe

dope, or regulated chemicals are removed from soil and sent to landfills approved for these products.

These operations are monitored by Mi Swaco service technicians. Daily logs are maintained to ensure optimal equipment operation and maintenance. Screen and chemical use is logged to maintain inventory control. Fluid properties are monitored and recorded and drilling mud volumes are accounted for in the mud storage farm. This data is kept for end of well review to insure performance goals are met. Lessons learned are logged and used to help with continuous improvement.

A MI SWACO field supervisor manages from 3-5 wells. They are responsible for training personnel, supervising installations, and inspecting sites for compliance of MI SWACO safety and operational policy.

III. Closure Plan

A maximum 340' X 340' caliche pad is built per well. All of the trucks and steel tanks fit on this pad. All fluid cuttings go to the steel tanks to be hauled by various trucking companies to an agency approved disposal.

A multibowl wellhead may be used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested.

Devon proposes using a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be 3000 (3M) psi.

- Wellhead will be installed by wellhead representatives.
- If the welding is performed by a third party, the wellhead representative will monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
- Wellhead representative will install the test plug for the initial BOP test.
- Wellhead company will install a solid steel body pack-off to completely isolate the lower head after cementing intermediate casing. After installation of the pack-off, the pack-off and the lower flange will be tested to 3M, as shown on the attached schematic. Everything above the pack-off will not have been altered whatsoever from the initial nipple up. Therefore the BOP components will not be retested at that time.
- If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head will be cut and top out operations will be conducted.
- Devon will pressure test all seals above and below the mandrel (but still above the casing) to full working pressure rating.
- Devon will test the casing to 0.22 psi/ft or 1500 psi, whichever is greater, as per Onshore Order #2.

After running the 13-3/8" surface casing, a 13-5/8" BOP/BOPE system with a minimum rating of 3M will be installed on the wellhead system and will undergo a 250 psi low pressure test followed by a 3,000 psi high pressure test. The 3,000 psi high and 250 psi low test will cover testing requirements a maximum of 30 days, as per Onshore Order #2. If the well is not complete within 30 days of this BOP test, another full BOP test will be conducted, as per Onshore Order #2.

After running the 9-5/8' intermediate casing with a mandrel hanger, the 13-5/8" BOP/BOPE system with a minimum rating of 3M will already be installed on the wellhead.

The pipe rams will be operated and checked each 24 hour period and each time the drill pipe is out of the hole. These tests will be logged in the daily driller's log. A 2" kill line and 3" choke line will be incorporated into the drilling spool below the ram BOP. In addition to the rams and annular preventer, additional BOP accessories include a kelly cock, floor safety valve, choke lines, and choke manifold rated at 3,000 psi WP.

Devon's proposed wellhead manufactures will be FMC Technologies, Cactus Wellhead, or Cameron.

