

HOBBS OCD

NOV 04 2019

FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

RECEIVED

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. NMNM013647
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other		6. If Indian, Allottee or Tribe Name
1c. Type of Completion: <input type="checkbox"/> Hydraulic Fracturing <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		7. If Unit or CA Agreement, Name and No.
2. Name of Operator MARATHON OIL PERMIAN LLC (372098)		8. Lease Name and Well No. CHARLIE MURPHY 6 TB FC 14H (3726318)
3a. Address 5555 San Felipe St. Houston TX 77056	3b. Phone No. (include area code) (713)629-6600	9. API Well No. 30-025-46884
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NENE / 272 FNL / 1171 FEL / LAT 32.0788805 / LONG -103.4018227 At proposed prod. zone SESE / 100 FSL / 1309 FEL / LAT 32.0508597 / LONG -103.4022144		10. Field and Pool, or Exploratory WC-025 G 08-S2535340 / BONE SPRING
11. Sec., T, R, M, or Blk. and Survey or Area SEC 6 / T26S / R35E / NMP		12. County or Parish LEA
13. State NM		14. Distance in miles and direction from nearest town or post office* 12.2 miles
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 100 feet	16. No of acres in lease 1281.31	17. Spacing Unit dedicated to this well 640
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 1330 feet	19. Proposed Depth 12524 feet / 22582 feet	20. BLM/BIA Bond No. in file FED: NMB001555
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3270 feet	22. Approximate date work will start* 08/01/2019	23. Estimated duration 30 days
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be requested by the BLM. |

25. Signature (Electronic Submission)	Name (Printed/Typed) Jennifer Van Curen / Ph: (432)687-7328	Date 04/11/2019
Title Permitting Team Lead		
Approved by (Signature) (Electronic Submission)	Name (Printed/Typed) Cody Layton / Ph: (575)234-5959	Date 10/25/2019
Title Assistant Field Manager Lands & Minerals Office CARLSBAD		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

APPROVED WITH CONDITIONS
Approval Date: 10/25/2019

INSTRUCTIONS

GENERAL: This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

ITEM 1: If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

ITEM 4: Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

ITEM 14: Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the well, and any other required information, should be furnished when required by Federal agency offices.

ITEMS 15 AND 18: If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective productive zone.

ITEM 22: Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

ITEM 24: If the proposal will involve hydraulic fracturing operations, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

PRINCIPAL PURPOSES: The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service well or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

ROUTINE USE: Information from the record and/or the record will be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM connects this information to an evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications. Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease. The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Connection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

Additional Operator Remarks

Location of Well

1. SHL: NENE / 272 FNL / 1171 FEL / TWSP: 26S / RANGE: 35E / SECTION: 6 / LAT: 32.0788805 / LONG: -103.4018227 (TVD: 0 feet, MD: 0 feet)
PPP: NESE / 2640 FSL / 1310 FEL / TWSP: 26S / RANGE: 35E / SECTION: 7 / LAT: 32.0578423 / LONG: -103.4022144 (TVD: 12493 feet, MD: 20035 feet)
BHL: SESE / 100 FSL / 1309 FEL / TWSP: 26S / RANGE: 35E / SECTION: 7 / LAT: 32.0508597 / LONG: -103.4022144 (TVD: 12524 feet, MD: 22582 feet)

BLM Point of Contact

Name: Tanja Baca

Title: Admin Support Assistant

Phone: 5752345940

Email: tabaca@blm.gov

CONFIDENTIAL

Review and Appeal Rights

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.

Geologic Conditions of Approval

:

The operator proposes to set surface casing at 1040', which will not adequately protect all usable water zones. Instead, set casing at 1120. This is an acceptable set point. If salt is encountered, set casing 25 feet above the salt. The operator proposes to set intermediate casing at 5400', which will be in the Delaware Sands. Instead, set casing at 5330 feet, which will be in the Lamar Limestone. Run GR and CNL logs from TD to the surface and submit to the BLM as soon as possible for future development.

CONFIDENTIAL

**PECOS DISTRICT
DRILLING OPERATIONS
CONDITIONS OF APPROVAL**

OPERATOR'S NAME:	Marathon Oil Permian LLC
LEASE NO.:	NMNM013647
WELL NAME & NO.:	Charlie Murphy 6 TB FC 14H
SURFACE HOLE FOOTAGE:	272' FNL & 1171' FEL
BOTTOM HOLE FOOTAGE:	100' FSL & 1309' FEL
LOCATION:	Section 6, T 26S, R 35E, NMPM
COUNTY:	Lea County, New Mexico

H2S	<input checked="" type="radio"/> Yes	<input type="radio"/> No	
Potash	<input checked="" type="radio"/> None	<input type="radio"/> Secretary	<input type="radio"/> R-111-P
Cave/Karst Potential	<input checked="" type="radio"/> Low	<input type="radio"/> Medium	<input type="radio"/> High
Variance	<input type="radio"/> None	<input checked="" type="radio"/> Flex Hose	<input type="radio"/> Other
Wellhead	<input type="radio"/> Conventional	<input checked="" type="radio"/> Multibowl	<input type="radio"/> Both
Other	<input type="checkbox"/> 4 String Area	<input type="checkbox"/> Capitan Reef	<input type="checkbox"/> WIPP
Other	<input checked="" type="checkbox"/> Fluid Filled	<input type="checkbox"/> Cement Squeeze	<input type="checkbox"/> Pilot Hole
Special Requirements	<input type="checkbox"/> Water Disposal	<input checked="" type="checkbox"/> COM	<input type="checkbox"/> Unit

A. HYDROGEN SULFIDE

1. Hydrogen Sulfide (H2S) monitors shall be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

1. The 13-3/8" surface casing shall be set at approximately 1120' (a minimum of 25' into the Rustler Anhydrite and above the salt) and cemented to surface to adequately protect groundwater detected as deep as 1110'.
 - a. **If cement does not circulate to surface**, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of **6 hours** after pumping cement, ideally between 8-10 hours after completing the cement job.
 - b. WOC time for a primary cement job will be a minimum of **8 hours** or **500 psi** compressive strength, whichever is greater. This is to include the lead cement.
 - c. If cement falls back, remedial cementing will be done prior to drilling out that string.
 - d. WOC time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 psi compressive strength, whichever is greater.

2. The 9-5/8" intermediate casing shall be set at approximately 5330' (in the Lamar Limestone) and cemented to surface.
 - a. If cement does not circulate to surface, see B.1.a, c & d.
 - b. This casing must be kept at least 1/3 full at all times in order to meet BLM collapse requirements.
3. The 7" production casing shall be cemented with at least 200' tie-back into the previous casing.
4. The 4-1/2" production liner shall be cemented with at least 100' tie-back into the previous casing.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).
2. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M) psi**.
3. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the intermediate casing shoe shall be **10,000 (10M) psi**. **Variance approved to use a 5M annular. The annular must be tested to full working pressure (5000 psi).**

D. SPECIAL REQUIREMENTS

1. The operator will submit a Communitization Agreement to the Carlsbad Field Office, 620 E Greene St. Carlsbad, New Mexico 88220, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
2. The well sign on location shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

DR 8/18/2019

GENERAL REQUIREMENTS

1. The BLM is to be notified in advance for a representative to witness:
 - a. Spudding well (minimum of 24 hours)
 - b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
 - c. BOP/BOPE tests (minimum of 4 hours)
 - ☒ Eddy County
Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822
 - ☒ Lea County
Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240,
(575) 393-3612
2. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig:
 - i. Notify the BLM when moving in and removing the Spudder Rig.
 - ii. Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - iii. BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
3. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
4. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be available upon request. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or

if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.

2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification

matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.

3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).
 - c. The tests shall be done by an independent service company utilizing a test plug. The results of the test shall be reported to the appropriate BLM office.
 - d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a

maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.

- e. All tests are required to be recorded on a calibrated test chart and shall be made available upon request.
- f. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes. This test shall be performed prior to the test at full stack pressure.
- g. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

- 1. Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

- 1. All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.
- 2. Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Operator Certification Data Report

11/01/2019

Operator Certification

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

NAME: Melissa Szudera

Signed on: 04/01/2019

Title: REGULATORY COMPLIANCE REPRESENTATIVE

Street Address:

City:

State:

Zip:

Phone: (713)296-3179

Email address: mszudera@marathonoil.com

Field Representative

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Application Data Report

11/01/2019

APD ID: 10400040421

Submission Date: 04/11/2019

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: CHARLIE MURPHY 6 TB FC

Well Number: 14H

Well Type: OIL WELL

Well Work Type: Drill

Highlighted data
reflects the most
recent changes

[Show Final Text](#)

Section 1 - General

APD ID: 10400040421

Tie to previous NOS?

Submission Date: 04/11/2019

BLM Office: CARLSBAD

User: Melissa Szudera

Title: REGULATORY COMPLIANCE
REPRESENTATIVE

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM013647

Lease Acres: 1281.31

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? YES

Permitting Agent? NO

APD Operator: MARATHON OIL PERMIAN LLC

Operator letter of designation:

Operator Info

Operator Organization Name: MARATHON OIL PERMIAN LLC

Operator Address: 5555 San Felipe St.

Zip: 77056

Operator PO Box:

Operator City: Houston

State: TX

Operator Phone: (713)629-6600

Operator Internet Address:

Section 2 - Well Information

Well in Master Development Plan? NO

Master Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: CHARLIE MURPHY 6 TB FC

Well Number: 14H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: WC 025 G 08
S2535340

Pool Name: BONE SPRING
37570

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: CHARLIE MURPHY 6 TB FC

Well Number: 14H

Is the proposed well in an area containing other mineral resources? NATURAL GAS,OIL

Is the proposed well in a Helium production area? N Use Existing Well Pad? NO New surface disturbance?

Type of Well Pad: MULTIPLE WELL

Multiple Well Pad Name:

Number: 299-10

Well Class: HORIZONTAL

CHARLIE MURPHY 6 FC

Number of Legs: 1

Well Work Type: Drill

Well Type: OIL WELL

Describe Well Type:

Well sub-Type: INFILL

Describe sub-type:

Distance to town: 12.2 Miles

Distance to nearest well: 1330 FT

Distance to lease line: 100 FT

Reservoir well spacing assigned acres Measurement: 640 Acres

Well plat: CHARLIE_MURPHY_6_TB_FC_14H_REV_5__CERTIFIED__FORM_C102__02_04_2019_20190329101305.pdf

Well work start Date: 08/01/2019

Duration: 30 DAYS

Section 3 - Well Location Table

Survey Type: RECTANGULAR

Describe Survey Type:

Datum: NAD83

Vertical Datum: NAVD88

Survey number: 3954

Reference Datum:

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce
SHL Leg #1	272	FNL	117 1	FEL	26S	35E	6	Aliquot NENE	32.07888 05	- 103.4018 227	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 013647	327 0	0	0	
KOP Leg #1	100	FNL	131 2	FEL	26S	35E	6	Aliquot NENE	32.07935 34	- 103.4022 791	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 013647	- 865 6	119 42	119 26	
PPP Leg #1	264 0	FSL	131 0	FEL	26S	35E	7	Aliquot NESE	32.05784 23	- 103.4022 304	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 115000	- 922 3	200 35	124 93	

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: CHARLIE MURPHY 6 TB FC

Well Number: 14H

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce
EXIT Leg #1	100	FSL	130 9	FEL	26S	35E	7	Aliquot SESE	32.05085 97	- 103.4022 144	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 115000	- 925 4	225 82	125 24	
BHL Leg #1	100	FSL	130 9	FEL	26S	35E	7	Aliquot SESE	32.05085 97	- 103.4022 144	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 115000	- 925 4	225 82	125 24	



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

11/01/2019

APD ID: 10400040421

Submission Date: 04/11/2019

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: CHARLIE MURPHY 6 TB FC

Well Number: 14H

Well Type: OIL WELL

Well Work Type: Drill

[Show Final Text](#)

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
1	RUSTLER	3270	1021	1021	ANHYDRITE, DOLOMIT E	OTHER : Brine	N
2	SALADO	1810	1460	1460	ANHYDRITE, SALT	OTHER : Brine	N
3	CASTILE	-228	3498	3514	SALT	OTHER : Brine	N
4	LAMAR	-2050	5320	5336	OTHER : Sand/Shales	OIL	N
5	BELL CANYON	-2078	5348	5364	SHALE, SANDSTONE	OIL	N
6	BRUSHY CANYON	-4686	7956	8023	OTHER : Sands/Carbonate	OIL	N
7	BONE SPRING	-5977	9247	9263	OTHER : Sands/Carbonate	OIL	Y

Section 2 - Blowout Prevention

Pressure Rating (PSI): 10M

Rating Depth: 15000

Requesting Variance? YES

Variance request: A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart. BOP variance is requested for the annular to be 5000 psi on 10000 psi BOP stack.

Testing Procedure: - BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated on drill plan attachment per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table attached. If the system is upgraded all the components installed will be functional and tested. The Annular will be tested to 100% of 5000 working pressure (see attached BOP plan). The working pressure of 10000 for the Blind Ram and Double Ram will be tested to 10000 psi. - Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock, full opening safety valve / inside BOP and choke lines and choke manifold. See attached schematics. - Formation integrity test will be performed per Onshore Order #2. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i. - A multibowl wellhead is being used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested. See attached schematic.

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: CHARLIE MURPHY 6 TB FC

Well Number: 14H

Choke Diagram Attachment:

DRILL_2_CHARLIEMURPHY_10M.THREE_CHOKE_MANIFOLD.BLM_20190329132141.pdf

DRILL_2_CHARLIEMURPHY_Choke_Line_Flex_III_Rig_20190329132205.pdf

DRILL_2_CHARLIEMURPHY_Choke_Line_Test_Chart_SN_63393_20190329132234.pdf

DRILL_2_CHARLIEMURPHY_Contitech_Hose_SN_663393_20190329132245.pdf

BOP Diagram Attachment:

DRILL_2_BOP_CHARLIEMURPHY_DrillingWellControlPlan_20190329132301.pdf

DRILL_2_BOP_CHARLIEMURPHY_WH_TH_DESIGN__2_DRAWING_20190329132310.pdf

DRILL_2_BOP__10M_Flex.BOPE_x_5M_ANNULAR.BLM_20191009062922.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	1040	0	1040	3270	2230	1040	J-55	54.5	ST&C	5.52	2.5	BUOY	2.5	BUOY	2.5
2	INTERMEDIATE	12.25	9.625	NEW	API	N	0	5400	0	5383	3270	-2113	5400	J-55	36	LT&C	1.39	1.42	BUOY	1.8	BUOY	1.8
3	PRODUCTION	8.75	7.0	NEW	API	N	0	11800	0	11783	3270	-8513	11800	P-110	29	BUTT	2.21	1.18	BUOY	1.9	BUOY	1.9
4	LINER	6.125	4.5	NEW	API	N	11500	22582	11483	12524	-8213	-9254	11082	P-110	13.5	BUTT	1.33	1.56	BUOY	1.88	BUOY	1.88

Casing Attachments

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: CHARLIE MURPHY 6 TB FC

Well Number: 14H

Casing Attachments

Casing ID: 1 **String Type:** SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

DRILL_3_CHARLIEMURPHY_Surface_20190329132450.pdf

Casing ID: 2 **String Type:** INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

DRILL_3_CHARLIEMURPHY_Int_1_Csg_20190329132641.pdf

Casing ID: 3 **String Type:** PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

DRILL_3_CHARLIEMURPHY__Int_II_Csg_20190329132913.pdf

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: CHARLIE MURPHY 6 TB FC

Well Number: 14H

Casing Attachments

Casing ID: 4 String Type: LINER

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

DRILL_3_CHARLIEMURPHY_ProdLiner_20190329133301.pdf

Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
LINER	Lead					0					
LINER	Tail										
SURFACE	Lead				55	1.73					
SURFACE	Tail				55						
INTERMEDIATE	Lead				100	2.21					
INTERMEDIATE	Tail				100						
PRODUCTION	Lead				250	3.21					
PRODUCTION	Tail				250						

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: CHARLIE MURPHY 6 TB FC

Well Number: 14H

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: The necessary mud products for additional weight and fluid loss control will be on location at all times.

Describe the mud monitoring system utilized: Losses or gains in the mud system will be monitored visually/manually as well as with an electronic PVT.

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
1180 0	2258 2	OIL-BASED MUD	11.5	13							
1040	5400	OTHER : Brine	9.9	10.2							
0	1040	WATER-BASED MUD	8.4	8.8							
5400	1180 0	OTHER : Cut Brine	8.8	9.4							

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

None Planned.

List of open and cased hole logs run in the well:

GR

Coring operation description for the well:

None Planned.

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: CHARLIE MURPHY 6 TB FC

Well Number: 14H

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 7780

Anticipated Surface Pressure: 5024.71

Anticipated Bottom Hole Temperature(F): 195

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geohazards description:

Contingency Plans geohazards attachment:

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations plan:

DRILL_7_CHARLIEMURPHY_ContingencyPlan_20190329134054.pdf

DRILL_7_CHARLIEMURPHY_H2S_Contingency_Plan_Summary_Rev1_20190329134113.pdf

DRILL_7_CHARLIEMURPHY_Pad_Flex_III_Rev1_20190329134122.pdf

Drill_7_CHARLIEMURPHY_GCP_20190329135820.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

DRILL_8_CHARLIEMURPHY6TBFC_14H_PrelimA_36x48WM_20190329135846.pdf

DRILL_8_CHARLIEMURPHY_Lease_Map_20190329135907.pdf

DRILL_8_CHARLIEMURPHY6TBFC_14H_PrelimA_WPReport_20190329140129.pdf

Other proposed operations facets description:

- Kelly cock will be in the drill string at all times.
- A full opening drill pipe stabbing valve having the appropriate connections will be on the rig floor unobstructed and readily accessible at all times.
- Hydrogen Sulfide detection equipment will be in operation after drilling out the surface casing shoe until the production casing is cemented. Breathing equipment will be on location upon drilling the surface casing shoe until total depth is reached. If Hydrogen Sulfide is encountered, measured amounts and formations will be reported to the BLM.
- Marathon Oil will apply for an NSL and receive approval from the OCD prior to drilling this well.

Potential Hazards:

- H2S detection equipment will be in operation after drilling out the surface casing shoe until the production casing has been cemented. Breathing equipment will be on location from drilling out the surface shoe until production casing is cemented. If H2S is encountered the operator will comply with Onshore Order #6.
- No abnormal temperatures or pressures are anticipated. All personnel will be familiar with all aspects of safe operation of equipment being used to drill this well. Adequate flare lines will be installed off the mud/gas separator where gas may be flared safely.
- No losses are anticipated at this time.
- All personnel will be familiar with all aspects of safe operation of equipment being used to drill this well.
- Adequate flare lines will be installed off the mud/gas separator where gas may be flared safely.

Other proposed operations facets attachment:

DRILL_8_CHARLIEMURPHYBatch_Drilling_Plan_and_Surface_Rig_Request_20190329135922.pdf

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: CHARLIE MURPHY 6 TB FC

Well Number: 14H

CHARLIE_MURPHY_6_TB_FC_14H_20190401052502.pdf

Other Variance attachment:

**THIS H2S DRILLING OPERATIONS PLAN WAS
PREPARED BY: Sean Chamblee
Strategic Account Manager
Cell: 713-703-6295**

**TOTAL SAFETY INC
1420 East Greene St
Carlsbad, NM 88220
Phone: 432-561-5049**

H2S DRILLING OPERATIONS PLAN INDEX

- I. INTRODUCTION
 - A. Oil Company Address and Legal Description of Well Site
 - B. Directions to Well Site
 - C. Purpose of Plan
- II. LOCATION LAYOUT
 - A. Location Map
 - B. General & Specific Area Maps
- III. SAFETY EQUIPMENT
 - A. Safety Equipment Provided by TOTAL SAFETY INC.
 - B. Type of Equipment and Storage Locations
 - C. Maximum Number of People on Location at any one time
 - D. Safety Equipment Layout Diagram
- IV. OPERATING PROCEDURES
 - A. Blowout Prevention Measures During Drilling
 - B. Gas Monitoring Equipment
 - C. Crew Training and Protection
 - D. Metallurgical Considerations
 - E. Mud Program and Treating
 - F. Well Control Equipment
- V. OPERATING CONDITIONS
 - A. Definition of Warning Flags
 - B. Circulating Out Kick (Wait and Weight Method)
 - C. Coring Operations in H2S Bearing Zones
- VI. EMERGENCY PROCEDURES
 - A. Sounding Alarm
 - B. Drilling Crew Actions
 - C. Responsibilities of Personnel
 - D. Steps to be Taken
 - E. Company and Contract Personnel
 - F. Leak Ignition
 - G. General Equipment
 - H. Critical Operations

VII. LIST OF APPENDICES

- A. Emergency and Medical Facilities
- B. Law Enforcement Agencies and Fire Fighting Facilities
- C. Well Control Specialists
- D. Governmental Agencies

VIII. RESIDENTS AND LANDOWNERS

- A. Radius of Exposure Map with Residences Shown
- B. Residents Within Radius of Exposure and Telephone Numbers

IX. ADDITIONAL INFORMATION

- A. Hydrogen Sulfide Essay
- B. Hydrogen Sulfide Hazards
- C. Toxicity Table
- D. Treatment
- E. Characteristics of H₂S
- F. Safe Practices

INTRODUCTION

H2S DRILLING OPERATIONS PLAN

This Drilling Operations Plan was written specifically for:

**MARATHON OIL COMPANY
3122 NATIONAL PARKS HIGHWAY
CALRSBAD, NM 88220**

Action Plan for Accidental Release of H2S

**CHARLIE MURPHY 6
WXY FC Well # 12H
TB FC Well # 14H
WA FC Well # 15H
WXY FC Well # 18H**

LEA COUNTY, NM

Information, provisions and practices, as set forth in this plan, may be subject to revision and/or updating.

03/08/2019

MARATHON OIL COMPANY
3122 NATIONAL PARKS HIGHWAY
CARLSBAD, NM 88220

CHARLIE MURPHY 6
WXY FC Well # 12H
TB FC Well # 14H
WA FC Well # 15H
WXY FC Well # 18H

LEA COUNTY, NM

Directions:

FROM THE MARATHON OFFICE AT 4111 TIDWELL, CARLSBAD, NM, HEAD SOUTH ON TIDWELL RD TOWARD US HWY 285 N FOR 0.2 MILES. TURN LEFT ONTO US HWY 285 S, HEADING SOUTHEAST, FOR 5.1 MILES TO NM HWY 31. TURN LEFT ONTO NM HWY 31, HEADING EAST, FOR 7.7 MILES TO NM HWY 128 E. TURN RIGHT ONTO NM HWY 128 E, HEADING EAST, FOR 38.7 MILES TO BATTLE AXE ROAD (COUNTY ROAD 2). TURN RIGHT ONTO BATTLE AXE ROAD, HEADING SOUTH, FOR 0.3 MILES. KEEP RIGHT TO STAY ON BATTLE AXE ROAD, HEADING WEST, FOR 2.6 MILES. TURN RIGHT TO STAY ON BATTLE AXE ROAD, HEADING WEST, FOR 9.3 MILES TO A CALICHE ROAD. TURN LEFT ONTO A CALICHE ROAD, HEADING SOUTH, FOR 0.7 MILES TO A "T" INTERSECTION OF CALICHE ROADS. TURN LEFT ONTO A CALICHE ROAD, HEADING EAST FOR 8.3 MILES TO A CALICHE ROAD. TURN LEFT ONTO A CALICHE ROAD, HEADING NORTH FOR 0.3 MILES TO THE PROPOSED LEASE ROAD FOR THE CHARLIE MURPHY 6 FC WXY 12H-TB 14H-WA 15H-WXY 18H. TURN RIGHT ONTO SAID PROPOSED LEASE ROAD, HEADING NORTH, FOR 0.6 MILES, ENTERING THE SOUTHWEST CORNER OF SAID WELL PAD.

GPS Coordinates: 32.07888150, -103.40191987
LEA COUNTY, NEW MEXICO

PURPOSE OF PLAN: The purpose of this plan is to safeguard the lives of the public, contract personnel and company personnel in the event of equipment failure or disasters during drilling or completion operations in formations that may contain Hydrogen Sulfide Gas, H₂S.

As a precautionary measure, this Drilling Plan has been prepared to assure the safety of all concerned, should a disaster occur. However, the Oil Company Representative may have specified materials and practices for the drilling or completion of this well, which supersede the minimum requirements as outlined in this plan.

Definitions: For the purpose of this plan the following definitions are to be referred to:

Controlled Release – Any release that is planned and occurs during normal operations. A controlled release is managed per the procedures outlined in this section.

Uncontrolled Release – Any release that is unplanned and not immediately contained utilizing established shut-in procedures. An uncontrolled release is normally associated with a loss of well control.

SCBA – (Self Contained Breathing Apparatus) – A full-face mask respirator with a supplied positive pressure air source.

Donned SCBA – When it is required per this plan to “don” a SCBA, personnel will be 100% masked up and be on supplied breathing air.

SCBA On Person – When it is required per this plan to have SCBA “on person”, personnel will be required to wear the SCBA equipment - but not be masked up.

“Qualified Buddy” – Person who has been fit tested and is trained and is familiar with the requirements of donning an SCBA. This person will provide immediate assistance to another person who may be utilizing an SCBA or SkaPack in an IDLH atmosphere in the event of an emergency situation.

In Scope Personnel – Rig Personnel who will be working or otherwise present in potential H₂S release areas, including the rig floor, cellar, pits, and shaker areas. This would not include 3rd party contractors who do not have a function, besides evacuating the rig, during an emergency condition such as during a well control event or H₂S / LEL alarm. All qualified personnel that have a function to shut a well in during an emergency will be considered In-Scope per this plan

Out of Scope Personnel – All personnel that are not in scope will be Out of Scope per the definition of this plan


H₂S Office – Onsite office trailer space or vehicle that will be designated as the H₂S office

Marathon H2S Plan Custodian – Marathon HES Advisor, Supervisor or Technician that has been specifically assigned per the authorization page of this plan to maintain this document.


LEGEND	
PROPOSED WELL PAD	—
ARCH SURVEY LIMITS	—
PROPOSED LEASE ROAD	—
EXISTING LEASE ROAD	- - - -
PROPERTY LINE	— R —
WATER LINE	— W —
SECTION LINE	— - - -

WELL LOCATION PLAT

CHARLIE MURPHY 6 FC
SEC. 6 TWP. 26-S RGE. 35-E
SURVEY: N.M.P.M.
COUNTY: LEA
OPERATOR: MARATHON OIL PERMIAN LLC
U.S.G.S. TOPOGRAPHIC MAP: ANDREW'S PLACE, N.M.

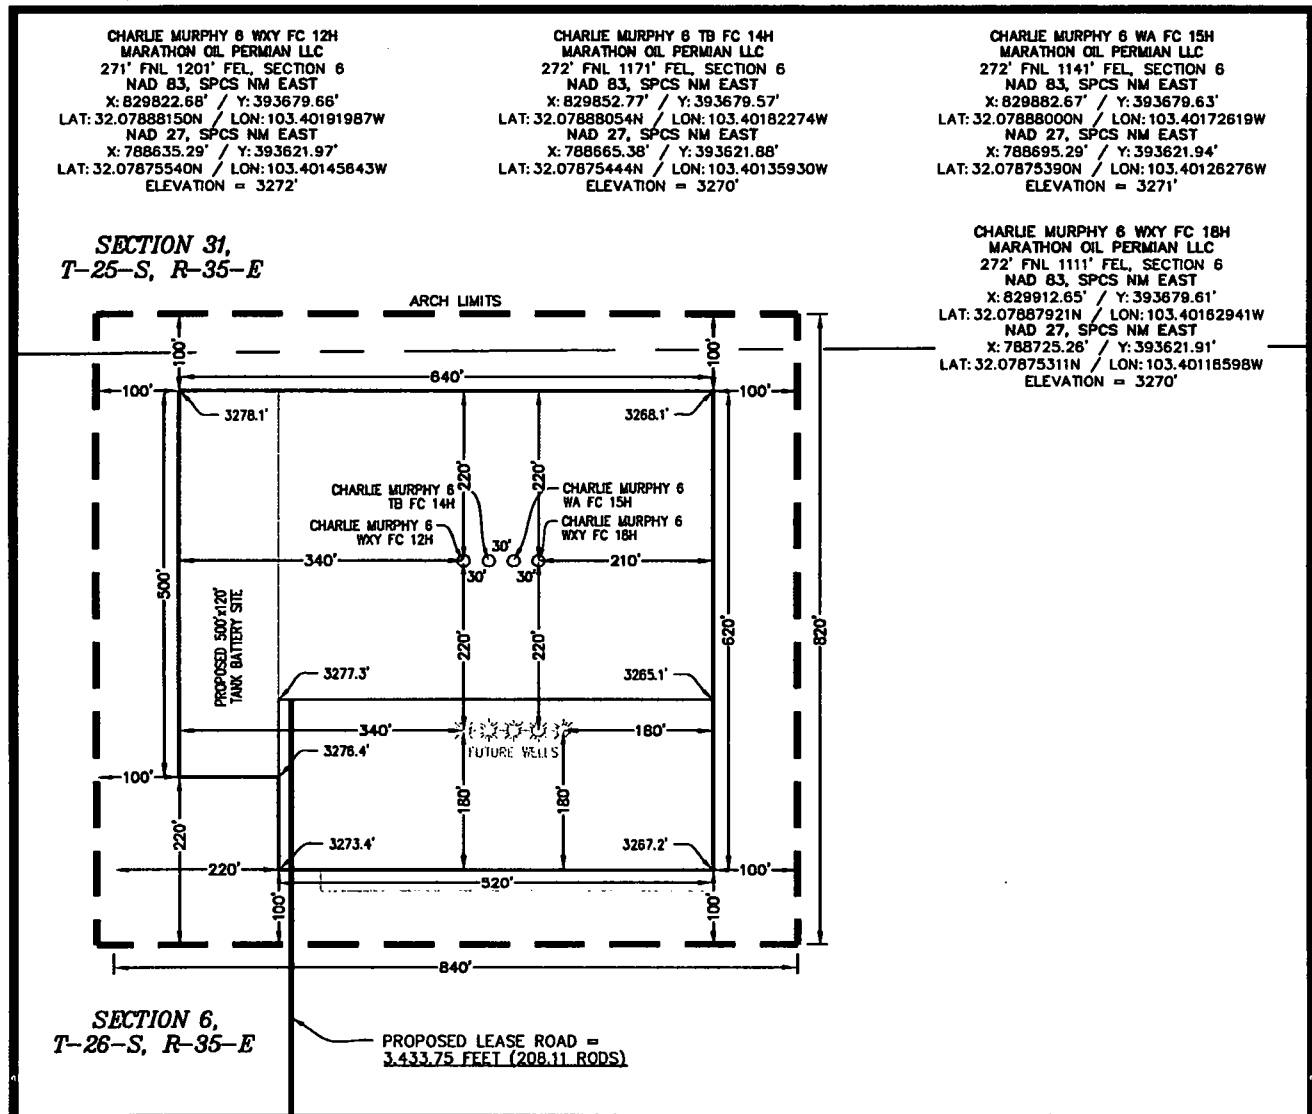

NOTE:
THIS IS NOT A BOUNDARY SURVEY,
APPARENT PROPERTY CORNERS AND
PROPERTY LINES ARE SHOWN FOR
INFORMATION ONLY. BOUNDARY DATA SHOWN
IS FROM STATE OF NEW MEXICO OIL
CONSERVATION DIVISION FORM C-102
INCLUDED IN THIS SUBMITAL.



NOVEMBER 29, 2018

[Signature]

DAVID W. MYERS 11403




2	11/27/18	JCS
REV.	DATE	BY

SHEET 5 OF 6

PREPARED BY:
R-SQUARED GLOBAL, LLC
1309 LOUISVILLE AVENUE, MONROE, LA 71201
518-323-8900 OFFICE
JOB No. R3984_001

NEW OR RECONSTRUCTED ACCESS ROADS

CHARLIE MURPHY 6 FC
 SEC. 6 TWP. 26-S RGE. 35-E
 SURVEY: N.M.P.M.
 COUNTY: LEA
 OPERATOR: MARATHON OIL PERMIAN LLC
 U.S.G.S. TOPOGRAPHIC MAP: ANDREW'S PLACE, N.M.

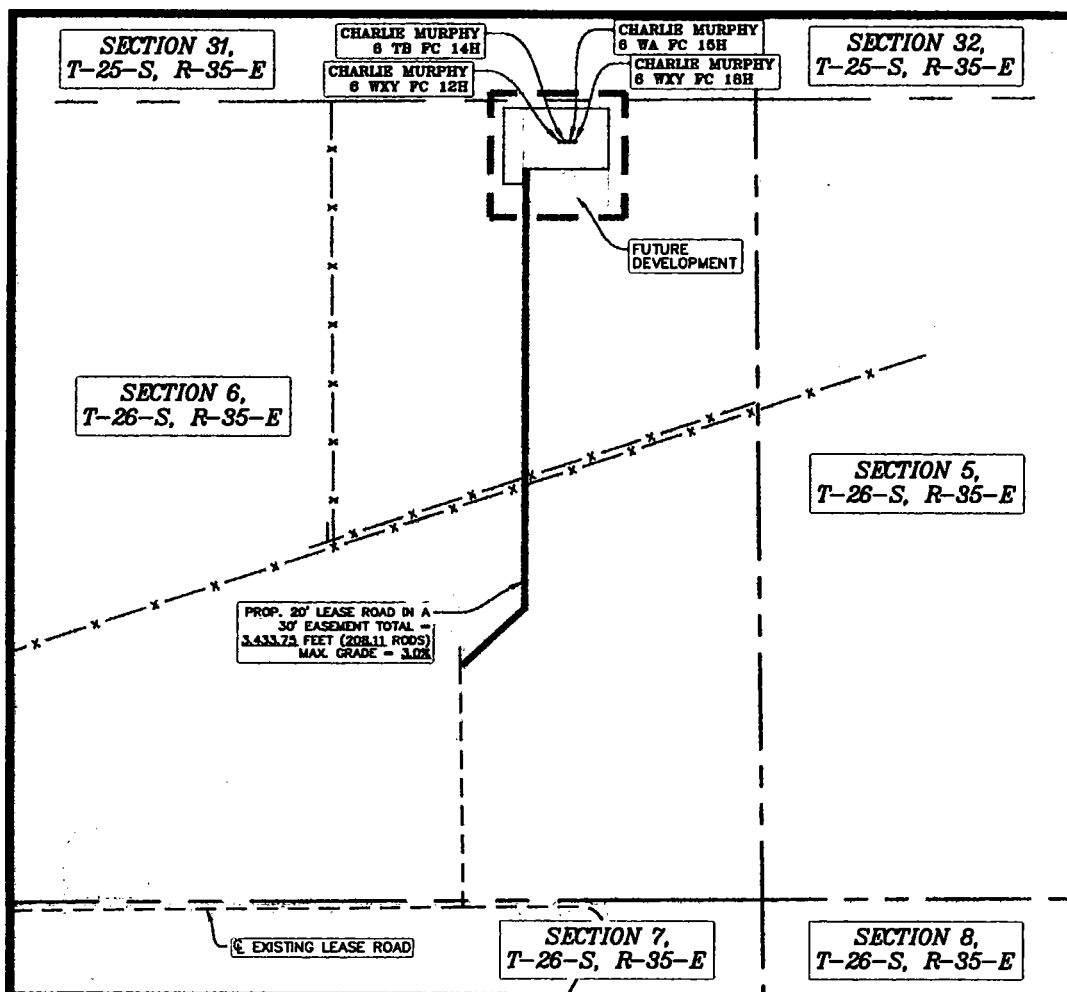

2	11/27/18	JCS
REV.	DATE	BY

SCALE: 1" = 1,000'

LEGEND

PROPOSED WELL PAD	—————	DRILL ISLAND	- - - - -
ARCH SURVEY LIMITS	=====	WATER LINE	— w — w —
EXISTING LEASE ROAD	- - - - -	EXISTING PIPELINE	- + - + - + - + -
PROPOSED LEASE ROAD	=====	FENCE	— x — x —
SECTION LINE	—————	WELLS	•
PROPERTY LINE	— R —		

SHEET 1 OF 6

PREPARED BY:
 R-SQUARED GLOBAL, LLC
 1309 LOUISVILLE AVENUE, MONROE, LA 71201
 318-323-8800 OFFICE
 JOB No. E3984_001

SAFETY EQUIPMENT

All H2S related Safety Equipment must be installed, tested and Operational at a depth of 500 feet above, or 3 days prior to penetrating the first zone expected to contain H2S.

SAFETY EQUIPMENT PROVIDED BY TOTAL SAFETY INC.


<u>QTY</u>	<u>EQUIPMENT</u>
6 each	30-minute self-contained breathing apparatus
6 each	ELSA Escape Packs
1 Lot	Sufficient low-pressure airline hose with quick connects
1	6 Channel fixed H2S monitor
4	H2S Sensors (Loc determined at rig up – General: Cellar, Shale Shaker, floor/driller area)
4	Explosion proof Alarm Station (1-Drill Floor, 1- Pits/Shakers, 1- Generators, 1 Quarters area)
10	Personal H2S Monitors
1	Gastec pump type gas detector
Set	Various range of H2s & SO2 detector tubes
2 each	Windsocks w/frames and poles
1 Set	H2S and briefing area signs
1 Set	Well condition signs and flags
1	Flare Gun & Flares

TYPE OF EQUIPMENT AND STORAGE LOCATIONS

1. There will be six 30-minute self-contained breathing apparatus on location. They will be positioned as follows: Two at Briefing Area #1 Two at Briefing Area #2, Two at rig dog house. SCBA Facepieces will be equipped with voice amplifiers for effective means of communication when using protective breathing apparatus.
2. There will be six Escape-type packs on location. One for the Derrickman. One on the Shaker. One at the bottom of rig dog house stairway and spares.
3. A Gastec, pump type, gas detector with low and high range detector tubes for H₂S and SO₂ will be located in the doghouse
4. Two Briefing Areas will be designated at opposite ends of the location.
5. The Briefing Area most upwind is designated as the Safety Briefing Area #1. In an emergency, personnel must assemble at this upwind area for instructions from their supervisor.
6. The H₂S 'Safety' trailer provided by Total Safety, Inc. will contain a cascade system of at least 5 each -300 C.F. air cylinders that will provide a continuous air supply to air lines located on the rig. Note: This trailer will **Only** be provided if H₂S conditions require the use of the Air Trailer. (If Required)
7. Two windsocks will be installed so as to be visible from all parts of the location.
8. A well condition warning sign will be displayed at the location entrance to advise of current operating conditions. The condition signs must be at least 200' from the entrance but not more than 500' away.
9. A list of emergency telephone numbers will be kept on rig floor, tool pusher's trailer, the Oil Company's trailer and in the "safety" trailer (if Provided).
10. The primary means of communication will be cell phones.

11. A barricade will be available to block the entrance to location should an emergency occur. In most cases the use of a vehicle is used to block the entrance.
12. A 6-channel H₂S monitor will be located in the doghouse. The 3 sensors will be installed: one on the shale shaker, one at the Cellar, one at the rig floor.
13. An undulating high and low pitch siren and light will be installed on the derrick "A" leg.
14. If H₂S concentration reach 10 ppm an explosion-proof bug blower (fan) will be installed under the rig floor to disperse possible accumulations of H₂S.
15. Any time it is necessary to flare gas containing H₂S, a Sulfur Dioxide monitor or Detector tubes will be used to determine SO₂ concentrations.
16. A flare gun with flares will also be provided in the event it is necessary to ignite the well from a safe distance.

SAFETY EQUIPMENT LAYOUT

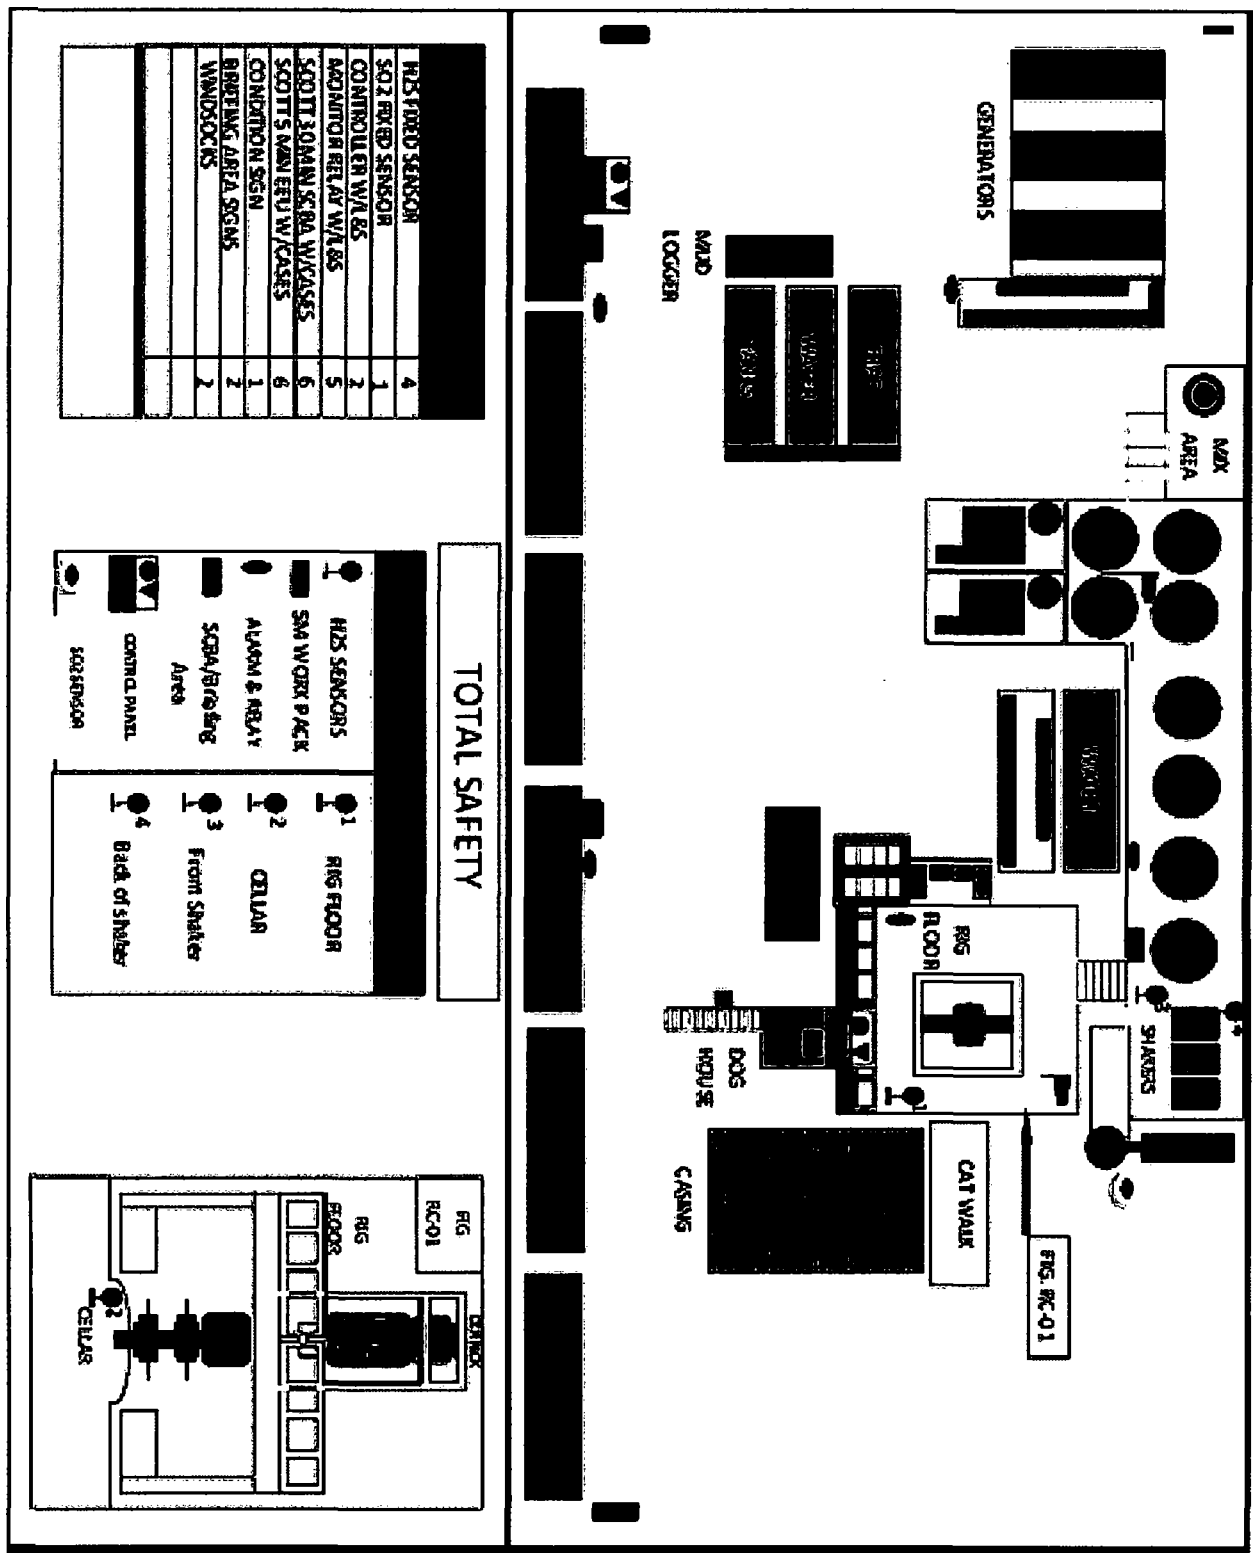

OPERATING PROCEDURES

BLOWOUT PREVENTION MEASURES DURING DRILLING

1. Blowout Prevention Requirements:

All BOP equipment shall meet the American Petroleum Institute specifications as to materials acceptable for H₂S service and tested accordingly (or to BLM specifications).

2. Drilling String Requirements:

All drill string components are to be of material that meets the American Petroleum Institute's specifications for H₂S service. All drill string components should be inspected to IADC critical service specifications prior to running in well.

GAS MONITORING EQUIPMENT

1. A continuous H₂S detection system, consisting of three H₂S detectors and an audible/visual warning system will be in operating during all phases of this H₂S Drilling Operations Plan. The detection system will be adjusted and calibrated such that an H₂S exposure of 10 ppm or higher (at any sensor) will trigger the audible and visual portion (wailing or yelping siren) of the warning system (i.e. H₂S continually present at or above threshold levels) a trained operator or H₂S supervisor will monitor the H₂S detection system.

2. When approaching or completing H₂S formations, crewmembers may attach personnel H₂S monitors to their person.

3. Hand held H₂S sampling gas detectors will be used to check areas not covered by automatic monitoring equipment.

CREW TRAINING AND PROTECTION

1. All personnel working at the well site will be properly trained in accordance with the general training requirements outlined in the API Recommended Practices for Safe Drilling of Wells Containing H₂S. The training will cover, but will not be limited to, the following:

- a. General information of H₂S AND SO₂ GAS
- b. Hazards of these gases
- c. Safety equipment on location
- d. Proper use and care of personal protective equipment
- e. Operational procedures in dealing with H₂S gas
- f. Evacuation procedures
- g. First aid, reviving an H₂S victim, toxicity, etc.
- h. Designated Safe Briefing Areas
- i. Buddy System
- j. Regulations
- k. Review of Drilling Operations Plan

2. Initial training shall be completed when drilling reaches, a depth of 500' above or 3 days prior to penetrating (whichever comes first) the first zone containing or expected to contain H₂S. It must also include a review of the site specific Drilling Operations Plan and, if applicable, the Public Protections Plan.

3. Weekly H₂S and well control drills for all personnel on each working crew shall be conducted.

4. All training sessions and drills shall be recorded on the driller's log or its equivalent.

5. Safety Equipment:

As outlined in the Safety Equipment index, H₂S safety protection equipment will be available to/or assigned each person on location.

6. One person (by job title) shall be designated and identified to all on-site personnel as the person primarily responsible for the overall operation of the on-site safety and training programs. This will be the PIC

METALLURGICAL CONSIDERATIONS

1. Steel drill pipe used in H₂S environments should have yield strength of 95,000psi or less because of potential embrittlement problems. Must conform to the current National Association of Corrosion Engineers (NACE) Standard MR-0175-90, Material Requirement, Sulfide Stress Cracking Resistant Metallica Material for Oil Field Equipment. Drill stem joints near the top of the drill string are normally under the highest stress levels during drilling and do not have the protection of elevated down hole temperatures. These factors should be considered in design of the drill string. Precautions should be taken to minimize drill string stress caused by conditions such as excessive dogleg severity, improper torque, whip, abrasive wear or tool joints and joint imbalance. American Petroleum Institute, Bulletin RR 7G, will be used as a guideline for drill string precautions.
2. Corrosion inhibitors may be applied to the drill pipe or to the mud system as an additional safeguard.
3. Blowout preventors should meet or exceed the recommendations for H₂S service as set forth in the latest edition of API RI 53.

MUD PROGRAM AND TREATING

1. It is of utmost importance that the mud be closely monitored for detection of H₂S and reliability of the H₂S treating chemicals.
2. Identification and analysis of sulfides in the mud and mud filtrates will be carried out per operators prescribed procedures.
3. The mud system will be pre-treated with Zinc Carbonate, Ironite Sponge or similar chemicals of H₂S control prior to drilling into the H₂s bearing formation. Sufficient quantities of corrosion inhibitor should be on location to treat the drill string during Drill Stem Test Operations. Additionally, Aqua Ammonia should be on hand to treat the drill string for crew protection, should H₂S be encountered while tripping string following drill stem testing

WELL CONTROL EQUIPMENT

1. Flare System

a. A flare system shall be designed and installed to safely gather and burn H₂S Bearing gas.

1. Flare lines shall be located as far from the operating site as feasible and in a manner to compensate for wind changes.
2. The flare line mouth shall be located not less then 150' from wellbore.
3. Flare lines shall be straight unless targeted with running tees.
4. Flare Gun & Flares to ignite the well

2. Remote Controlled Choke

a. A remote controlled choke shall be installed for all H₂S drilling and where feasible for completion operations. A remote controlled valve may be used in lieu of this requirement for completions operations.

3. Mud-gas separators and rotating heads shall be installed and operable for all exploratory wells.

OPERATING CONDITIONS

A Well Condition Sign and Flag will be posted on all access roads to the location. The sign shall be legible and large enough to be read by all persons entering the well site and be placed a minimum of 200' but no more than 500' from the well site which allows vehicles to turn around at a safe distance prior to reaching the site.

DEFINITION OF WARNING FLAGS

1. Condition:
GREEN-NORMAL OPERATIONS
Any operation where the possibility of encountering H₂S exists but no H₂S has been detected.
2. Condition:
YELLOW-POTENTIAL DANGER, CAUTION
Any operation where the possibility of encountering H₂S exists and in all situations where concentrations of H₂S are detected in the air below the threshold level (10ppm)
 - a. Cause of condition:
 - *Circulating up drill breaks
 - *Trip gas after trip
 - *Circulating out gas on choke
 - *Poisonous gas present, but below threshold concentrations
 - *Drill stem test
 - b. Safety Action:
 - *Check safety equipment and keep it with you
 - *Be alert for a change in condition
 - *Follow instructions
3. Condition:
RED-EXTREME DANGER
Presence of H₂S at or greater than 10ppm. Breathing apparatus must be worn.
 - a. Safety action:

***MASK UP.** All personal will have protective breathing equipment with them. All nonessential personnel will move to the Safe Briefing Area and stay there until instructed to do otherwise. All essential Qualified Personnel, using the "Buddy System" (those necessary to maintain control of the well) will don breathing apparatus to perform operations related to well control.

The decision to ignite the well is the responsibility of the operator's on-site representative and should be made only as a last resort, when it is clear that:

- *human life is endangered**
- *there is no hope of controlling the well under prevailing conditions**

Order evacuation of local people within the danger zone. Request help from local authorities, State Police, Sheriff's Dept. and Service Representative.

CIRCULATING OUT KICK (WAIT AND WEIGHT METHOD)

If it is suspected that H₂S is present with the gas whenever a kick is taken, the wait and weight method of eliminating gas and raising the mud will be followed.

1. Wait and Weight Method:

a. The wait and Weight Method is:

- *increase density of mud in pits to 'kill' weight mud.**
- *open choke and bring pump to initial circulating pressure by holding casing pressure at original valve until pump is up to predetermined speed.**
- *when initial circulating pressure is obtained on drill pipe, zero pump stroke counter and record time.**
- *reduce drill pipe pressure from initial circulating pressure to final circulating pressure by using pump strokes and/or time according to graph**
- *when 'kill' weight mud is at the bit, hold final circulating pressure until kill weight mud is to surface.**

b. If a kick has occurred, the standard blowout procedure will be followed and the wait and weight method will be used to kill the well. When the well has been put on the choke and circulation has been established, the following safety procedure must be established.

- *determine when gas is anticipated to reach surface.**

- *all non-essential personnel must be moved to safe briefing area
- *all remaining personnel will check out and keep with them their protective breathing apparatus.
- *mud men will see that the proper amount of H₂S scavenging chemical is in the mud and record times checked
- *make sure ignition flare is burning and valves are open to designated flare stacks

CORING OPERATIONS IN H₂S BEARING ZONES

1. Personal protective breathing apparatus will be worn from 10 to 15 stands in advance of retrieving the core barrel. Cores to be transported should be sealed and marked to the presence of H₂S.
 - a. Yellow Caution Flag will be flown at the well condition sign.
 - b. The "NO SMOKING" rule will be enforced

DRILL STEM TESTING OF H₂S ZONES

1. The DST subsurface equipment will be suitable for H₂S service as recommended by the API
2. Drill stem testing of H₂S zone will be conducted in daylight hours
3. All non-essential personnel will be moved to an established safe area or off location
4. The "NO SMOKING" rule will be enforced
5. DST fluids will be circulated through a remote controlled choke and a separator to permit flaring of gas. A continuous pilot light will be used.
6. A yellow or red flag will be flown at entrance to location depending on present gas condition
7. If warranted, the use of Aqua Ammonia for neutralizing the toxicity of H₂S from drill string
 - a. During drill stem tests adequate Filming Amine for H₂S corrosion and Aqua Ammonia for neutralizing H₂S should be on location.
8. On completion of DST, if H₂S contaminated formation fluids or gases are present in drill string, floor workers will be masked up before test valve is removed from drill string and continue "mask

on" conditions until such time that readings in the work area do not exceed 10ppm of H₂S gas.

EMERGENCY PROCEDURES

SOUNDING ALARM

In case of an alarm the crews will muster up at the designated area. Total Safety will be dispatched with (2) HES Techs who are to go in under protective breathing air and check the alarm readings and sniff ambient air for the presence of H₂S.

By no means are the Co. Rep or HES Advisor to go in under air with the HES Tech. If there is another method in place where the Rig Manager is to go in with the Tech we need to ensure that the rig company has cleared them and that they are properly trained.

1. The fact is to be instilled in the minds of all rig personnel that the sounding alarm means only one thing: H₂S IS PRESENT. Everyone is to proceed to his assigned station and the contingency plan is put into effect.

DRILLING CREW ACTIONS

1. All personnel will don their protective breathing apparatus. The driller will take necessary precautions as indicated in operating procedures.
2. The Buddy system will be implemented. All personnel will act upon directions from the operator's on-site representative.
3. If there are non-essential personnel on location, they will move off location.
4. Entrance to the location will be patrolled, and the proper well condition flag will be displayed at the entrance to the location.

RESPONSIBILITIES OF PERSONNEL

In order to assure the proper execution of this plan, it is essential that one person be responsible for and in complete charge of implementing these procedures. The responsibility will be as follows:

1. The operator's on-site representative or his assistant
2. Contract Tool Pusher

STEPS TO BE TAKEN

In the event of an accidental release of a potentially hazardous volume of H₂S, the following steps will be taken:

1. Contact by the quickest means of communications: the main offices of Oil Company & Contractor as listed on the preceding page.
2. An assigned crewmember will blockade the entrance to the location. No unauthorized personnel will be allowed entry into the location.
3. The operator's on-site representative will remain on location and attempt to regain control of the well.
4. The drilling company's rig superintendent will begin evacuation of those persons in immediate danger. He will begin by telephoning residents in the danger zone. In the event of no contact by telephoning, the tool pusher will proceed at once to each dwelling for a person-to-person contact. In the event the tool pusher cannot leave the location, he will assign a responsible crewmember to proceed in the evacuation off local residents. Upon arrival, the Sheriff's Department and TOTAL SAFETY personnel will aid in further evacuation.

LEAK IGNITION

Leak Ignition procedure: (used to ignite a leak in the event it becomes necessary to protect the public)

1. Two men, the operator's on-site representative and the contractor's rig superintendent or TOTAL SAFETY's representative(s), wearing self-contained pressure demand air masks must determine the perimeter of the flammable area. This should be done with one man using an H₂S detector and the other one using a flammable gas

detector. The flammable perimeter should be established at 30% to 40% of the lower flammable limits.

2. After the flammable perimeter has been established and all employees and citizens have been removed from the area, the ignition team should move to the up-wind area of the leak perimeter and fire a flare into the area if the leak isn't ignited on the first attempt, move in 20 to 30 feet and fire again. Continue moving in and firing until the leak is ignited or the flammable gas detector indicates the ignition team is moving into the hazardous area. If trouble is incurred in igniting the leak by firing toward the leak, try firing 40 degrees to 90 degrees to each side of the area where you have been firing. If still no ignition is accomplished ignite the copper line burner and push it into the leak area. This should accomplish ignition. If ignition is not possible due to the makeup of the gas, the toxic leak perimeter must be established and maintained to insure evacuation is completed and continue until the emergency is secure.
3. The following equipment and man-power will be required to support the ignition team:
 - a. one flare gun with flares
 - b. four pressure demand air packs
 - c. two nylon ropes tied to the ignition team
 - d. two men in a clear area equipped with air packs
 - e. portable propane bottle with copper line
4. The person with the final authority to ignite the well.

GENERAL EQUIPMENT

1. Two areas on the location will be designated as Briefing Areas. The one that is upwind from the well will be designated a the "Safe Briefing Area"
2. In the case of an emergency, personnel will assemble in the upwind area as per prior instructions from the operator's representative.
3. The H2S "Safety" trailer provide by TOTAL SAFETY will contain 10 air cylinders, a resuscitator, one 30-minute air pack and will have a windsock.
4. Two other windsocks will be installed.
5. A condition warning sign will be displayed at the location entrance.
6. A list of emergency telephone numbers will be kept on the rig floor, tool pusher's trailer and the Oil Company's trailer.

7. Two barricades will be available to block the entrance to location.
8. An undulating high and low pitch siren will be installed.
9. A telephone line or mobile phone will be available at the well site for incoming and outgoing communications.

CRITICAL OPERATIONS

These guidelines will be implemented during H2S alarms on drilling locations with the intent of minimizing catastrophic damage of "**critical tasks**" **ONLY** and exposure of field personnel (e.g. cement in the stack). We will wait on Total Safety (or H2S Safety Company) for all other alarm events that aren't defined as "critical".

- 1.) H2S alarm sounds, crews secure well, and muster based off of wind direction. MOC Operation, MOC Safety, and H2S service company notification will be made and representative from the H2S Service Company is in route to location.
- 2.) Two qualified in scope personnel will don SCBA, utilizing the "buddy system", and respond to area of H2S alarm location to verify the presence of H2S utilizing hand held four gas analyzer or other approved and provided method.
- 3.) If no H2S is found, the "all clear" will be authorized by the Marathon Oil Drilling Superintendent and HES to resume operations. H2S service company will still be required to respond.

Note: Personnel will return to muster area awaiting H2S service company and additional equipment if H2S is verified.

Note: Personnel will be trained annually on H2S and the elements of this guideline. The MOC HES Advisor and Co Man will receive hands on training from a H2S service company field tech, on how to properly identify the location of the alarming sensor, and the proper method for checking the alarmed area.

APPENDICES

EMERGENCY & MEDICAL FACILITIES:

Marathon Oil Corporation Emergency Numbers			
Brent Evans	Drilling Manager	blevans@marathonoil.com	832 967-8474
Mark Bly	Drilling Superintendent	permiansuper@marathonoil.com	281-840-0467
Chad Butler	Drilling Superintendent	permiansuper@marathonoil.com	281-840-0467
Jacob Beaty	Drilling Engineer	jabeaty@marathonoil.com	713-296-1915
Noah Adams	HES Professional	njadams@marathonoil.com	713-591-4068
Nick Rogers	Lead HES Advisor	permiansuper@marathonoil.com	281-659-3734
Scott Doughty	Lead HES Advisor	permiansuper@marathonoil.com	281-659-3734
H&P 480	Company Man	Hp480@marathonoil.com	281-768-9946
H&P 498	Company Man	Hp498@marathonoil.com	281-745-0771
H&P 441	Company Man	Hp441@marathonoil.com	
Precision 582	Company Man	prec582@marathonoil.com	
Precision 594	Company Man	Prec594@marathonoil.com	
H&P 480	HES Advisor	Hp480hes@marathonoil.com	
H&P 498	HES Advisor	Hp498hes@marathonoil.com	
H&P 441	HES Advisor	Hp441hes@marathonoil.com	
Precision 582	HES Advisor	prec582@marathonoil.com	
Precision 594	HES Advisor	Prec594hes@marathonoil.com	

Emergency Services Area Numbers: Or Call 911			
Sheriff (Eddy County, NM)	575-887-7551	New Mexico Poison Control	800-222-1222
Sheriff (Lea County, NM)	575-396-3611	Border Patrol (Las Cruces, NM)	575-528-6600
New Mexico State Police	575-392-5580/5588	Energy Minerals & Natural Resources Dept.	575-748-1283
Carlsbad Medical Center	575-887-4100	Environmental Health Dept.	505-476-8600
Lea Regional Medical Center	575-492-5000	OSHA (Santa Fe, NM)	505-827-2855
Police (Carlsbad, NM)	575-885-2111		
Police (Hobbs, NM)	575-392-9265		
Fire (Carlsbad, NM)	575-885-3124		
Fire (Hobbs, NM)	575-397-9308		
Ambulance Service	911	TOTAL SAFETY H2S – SAFETY SERVICES	432-561-5049


1. For Life Flight, 1st dial "911" They will determine nearest helicopter and confirm the need for helicopter.

RESIDENTS AND LANDOWNERS

THERE ARE NO RESIDENCE WITHIN 1 MILE RADIUS OF WELL LOCATION.

ONE-MILE RADIUS MAP

CHARLIE MURPHY 6 FC
SEC. 6 TWP. 26-S RGE. 35-E
SURVEY: N.M.P.M.
COUNTY: LEA
OPERATOR: MARATHON OIL PERMIAN LLC
U.S.G.S. TOPOGRAPHIC MAP: ANDREWS PLACE, NM, TX.

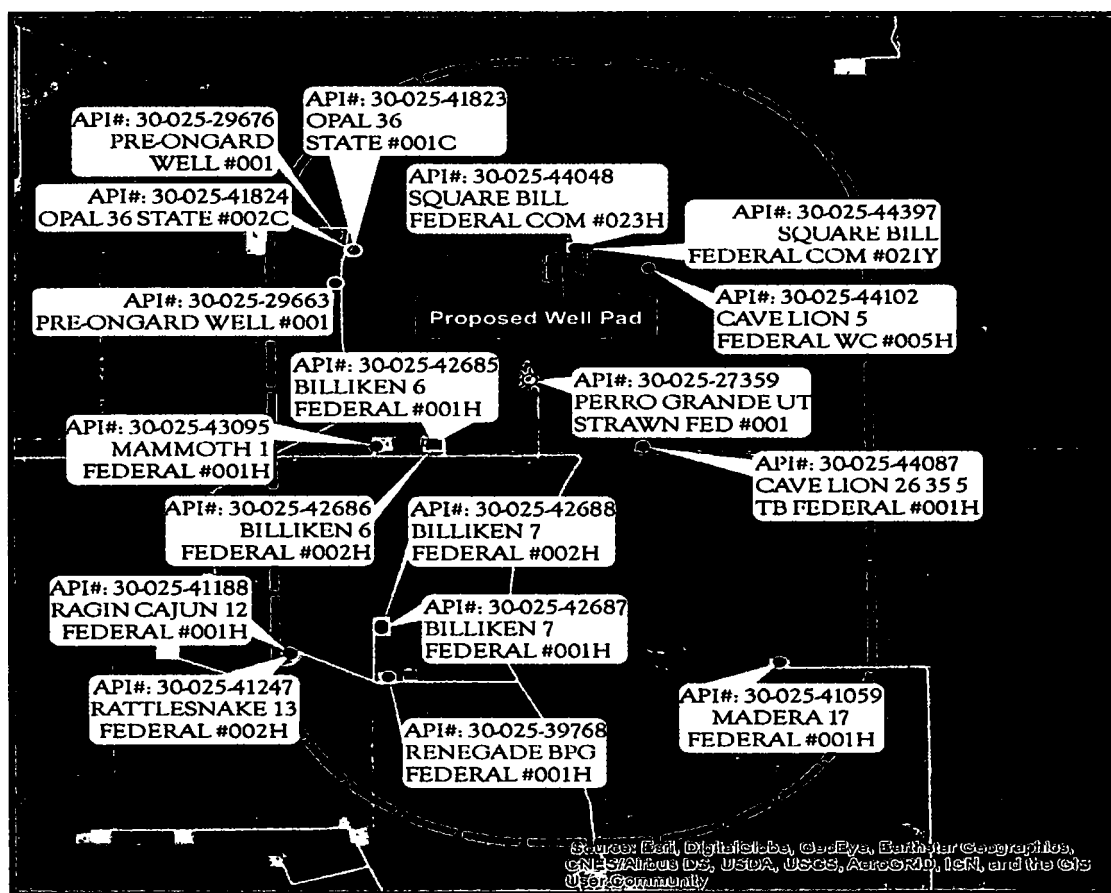

Proposed Well Pad

Arch Survey Limits

Section Line

CO2 Active

CO2 Cancelled

CO2, Plugged

Gas, Active

Gas, Cancelled

Gas, New

Gas, Plugged

Gas, Abandoned

Injection, Active

Injection, New

Injection, Plugged

Salt Water Injection, Cancelled

Injection, Abandoned

Oil, Active

Oil, Cancelled

Oil, New

Oil, Plugged

Oil, Abandoned

Salt Water Injection, Active

Salt Water Injection, New

Salt Water Injection, Plugged

Water, Active

Water, Plugged



SHEET 2 OF 6

PREPARED BY:
RSQUARED GLOBAL, LLC
1309 LOUISVILLE AVENUE, MONROE, LA 71201
713.313-6900 OFFICE
JOB No. R3934_001

ADDITIONAL INFORMATION

A. HYDROGEN SULFIDE ESSAY

A deadly enemy of those people employed in the petroleum industry, this gas can paralyze or kill quickly. At least part of the answer lies in education in the hazards, symptoms, characteristics, safe practices, treatment, and the proper use of personal protective equipment.

B. HYDROGEN SULFIDE HAZARDS

The principal hazard to personnel is asphyxiation or poisoning by inhalation. Hydrogen Sulfide is a colorless, flammable gas having an offensive odor and a sweetish taste. It is highly toxic and doubly hazardous because it is heavier than air (specific gravity = 1.19). Its offensive odor, like that of a rotten egg, has been used as an indicator by many old timers in the oil field, but is not a reliable warning of the presence of gas in a dangerous concentration because people differ greatly in their ability to detect smells. Where high concentrations are encountered, the olfactory nerves are rapidly paralyzed, diluting the sense of smell as a warning indicator. A concentration of a few hundredths of one percent higher than that causing irritation can cause asphyxia and death—in other words there is a very narrow margin between consciousness and unconsciousness, and between unconsciousness and death.

Where high concentrations cause respiratory paralysis, spontaneous breathing does not return unless artificial respiration is applied. Although breathing is paralyzed the heart may continue beating for ten minutes after the attack.

C. PHYSIOLOGICAL SYSTEMS

ACUTE: results in almost instantaneous asphyxia, with seeming respiratory paralysis acute poisoning, or strangulation, may occur after even a few seconds inhalation of high concentration and results in panting respiration, pallor, cramps, paralysis and almost immediate loss of consciousness with extreme rapidity from respiratory and cardiac paralysis. One breath of a sufficiently high concentration may have this result.

SUBACUTE: RESULTS IN IRRITATION, PRINCIPALLY OF THE EYES, PERSISTENT COUGH, TIGHTENING OR BURNING IN THE CHEST AND SKIN IRRITATION FOLLOVED BY DEPRESSION OF THE CENTRAL NERVOUS SYSTEM. The eye irritation ranges in severity from mild conjunctivitis to swelling and bulging of the conjunctiva photophobia (abnormal intolerance of light) and temporary blindness.

D. TREATMENT

1. Victim should be removed to fresh air immediately by rescuers wearing respiratory protective equipment. Protect yourself while rescuing.
2. If the victim is not breathing, begin immediately to apply artificial respiration. (See other chart for the chances for life after breathing has stopped.) If a resuscitator is available let another employee get it and prepare for use.
3. Treat for shock, keep victim warm and comfortable
4. Call a doctor, in all cases, victims of poisoning should be attended by a physician.

E. CHARACTERISTICS OF H₂S

1. Extremely Toxic (refer to chart for toxicity of Hydrogen Sulfide).
2. Heavier than air. Specific gravity= 1.19.
3. Colorless, has odor of rotten eggs.
4. Burns with a blue flame and produces sulfur Dioxide (SO₂) gas, which is very irritating to eyes and lungs. The SO₂ is also toxic and can cause serious injury.
5. H₂S is almost as toxic as hydrogen cyanide.
6. H₂S forms explosive mixture, with air between 4.3% and 46% by volume.
7. Between 5 and 6 times as toxic as carbon monoxide.
8. Produces irritation to eyes, throat, and respiratory tract.
9. Threshold Limit Value (TLV) maximum of eight hours exposure without protective respiratory equipment-10ppm.

F. SAFE PRACTICES

If you are faced with an H₂S problem in your operations, the following safe practices are recommended:

1. Be absolutely sure all concerned are familiar with the hazards concerning H₂S and how to avoid it.
2. All employees should know how to operate and maintain respiration equipment.
3. Be able to give and demonstrate artificial respiration.
4. Post areas where there is poisonous gas with suitable warning signs.
5. Be sure all new employees are thoroughly schooled before they are sent to the field-tomorrow may be too late.
6. Teach men to avoid gas whenever possible-work on the windward side, have fresh air mask available.
7. Never let bad judgment guide you-wear respiratory equipment when gauging tanks, etc. Never try to hold your breath in order to enter a contaminated atmosphere.
8. In areas of high concentration, a two-man operation is preferred.
9. Never enter a tank, cellar or other enclosed place where gas can accumulate without proper respiratory protective equipment and a safety belt secured to a lifeline held by another person outside.
10. Always check out danger areas first with H₂S detectors before allowing anyone to enter. DO NOT TRY TO DETERMINE THE PRESENCE OF GAS BY its ODOR.
11. Wear proper respiratory equipment for the job at hand. Never take a chance with equipment with which you are unfamiliar. If in doubt, consult your supervisor.
12. Carry out practice drills every month with emergency and maintenance breathing air equipment. Telling or showing a group how to operate equipment is not enough-make them show you.
13. Maximum care should be taken to prevent the escape of fumes into the air of working places by leaks, etc.
14. Communication such as radio and telephones should be provided for those people employed where H₂S may be present.

TOXICITY OF HYDROGEN SULFIDE TO MEN

<u>H2S Per Cent (PPM)**</u>	<u>0 - 2 Minutes</u>	<u>0 - 15 Minutes</u>	<u>15 - 30 Minutes</u>	<u>30 Minutes to 1 hour</u>	<u>1 - 4 Hours</u>	<u>4 - 8 Hours</u>	<u>4 - 48 Hours</u>
0.005 (50) 0.010 (100)				Mild Conjunctiv- ities; respiratory tract irritation			
0.010 (100) 0.015 (150)		Coughing; irritation of eyes; loss of sense of smell	Disturbed respiration; pain in eyes; sleepiness	Throat	Salivation & mucous dis- charge; sharp pain in eyes; coughing	Increased symptoms*	Hemorrhage & death*
0.015 (150) 0.020 (200)		Loss of sense of smell	Throat & eye irritation	Throat & eye irritation	Difficult breathing; blurred vision; light & shy	Serious irritating effects	Hemorrhage & death*
0.025 (250) 0.035 (350)	Irritation of eyes; loss of sense of smell	Irritation of eyes	Painful secretion of tears; weari- ness	Light & shy; nasal catarrh; pain in eyes; difficult breathing	Hemorrhage & death		
0.035 (350)		Irritation of eyes; loss of sense of smell	Difficult respiration coughing; irritation of eyes	Increased irritation of eyes and nasal tract; dull pain head; weariness; light shy	Dizziness weak- ness; increased irritation; death	Death*	
0.050 (500)	Coughing collapse & unconscious- ness	Respiratory disturbances; irritation of eyes; collapse	Serious eye irritation; palpitation of heart; few cases of death*	Severe pain in eyes and head dizziness; trem- bling of extre- mities; great weakness & death*			
0.060 (600) 0.070 (700) 0.808 (800) 0.100 (1000) 0.150 (1500)	Collapse * unconscious- ness; death*	Collapse* unconscious- ness; death*					

*Data secured from experiments of dogs which have susceptibility similar to men. **PPM - parts per million



Marathon Oil
Lea County, NM
Charlie Murphy 6
TB FC #14H
Prelim Plan A
GL: 3270' + KB: 26.5' (H&P498)

US State Plane 1927 (Exact solution)
NAD 1927 (NADCON CONUS)
Clarke 1866
New Mexico East 3001
Mean Sea Level

RKB Elevation: Well @ 3298.50usft (GL: 3270' + KB: 26.5' (H&P498))

+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Slot
0.00	0.00	393621.88	788665.38	32.078754	-103.401359	

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Diag	VSec
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2	1500.00	0.00	0.00	1500.00	0.00	0.00	0.00	0.00
3	2000.00	10.00	320.09	1897.47	33.39	-27.82	2.00	-33.68
4	2780.79	10.00	320.09	2766.40	137.39	-114.90	0.00	-138.59
5	3280.79	0.00	0.00	3263.86	170.78	-142.82	2.00	-172.27
6	11942.93	0.00	0.00	11926.00	170.78	-142.82	0.00	-172.27
7	12687.09	89.30	179.40	12403.43	-300.81	-137.86	12.00	299.35
8	22582.12	89.30	179.40	12524.55	-10194.56	-33.83	0.00	10193.65

WELLBORE TARGET DETAILS (MAP CO-ORDINATES)

Name	TVD	+N/-S	+E/-W	Northing	Easting
[Chart]Murhp6#14H[KOP]/FTP	11926.00	170.78	-142.82	393792.68	788522.56
[Chart]Murhp6#14H[LTP]/BHL	12524.55	-10194.56	-33.83	383427.32	788631.55




Azimuths to Grid North
True North: 0.49°
Magnetic North: 6.12°
Magnetic Field
Strength: 47761.2nT
Dip Angle: 59.72°
Date: 2/1/2019
Model: HDGM


Azimuth Corrections

Total Magnetic Corr. (M to G): 6.12°


Declination (M to T): 6.62° East

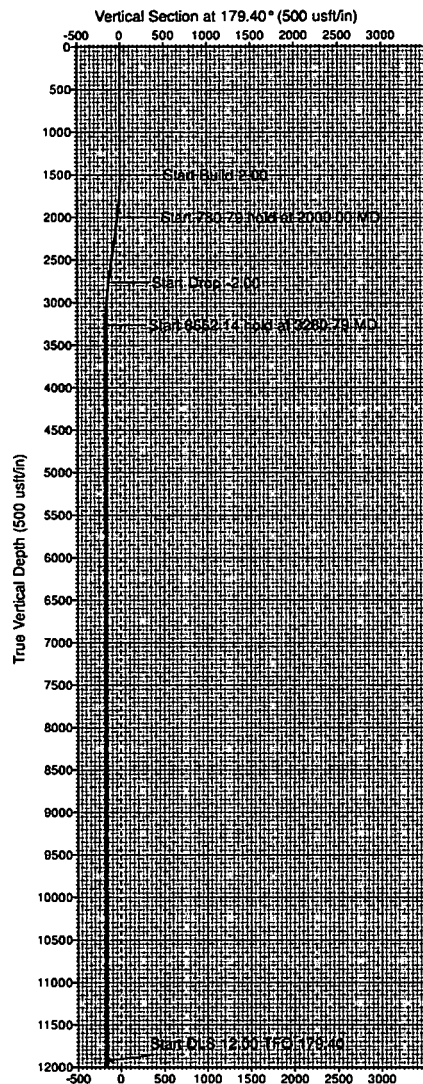


Target Line: 12400' TVD @ 0' VS :: 89.3° INC

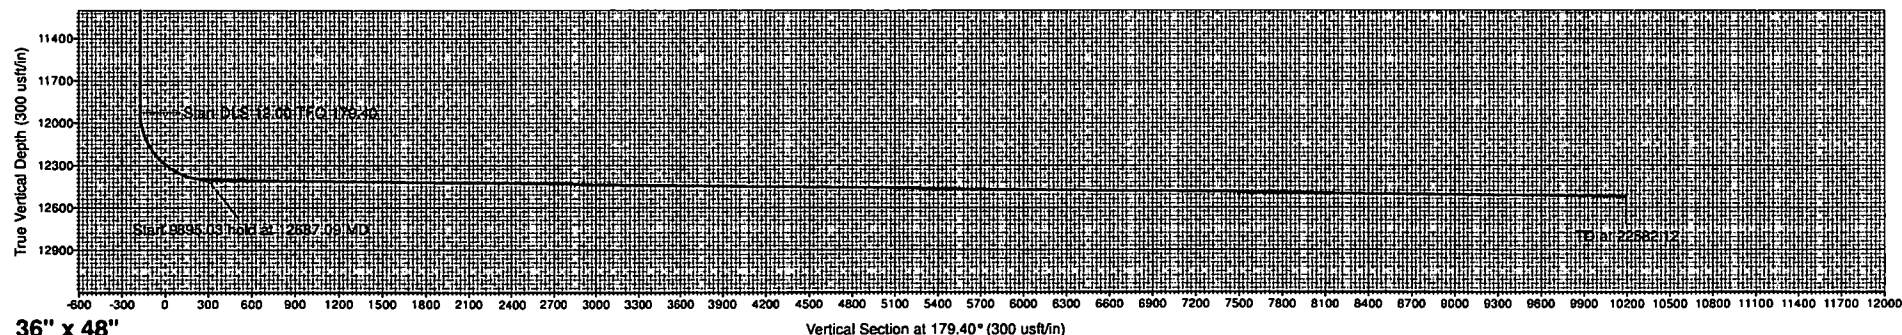

36" x 48"

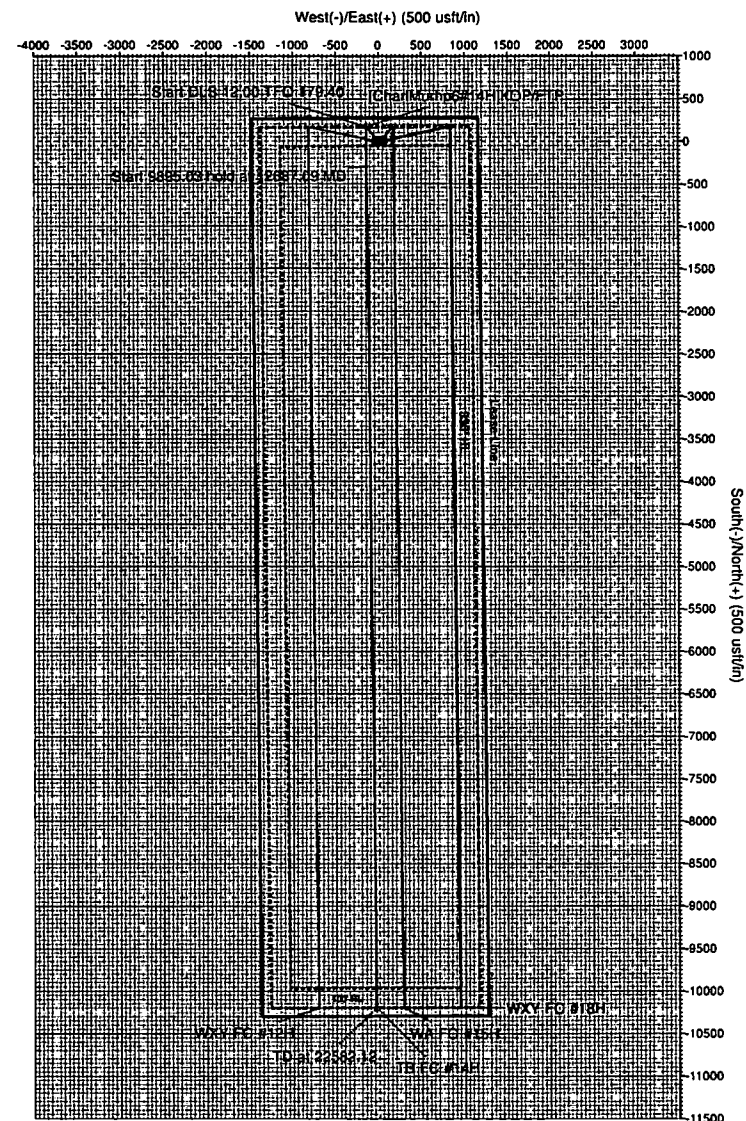

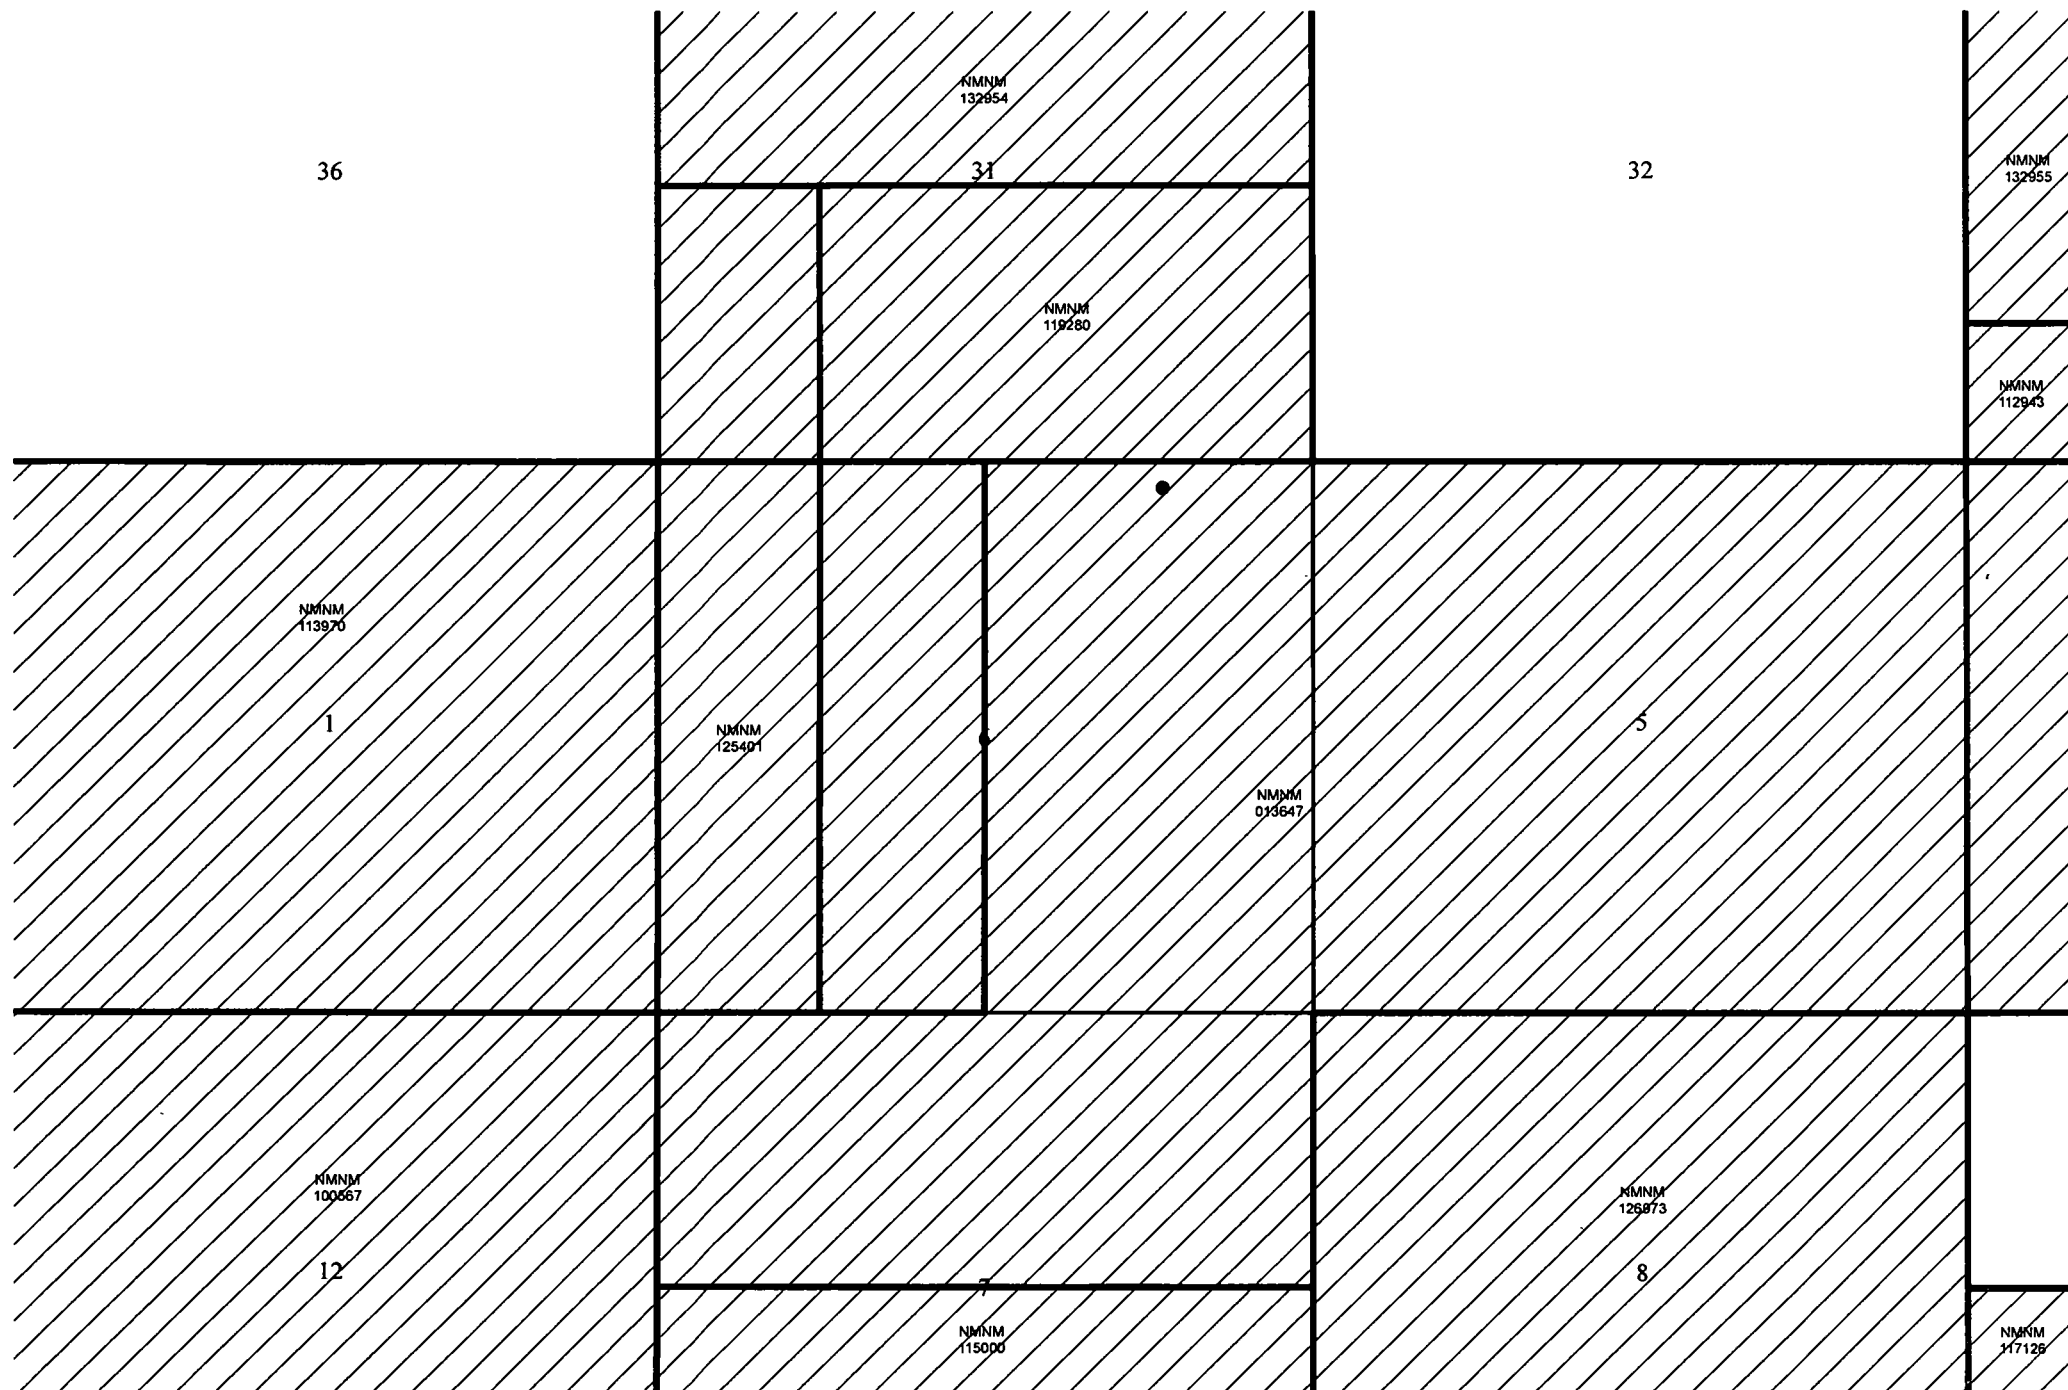

Company:	Marathon Oil	Local Co-ordinate Reference:	Well TB FC #14H
Project:	Lea County, NM	TVD Reference:	Well @ 3296.50usft (GL: 3270' + KB: 26.5' (H&P498))
Site:	Charlie Murphy 6	MD Reference:	Well @ 3296.50usft (GL: 3270' + KB: 26.5' (H&P498))
Well:	TB FC #14H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	Prelim Plan A	Database:	WellPlanner1

Project	Lea County, NM		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site						Charlie Murphy 6											
Site Position:			Northing:			393,621.97 usft			Latitude:			32.078755					
From:			Map			Easting:			788,635.29 usft			Longitude:			-103.401457		
Position Uncertainty:			0.00 usft			Slot Radius:			13-3/16 "			Grid Convergence:			0.49 °		

Well	TB FC #14H					
Well Position	+N/-S	0.00 usft	Northing:	393,621.88 usft	Latitude:	32.078755
	+E/-W	0.00 usft	Easting:	788,665.38 usft	Longitude:	-103.401360
Position Uncertainty		0.00 usft	Wellhead Elevation:	usft	Ground Level:	3,270.00 usft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HDGM	2/1/2019	6.62	59.72	47,761.20

Design	Prelim Plan A				
Audit Notes:					
Version:	Phase:	PLAN	Tie On Depth:	0.00	
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.00	0.00	0.00	179.40	

Survey Tool Program	Date	2/4/2019			
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description	
0.00	5,000.00	Prelim Plan A (OH)	MWD+IFR1	OWSG MWD + IFR1	
5,000.00	10,000.00	Prelim Plan A (OH)	MWD+IFR1	OWSG MWD + IFR1	
10,000.00	22,582.12	Prelim Plan A (OH)	MWD+IFR1	OWSG MWD + IFR1	

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00	
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00	
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00	
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00	
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00	
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00	

Company:	Marathon Oil	Local Co-ordinate Reference:	Well TB FC #14H
Project:	Lea County, NM	TVD Reference:	Well @ 3296.50usft (GL: 3270' + KB: 26.5' (H&P498))
Site:	Charlie Murphy 6	MD Reference:	Well @ 3296.50usft (GL: 3270' + KB: 26.5' (H&P498))
Well:	TB FC #14H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	Prelim Plan A	Database:	WellPlanner1

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	2.00	320.09	1,599.98	1.34	-1.12	-1.35	2.00	2.00	0.00
1,700.00	4.00	320.09	1,699.84	5.35	-4.48	-5.40	2.00	2.00	0.00
1,800.00	6.00	320.09	1,799.45	12.04	-10.07	-12.14	2.00	2.00	0.00
1,900.00	8.00	320.09	1,898.70	21.39	-17.89	-21.57	2.00	2.00	0.00
2,000.00	10.00	320.09	1,997.47	33.39	-27.92	-33.68	2.00	2.00	0.00
2,100.00	10.00	320.09	2,095.95	46.71	-39.06	-47.11	0.00	0.00	0.00
2,200.00	10.00	320.09	2,194.43	60.03	-50.20	-60.55	0.00	0.00	0.00
2,300.00	10.00	320.09	2,292.91	73.35	-61.34	-73.99	0.00	0.00	0.00
2,400.00	10.00	320.09	2,391.39	86.67	-72.48	-87.42	0.00	0.00	0.00
2,500.00	10.00	320.09	2,489.87	99.99	-83.62	-100.86	0.00	0.00	0.00
2,600.00	10.00	320.09	2,588.35	113.31	-94.76	-114.30	0.00	0.00	0.00
2,700.00	10.00	320.09	2,686.83	126.63	-105.90	-127.73	0.00	0.00	0.00
2,780.79	10.00	320.09	2,766.40	137.39	-114.90	-138.59	0.00	0.00	0.00
2,800.00	9.62	320.09	2,785.32	139.90	-117.00	-141.12	2.00	-2.00	0.00
2,900.00	7.62	320.09	2,884.19	151.39	-126.61	-152.71	2.00	-2.00	0.00
3,000.00	5.62	320.09	2,983.52	160.23	-134.00	-161.63	2.00	-2.00	0.00
3,100.00	3.62	320.09	3,083.19	166.41	-139.16	-167.85	2.00	-2.00	0.00
3,200.00	1.62	320.09	3,183.08	169.91	-142.09	-171.38	2.00	-2.00	0.00
3,280.79	0.00	0.00	3,263.86	170.78	-142.82	-172.27	2.00	-2.00	0.00
3,300.00	0.00	0.00	3,283.07	170.78	-142.82	-172.27	0.00	0.00	0.00
3,400.00	0.00	0.00	3,383.07	170.78	-142.82	-172.27	0.00	0.00	0.00
3,500.00	0.00	0.00	3,483.07	170.78	-142.82	-172.27	0.00	0.00	0.00
3,600.00	0.00	0.00	3,583.07	170.78	-142.82	-172.27	0.00	0.00	0.00
3,700.00	0.00	0.00	3,683.07	170.78	-142.82	-172.27	0.00	0.00	0.00
3,800.00	0.00	0.00	3,783.07	170.78	-142.82	-172.27	0.00	0.00	0.00
3,900.00	0.00	0.00	3,883.07	170.78	-142.82	-172.27	0.00	0.00	0.00
4,000.00	0.00	0.00	3,983.07	170.78	-142.82	-172.27	0.00	0.00	0.00
4,100.00	0.00	0.00	4,083.07	170.78	-142.82	-172.27	0.00	0.00	0.00
4,200.00	0.00	0.00	4,183.07	170.78	-142.82	-172.27	0.00	0.00	0.00
4,300.00	0.00	0.00	4,283.07	170.78	-142.82	-172.27	0.00	0.00	0.00
4,400.00	0.00	0.00	4,383.07	170.78	-142.82	-172.27	0.00	0.00	0.00
4,500.00	0.00	0.00	4,483.07	170.78	-142.82	-172.27	0.00	0.00	0.00
4,600.00	0.00	0.00	4,583.07	170.78	-142.82	-172.27	0.00	0.00	0.00

Company:	Marathon Oil	Local Co-ordinate Reference:	Well TB FC #14H
Project:	Lea County, NM	TVD Reference:	Well @ 3296.50usft (GL: 3270' + KB: 26.5' (H&P498))
Site:	Charlie Murphy 6	MD Reference:	Well @ 3296.50usft (GL: 3270' + KB: 26.5' (H&P498))
Well:	TB FC #14H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	Prelim Plan A	Database:	WellPlanner1

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,700.00	0.00	0.00	4,683.07	170.78	-142.82	-172.27	0.00	0.00	0.00
4,800.00	0.00	0.00	4,783.07	170.78	-142.82	-172.27	0.00	0.00	0.00
4,900.00	0.00	0.00	4,883.07	170.78	-142.82	-172.27	0.00	0.00	0.00
5,000.00	0.00	0.00	4,983.07	170.78	-142.82	-172.27	0.00	0.00	0.00
5,100.00	0.00	0.00	5,083.07	170.78	-142.82	-172.27	0.00	0.00	0.00
5,200.00	0.00	0.00	5,183.07	170.78	-142.82	-172.27	0.00	0.00	0.00
5,300.00	0.00	0.00	5,283.07	170.78	-142.82	-172.27	0.00	0.00	0.00
5,400.00	0.00	0.00	5,383.07	170.78	-142.82	-172.27	0.00	0.00	0.00
5,500.00	0.00	0.00	5,483.07	170.78	-142.82	-172.27	0.00	0.00	0.00
5,600.00	0.00	0.00	5,583.07	170.78	-142.82	-172.27	0.00	0.00	0.00
5,700.00	0.00	0.00	5,683.07	170.78	-142.82	-172.27	0.00	0.00	0.00
5,800.00	0.00	0.00	5,783.07	170.78	-142.82	-172.27	0.00	0.00	0.00
5,900.00	0.00	0.00	5,883.07	170.78	-142.82	-172.27	0.00	0.00	0.00
6,000.00	0.00	0.00	5,983.07	170.78	-142.82	-172.27	0.00	0.00	0.00
6,100.00	0.00	0.00	6,083.07	170.78	-142.82	-172.27	0.00	0.00	0.00
6,200.00	0.00	0.00	6,183.07	170.78	-142.82	-172.27	0.00	0.00	0.00
6,300.00	0.00	0.00	6,283.07	170.78	-142.82	-172.27	0.00	0.00	0.00
6,400.00	0.00	0.00	6,383.07	170.78	-142.82	-172.27	0.00	0.00	0.00
6,500.00	0.00	0.00	6,483.07	170.78	-142.82	-172.27	0.00	0.00	0.00
6,600.00	0.00	0.00	6,583.07	170.78	-142.82	-172.27	0.00	0.00	0.00
6,700.00	0.00	0.00	6,683.07	170.78	-142.82	-172.27	0.00	0.00	0.00
6,800.00	0.00	0.00	6,783.07	170.78	-142.82	-172.27	0.00	0.00	0.00
6,900.00	0.00	0.00	6,883.07	170.78	-142.82	-172.27	0.00	0.00	0.00
7,000.00	0.00	0.00	6,983.07	170.78	-142.82	-172.27	0.00	0.00	0.00
7,100.00	0.00	0.00	7,083.07	170.78	-142.82	-172.27	0.00	0.00	0.00
7,200.00	0.00	0.00	7,183.07	170.78	-142.82	-172.27	0.00	0.00	0.00
7,300.00	0.00	0.00	7,283.07	170.78	-142.82	-172.27	0.00	0.00	0.00
7,400.00	0.00	0.00	7,383.07	170.78	-142.82	-172.27	0.00	0.00	0.00
7,500.00	0.00	0.00	7,483.07	170.78	-142.82	-172.27	0.00	0.00	0.00
7,600.00	0.00	0.00	7,583.07	170.78	-142.82	-172.27	0.00	0.00	0.00
7,700.00	0.00	0.00	7,683.07	170.78	-142.82	-172.27	0.00	0.00	0.00
7,800.00	0.00	0.00	7,783.07	170.78	-142.82	-172.27	0.00	0.00	0.00
7,900.00	0.00	0.00	7,883.07	170.78	-142.82	-172.27	0.00	0.00	0.00
8,000.00	0.00	0.00	7,983.07	170.78	-142.82	-172.27	0.00	0.00	0.00
8,100.00	0.00	0.00	8,083.07	170.78	-142.82	-172.27	0.00	0.00	0.00
8,200.00	0.00	0.00	8,183.07	170.78	-142.82	-172.27	0.00	0.00	0.00
8,300.00	0.00	0.00	8,283.07	170.78	-142.82	-172.27	0.00	0.00	0.00
8,400.00	0.00	0.00	8,383.07	170.78	-142.82	-172.27	0.00	0.00	0.00
8,500.00	0.00	0.00	8,483.07	170.78	-142.82	-172.27	0.00	0.00	0.00
8,600.00	0.00	0.00	8,583.07	170.78	-142.82	-172.27	0.00	0.00	0.00
8,700.00	0.00	0.00	8,683.07	170.78	-142.82	-172.27	0.00	0.00	0.00
8,800.00	0.00	0.00	8,783.07	170.78	-142.82	-172.27	0.00	0.00	0.00

Company:	Marathon Oil	Local Co-ordinate Reference:	Well TB FC #14H
Project:	Lea County, NM	TVD Reference:	Well @ 3296.50usft (GL: 3270' + KB: 26.5' (H&P498))
Site:	Charlie Murphy 6	MD Reference:	Well @ 3296.50usft (GL: 3270' + KB: 26.5' (H&P498))
Well:	TB FC #14H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	Prelim Plan A	Database:	WellPlanner1

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,900.00	0.00	0.00	8,883.07	170.78	-142.82	-172.27	0.00	0.00	0.00
9,000.00	0.00	0.00	8,983.07	170.78	-142.82	-172.27	0.00	0.00	0.00
9,100.00	0.00	0.00	9,083.07	170.78	-142.82	-172.27	0.00	0.00	0.00
9,200.00	0.00	0.00	9,183.07	170.78	-142.82	-172.27	0.00	0.00	0.00
9,300.00	0.00	0.00	9,283.07	170.78	-142.82	-172.27	0.00	0.00	0.00
9,400.00	0.00	0.00	9,383.07	170.78	-142.82	-172.27	0.00	0.00	0.00
9,500.00	0.00	0.00	9,483.07	170.78	-142.82	-172.27	0.00	0.00	0.00
9,600.00	0.00	0.00	9,583.07	170.78	-142.82	-172.27	0.00	0.00	0.00
9,700.00	0.00	0.00	9,683.07	170.78	-142.82	-172.27	0.00	0.00	0.00
9,800.00	0.00	0.00	9,783.07	170.78	-142.82	-172.27	0.00	0.00	0.00
9,900.00	0.00	0.00	9,883.07	170.78	-142.82	-172.27	0.00	0.00	0.00
10,000.00	0.00	0.00	9,983.07	170.78	-142.82	-172.27	0.00	0.00	0.00
10,100.00	0.00	0.00	10,083.07	170.78	-142.82	-172.27	0.00	0.00	0.00
10,200.00	0.00	0.00	10,183.07	170.78	-142.82	-172.27	0.00	0.00	0.00
10,300.00	0.00	0.00	10,283.07	170.78	-142.82	-172.27	0.00	0.00	0.00
10,400.00	0.00	0.00	10,383.07	170.78	-142.82	-172.27	0.00	0.00	0.00
10,500.00	0.00	0.00	10,483.07	170.78	-142.82	-172.27	0.00	0.00	0.00
10,600.00	0.00	0.00	10,583.07	170.78	-142.82	-172.27	0.00	0.00	0.00
10,700.00	0.00	0.00	10,683.07	170.78	-142.82	-172.27	0.00	0.00	0.00
10,800.00	0.00	0.00	10,783.07	170.78	-142.82	-172.27	0.00	0.00	0.00
10,900.00	0.00	0.00	10,883.07	170.78	-142.82	-172.27	0.00	0.00	0.00
11,000.00	0.00	0.00	10,983.07	170.78	-142.82	-172.27	0.00	0.00	0.00
11,100.00	0.00	0.00	11,083.07	170.78	-142.82	-172.27	0.00	0.00	0.00
11,200.00	0.00	0.00	11,183.07	170.78	-142.82	-172.27	0.00	0.00	0.00
11,300.00	0.00	0.00	11,283.07	170.78	-142.82	-172.27	0.00	0.00	0.00
11,400.00	0.00	0.00	11,383.07	170.78	-142.82	-172.27	0.00	0.00	0.00
11,500.00	0.00	0.00	11,483.07	170.78	-142.82	-172.27	0.00	0.00	0.00
11,600.00	0.00	0.00	11,583.07	170.78	-142.82	-172.27	0.00	0.00	0.00
11,700.00	0.00	0.00	11,683.07	170.78	-142.82	-172.27	0.00	0.00	0.00
11,800.00	0.00	0.00	11,783.07	170.78	-142.82	-172.27	0.00	0.00	0.00
11,900.00	0.00	0.00	11,883.07	170.78	-142.82	-172.27	0.00	0.00	0.00
11,942.93	0.00	0.00	11,926.00	170.78	-142.82	-172.27	0.00	0.00	0.00
[CharlMurhp6#14H]KOP/FTP									
11,950.00	0.85	179.40	11,933.07	170.73	-142.82	-172.21	12.00	12.00	0.00
11,975.00	3.85	179.40	11,958.04	169.70	-142.81	-171.19	12.00	12.00	0.00
12,000.00	6.85	179.40	11,982.93	167.37	-142.78	-168.86	12.00	12.00	0.00
12,025.00	9.85	179.40	12,007.67	163.74	-142.75	-165.23	12.00	12.00	0.00
12,050.00	12.85	179.40	12,032.17	158.83	-142.69	-160.31	12.00	12.00	0.00
12,075.00	15.85	179.40	12,056.39	152.63	-142.63	-154.12	12.00	12.00	0.00
12,100.00	18.85	179.40	12,080.25	145.18	-142.55	-146.66	12.00	12.00	0.00
12,125.00	21.85	179.40	12,103.69	136.49	-142.46	-137.97	12.00	12.00	0.00
12,150.00	24.85	179.40	12,126.64	126.58	-142.36	-128.06	12.00	12.00	0.00

Company:	Marathon Oil	Local Co-ordinate Reference:	Well TB FC #14H
Project:	Lea County, NM	TVD Reference:	Well @ 3296.50usft (GL: 3270' + KB: 26.5' (H&P498))
Site:	Charlie Murphy 6	MD Reference:	Well @ 3296.50usft (GL: 3270' + KB: 26.5' (H&P498))
Well:	TB FC #14H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	Prelim Plan A	Database:	WellPlanner1

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
12,175.00	27.85	179.40	12,149.04	115.49	-142.24	-116.97	12.00	12.00	0.00
12,200.00	30.85	179.40	12,170.83	103.24	-142.11	-104.72	12.00	12.00	0.00
12,225.00	33.85	179.40	12,191.95	89.86	-141.97	-91.34	12.00	12.00	0.00
12,250.00	36.85	179.40	12,212.33	75.40	-141.82	-76.88	12.00	12.00	0.00
12,275.00	39.85	179.40	12,231.94	59.89	-141.65	-61.37	12.00	12.00	0.00
12,300.00	42.85	179.40	12,250.70	43.38	-141.48	-44.86	12.00	12.00	0.00
12,325.00	45.85	179.40	12,268.58	25.91	-141.30	-27.38	12.00	12.00	0.00
12,350.00	48.85	179.40	12,285.52	7.52	-141.10	-9.00	12.00	12.00	0.00
12,375.00	51.85	179.40	12,301.47	-11.72	-140.90	10.25	12.00	12.00	0.00
12,400.00	54.85	179.40	12,316.39	-31.78	-140.69	30.30	12.00	12.00	0.00
12,425.00	57.85	179.40	12,330.24	-52.58	-140.47	51.11	12.00	12.00	0.00
12,450.00	60.85	179.40	12,342.99	-74.09	-140.25	72.61	12.00	12.00	0.00
12,475.00	63.85	179.40	12,354.59	-96.23	-140.01	94.76	12.00	12.00	0.00
12,500.00	66.85	179.40	12,365.01	-118.95	-139.77	117.47	12.00	12.00	0.00
12,525.00	69.85	179.40	12,374.24	-142.18	-139.53	140.71	12.00	12.00	0.00
12,550.00	72.85	179.40	12,382.23	-165.86	-139.28	164.39	12.00	12.00	0.00
12,575.00	75.85	179.40	12,388.97	-189.93	-139.03	188.46	12.00	12.00	0.00
12,600.00	78.85	179.40	12,394.45	-214.32	-138.77	212.85	12.00	12.00	0.00
12,625.00	81.85	179.40	12,398.64	-238.96	-138.51	237.50	12.00	12.00	0.00
12,650.00	84.85	179.40	12,401.54	-263.79	-138.25	262.33	12.00	12.00	0.00
12,675.00	87.85	179.40	12,403.13	-288.73	-137.99	287.27	12.00	12.00	0.00
12,687.09	89.30	179.40	12,403.43	-300.81	-137.86	299.35	12.00	12.00	0.00
12,700.00	89.30	179.40	12,403.59	-313.73	-137.73	312.27	0.00	0.00	0.00
12,800.00	89.30	179.40	12,404.81	-413.71	-136.67	412.26	0.00	0.00	0.00
12,900.00	89.30	179.40	12,406.04	-513.70	-135.62	512.25	0.00	0.00	0.00
13,000.00	89.30	179.40	12,407.26	-613.69	-134.57	612.24	0.00	0.00	0.00
13,100.00	89.30	179.40	12,408.48	-713.67	-133.52	712.24	0.00	0.00	0.00
13,200.00	89.30	179.40	12,409.71	-813.66	-132.47	812.23	0.00	0.00	0.00
13,300.00	89.30	179.40	12,410.93	-913.65	-131.42	912.22	0.00	0.00	0.00
13,400.00	89.30	179.40	12,412.16	-1,013.63	-130.37	1,012.21	0.00	0.00	0.00
13,500.00	89.30	179.40	12,413.38	-1,113.62	-129.31	1,112.21	0.00	0.00	0.00
13,600.00	89.30	179.40	12,414.60	-1,213.61	-128.26	1,212.20	0.00	0.00	0.00
13,700.00	89.30	179.40	12,415.83	-1,313.60	-127.21	1,312.19	0.00	0.00	0.00
13,800.00	89.30	179.40	12,417.05	-1,413.58	-126.16	1,412.18	0.00	0.00	0.00
13,900.00	89.30	179.40	12,418.28	-1,513.57	-125.11	1,512.18	0.00	0.00	0.00
14,000.00	89.30	179.40	12,419.50	-1,613.56	-124.06	1,612.17	0.00	0.00	0.00
14,100.00	89.30	179.40	12,420.72	-1,713.54	-123.01	1,712.16	0.00	0.00	0.00
14,200.00	89.30	179.40	12,421.95	-1,813.53	-121.96	1,812.15	0.00	0.00	0.00
14,300.00	89.30	179.40	12,423.17	-1,913.52	-120.90	1,912.15	0.00	0.00	0.00
14,400.00	89.30	179.40	12,424.40	-2,013.50	-119.85	2,012.14	0.00	0.00	0.00
14,500.00	89.30	179.40	12,425.62	-2,113.49	-118.80	2,112.13	0.00	0.00	0.00
14,600.00	89.30	179.40	12,426.84	-2,213.48	-117.75	2,212.12	0.00	0.00	0.00

Company: Marathon Oil
Project: Lea County, NM
Site: Charlie Murphy 6
Well: TB FC #14H
Wellbore: OH
Design: Prelim Plan A

Local Co-ordinate Reference: Well TB FC #14H
TVD Reference: Well @ 3296.50usft (GL: 3270' + KB: 26.5' (H&P498))
MD Reference: Well @ 3296.50usft (GL: 3270' + KB: 26.5' (H&P498))
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: WellPlanner1

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
14,700.00	89.30	179.40	12,428.07	-2,313.47	-116.70	2,312.12	0.00	0.00	0.00
14,800.00	89.30	179.40	12,429.29	-2,413.45	-115.65	2,412.11	0.00	0.00	0.00
14,900.00	89.30	179.40	12,430.52	-2,513.44	-114.60	2,512.10	0.00	0.00	0.00
15,000.00	89.30	179.40	12,431.74	-2,613.43	-113.54	2,612.09	0.00	0.00	0.00
15,100.00	89.30	179.40	12,432.96	-2,713.41	-112.49	2,712.09	0.00	0.00	0.00
15,200.00	89.30	179.40	12,434.19	-2,813.40	-111.44	2,812.08	0.00	0.00	0.00
15,300.00	89.30	179.40	12,435.41	-2,913.39	-110.39	2,912.07	0.00	0.00	0.00
15,400.00	89.30	179.40	12,436.64	-3,013.37	-109.34	3,012.06	0.00	0.00	0.00
15,500.00	89.30	179.40	12,437.86	-3,113.36	-108.29	3,112.06	0.00	0.00	0.00
15,600.00	89.30	179.40	12,439.09	-3,213.35	-107.24	3,212.05	0.00	0.00	0.00
15,700.00	89.30	179.40	12,440.31	-3,313.34	-106.19	3,312.04	0.00	0.00	0.00
15,800.00	89.30	179.40	12,441.53	-3,413.32	-105.13	3,412.03	0.00	0.00	0.00
15,900.00	89.30	179.40	12,442.76	-3,513.31	-104.08	3,512.03	0.00	0.00	0.00
16,000.00	89.30	179.40	12,443.98	-3,613.30	-103.03	3,612.02	0.00	0.00	0.00
16,100.00	89.30	179.40	12,445.21	-3,713.28	-101.98	3,712.01	0.00	0.00	0.00
16,200.00	89.30	179.40	12,446.43	-3,813.27	-100.93	3,812.00	0.00	0.00	0.00
16,300.00	89.30	179.40	12,447.65	-3,913.26	-99.88	3,912.00	0.00	0.00	0.00
16,400.00	89.30	179.40	12,448.88	-4,013.24	-98.83	4,011.99	0.00	0.00	0.00
16,500.00	89.30	179.40	12,450.10	-4,113.23	-97.77	4,111.98	0.00	0.00	0.00
16,600.00	89.30	179.40	12,451.33	-4,213.22	-96.72	4,211.97	0.00	0.00	0.00
16,700.00	89.30	179.40	12,452.55	-4,313.21	-95.67	4,311.97	0.00	0.00	0.00
16,800.00	89.30	179.40	12,453.77	-4,413.19	-94.62	4,411.96	0.00	0.00	0.00
16,900.00	89.30	179.40	12,455.00	-4,513.18	-93.57	4,511.95	0.00	0.00	0.00
17,000.00	89.30	179.40	12,456.22	-4,613.17	-92.52	4,611.94	0.00	0.00	0.00
17,100.00	89.30	179.40	12,457.45	-4,713.15	-91.47	4,711.94	0.00	0.00	0.00
17,200.00	89.30	179.40	12,458.67	-4,813.14	-90.41	4,811.93	0.00	0.00	0.00
17,300.00	89.30	179.40	12,459.89	-4,913.13	-89.36	4,911.92	0.00	0.00	0.00
17,400.00	89.30	179.40	12,461.12	-5,013.11	-88.31	5,011.91	0.00	0.00	0.00
17,500.00	89.30	179.40	12,462.34	-5,113.10	-87.26	5,111.91	0.00	0.00	0.00
17,600.00	89.30	179.40	12,463.57	-5,213.09	-86.21	5,211.90	0.00	0.00	0.00
17,700.00	89.30	179.40	12,464.79	-5,313.08	-85.16	5,311.89	0.00	0.00	0.00
17,800.00	89.30	179.40	12,466.01	-5,413.06	-84.11	5,411.88	0.00	0.00	0.00
17,900.00	89.30	179.40	12,467.24	-5,513.05	-83.06	5,511.88	0.00	0.00	0.00
18,000.00	89.30	179.40	12,468.46	-5,613.04	-82.00	5,611.87	0.00	0.00	0.00
18,100.00	89.30	179.40	12,469.69	-5,713.02	-80.95	5,711.86	0.00	0.00	0.00
18,200.00	89.30	179.40	12,470.91	-5,813.01	-79.90	5,811.85	0.00	0.00	0.00
18,300.00	89.30	179.40	12,472.13	-5,913.00	-78.85	5,911.85	0.00	0.00	0.00
18,400.00	89.30	179.40	12,473.36	-6,012.98	-77.80	6,011.84	0.00	0.00	0.00
18,500.00	89.30	179.40	12,474.58	-6,112.97	-76.75	6,111.83	0.00	0.00	0.00
18,600.00	89.30	179.40	12,475.81	-6,212.96	-75.70	6,211.82	0.00	0.00	0.00
18,700.00	89.30	179.40	12,477.03	-6,312.95	-74.64	6,311.82	0.00	0.00	0.00
18,800.00	89.30	179.40	12,478.25	-6,412.93	-73.59	6,411.81	0.00	0.00	0.00

Company:	Marathon Oil	Local Co-ordinate Reference:	Well TB FC #14H
Project:	Lea County, NM	TVD Reference:	Well @ 3296.50usft (GL: 3270' + KB: 26.5' (H&P498))
Site:	Charlie Murphy 6	MD Reference:	Well @ 3296.50usft (GL: 3270' + KB: 26.5' (H&P498))
Well:	TB FC #14H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	Prelim Plan A	Database:	WellPlanner1

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
18,900.00	89.30	179.40	12,479.48	-6,512.92	-72.54	6,511.80	0.00	0.00	0.00
19,000.00	89.30	179.40	12,480.70	-6,612.91	-71.49	6,611.79	0.00	0.00	0.00
19,100.00	89.30	179.40	12,481.93	-6,712.89	-70.44	6,711.79	0.00	0.00	0.00
19,200.00	89.30	179.40	12,483.15	-6,812.88	-69.39	6,811.78	0.00	0.00	0.00
19,300.00	89.30	179.40	12,484.38	-6,912.87	-68.34	6,911.77	0.00	0.00	0.00
19,400.00	89.30	179.40	12,485.60	-7,012.85	-67.29	7,011.76	0.00	0.00	0.00
19,500.00	89.30	179.40	12,486.82	-7,112.84	-66.23	7,111.76	0.00	0.00	0.00
19,600.00	89.30	179.40	12,488.05	-7,212.83	-65.18	7,211.75	0.00	0.00	0.00
19,700.00	89.30	179.40	12,489.27	-7,312.81	-64.13	7,311.74	0.00	0.00	0.00
19,800.00	89.30	179.40	12,490.50	-7,412.80	-63.08	7,411.73	0.00	0.00	0.00
19,900.00	89.30	179.40	12,491.72	-7,512.79	-62.03	7,511.73	0.00	0.00	0.00
20,000.00	89.30	179.40	12,492.94	-7,612.78	-60.98	7,611.72	0.00	0.00	0.00
20,100.00	89.30	179.40	12,494.17	-7,712.76	-59.93	7,711.71	0.00	0.00	0.00
20,200.00	89.30	179.40	12,495.39	-7,812.75	-58.87	7,811.70	0.00	0.00	0.00
20,300.00	89.30	179.40	12,496.62	-7,912.74	-57.82	7,911.70	0.00	0.00	0.00
20,400.00	89.30	179.40	12,497.84	-8,012.72	-56.77	8,011.69	0.00	0.00	0.00
20,500.00	89.30	179.40	12,499.06	-8,112.71	-55.72	8,111.68	0.00	0.00	0.00
20,600.00	89.30	179.40	12,500.29	-8,212.70	-54.67	8,211.67	0.00	0.00	0.00
20,700.00	89.30	179.40	12,501.51	-8,312.68	-53.62	8,311.67	0.00	0.00	0.00
20,800.00	89.30	179.40	12,502.74	-8,412.67	-52.57	8,411.66	0.00	0.00	0.00
20,900.00	89.30	179.40	12,503.96	-8,512.66	-51.51	8,511.65	0.00	0.00	0.00
21,000.00	89.30	179.40	12,505.18	-8,612.65	-50.46	8,611.64	0.00	0.00	0.00
21,100.00	89.30	179.40	12,506.41	-8,712.63	-49.41	8,711.64	0.00	0.00	0.00
21,200.00	89.30	179.40	12,507.63	-8,812.62	-48.36	8,811.63	0.00	0.00	0.00
21,300.00	89.30	179.40	12,508.86	-8,912.61	-47.31	8,911.62	0.00	0.00	0.00
21,400.00	89.30	179.40	12,510.08	-9,012.59	-46.26	9,011.61	0.00	0.00	0.00
21,500.00	89.30	179.40	12,511.30	-9,112.58	-45.21	9,111.61	0.00	0.00	0.00
21,600.00	89.30	179.40	12,512.53	-9,212.57	-44.16	9,211.60	0.00	0.00	0.00
21,700.00	89.30	179.40	12,513.75	-9,312.55	-43.10	9,311.59	0.00	0.00	0.00
21,800.00	89.30	179.40	12,514.98	-9,412.54	-42.05	9,411.59	0.00	0.00	0.00
21,900.00	89.30	179.40	12,516.20	-9,512.53	-41.00	9,511.58	0.00	0.00	0.00
22,000.00	89.30	179.40	12,517.42	-9,612.52	-39.95	9,611.57	0.00	0.00	0.00
22,100.00	89.30	179.40	12,518.65	-9,712.50	-38.90	9,711.56	0.00	0.00	0.00
22,200.00	89.30	179.40	12,519.87	-9,812.49	-37.85	9,811.56	0.00	0.00	0.00
22,300.00	89.30	179.40	12,521.10	-9,912.48	-36.80	9,911.55	0.00	0.00	0.00
22,400.00	89.30	179.40	12,522.32	-10,012.46	-35.74	10,011.54	0.00	0.00	0.00
22,500.00	89.30	179.40	12,523.55	-10,112.45	-34.69	10,111.53	0.00	0.00	0.00
22,582.12	89.30	179.40	12,524.55	-10,194.56	-33.83	10,193.65	0.00	0.00	0.00

[CharlMurhp6#14H]LTP/BHL

Company:	Marathon Oil	Local Co-ordinate Reference:	Well TB FC #14H
Project:	Lea County, NM	TVD Reference:	Well @ 3296.50usft (GL: 3270' + KB: 26.5' (H&P498))
Site:	Charlie Murphy 6	MD Reference:	Well @ 3296.50usft (GL: 3270' + KB: 26.5' (H&P498))
Well:	TB FC #14H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	Prelim Plan A	Database:	WellPlanner1

Design Targets									
Target Name	Dip Angle	Dip Dir.	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
- hit/miss target	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(usft)		
- Shape									
[CharlMurhp6#14H]KOP	0.00	0.00	11,926.00	170.78	-142.82	393,792.66	788,522.56	32.079227	-103.401816
- plan hits target center									
- Point									
[CharlMurhp6#14H]LTP/	0.00	0.00	12,524.5 5	-10,194.56	-33.83	383,427.32	788,631.55	32.050734	-103.401753
- plan hits target center									
- Point									

Checked By: _____ Approved By: _____ Date: _____

Batch Drilling Plan

- Marathon Oil Permian LLC. respectfully requests the option to "batch" drill sections of a well with intentions of returning to the well for later completion.
- When it is determined that the use of a "batch" drilling process to increase overall efficiency and reduce rig time on location, the following steps will be utilized to ensure compliant well control before releasing drilling rig during the batch process.
- Succeeding a successful cement job, fluid levels will be monitored in both the annulus and casing string to be verified static.
- A mandrel hanger packoff will be ran and installed in the multi-bowl wellhead isolating and creating a barrier on the annulus. This packoff will be tested to 5,000 PSI validating the seals.
- At this point the well is secure and the drilling adapter will be removed from the wellhead.
- A 13-5/8" 5M temporary abandonment cap will be installed on the wellhead by stud and nut flange. The seals of the TA cap will then be pressure tested to 5,000 PSI.
- The drilling rig will skid to the next well on the pad to continue the batch drilling process.
- When returning to the well with the TA cap, the TA cap will be removed and the BOP will be nipped up on the wellhead.
- A BOP test will then be conducted according to Onshore Order #2 and drilling operations will resume on the subject well.

Request for Surface Rig

- Marathon Oil Permian LLC. Requests the option to contract a surface rig to drill, set surface casing and cement on the subject well. If the timing between rigs is such that Marathon Oil Permian LLC. would not be able to preset the surface section, the primary drilling rig will drill the well in its entirety per the APD.

MARATHON OIL PERMIAN LLC

DRILLING AND OPERATIONS PLAN

WELL NAME / NUMBER: CHARLIE MURPHY 6 TB FC 14H
STATE: NEW MEXICO **COUNTY:** LEA

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	TWSP	Range	Section	Aliquot/Lot/Trac	Latitude (NAD 83)	Longitude (NAD 83)	County	State	Meridian	Lease Type	Lease Number	Elevation (ft SS)	MD (RKB)	TVD (RKB)
SHL	272	FNL	1171	FEL	26S	35E	6	NENE	32.07888054	-103.40182274	Lea	NM	NMP	F	NMNM013647	3270	0	0
KOP/FTP	100	FNL	1312	FEL	26S	35E	6	NENE	32.07935335	-103.40227907	Lea	NM	NMP	F	NMNM013647	-8656	11942	11926
EXIT	2640	FSL	1310	FEL	26S	35E	7	NESE	32.05784232	-103.40223042	Lea	NM	NMP	F	NMNM013647	-9223	20035	12493
ENTER	2640	FSL	1310	FEL	26S	35E	7	NESE	32.05784232	-103.40223042	Lea	NM	NMP	F	NMNM115000	-9223	20035	12493
LTP/BHL	100	FSL	1309	FEL	26S	35E	7	SESE	32.05085970	-103.40221443	Lea	NM	NMP	F	NMNM115000	-9254	22582	12524

1. GEOLOGIC NAME OF SURFACE FORMATION

a. Permian/Quaternary Alluvium

2. ESTIMATED TOPS OF GEOLOGICAL MARKERS & DEPTHS OF ANTICIPATED FRESH WATER, OIL OR GAS

Formation	True Vertical Depth (ft)	Measured Depth (ft)	Lithologies	Mineral Resources	Producing Formation
Rustler	1021	1021	Anhydrite/Dolomite	BRINE	N
Salado	1460	1460	Salt/Anhydrite	BRINE	N
Castile	3498	3514	Base Salt	BRINE	N
Lamar	5320	5336	Limy Sands	BRINE	N
Bell Canyon	5348	5364	Sand/Shales	OIL	Y
Brushy Canyon	7956	8023	Sands/Carbonates	OIL	Y
Bone Spring	9247	9263	Sands/Carbonates	OIL	Y
Wolfcamp	N/A	N/A	Carbonates/Shales/Sands	OIL	Y

DEEPEST EXPECTED FRESH WATER: 950' TVD

ANTICIPATED BOTTOM HOLE PRESSURE: 7,780 psi

ANTICIPATED BOTTOM HOLE TEMPERATURE: 195°F

ANTICIPATED ABNORMAL PRESSURE: N

ANTICIPATED ABNORMAL TEMPERATURE: N

3. CASING PROGRAM

String Type	Hole Size	Csg Size	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Weight (lbs/ft)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
Surface	17 1/2	13 3/8	0	1040	0	1040	54.5	J55	STC	5.52	2.5	2.5
Intermediate I	12 1/4	9 5/8	0	5400	0	5383	36	J55	LTC	1.39	1.42	1.8
Intermediate II	8 3/4	7	0	11800	0	11783	29	P110	BTC	2.21	1.18	1.9
Production Liner	6 1/8	4 1/2	11500	22582	11483	12524	13.5	P110	BTC	1.33	1.56	1.88

Minimum safety factors: Burst 1.125 Collapse 1.125 Tension 1.8 Wet/1.6 Dry

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

4. CEMENT PROGRAM:

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity (sks)	Yield (ft3/sks)	Density (ppg)	Slurry Volume (ft3)	Excess (%)	Cement Type	Additives
Surface	Lead	--	0	832	668	1.73	13.5	1156	100	Class C	3 lbm/sk granular LCM + 0.1250 lbm/sk Poly-E-Flake
Surface	Tail	--	832	1040	217	1.33	14.8	289	100	Class C	N/A
Intermediate I	Lead	--	0	4400	1091	2.21	12.8	2412	75	Class C	0.02 Gal/Sk Defoamer + 0.5% Extender + 1% Accelerator
Intermediate I	Tail	--	4400	5400	306	1.33	14.8	407	30	Class C	0.3 % Retarder
Intermediate II	Lead	--	5100	10800	454	3.21	11	1457	70	Class C	0.85% retarder + 10% extender + 0.02 gal/sk defoamer + 2.0% Extender + 0.15% Viscosifier
Intermediate II	Tail	--	10800	11800	170	1.15	13.8	195	30	Class H	3% extender + 0.15% Dispersant + 0.03 gal/sk retarder
Production Liner	Tail	--	11500	22582	1112	1.22	14.5	1357	30	Class H	0.1% retarder + 3.5% extender + 0.3% fluid loss + 0.1% Dispersant

Stage tool depth(s) will be adjusted based on hole conditions and cement volumes will be adjusted proportionally. Stage tool will be set a minimum of 50 feet below previous casing and a minimum of 200 feet above current shoe. Lab reports with the 500 psi compressive strength time for the cement will be onsite for review.

Pilot hole depth: N/A TVD/MD

KOP: N/A TVD/MD

Plug top	Plug Bottom	Excess (%)	Quantity (sx)	Density (ppg)	Yield (ft3/sx)	Water gal/sk	Slurry Description and Cement Type

Attach plugging procedure for pilot hole.

N/A

5. PRESSURE CONTROL EQUIPMENT

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Type	✓	Tested to:
12 1/4"	13 5/8	10000	Annular	x	50% of working pressure
			Blind Ram		10000

			Pipe Ram	x	
			Double Ram	x	
			Other*		
8 3/4"	13 5/8	10000	Annular	x	50% of working pressure
			Blind Ram		10000
			Pipe Ram	x	
			Double Ram	x	
			Other*		
6 1/8"	13 5/8	10000	Annular	x	50% of working pressure
			Blind Ram		10000
			Pipe Ram	x	
			Double Ram	x	
			Other*		

*Specify if additional ram is utilized.

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock, full opening safety valve / inside BOP and choke lines and choke manifold. See attached schematics.

Y	Formation integrity test will be performed per Onshore Order #2. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i.		
Y	A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.		
	N	Are anchors required by manufacturer?	
Y	A multibowl wellhead is being used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested. See attached schematic.		

6. MUD PROGRAM:

Top Depth	Bottom Depth	Mud Type	Min. Weight (ppg)	Max. Weight (ppg)	Additional Characteristics
0	1040	Water Based Mud	8.4	8.8	
1040	5400	Brine	9.9	10.2	
5400	11800	Cut Brine	8.8	9.4	
11800	22582	Oil Based mud	11.5	13.0	

Losses or gains in the mud system will be monitored visually/manually as well as with an electronic PVT. The necessary mud products for additional weight and fluid loss control will be on location at all times.

7. AUXILIARY WELL CONTROL AND MONITORING EQUIPMENT

- a. A Kelly cock will be in the drill string at all times.
- b. A full opening drill pipe stabbing valve having the appropriate connections will be on the rig floor unobstructed and readily accessible at all times.
- c. Hydrogen Sulfide detection equipment will be in operation after drilling out the surface casing shoe until the production casing is cemented. Breathing equipment will be on location upon drilling the surface casing shoe until total depth is reached. **If Hydrogen Sulfide is encountered , measured amounts and formations will be reported to the BLM**

8. LOGGING / CORING AND TESTING PROGRAM:

- A. Mud Logger: None.
- B. DST's: None.
- C. Open Hole Logs: GR while drilling from Intermediate casing shoe to TD.

9. POTENTIAL HAZARDS:

- A. H2S detection equipment will be in operation after drilling out the surface casing shoe until the production casing has been cemented. Breathing equipment will be on location from drilling out the surface shoe until production casing is cemented. If H2S is encountered the operator will comply with Onshore Order #6.
- B. No abnormal temperatures or pressures are anticipated. All personnel will be familiar with all aspects of safe operation of equipment being used to drill this well. Adequate flare lines will be installed off the mud/gas separator where gas may be flared safely.
- C. No losses are anticipated at this time.
- D. All personnel will be familiar with all aspects of safe operation of equipment being used to drill this well.
- E. Adequate flare lines will be installed off the mud/gas separator where gas may be flared safely.

10. ANTICIPATED STARTING DATE AND DURATION OF OPERATIONS

Road and location construction will begin after the BLM has approved the APD. Anticipated spud date will be as soon as possible after BLM approval and as soon as a rig will be available. Move in operations and drilling is expected to take 30 days.



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

PWD Data Report

11/01/2019

APD ID: 10400040421

Submission Date: 04/11/2019

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: CHARLIE MURPHY 6 TB FC

Well Number: 14H

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit specifications:

Pit liner description:

Pit liner manufacturers information:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule attachment:

Lined pit reclamation description:

Lined pit reclamation attachment:

Leak detection system description:

Leak detection system attachment:

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: CHARLIE MURPHY 6 TB FC

Well Number: 14H

Lined pit Monitor description:

Lined pit Monitor attachment:

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information attachment:

Section 3 - Unlined Pits

Would you like to utilize Unlined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD disturbance (acres):

PWD surface owner:

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit specifications:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule attachment:

Unlined pit reclamation description:

Unlined pit reclamation attachment:

Unlined pit Monitor description:

Unlined pit Monitor attachment:

Do you propose to put the produced water to beneficial use?

Beneficial use user confirmation:

Estimated depth of the shallowest aquifer (feet):

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic evidence:

State authorization:

Unlined Produced Water Pit Estimated percolation:

Unlined pit: do you have a reclamation bond for the pit?

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: CHARLIE MURPHY 6 TB FC

Well Number: 14H

Is the reclamation bond a rider under the BLM bond?

Unlined pit bond number:

Unlined pit bond amount:

Additional bond information attachment:

Section 4 - Injection

Would you like to utilize Injection PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Injection PWD discharge volume (bbl/day):

Injection well mineral owner:

Injection well type:

Injection well number:

Injection well name:

Assigned injection well API number?

Injection well API number:

Injection well new surface disturbance (acres):

Minerals protection information:

Mineral protection attachment:

Underground Injection Control (UIC) Permit?

UIC Permit attachment:

Section 5 - Surface Discharge

Would you like to utilize Surface Discharge PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Surface discharge PWD discharge volume (bbl/day):

Surface Discharge NPDES Permit?

Surface Discharge NPDES Permit attachment:

Surface Discharge site facilities information:

Surface discharge site facilities map:

Section 6 - Other

Would you like to utilize Other PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Other PWD discharge volume (bbl/day):

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: CHARLIE MURPHY 6 TB FC

Well Number: 14H

Other PWD type description:

Other PWD type attachment:

Have other regulatory requirements been met?

Other regulatory requirements attachment:



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Bond Info Data Report

11/01/2019

APD ID: 10400040421

Submission Date: 04/11/2019

Operator Name: MARATHON OIL PERMIAN LLC

Well Name: CHARLIE MURPHY 6 TB FC

Well Number: 14H

Well Type: OIL WELL

Well Work Type: Drill

[Show Final Text](#)

Bond Information

Federal/Indian APD: FED

BLM Bond number: NMB001555

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment:



Application for Permit to Drill

U.S. Department of the Interior
Bureau of Land Management

APD Package Report

Date Printed: 11/01/2019 11:14 AM

APD ID: 10400040421

Well Status: AAPD

APD Received Date: 04/11/2019 01:24 PM

Well Name: CHARLIE MURPHY 6 TB FC

Operator: MARATHON OIL PERMIAN LLC

Well Number: 14H

APD Package Report Contents

- Form 3160-3
- Operator Certification Report
- Application Report
- Application Attachments
 - Well Plat: 1 file(s)
- Drilling Plan Report
- Drilling Plan Attachments
 - Blowout Prevention Choke Diagram Attachment: 4 file(s)
 - Blowout Prevention BOP Diagram Attachment: 3 file(s)
 - Casing Design Assumptions and Worksheet(s): 4 file(s)
 - Hydrogen sulfide drilling operations plan: 4 file(s)
 - Proposed horizontal/directional/multi-lateral plan submission: 3 file(s)
 - Other Facets: 2 file(s)
- SUPO Report
- SUPO Attachments
 - Existing Road Map: 1 file(s)
 - New Road Map: 3 file(s)
 - Access road engineering design attachment: 1 file(s)
 - Attach Well map: 1 file(s)
 - Production Facilities map: 1 file(s)
 - Water source and transportation map: 1 file(s)
 - Construction Materials source location attachment: 1 file(s)
 - Well Site Layout Diagram: 3 file(s)
 - Recontouring attachment: 1 file(s)
 - Other SUPO Attachment: 3 file(s)
- PWD Report
- PWD Attachments
 - None

- Bond Report
- Bond Attachments
 - None