

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.
NMSF080379

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
San Juan 29-6 Unit #11B

9. API Well No.
30-039-29276

10. Field and Pool, or Exploratory Area
Blanco Mesaverde

11. County or Parish, State
Rio Arriba
NM

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well
 Oil Well Gas Well Other

2. Name of Operator
ConocoPhillips Co.

3a. Address
P.O. Box 2197, WL3-6081 Houston Tx 77252

3b. Phone No. (include area code)
(832)486-2326

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
Sec 7 T29N R6W NENW 400FNL 2620FWL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/ Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input checked="" type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplate horizontally, give subsurface locations measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Due to lost circulation problems in offset wells, we are requesting approval to change our casing and cementing data as per the attached.

Approval given via e-mail 11/22/05



14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)
Deborah Marberry

Signature
Deborah Marberry

Title
Regulatory Analyst

Date
11/22/2005

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by *Adrian Brenley* Title *Ret. Eng* Date *11/29/05*


Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office
FFO

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

NMCOO

San Juan 29-6 #11B
Halliburton Cementing Program

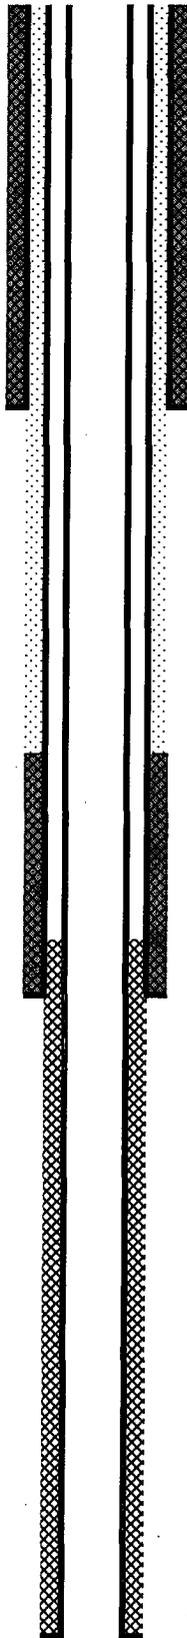

SURFACE CASING :

Drill Bit Diameter	12.25 "	
Casing Outside Diameter	9.625 "	Casing Inside Diam. 9.001 "
Casing Weight	32.3	ppf
Casing Grade	H-40	
Shoe Depth	230'	
Cement Yield	1.21	cuft/sk
Excess Cement	125	%
Cement Required	140	sx

SHOE 230' , 9.625" , 32.3 ppf, H-40 STC

INTERMEDIATE CASING :

Drill Bit Diameter	8.75 "	
Casing Outside Diameter	7 "	Casing Inside Diam. 6.456 "
Casing Weight	20	ppf
Casing Grade	J-55	
Shoe Depth	3448'	
Lead Cement Yield	2.88	cuft/sk
Lead Cement Excess	150	%
Tail Cement Length	689.6'	
Tail Cement Yield	1.33	cuft/sk
Tail Cement Excess	150	%
Lead Cement Required	343	sx
Tail Cement Required	202	sx


SHOE 3448' , 7" , 20 ppf, J-55 STC

PRODUCTION CASING :

Drill Bit Diameter	6.25 "	
Casing Outside Diameter	4.5 "	Casing Inside Diam. 4.052 "
Casing Weight	10.5	ppf
Casing Grade	J-55	
Top of Cement	3248'	200' inside intermediate casing
Shoe Depth	6148'	
Cement Yield	1.45	cuft/sk
Cement Excess	50	%
Cement Required	303	sx

SHOE 6148' , 4.5" , 10.5 ppf, J-55 STC

San Juan 29-6 #11B
Schlumberger Cementing Program

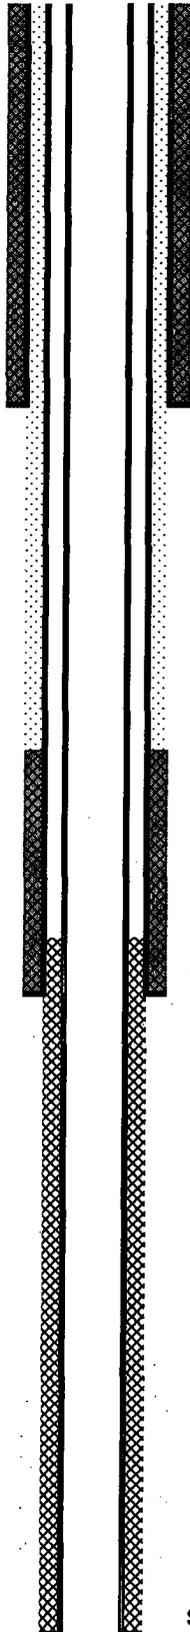

SURFACE CASING :

Drill Bit Diameter	12.25 "	
Casing Outside Diameter	9.625 "	Casing Inside Diam. 9.001 "
Casing Weight	32.3 ppf	
Casing Grade	H-40	
Shoe Depth	235 '	
Cement Yield	1.16 cuft/sk	
Excess Cement	125 %	
Cement Required	143 sx	

SHOE 235 ', 9.625 ", 32.3 ppf, H-40 STC

INTERMEDIATE CASING :

Drill Bit Diameter	8.75 "	
Casing Outside Diameter	7 "	Casing Inside Diam. 6.456 "
Casing Weight	20 ppf	
Casing Grade	J-55	
Shoe Depth	3448 '	
Lead Cement Yield	2.72 cuft/sk	
Lead Cement Excess	150 %	
Tail Cement Length	690 '	
Tail Cement Yield	1.31 cuft/sk	
Tail Cement Excess	150 %	
Lead Cement Required	363 sx	
Tail Cement Required	205 sx	

SHOE 3448 ', 7 ", 20 ppf, J-55 STC

PRODUCTION CASING :

Drill Bit Diameter	6.25 "	
Casing Outside Diameter	4.5 "	Casing Inside Diam. 4.052 "
Casing Weight	10.5 ppf	
Casing Grade	J-55	
Top of Cement	3248 '	200' inside intermediate casing
Shoe Depth	6148 '	
Cement Yield	1.44 cuft/sk	
Cement Excess	50 %	
Cement Required	305 sx	

SHOE 6148 ', 4.5 ", 10.5 ppf, J-55 STC