

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO.
30-031-21067

5. Indicate Type of Lease
STATE ☒ FEE ☐

6. State Oil & Gas Lease No.
VO-7480

7. Lease Name or Unit Agreement Name

Saladita State

8. Well Number 1

9. OGRID Number 10459

10. Pool name or Wildcat
Wildcat

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☐ Other (X) Dry Hole

2. Name of Operator

High Plains Petroleum Corporation

3. Address of Operator 3860 Carlock Drive
Boulder, CO 80305

4. Well Location

Unit Letter M : 685 feet from the South line and 685 feet from the West line
Section 36 Township 18 North Range 5 West NMPM McKinley County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
GR 6563

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☒
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐
CLOSED-LOOP SYSTEM ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

High Plains Petroleum proposes plugging the well as follows:

Notify NMOCD 24 hrs
prior to beginning
operations

- (1) Move in and rig up a cementing unit when available.
- (2) Remove the pup joint in the tubinghead and the tubinghead.
- (3) Pick up a 6 1/8" mill, 5 drill collars and a workstring. RIH and mill out 2 composite BP's and 4 CIBP's with 8,000 lbs. WOM and at 50 to 125 RPM. RIH and check the PBTD. PUH.
- (4) If the PBTD is 2358', set @ 2295' and cement 2291-2191' w/ 50% excess (28 sx. CIB cmt. cont. 2% CaCl2). PUH. WOC. TIH and tag cmt.. If necessary, top off cmt.. PUH.
- (5) If the PBTD is 2036', as measured by Schlumberger, set @ 1475' and cement 1473-1373' w/ 50% excess (28 sx. CIB cmt. cont. 2% CaCl2). PUH. WOC. TIH and tag cmt. If necessary, top off cmt.. TOH.
- (6) RIH and set a cement retainer @ 436'. Circulate cmt. from 436' to surface w/ 85 sx. CIB cmt. cont. 2% CaCl2. WOC. Top off casing if necessary.
- (7) Cutoff the wellhead and install a dryhole marker. Record GPS coordinates for P&A marker on tower report. Photograph P&A marker in place.
- (8) Rig down and move out.

OIL CONS. DIV DIST. 3

Spud Date:

3/3/2006

Rig Release Date:

8/6/2006

NOV 02 2015

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE John B. Somers II TITLE Petroleum Engineer & President DATE 10/28/2015

Type or print name John B. Somers II E-mail address: HPBoulder@yahoo.com PHONE: 303-494-4529

For State Use Only


APPROVED BY: [Signature] TITLE DEPUTY OIL & GAS INSPECTOR DATE 11-17-15

Conditions of Approval (if any):

DISTRICT #3

KC
2

Well Diagram
Saladita State #1

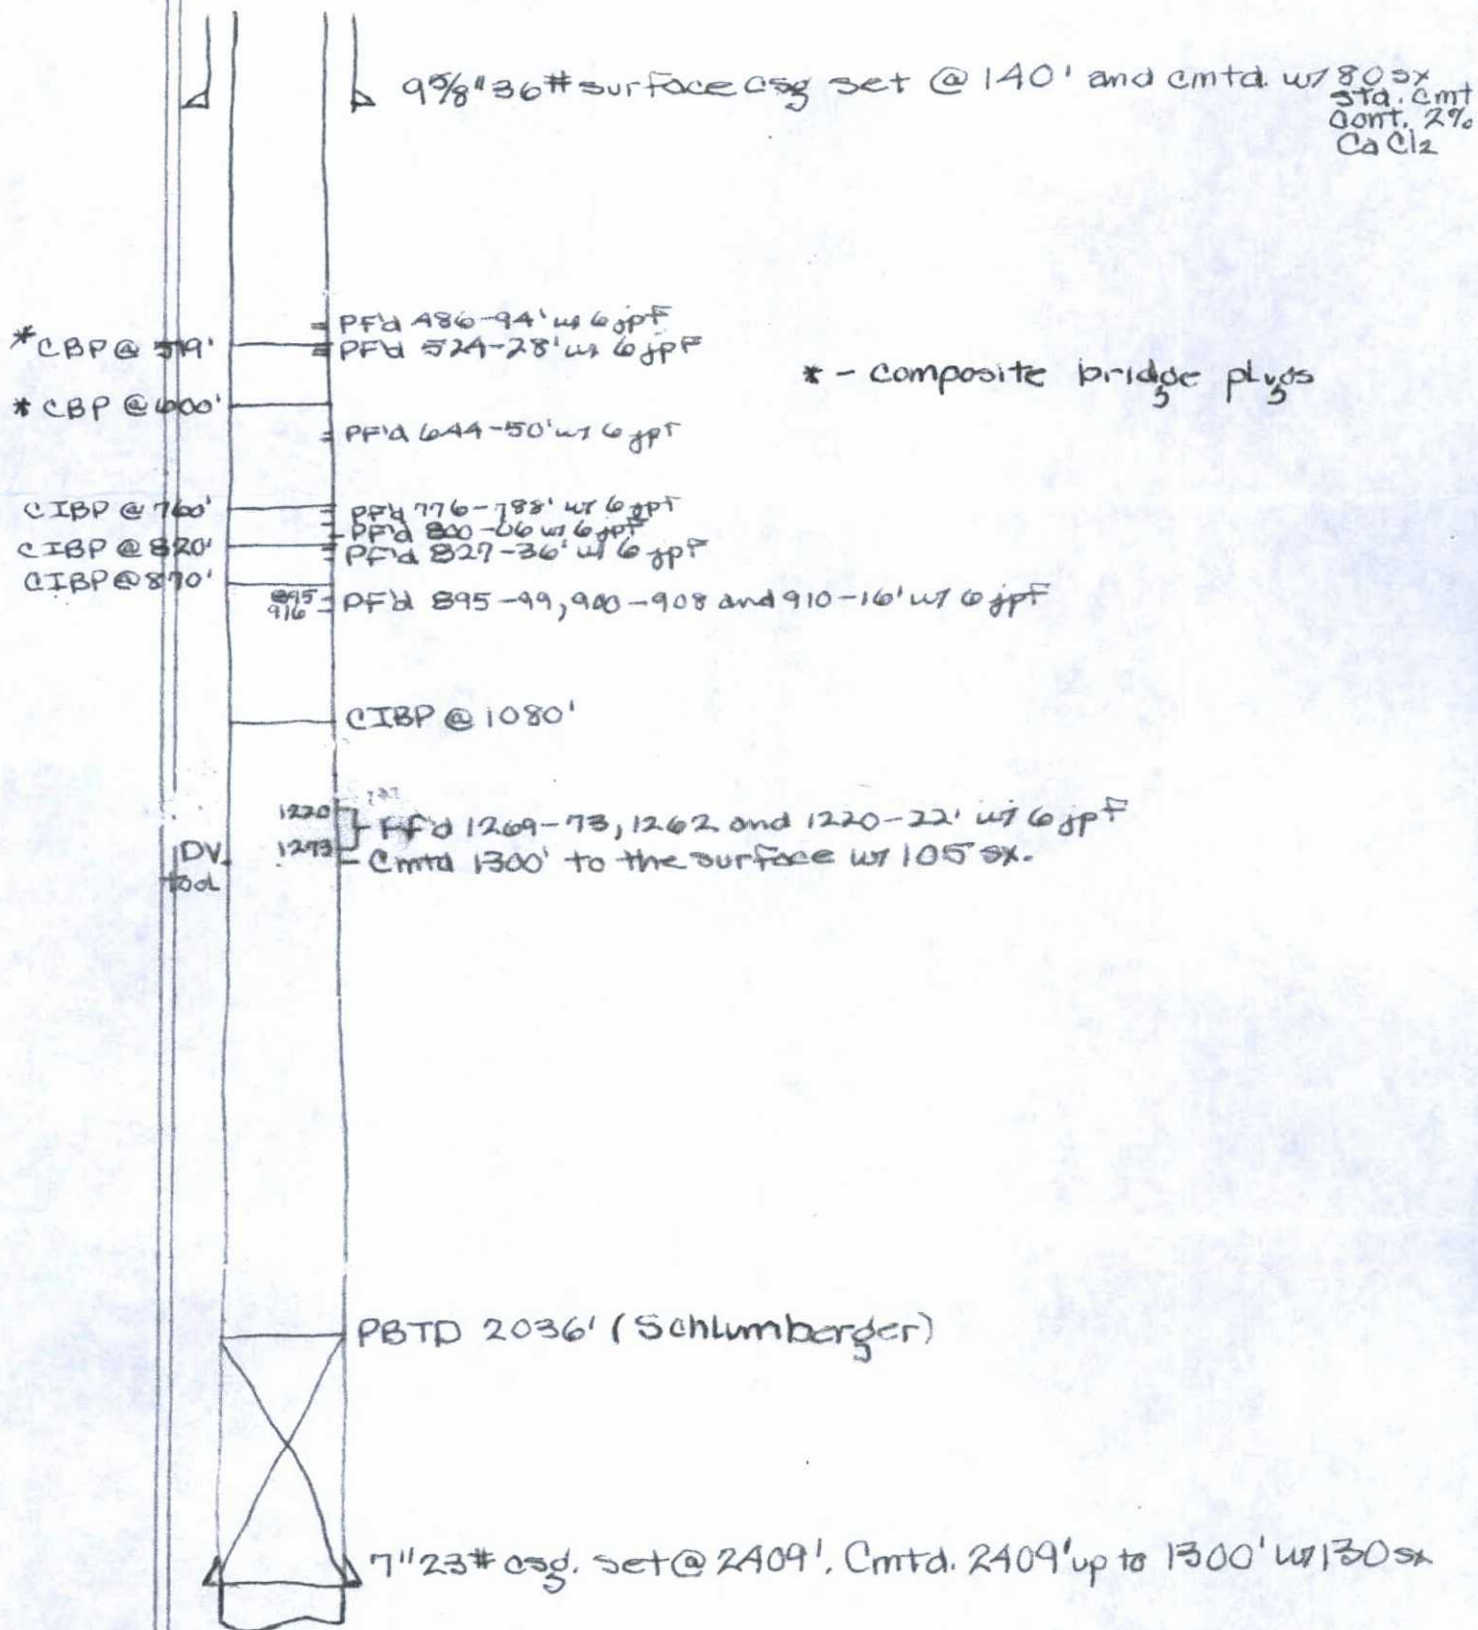

Prepared by - J. Somers

on - Oct. 27, 2015