District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office. For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

	Pit, Belov		01	
13159 Propos	sed Alternative Method	d Permit or Clos	sure Plan A	pplication
1010	Below grade tank registrati			OIL CONS. DIV DIST.
45-08035	Permit of a pit or proposed	alternative method		
75-00000	Closure of a pit, below-grad Modification to an existing	de tank, or proposed a	alternative metho	od OCT 16 2015
	Closure plan only submitter			mitted pit, below-grade tank,
or proposed alter	native method			
	se submit one application (Form C			
				n of surface water, ground water or the al authority's rules, regulations or ordinand
		mply will ally outer app	feasie government	ar autionity 5 funds, regulations of oranian
Operator: Burlington Resources		OGRID #:	14538	
ddress:PO BOX 4289, Farming	on, NM 87499			
Facility or well name: Cozzens 4				
API Number: <u>30-045-08035</u>	OCD Perm	it Number:		
J/L or Qtr/Qtr <u>E (SWNW)</u> Section	on <u>20</u> Township	29N Range	<u>11W</u>	County: San Juan
Center of Proposed Design: Latitude	<u>36.71215•N</u> Longitude108.02	2080	<u>∎W</u> NAD: □	1927 🖾 1983
unfana Ouman D Fadanal D Stata	🛛 Private 🗌 Tribal Trust or India	n Allotment		
	er vitation 🗌 P&A 🗌 Multi-Well F			
Pit: Subsection F, G or J of 19. remporary: Drilling Workov Permanent Emergency Lined Unlined String-Reinforced Liner Seams: Welded	er vitation □ P&A □ Multi-Well F Thicknessmil LLDPE □	HDPE PVC	Other	
Pit: Subsection F, G or J of 19. Temporary: Drilling Workov Permanent Emergency Ca Lined Unlined Liner type: String-Reinforced Liner Seams: Welded Factory	er vitation	HDPE PVC	Other	
Pit: Subsection F, G or J of 19. Temporary: Drilling Workow Permanent Emergency Ca Lined Unlined Liner type: String-Reinforced Striner Seams: Welded Factory Mathematical Subsection Subsection Subsection	er vitation	HDPE PVC	Other	
Pit: Subsection F, G or J of 19. Temporary: Drilling Workov Permanent Emergency Ca Lined Unlined Liner type: String-Reinforced Striner Seams: Welded Factory Below-grade tank: Subsection Volume: 120	er vitation	HDPE PVC	Other	
Pit: Subsection F, G or J of 19. Temporary: Drilling Workow Permanent Emergency Car Lined Unlined Liner type: String-Reinforced Striner Seams: Welded Factory Below-grade tank: Subsection Jolume: 120 Fank Construction material:	er vitation P&A Multi-Well F Thickness mil LLDPE Other for 19.15.17.11 NMAC bbl Type of fluid: <u>Produ</u>	HDPE PVC	Other	x W x D
Pit: Subsection F, G or J of 19. Cemporary: Drilling Workov Permanent Emergency Ca Lined Unlined Liner type: String-Reinforced Striner Seams: Welded Factory Below-grade tank: Subsection /olume: 120 Fank Construction material:	er vitation	HDPE PVC	Other	x W x D
Pit: Subsection F, G or J of 19. 'emporary: Drilling Workov Permanent Emergency Ca Lined Unlined Liner type: String-Reinforced	er vitation P&A Multi-Well F Thickness mil LLDPE Other Produces I of 19.15.17.11 NMAC _bbl Type of fluid: Produces Metal detection Visible sidewalls, lif Visible sidewalls only Other _	HDPE PVC b	Other	x W x D
Pit: Subsection F, G or J of 19. Cemporary: Drilling Workow Permanent Emergency Car Lined Unlined Liner type: String-Reinforced String-Reinforced Liner Seams: Welded Factory String-Reinforced Subsection Oume: 120 Cark Construction material: Secondary containment with leak Visible sidewalls and liner V Liner type: Thickness 45	er vitation P&A Multi-Well F Thickness mil LLDPE Other Produces I of 19.15.17.11 NMAC _bbl Type of fluid: Produces Metal detection Visible sidewalls, lif Visible sidewalls only Other _	HDPE PVC b	Other	x W x D
Pit: Subsection F, G or J of 19. 'emporary: Drilling Workow Permanent Emergency Car Lined Unlined Liner type: String-Reinforced Welded Factory X Below-grade tank: Subsection /olume: 120 'ank Construction material:	er vitation P&A Multi-Well F Thickness mil LLDPE Other Produces I of 19.15.17.11 NMAC _bbl Type of fluid: Produces Metal detection Visible sidewalls, lif Visible sidewalls only Other _	HDPE PVC b	Other	x W x D
Pit: Subsection F, G or J of 19. 'emporary: Drilling Workov Permanent Emergency Ca Lined Unlined Liner type: String-Reinforced Welded Factory Below-grade tank: Subsection /olume: 120 'ank Construction material:	er vitation P&A Multi-Well F Thickness mil LLDPE Other Produces tof 19.15.17.11 NMAC bbl Type of fluid: Produces Metal detection Visible sidewalls, lif Visible sidewalls only Other mil HDPE PV	HDPE PVC	Other	x W x D
Pit: Subsection F, G or J of 19. 'emporary: Drilling Workov Permanent Emergency Ca Lined Unlined Liner type: String-Reinforced	er vitation P&A Multi-Well F Thickness mil LLDPE Other Produces tof 19.15.17.11 NMAC bbl Type of fluid: Produces Metal detection Visible sidewalls, lif Visible sidewalls only Other mil HDPE PV	HDPE PVC	Other	x Wx D
Pit: Subsection F, G or J of 19. 'emporary: Drilling Workow Permanent Emergency Ca Lined Unlined Liner type: String-Reinforced	er vitation P&A Multi-Well F Thickness mil LLDPE Other Other Other Other Produ Metal detection Visible sidewalls, li Visible sidewalls only Other PV equired. Exceptions must be subm	HDPE PVC	Other I Dimensions: L matic overflow sh PE vironmental Burea	x Wx D
Pit: Subsection F, G or J of 19. 'emporary: Drilling Workow Permanent Emergency Ca Lined Unlined Liner type: String-Reinforced	er vitation P&A Multi-Well F Thickness mil LLDPE Other Oth	HDPE PVC □ Volume: bt uced Water iner, 6-inch lift and auto 'C Other tt itted to the Santa Fe En its, temporary pits, and it	Other I Dimensions: L matic overflow sh <u>PPE</u> vironmental Burea below-grade tanks	x Wx D
Pit: Subsection F, G or J of 19. Temporary: Drilling Workov Permanent Emergency Ca Lined Unlined Liner type: String-Reinforced	er vitation P&A Multi-Well F Thickness mil LLDPE Other Othe	HDPE PVC □ Volume: bt uced Water iner, 6-inch lift and auto 'C Other tt itted to the Santa Fe En itted to the Santa Fe En tt itted to the Santa Fe En tt itted to the Santa Fe En tt itted if located within 10 tt	Other I Dimensions: L matic overflow sh <u>PPE</u> vironmental Burea below-grade tanks	x Wx D

Page 1 of 6

Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)

Screen Netting Other

Monthly inspections (If netting or screening is not physically feasible)

Signs: Subsection C of 19.15.17.11 NMAC

12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers

Signed in compliance with 19.15.16.8 NMAC

Variances and Exceptions:

Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.

Please check a box if one or more of the following is requested, if not leave blank:

Variance(s): Requests must be submitted to the appropriate division district for consideration of approval.
 Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

^{9.} <u>Siting Criteria (regarding permitting)</u> : 19.15.17.10 NMAC <i>Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below.</i> Siting criteria does not apply to drying pads or above-grade tanks. General siting				
General siting				
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank	☐ Yes ☐ No ⊠ NA			
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ⊠ NA			
 Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) Written confirmation or verification from the municipality; Written approval obtained from the municipality 	🗔 Yes 🗌 No			
 Within the area overlying a subsurface mine. (Does not apply to below grade tanks) Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division 	🗌 Yes 🗌 No			
 Within an unstable area. (Does not apply to below grade tanks) Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	Yes No			
Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map	Yes No			
Below Grade Tanks	11			
 Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site 	🗋 Yes 🛛 No			
 Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site 	Yes 🛛 No			
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)				
 Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) Topographic map; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No			
 Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 	Yes No			
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	Yes No			

 Within 100 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site 	Yes No
Temporary Pit Non-low chloride drilling fluid	
 Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site 	🗆 Yes 🗌 No
 Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 	Yes No
Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	🗌 Yes 🗌 No
 Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No
Permanent Pit or Multi-Well Fluid Management Pit	
 Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site 	🗋 Yes 🗌 No
 Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 	🗌 Yes 🗌 No
 Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No
 Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No
 10. <u>Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist</u>: Subsection B of 19.15.17.9 N <i>Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the dot attached.</i> Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19. and 19.15.17.13 NMAC 	cuments are
Previously Approved Design (attach copy of design) API Number: or Permit Number:	
11. Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the doc attached. Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC A List of wells with approved application for permit to drill associated with the pit. Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 and 19.15.17.13 NMAC Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.10 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC	
Previously Approved Design (attach copy of design) API Number: or Permit Number: or Permi	1. 1. A.
	the second

12. Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Hydrogeon and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Hydrogeon and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Difield Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of 19.15.17.13 NMAC	documents are
Proposed Closure: 19.15.17.13 NMAC	
Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-well F Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial Alternative Closure Method Alternative Closure Method	luid Management Pit
14. Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be	
 closure plan. Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC 	
15.	
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. F 19.15.17.10 NMAC for guidance.	rce material are Please refer to
Ground water is less than 25 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No NA
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	□ Yes □ No □ NA
Ground water is more than 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	□ Yes □ No □ NA
 Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site 	🗋 Yes 🗌 No
 Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 	🗌 Yes 🗌 No
 Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No
Written confirmation or verification from the municipality; Written approval obtained from the municipality	Yes No
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	
Form C 144	ALC: N

adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written appre-	oval obtained from the municipality	Yes No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mini	ng and Mineral Division	Yes No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geolo	ogy & Mineral Resources; USGS; NM Geological	
Society; Topographic map		Yes No
Within a 100-year floodplain. - FEMA map		Yes No
 16. On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements Construction/Design Plan of Burial Trench (if applicable) based upon the Construction/Design Plan of Temporary Pit (for in-place burial of a drying Protocols and Procedures - based upon the appropriate requirements of 19. Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection (for liquids, drilling fluids and Soil Cover Design - based upon the appropriate requirements of Subsection Soil Cover Design - based upon the appropriate requirements of Subsection (Site Reclamation Plan - based upon the appropriate requirements of Subsection (Site Reclamation Plan - based upon the appropriate requirements of Subsection (Site Reclamation Plan - based upon the appropriate requirements of Subsection (Site Reclamation Plan - based upon the appropriate requirements of Subsection (Site Reclamation Plan - based upon the appropriate requirements of Subsection (Site Reclamation Plan - based upon the appropriate requirements of Subsection (Site Reclamation Plan - based upon the appropriate requirements of Subsection (Site Reclamation Plan - based upon the appropriate requirements of Subsection (Site Reclamation Plan - based upon the appropriate requirements of Subsection (Site Reclamation Plan - based upon the appropriate requirements of Subsection (Site Reclamation Plan - based upon the appropriate requirements of Subsection (Site Reclamation Plan - based upon the appropriate requirements of Subsection (Site Reclamation Plan - based upon the appropriate requirements of Subsection (Site Reclamation Plan - based upon the appropriate requirements of Subsection (Site Reclamation Plan - based upon the appropriate requirements of Subsection (Site Reclamation Plan - based upon the appropriate requirements of Sub	equirements of 19.15.17.10 NMAC of Subsection E of 19.15.17.13 NMAC appropriate requirements of Subsection K of 19.15.17 g pad) - based upon the appropriate requirements of 19 .15.17.13 NMAC equirements of 19.15.17.13 NMAC of 19.15.17.13 NMAC 1 drill cuttings or in case on-site closure standards can n H of 19.15.17.13 NMAC on H of 19.15.17.13 NMAC	.11 NMAC .15.17.11 NMAC
17. Operator Application Certification:		
I hereby certify that the information submitted with this application is true, accur	rate and complete to the best of my knowledge and be	lief.
Name (Print):	Title:	
Signature:	Date:	
e-mail address:	Pepephone:	<u></u>
18. OCD Approval: Permit Application (including closure plan) 🕅 Closure P	Conditions (see attachment)	
	111	15/15
OCD Representative Signature:	Approval Date:	415
Title: Environ mental Spec	OCD Permit Number:	Charles and the
^{19.} Closure Report (required within 60 days of closure completion): 19.15.17.13 Instructions: Operators are required to obtain an approved closure plan prior The closure report is required to be submitted to the division within 60 days of a section of the form until an approved closure plan has been obtained and the co	to implementing any closure activities and submitting the completion of the closure activities. Please do no losure activities have been completed.	t complete this
	Closure Completion Date: <u>11/18/201</u>	4
20. Closure Method: ⊠ Waste Excavation and Removal □ On-Site Closure Method □ Alterna □ If different from approved plan, please explain.	ative Closure Method 🗌 Waste Removal (Closed-1	

Oil Conservation Division

22. **Operator Closure Certification:**

I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.

Name (Print): Crystal Walker Title: Regulatory (Coordinator
Signature: Stal Wa	Ckee Date: 10/

e-mail address: crystal.walker@cop.com Telephone: (505) 326-9837

Burlington Resources Oil & Gas Company, LP San Juan Basin Below Grade Tank Closure Report

Lease Name: Cozzens 4 API No.: 30-045-08035

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure of the below-grade tank referenced above. All proper documentation regarding closure activities is being included with the C-144.

General Plan:

 BR shall close a below-grade tank within 60 days of cessation of operations per Subsection G.4 of 19.15.17.13 NMAC. This will include a) below-grade tanks that do not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC; b) an earlier date that the division requires because of imminent danger to fresh water, public health or the environment. For any closure, BR will file the C144 Closure Report as required.

The below-grade tank referenced above was permitted and closed within 60 days of cessation of the below-grade tanks operation.

 BR shall remove liquids and sludge from a below-grade tank prior to implementing a closure method and shall dispose of the liquids and sludge in a division-approved facility. The facilities to be used will be Basin Disposal (Permit #NM-01-005), JFJ Landfarm % Industrial Ecosystem Inc. (Permit # NM-01-0010B) and Envirotech Land Farm (Permit #NM-01-011). The liner after being cleaned well (Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC) will be disposed of at the San Juan County Regional Landfill located on CR 3100.

All recovered liquids were disposed of at Basin Disposal (Permit #NM-01-005) and any sludge or soil required to be removed to facilitate closure was hauled to Envirotech Land Farm (Permit #NM-01-011) and JFJ Landfarm % IEI (Permit #NM-01-0010B). The liner was cleaned per Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC was disposed of at the San Juan County Regional Landfill located on CR 3100.

3. BR will receive prior approval to remove the below-grade tank and dispose of it in a division-approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.

The below-grade tank was disposed of in a division-approved manner.

4. If there is any on-site equipment associated with a below-grade tank, then BR shall remove the equipment, unless the equipment is required for some other purpose.

All on-site equipment associated with the below-grade tank was removed.

5. BR will test the soils beneath the below-grade tank to determine whether a release has occurred. BR shall collect, at a minimum, a five point, composite sample; collect individual grab samples from any area that is wet, discolored or showing other evidence of a release; and analyzed for the constituents listed in Table I of 19.15.17.13 NMAC. COPC shall notify the division of its results on form C-141.

A five point composite sample was taken of the below-grade tank using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached). Form C-141 is attached.

Components	Tests Method	Limit (mg/kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B 50	
TPH	EPA SW-846 418.1	100
Chlorides	EPA 300.0	250

6. If BR or the division determines that a release has occurred, then BR shall comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC, as appropriate.

A release was not determined for the above referenced well.

7. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Table I of 19.15.17.13 NMAC, then BR shall backfill the excavation with compacted, non-waste containing, earthen material; construct a division-prescribed soil cover; recontour and re-vegetate the site.

The below-grade tank area passed all requirements of Paragraph (4) of Subsection E of 19.15.17.13 NMAC and was backfilled with compacted, non-waste containing, earthen material.

- Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.

Notification is attached.

9. The surface owner shall be notified of BR's closing of the below-grade tank 72 hours, but not more than one week, prior to closure as per the approved closure plan via certified mail, return receipt requested.

The closure process notification to the landowner was sent via certified mail. (See Attached) (Well located on Federal Land, certified mail is not required for Federal Land per BLM/OCD MOU.)

10. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The below-grade tank area was re-contoured to match fit, shape, line, form and texture of the surrounding area. Re-shaping including drainage control, to prevent ponding and erosion. Natural drainages were unimpeded and water bars and/or silt traps were placed in areas where needed to prevent erosion on a large scale. Final recontour has a uniform appearance with smooth surface, fitting the natural landscape.

11. BR shall seed the disturbed areas the first favorable growing season following closure of a below-grade tank. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM stipulated seed mixes will used on federally regulated lands and division-approved seed mixtures (administratively approved if required) will be utilized on all State or private lands. A uniform vegetative cover has been established that reflects a life-form ratio of plus or minus fifty percent (50%) of pre- disturbance levels and a total percent plant cover of at least seventy percent (70%) of pre-disturbance levels, excluding noxious weeds. If alternate seed mix is required by the state, private owner or tribe, it will be implemented with administrative approval if needed. COPC will repeat seeding or planting will be continued until successful vegetative growth occurs. Provision 13 was accomplished through complying with BLM seeding requirements as allowed by the BLM/OCD MOU.

12. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material, with chloride concentrations less than 600 mg/kg as analyzed by EPA Method 300.0, to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.

The below-grade tank area was backfilled and more than four feet of cover was achieved and the cover included one foot of suitable material to establish vegetation at the site.

- 13. All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on C-144 and incorporate the following:
 - Soil Backfilling and Cover Installation (See Report)
 - Re-vegetation application rates and seeding techniques (See Report)
 - Photo documentation of the site reclamation (Included as an attachment)
 - Confirmation Sampling Results (Included as an attachment)
 - Proof of closure notice (Included as an attachment)

Walker, Crystal

From:	Busse, Dollie L
Sent:	Wednesday, November 12, 2014 7:55 AM
То:	Cory.Smith@state.nm.us
Cc:	Journey, Denise D (Denise.Journey@conocophillips.com)
Subject:	Cozzens 4 - 72 Hour Notice
Importance:	High

The subject well has a below-grade tank that will begin the closure process between 72 hours and one week from this notification. Please contact me at any time if you have any questions or concerns.

Currently the scheduled strip date is Monday, November 17.

Well Name:	Cozzens 4
API#:	30-045-08035
Location:	2310' FNL & 990' FWL Sec. 20, T29N, R11W Unit Letter " E "
Operator:	Burlington Resources
Surface Owner:	Fee
Lease:	SF-079521A

Dollie L. Busse | Staff Regulatory Technician | ConocoPhillips | San Juan Business Unit | P.O. Box 4289 | Farmington, NM 87499 | Office: 505-324-6104 | Cell: 505-215-3069 | E-mail: dollie.l.busse@cop.com



ConocoPhillips Company REFS-PTRRC – San Juan Business Unit Lisabeth Jones 3401 East 30th Street Farmington, NM 87402 Telephone: (505) 326-9558 Facsimile: (505) 324-6136 <u>lisabeth.s.jones@conocophillips.com</u>

CERTIFIED MAIL – RETURN RECEIPT REQUESTED 71791000164208020811

July 22, 2014

Five Star Farm Inc. 6196 Hwy 64 Bloomfield, NM 87413

Subject: P&A Surface Entry Notice Cozzens 4 SWNW Section 20, T29N, R11W San Juan County, New Mexico

Dear Landowners:

Burlington Resources Oil & Gas Company LP, an affiliate of ConocoPhillips Company is hereby notifying you that we will be performing rig operations on the subject well located on your property. The rig event is tentatively scheduled for December 19, 2014.

If you have any questions regarding this work, please call the PTRRC hotline at (505) 324-6111 within five (5) days of receiving this notice.

Sincerely,

Risa Jones

Lisa Jones PTRRC Associate

State of New Mexico Energy Minerals and Natural Resources

Oil Conservation Division 1220 South St Francis Dr

Submit 1 Copy to appropriate District Office to accordance with 19.15.29 NMAC.

220 S. St. Fran	ncis Dr., Santa	a Fe, NM 8750	5		a Fe, NM 87					
12.08	. A		Rele	ease Notifica	tion and C	Corrective A	ction			
					OPER	TOR	🗌 Initi	al Report	× I	Final Repo
Name of Company Burlington Resources Address 3401 East 30 th St, Farmington, NM					Crystal Tafoya					
			gton, NN	1		No.(505) 326-9	837			
Facility Na	me: Cozze	ns 4			Facility T	pe: Gas Well		the second		
Surface Ow	ner Fee			Mineral Ow	ner		API No	.30-045-08	8035	
				LOCAT	ION OF RI	ELEASE				
Unit Letter E	Section 20	Township 29N	Range 11W	Feet from the N 2310	orth/South Line North	Feet from the 990	East/West Line West	County San Juan		
				Latitude 36.7	1215 Longitu	de <u>-108.02080</u>				
				NATU	RE OF REI	LEASE				
Type of Rele						of Release		Recovered		
Source of Re	elease				Date and	Hour of Occurren	ce Date and	Hour of Dis	covery	
Was Immedi	ate Notice (Yes [] No 🛛 Not Requ		To Whom?				
By Whom?	and the second				Date and	Hour				
Was a Water	course Read		Yes 🛛 1	No	If YES, Y	Volume Impacting	the Watercourse.			
		em and Reme iscovered du		n Taken.* Closure Activities.						
Describe Are N/A	ea Affected	and Cleanup /	Action Tak	en.*				4	ť	
regulations a public health should their or the enviro	Il operators or the envir operations h nment. In a	are required t ronment. The ave failed to a	o report ar acceptance adequately OCD accept	is true and complete ad/or file certain rele- e of a C-141 report investigate and rem tance of a C-141 rep	ase notifications by the NMOCD ediate contamination	and perform corre marked as "Final F tition that pose a the eve the operator of	ctive actions for rel Report" does not rel reat to ground wate responsibility for c	eases which ieve the oper r, surface wa ompliance w	may end ator of li ter, huma ith any o	anger ability an health
Signature:	~	40	u	alku		OIL CON	SERVATION	DIVISIC	<u>N</u>	
<						74447 TAX 11 14 14				
Printed Nam	e: Crystal				Approved b	y Environmental S	specialist:	_	12.	
Printed Nam Title: Regul		Walker			Approved b Approval D		Expiration	Date:		

ets II Neces II AYU III O uу Animas Environmental Services, LLC



December 15, 2014

Crystal Tafoya ConocoPhillips San Juan Business Unit Office 214-05 5525 Hwy 64 Farmington, New Mexico 87401

Via electronic mail to: SJBUE-Team@ConocoPhillips.com

RE: Below Grade Tank Closure Report Cozzens #4 San Juan County, New Mexico

Dear Ms. Tafoya:

Animas Environmental Services, LLC (AES) is pleased to provide the final report associated with the below grade tank (BGT) closure at ConocoPhillips (CoP) Cozzens #4, located in San Juan County, New Mexico. Tank removal had been completed by CoP contractors prior to AES' arrival at the location.

1.0 Site Information

1.1 Location

Site Name – Cozzens #4 Legal Description – SW¼ NW¼, Section 20, T29N, R11W, San Juan County, New Mexico Well Latitude/Longitude – N36.71222 and W108.02065, respectively BGT Latitude/Longitude – N36.71215 and W108.02080, respectively Land Jurisdiction – Private Figure 1. Topographic Site Location Map Figure 2. Aerial Site Map, November 2014

> 604 W. Piñon St. Farmington, NM 87401 505-564-2281

> > 1911 Main, Ste 280 Durango, CO 970-403-3084

www.animasenvironmental.com

Crystal Tafoya Cozzens #4 BGT Closure Report December 15, 2014 Page 2 of 5

1.2 NMOCD Ranking

In accordance with the New Mexico Oil Conservation Division (NMOCD) *Guidelines for Remediation of Leaks, Spills, and Releases* (August 1993), the location was given a ranking score of 40 based on the following factors:

- Depth to Groundwater: A BGT permit application (Form C-144) dated November 7, 2014, estimated the depth to groundwater at 76 feet below ground surface (bgs). (10 points)
- Wellhead Protection Area: Domestic wells SJ01003 and SJ01055 and irrigation well SP02870 are within 1,000 feet of the location. (20 points)
- Distance to Surface Water Body: Citizens Ditch and an unnamed wash are located 530 feet north and 640 feet east of the location, respectively. Both drain to the San Juan River. (10 points)

1.3 BGT Closure Assessment

AES was initially contacted by Steve Welch, CoP representative, on November 17, 2014, and on November 18, 2014, Emilee Skyles and Dylan Davis of AES mobilized to the location. AES personnel collected six soil samples from below the BGT liner. Four samples were collected from the perimeter of the BGT footprint, one sample was collected from the center of the BGT footprint, and one sample was composited from the four perimeter samples and one center sample.

2.0 Soil Sampling

On November 18, 2014, AES personnel conducted field sampling and collected five soil samples (S-1 through S-5) and one 5-point composite (SC-1) from below the BGT. Soil samples were collected from approximately 0.5 feet below the former BGT for field screening of volatile organic compounds (VOCs) and total petroleum hydrocarbon (TPH). Soil sample SC-1 was field screened for VOCs and chloride and was submitted for confirmation laboratory analysis. Soil sample locations are included on Figure 2.

2.1 Field Sampling

2.1.1 Volatile Organic Compounds

A portion of each sample was utilized for field screening of VOC vapors with a photoionization detector (PID) organic vapor meter (OVM). Before beginning field screening, the PID-OVM was first calibrated with 100 parts per million (ppm) isobutylene gas.

Crystal Tafoya Cozzens #4 BGT Closure Report December 15, 2014 Page 3 of 5

2.1.2 Total Petroleum Hydrocarbons

Soil samples were also analyzed in the field for TPH per U.S. Environmental Protection Agency (USEPA) Method 418.1 using a Buck Scientific Model HC-404 Total Hydrocarbon Analyzer Infrared Spectrometer (Buck). A 3-point calibration was completed prior to conducting soil analyses. Field analytical protocol followed AES's *Standard Operating Procedure: Field Analysis Total Petroleum Hydrocarbons per EPA Method* 418.1.

2.1.3 Chlorides

Soil sample SC-1 was field screened for chlorides using Chloride Drop Count Titration with silver nitrate. Sampling and analysis methods followed procedures provided by Hach Company.

2.2 Laboratory Analyses

The composite soil sample SC-1 collected for laboratory analysis was placed into a new, clean, laboratory-supplied container, which was then labeled, placed on ice, and logged onto a sample chain of custody record. The sample was maintained on ice until delivery to the analytical laboratory, Hall Environmental Analysis Laboratory (Hall), in Albuquerque, New Mexico. Soil sample SC-1 was laboratory analyzed for:

- Benzene, toluene, ethylbenzene, and xylene (BTEX) per USEPA Method 8021B;
- TPH for gasoline range organics (GRO) and diesel range organics (DRO) per USEPA Method 8015D; and
- Chloride per USEPA Method 300.0.

2.3 Field and Laboratory Analytical Results

Field screening readings for VOCs via OVM ranged from 0.0 ppm in S-1, S-2, S-5, and SC-1 up to 1.3 ppm in S-3. Field TPH concentrations ranged from less than 20.0 mg/kg in S-1 and S-3 through S-5 up to 21.1 mg/kg in S-2. The field chloride concentration in SC-1 was 80 mg/kg. Field sampling results are summarized in Table 1 and presented on Figure 2. The AES Field Sampling Report is attached.

Cozzens #4 BGT Closure, November 2014							
Sample ID	Date Sampled	Depth below BGT (ft)	VOCs OVM Reading (ppm)	Field TPH (mg/kg)	Field Chlorides (mg/kg)		
NMOCD Action	evel (NMAC 19.	15.17.13E)		100	250		
S-1	11/18/14	0.5	0.0	<20.0	NA		
S-2	11/18/14	0.5	0.0	21.1	NA		

Table 1. Soil Field Sampling VOCs, TPH, and Chloride Results

Crystal Tafoya Cozzens #4 BGT Closure Report December 15, 2014 Page 4 of 5

Sample ID	Date Sampled	Depth below BGT (ft)	VOCs OVM Reading (ppm)	Field TPH (mg/kg)	Field Chlorides (mg/kg)
S-3	11/18/14	0.5	1.3	<20.0	NA
S-4	11/18/14	0.5	0.3	<20.0	NA
S-5	11/18/14	0.5	0.0	<20.0	NA
SC-1	11/18/14	0.5	0.0	NA	80

NA - not analyzed

Laboratory analytical results reported benzene and total BTEX concentrations in SC-1 as less than 0.049 mg/kg and 0.246 mg/kg, respectively. TPH concentrations as GRO and DRO were reported at less than 4.9 mg/kg and 10 mg/kg, respectively. The laboratory chloride concentration was reported at 110 mg/kg. Laboratory analytical results are summarized in Table 2 and included on Figure 2. The laboratory analytical report is attached.

Table 2. Soil Laboratory Analytical Results

Sample ID	Date Sampled	Depth (ft)	Benzene (mg/kg)	Total BTEX (mg/kg)	TPH- GRO (mg/kg)	TPH- DRO (mg/kg)	Chlorides (mg/kg)
	NMOCD Ac (NMAC 19.1		0.2	50	1	00	250
SC-1	11/18/14	0.5	<0049	<0.246	<4.9	<10	110

3.0 Conclusions and Recommendations

NMOCD action levels for BGT closures are specified in New Mexico Administrative Code (NMAC) 19.15.17.13E. Field TPH concentrations were below the NMOCD action level of 100 mg/kg, with the highest concentration reported in S-2 with 21.1 mg/kg. Benzene and total BTEX concentrations in SC-1 were below the NMOCD action levels of 0.2 mg/kg and 50 mg/kg, respectively. Chloride concentrations in SC-1 were below the NMOCD action level of 250 mg/kg. Based on field sampling and laboratory analytical results for benzene, total BTEX, TPH, and chlorides, no further work is recommended at Cozzens #4.

If you have any questions about this report or site conditions, please do not hesitate to contact Emilee Skyles at (505) 564-2281.

Crystal Tafoya Cozzens #4 BGT Closure Report December 15, 2014 Page 5 of 5

Sincerely,

David g Reve

David J. Reese Environmental Scientist


Elizabeth & Mendly

Elizabeth McNally, P.E.

Attachments:

Figure 1. Topographic Site Location Map Figure 2. Aerial Site Map, November 2014 AES Field Sampling Report 111814 Hall Analytical Report 1411768

SVRMAIN2\Shared\Animas 2000\Dropbox (Animas Environmental)\0000 Animas Server Dropbox EM\2014 Projects\ConocoPhillips\Cozzens #4\Cozzens #4 BGT Closure Report 121514.docx

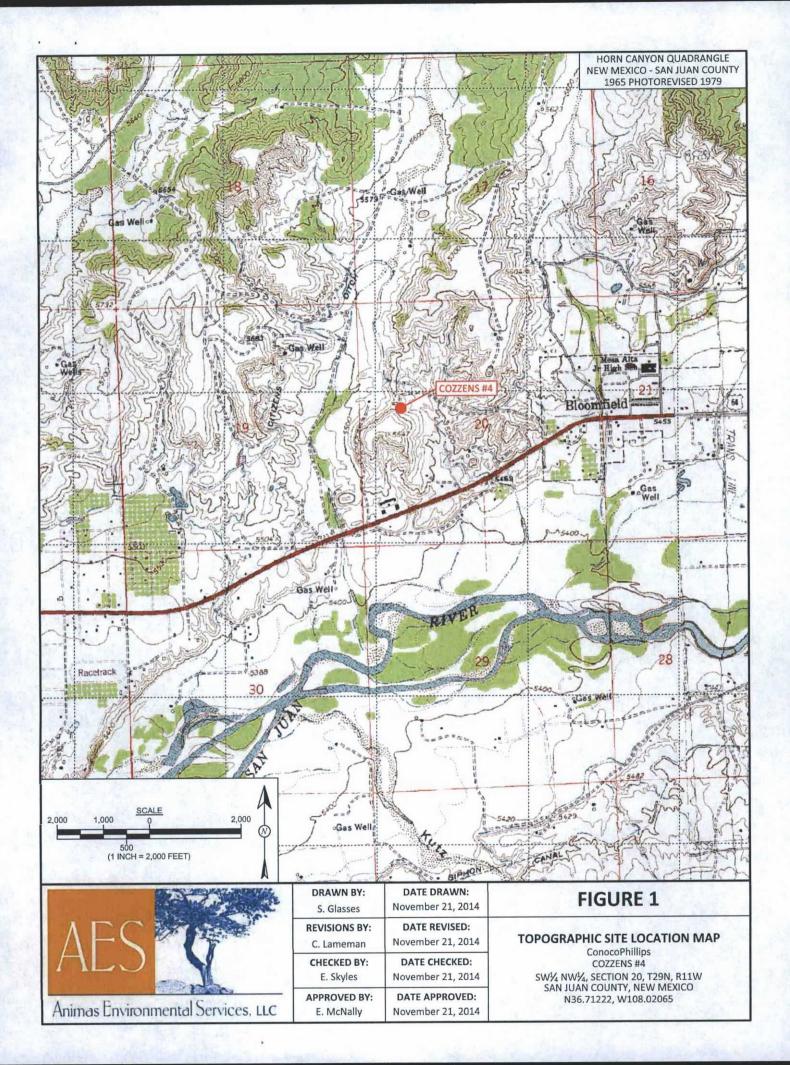

	LEGEND	
SA	MPLE LOCATIONS	5

	Field Sar		counto		
Sample ID	Date	OVM- PID (ppm)	TPH (mg/kg)	Chlorides (mg/kg)	
NMOCD ACTION LEVEL			100	250	
S-1	11/18/14	0.0	<20.0	NA	
S-2	11/18/14	0.0	21.1	NA	
S-3	11/18/14	1.3	<20.0	NA	
S-4	11/18/14	0.3	<20.0	NA	
S-5	11/18/14	0.0	<20.0	NA	
SC-1	11/18/14	0.0	NA	80	

SC-1 IS A 5-POINT COMPOSITE SAMPLE OF S-1 THROUGH S-5. NA - NOT ANALYZED


1.5		Laborato	ry Analytica	al Results	2102	CREAT N
Sample ID	Date	Benzene (mg/kg)	Total BTEX (mg/kg)	TPH - GRO (mg/kg)	TPH - DRO (mg/kg)	Chlorides (mg/kg)
NMOCD ACTION LEVEL		0.2	50	10	00	250
SC-1	11/18/14	< 0.049	<0.246	<4.9	<10	110

COZZENS #4 WELL MONUMENT

-4

- N36.71215 W108.02080

		SCALE	
40	20	ſ	40
	1 (1	1 0 NCH = 40 FEET)	

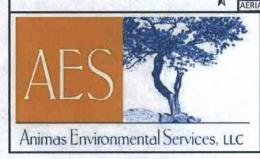

	DATE DRAWN: November 21, 2014	DRAWN BY: S. Glasses	k
BELOW	DATE REVISED: November 21, 2014	REVISIONS BY: C. Lameman	
N	DATE CHECKED: November 21, 2014	CHECKED BY: E. Skyles	
SW¼ NW SAN JU/ N3	DATE APPROVED: November 21, 2014	APPROVED BY: E. McNally	.C

FI	GL	JR	E	2
	-		-	-

AERIAL SITE MAP BELOW GRADE TANK CLOSURE NOVEMBER 2014 ConocoPhillips COZZENS #4 SW½ NW¼, SECTION 20, T29N, R11W SAN JUAN COUNTY, NEW MEXICO N36.71222, W108.02065

AES Field Sampling Report

Animas Environmental Services, LLC



Client: ConocoPhillips

Project Location: Cozzens #4

Date: 11/18/2014

Matrix: Soil

Sample ID	Collection Date	Collection Time	Sample Location	OVM (ppm)	Field Chloride (mg/kg)	Field TPH* (mg/kg)	Field TPH Analysis Time	TPH PQL (mg/kg)	DF	TPH Analysts Initials
S-1	11/18/2014	12:10	North	0.0	NA	14.3	13:00	20.0	1	EMS
S-2	11/18/2014	12:13	South	0.0	NA	21.1	13:04	20.0	1	EMS
S-3	11/18/2014	12:16	East	1.3	NA	15.7	13:08	20.0	1	EMS
S-4	11/18/2014	12:18	West	0.3	NA	18.4	13:15	20.0	1	EMS
S-5	11/18/2014	12:21	Center	0.0	NA	18.4	13:19	20.0	1	EMS
SC-1	11/18/2014	12:23	Composite	0.0	80		Not A	Analyzed for TP	РН	

DF **Dilution Factor**

- NA
- Not Analyzed
- PQL Practical Quantitation Limit

*Field TPH concentrations recorded may be below PQL.

Field Chloride - Quantab Chloride Titrators or Drop Count **Titration with Silver Nitrate** Total Petroleum Hydrocarbons - USEPA 418.1

Analyst: Sinh Sy L



Hall Environmental Analysis Laboratory 4901 Hawkins NE Albuquerque, NM 87109 TEL: 505-345-3975 FAX: 505-345-4107 Website: www.hallenvironmental.com

November 25, 2014

Emilee Skyles Animas Environmental 604 Pinon Street Farmington, NM 87401 TEL: (505) 564-2281 FAX

RE: COP Cozzens #4

OrderNo.: 1411768

Dear Emilee Skyles:

Hall Environmental Analysis Laboratory received 1 sample(s) on 11/19/2014 for the analyses presented in the following report.

These were analyzed according to EPA procedures or equivalent. To access our accredited tests please go to <u>www.hallenvironmental.com</u> or the state specific web sites. In order to properly interpret your results it is imperative that you review this report in its entirety. See the sample checklist and/or the Chain of Custody for information regarding the sample receipt temperature and preservation. Data qualifiers or a narrative will be provided if the sample analysis or analytical quality control parameters require a flag. When necessary, data qualifers are provided on both the sample analysis report and the QC summary report, both sections should be reviewed. All samples are reported, as received, unless otherwise indicated. Lab measurement of analytes considered field parameters that require analysis within 15 minutes of sampling such as pH and residual chlorine are qualified as being analyzed outside of the recommended holding time.

Please don't hesitate to contact HEAL for any additional information or clarifications.

ADHS Cert #AZ0682 -- NMED-DWB Cert #NM9425 -- NMED-Micro Cert #NM0190

Sincerely,

andy

Andy Freeman Laboratory Manager 4901 Hawkins NE Albuquerque, NM 87109

Ana	lytical	Report	
-----	---------	--------	--

Lab Order 1411768

Date Reported: 11/25/2014

Hall Environmental Analysis Laboratory, Inc.

CLIENT: Animas Environmental Project: COP Cozzens #4			Client Sampl Collection I		C-1 /18/2014 12:23:00 Pl	M
Lab ID: 1411768-001	Matrix: SOIL Received			Date: 11/19/2014 8:00:00 AM		
Analyses	Result	RL Qu	al Units	DF	Date Analyzed	Batch
EPA METHOD 8015D: DIESEL RANG	E ORGANICS				Analy	st: BCN
Diesel Range Organics (DRO)	ND	10	mg/Kg	1	11/20/2014 9:13:31 A	M 16454
Surr: DNOP	99.7	63.5-128	%REC	1	11/20/2014 9:13:31 A	
						M 16454
EPA METHOD 8015D: GASOLINE RA	NGE				Analy	M 16454 st: NSB
EPA METHOD 8015D: GASOLINE RA Gasoline Range Organics (GRO)	ND	4.9	mg/Kg	1	Analy 11/20/2014 10:26:09	st: NSB

	A STATE OF A				
EPA METHOD 8021B: VOLATILES					Analyst: NSB
Benzene	ND	0.049	mg/Kg	1	11/20/2014 10:26:09 PM 16461
Toluene	ND	0.049	mg/Kg	1	11/20/2014 10:26:09 PM 16461
Ethylbenzene	ND	0.049	mg/Kg	1	11/20/2014 10:26:09 PM 16461
Xylenes, Total	ND	0.099	mg/Kg	1	11/20/2014 10:26:09 PM 16461
Surr: 4-Bromofluorobenzene	101	80-120	%REC	1	11/20/2014 10:26:09 PM 16461
EPA METHOD 300.0: ANIONS					Analyst: LGP
Chloride	110	30	mg/Kg	20	11/24/2014 11:51:02 AM 16544

Refer to the QC Summary report and sample login checklist for flagged QC data and preservation information.

Qualifiers:	*	Value exceeds Maximum Contaminant Level.	В	Analyte detected in the associated Method	od Blank	
	Е	Value above quantitation range	Н	Holding times for preparation or analysis exceeded		
	J	Analyte detected below quantitation limits	ND	Not Detected at the Reporting Limit	Page 1 of 5	
	0	RSD is greater than RSDlimit	Р	Sample pH greater than 2.	rage rors	
	R	RPD outside accepted recovery limits	RL	Reporting Detection Limit		
	S	Spike Recovery outside accepted recovery limits				

WO#: 1411768 25-Nov-14

Hall Environmental Analysis Laboratory, Inc.

Client:Animas EnvironmentalProject:COP Cozzens #4

Sample ID MB-16544	SampType: MBLK	TestCode: EPA Method	300.0: Anions	
Client ID: PBS	Batch ID: 16544	RunNo: 22776		
Prep Date: 11/24/2014	Analysis Date: 11/24/2014	SeqNo: 672138	Units: mg/Kg	
Analyte	Result PQL SPK value	SPK Ref Val %REC LowLimit	HighLimit %RPD	RPDLimit Qual
Chloride	ND 1.5			- 1 C B
Sample ID LCS-16544	SampType: LCS	TestCode: EPA Method	300.0: Anions	PIC
Client ID: LCSS	Batch ID: 16544	RunNo: 22776		
Prep Date: 11/24/2014	Analysis Date: 11/24/2014	SeqNo: 672139	Units: mg/Kg	
Prep Date: 11/24/2014 Analyte		SeqNo: 672139 SPK Ref Val %REC LowLimit	Units: mg/Kg HighLimit %RPD	RPDLimit Qual

Qualifiers:

- * Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- O RSD is greater than RSDlimit
- R RPD outside accepted recovery limits
- S Spike Recovery outside accepted recovery limits
- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- P Sample pH greater than 2.
- RL Reporting Detection Limit

Page 2 of 5

	as Environme Cozzens #4	ntal						ik m	1	
Sample ID MB-16454	Samp1	уре: МІ	BLK	Test	tCode: El	PA Method	8015D: Dies	el Range (Organics	
Client ID: PBS	Batcl	h ID: 16	454	R	RunNo: 2	2625				
Prep Date: 11/19/2014	Analysis D	Date: 1	1/19/2014	S	eqNo: 6	67375	Units: mg/H	(g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qu
Diesel Range Organics (DRO)	ND	10						10 M	1000	
Surr: DNOP	7.4	the second	10.00		73.6	63.5	128		Ser. A.	
Sample ID LCS-16454	SampT	Type: LC	s	Test	tCode: El	PA Method	8015D: Dies	el Range (Organics	1
Client ID: LCSS	Batcl	h ID: 16	454	R	unNo: 2	2625				

Hall Environmental Analysis Laboratory, Inc.

WO#: 1411768

25-Nov-14

Analyte		Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
iesel Range Or	rganics (DRO)	ND	10						1.1.1	1. 2. 1. 1.	1.20
Surr: DNOP		7.4	140	10.00		73.6	63.5	128		the a	
Sample ID L	LCS-16454	SampTy	pe: LC	s	Tes	tCode: El	PA Method	8015D: Dies	el Range (Organics	142
Client ID: L	LCSS	Batch	ID: 16	454	F	RunNo: 2	2625				
Prep Date:	11/19/2014	Analysis Da	te: 1	1/19/2014	5	SeqNo: 6	67464	Units: mg/H	٢g		
Analyte		Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Diesel Range Or	rganics (DRO)	44	10	50.00	0	87.8	68.6	130	1		41.
Surr: DNOP		4.2		5.000		83.4	63.5	128		St. All	e -
Sample ID 1	1411768-001AMS	SampTy	pe: M	S	Tes	tCode: El	PA Method	8015D: Dies	el Range (Organics	a de maria
Client ID: S	SC-1	Batch	ID: 16	454	F	RunNo: 2	2659				
Prep Date:	11/19/2014	Analysis Da	te: 1	1/20/2014	5	SeqNo: 6	68357	Units: mg/k	٢g		
Analyte		Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
	rganics (DRO)	Result 51	PQL 10		SPK Ref Val 6.802	%REC 87.3	LowLimit 29.2	HighLimit 176	%RPD	RPDLimit	Qual
Analyte	rganics (DRO)						ALC: NOT THE REAL PROPERTY OF		%RPD	RPDLimit	Qual
Analyte Diesel Range Or Surr: DNOP	rganics (DRO) 1411768-001AMSD	51 5.3	10	50.30 5.030	6.802	87.3 106	29.2 63.5	176		J. S. P.	Qual
Analyte Diesel Range Or Surr: DNOP	1411768-001AMSD	51 5.3 SampTy	10	50.30 5.030 SD	6.802 Tes	87.3 106	29.2 63.5 PA Method	176 128		J. S. P.	Qual
Analyte Diesel Range Or Surr: DNOP Sample ID 1 Client ID: 5	1411768-001AMSD SC-1	51 5.3 SampTy	10 rpe: M ID: 16	50.30 5.030 SD 4454	6.802 Tes F	87.3 106 tCode: El	29.2 63.5 PA Method 2659	176 128	el Range (J. S. P.	Qual
Analyte Diesel Range Om Surr: DNOP Sample ID 1 Client ID: \$ Prep Date:	1411768-001AMSD SC-1	51 5.3 SampTy Batch	10 rpe: M ID: 16	50.30 5.030 SD 454 1/20/2014	6.802 Tes F	87.3 106 tCode: El RunNo: 2 SeqNo: 6	29.2 63.5 PA Method 2659	176 128 8015D: Diese	el Range (J. S. P.	Qual
Analyte Diesel Range Om Surr: DNOP Sample ID 1	1411768-001AMSD SC-1 11/19/2014	51 5.3 SampTy Batch Analysis Da	10 rpe: M: ID: 16 ate: 1	50.30 5.030 5454 1/20/2014 SPK value	6.802 Tes F	87.3 106 tCode: El RunNo: 2 SeqNo: 6	29.2 63.5 PA Method 2659 68358	176 128 8015D: Diese Units: mg/k	el Range ((g	Drganics	1

Qualifiers:

- * Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- O RSD is greater than RSDlimit
- R RPD outside accepted recovery limits
- S Spike Recovery outside accepted recovery limits
- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- P Sample pH greater than 2.
- RL Reporting Detection Limit

Page 3 of 5

Hall Environmental Analysis Laboratory, Inc.

WO#: 1411768

25-Nov-14

	Animas Environmental COP Cozzens #4										
Sample ID MB-16461	SampTyp	e: MBLK	1 n	TestCode: EPA Method 8015D: Gasoline Range							
Client ID: PBS	Batch II	D: 16461		F	RunNo: 22668						
Prep Date: 11/19/2014	Analysis Dat	e: 11/20	/2014	S	SeqNo: 6	68846	Units: mg/k	(g			
Analyte	Result	PQL SF	PK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual	
Gasoline Range Organics (GRO) Surr: BFB	ND 890	5.0	1000		89.1	80	120	A.	an taile an		
Sample ID LCS-16461	SampTyp	e: LCS		Tes	tCode: El	PA Method	8015D: Gaso	line Rang	e		
Client ID: LCSS	Batch II	D: 16461		F	RunNo: 2	2668					
Prep Date: 11/19/2014	Analysis Dat	e: 11/20	/2014	S	SeqNo: 6	68849	Units: mg/M	٢g			
Analyte	Result	PQL SF	K value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual	
Gasoline Range Organics (GRO)	23	5.0	25.00	0	91.8	65.8	139	1.1	14-9		
Surr: BFB	1000		1000		99.6	80	120				

Qualifiers:

- * Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- O RSD is greater than RSDlimit
- R RPD outside accepted recovery limits
- S Spike Recovery outside accepted recovery limits
- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- P Sample pH greater than 2.
- RL Reporting Detection Limit

Page 4 of 5

Hall Environmenta	l Analysis	Laboratory,	Inc.
-------------------	------------	-------------	------

WO#: 1411768

25-Nov-14

	s Environme Cozzens #4									
Sample ID MB-16461	Samp	Гуре: М	BLK	Tes	1942					
Client ID: PBS	Batc	h ID: 16	461	F	RunNo: 2	2668				
Prep Date: 11/19/2014	: 11/19/2014 Analysis Date: 11/20/2014 SeqNo: 668869		Units: mg/h	(g						
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	ND	0.050						- N - SA	Contra State	1.1
Toluene	ND	0.050								
Ethylbenzene	ND	0.050								
Xylenes, Total	ND	0.10								
Surr: 4-Bromofluorobenzene	0.97		1.000		97.2	80	120		Mar .	
Sample ID LCS-16461	Samp	Type: LC	S	Tes	- 1.5					
Client ID: LCSS	Batc	h ID: 16	461	F	RunNo: 2	2668				
Prep Date: 11/19/2014	Analysis [Date: 1	1/20/2014	S	SeqNo: 6	68870	Units: mg/k	٢g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	1.0	0.050	1.000	0	104	80	120		1999 B. 1999	1
Toluene	1.0	0.050	1.000	0	103	80	120			
Ethylbenzene	1.0	0.050	1.000	0	104	80	120			
Kylenes, Total	3.1	0.10	3.000	0	102	80	120			
Surr: 4-Bromofluorobenzene	1.0		1.000		102	80	120			

Qualifiers:

- * Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- O RSD is greater than RSDlimit
- R RPD outside accepted recovery limits
- S Spike Recovery outside accepted recovery limits
- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- P Sample pH greater than 2.
- RL Reporting Detection Limit

Page 5 of 5

ENVIRONMENTAL ANALYSIS LABORATORY TEL: 505-345-39	tal Analysis Labor 4901 Hawkin Ibuquerque, NM 8 175 FAX: 505-345- hallenvironmental	^{s NE} 7105 Sam 4107	Sample Log-In Check List							
Client Name: Animas Environmental Work Order Number	er: 1411768		RcptNo: 1							
Received by/date: 11/19/2014 8:00:00 A Logged By: Ashley Gallegos 11/19/2014 8:00:00 A Completed By: Ashley Gallegos 11/19/2014 10:19:19		AJ								
Reviewed By:		V	and the second							
Chain of Custody	•									
1. Custody seals intact on sample bottles?	Yes 🗌	No 🗆	Not Present							
2. Is Chain of Custody complete?	Yes 🗹	No 🗌	Not Present							
3. How was the sample delivered?	Courier									
Log In	4									
4. Was an attempt made to cool the samples?	Yes 🗹	No 🗆								
5. Were all samples received at a temperature of >0° C to 6.0°C	Yes 🗹	No 🗌								
6. Sample(s) in proper container(s)?	Yes 🗹	No 🗌	- 19 A A A A A A A A A A A A A A A A A A							
7. Sufficient sample volume for Indicated test(s)?	Yes 🗹	No 🗆								
8. Are samples (except VOA and ONG) properly preserved?	Yes 🗹	No 🗆								
9. Was preservative added to bottles?	Yes 🗌	No 🗹	NA 🗌							
10.VOA vials have zero headspace?	Yes	No 🗆	No VOA Vials 🗹							
11. Were any sample containers received broken?	Yes 🗆	No 🗹	# of preserved bottles checked							
12.Does paperwork match bottle labels? (Note discrepancies on chain of custody)	Yes 🗹	No 🗆	for pH: (<2 or >12 unless noted)							
13. Are matrices correctly identified on Chain of Custody?	Yes 🗹	No 🗔	Adjusted?							
14. Is it clear what analyses were requested?	Yes 🗹	No 🗔								
15. Were all holding times able to be met? (If no, notify customer for authorization.)	Yes 🗹	No 🗌	Checked by:							
Special Handling (if applicable)										
16. Was client notified of all discrepancies with this order?	Yes	No 🗌	NA 🗹							
Person Notified: Date: Date: Via: Via: Via: Client Instructions:	eMail [] F	Phone 🗌 Fax	In Person							

Cooler No	Temp °C	Condition	Seal Intact	Seal No.	Seal Date	Signed By
1	2.4	Good	Yes			

Client: Animas Environmental Services Mailing Address: 604 W. Pinon Tarmington, NM 87401 Phone #: 505-564-228/ email or Fax#:				Project #:	DZZENS			Te	el. 50	A	www ins N	AL v.hal NE - 975	lenv Alb	ironr	ment erqu 505-	AE tal.co e, Ni -345-	30 om M 87 -410	RA	NTA		
QA/QC	email or Fax#: QA/QC Package: Standard			Project Manager: E. Sky les Sampler: E. Sky les			RMB ⁵ s (8021)	TPH (Gas only)	(CHANNI (CHANNI)	(1)	.1)	8270 SIMS)		NO2, PO4, SO4)	8082 PCB's			Chlondes			îz
		□ Othe Matrix	Sample Request ID	Sample Terri	Preservative Type	HEADNO HEADNO NUMBER	BTEX + MTBE+ TMB ⁶ s (8021)	BTEX + MTBE + 1	TPH 8015B (GRO	TPH (Method 418.1)	EDB (Method 504.1)	PAH's (8310 or 82	RCRA 8 Metals	Anions (F,CI,NO ₃ ,NO ₂ ,PO ₄ ,SO ₄)	8081 Pesticides / 8082 PCB's	8260B (VOA)	8270 (Semi-VOA)	300.0 Ch/6			Air Bubbles (Y or N)
\[18[14	12:23	Snil	SC-I	1-402	Cool	-001	X		X									X			
Date: 8 14 Date: 1 8 -	Time: U28 Time: 2655 f necessary,	Relinquishe Relinquishe samples subr	- (SkyL	Received by: Received by: contracted to other a	Halt Beredited laboratorie	Date Time 1//S//Y /62 Date Time ARC 14 807 s. This serves as notice of) 81	<i>ipta</i>	2:(arl	os R	ley		A	REA	r: '	2		ARC Jelch al report.	1	



