By NVelez at 3:08 pm, Oct 17, 2025

1. Continue O&M & sampling as stated in report. 2. Submit next quarterly report by January 15, 2026.

October 13, 2025

New Mexico Oil Conservation Division

New Mexico Energy, Minerals, and Natural Resources Department 1220 South St. Francis Drive Santa Fe, New Mexico 87505

Re: Third Quarter 2025 – Solar SVE System Update

Bell Federal GC B#1 San Juan County, New Mexico Hilcorp Energy Company

NMOCD Incident Number: NCS1729355513

To Whom it May Concern:

Ensolum, LLC (Ensolum), on behalf of Hilcorp Energy Company (Hilcorp), presents this *Third Quarter 2025 – Solar SVE System Update* report summarizing the solar soil vapor extraction (SVE) system performance at the Bell Federal GC B#1 natural gas production well (Site), located in Section 11, Township 30 North, Range 13 West in San Juan County, New Mexico (Figure 1). The SVE system has been operating since January 16, 2018, to remediate subsurface soil impacts originating from a release of approximately 58 barrels (bbls) of natural gas condensate caused by an act of vandalism. This report summarizes Site activities performed in July, August, and September of 2025 to the New Mexico Oil Conservation Division (NMOCD).

SVE SYSTEM SPECIFICATIONS

Currently, a solar SVE system is operating at the Site, which consists of a 1/3-horsepower blower capable of producing 22 cubic feet per minute (cfm) flow at a vacuum of 29 inches of water column (IWC); three solar panels, with a total of 915 watts of maximum power output; and charged by four 12-volt deep cycle batteries that subsequently power the SVE blower. The system operation is controlled by a timer adjusted throughout the year based on available nominal daylight hours (generally nine hours per day during the winter and 14 hours per day during the summer). Four SVE wells (SVE01 through SVE04) are currently present at the Site as depicted on Figure 2.

THIRD QUARTER 2025 ACTIVITIES

During the third quarter of 2025, Ensolum and Hilcorp personnel performed bi-weekly operation and maintenance (O&M) visits to verify the system was operating as designed and to perform any required maintenance. During Site visits, the system timer and the angle of the solar panels were adjusted to account for seasonal variations and maximize system efficiency. Field notes collected during O&M visits are presented in Appendix A.

During the third quarter of 2025, SVE wells SVE02, SVE03, and SVE04 were operated to induce air flow in the impacted zones at the Site. Between June 27 and September 27, 2025, approximately 1,203 total hours of nominal daylight were available for the solar SVE system to operate. Available nominal daylight hours are based on estimates by the National Oceanic and Atmospheric Administration's (NOAA's) National Weather Service (NWS) for the Site location. Between these dates, the actual runtime for the

Hilcorp Energy Company
Third Quarter 2025 – Solar SVE System Update
Bell Federal GC B#1



system was 1,033.6 hours, equating to a third quarter 2025 runtime efficiency of 85.9 percent (%). No alarms were noted on the panel throughout the third quarter of 2025, and the system was operational upon arrival at each O&M visit; therefore, the downtime is likely the result of cloud cover reducing the available nominal daylight hours throughout the quarter. Table 1 presents the SVE system runtime compared to nominal available daylight hours per month. Appendix B presents photographs of the runtime meter for calculating the third quarter runtime efficiency.

A third quarter 2025 vapor sample was collected on August 8, 2025, from a sample port located between the SVE piping manifold and the SVE blower using a high vacuum air sampler. Prior to collection, the vapor sample was field screened with a photoionization detector (PID) for organic vapor monitoring (OVM). The vapor sample was collected directly into two 1-Liter Tedlar® bags and analyzed by Eurofins Environment Testing in Albuquerque, New Mexico for analysis of total volatile petroleum hydrocarbons (TVPH – also known as total petroleum hydrocarbons – gasoline range organics (TPH-GRO)) via United States Environmental Protection Agency (EPA) Method 8015D and volatile organic compounds (VOCs) following EPA Method 8260B, as well as fixed gas analysis of oxygen and carbon dioxide following American Society for Testing and Materials (ASTM) Method D-1946. Table 2 presents a summary of analytical data collected during this sampling event and historical sampling events, with the full laboratory analytical report included as Appendix C.

Vapor sample data and measured stack flow rates are used to estimate total mass recovered and total emissions generated by the SVE system (Table 3). Based on these estimates, 51,758 pounds (25.9 tons) of TVPH have been removed by the system to date. Results of the third quarter 2025 vapor analytical results continue to indicate the SVE is effectively removing petroleum hydrocarbons from the targeted subsurface and is not reaching asymptotic conditions.

DISCUSSION AND RECOMMENDATIONS

Bi-weekly O&M visits will continue to be performed by Ensolum and/or Hilcorp personnel to verify the SVE system is operating within normal working ranges (i.e., temperature, pressure, and vacuum). Deviations from regular operations will be noted on field logs and included in the following quarterly report. Hilcorp will continue operating the SVE system until asymptotic conditions at a diminished mass removal rate are observed. At that time, an evaluation of residual petroleum hydrocarbons will be assessed and further recommendations for remedial actions, if any, will be provided to NMOCD.

We appreciate the opportunity to provide this report to the NMOCD. If you should have any questions or comments regarding this report, please contact the undersigned.

Sincerely,

Ensolum, LLC

Stuart Hyde, LG (licensed in WY, WA & TX) Senior Managing Geologist (970) 903-1607

shyde@ensolum.com

Daniel R. Moir, PG (licensed in WY & TX) Senior Managing Geologist (303) 887-2946

dmoir@ensolum.com

Hilcorp Energy Company Third Quarter 2025 – Solar SVE System Update Bell Federal GC B#1



Attachments:

Figure 1 Site Location

Figure 2 SVE System Configuration

Table 1 Soil Vapor Extraction System Runtime Calculations

Table 2 Soil Vapor Extraction System Emissions Analytical Results
Table 3 Soil Vapor Extraction System Mass Removal and Emissions


Appendix A Field Notes

Appendix B Project Photographs

Appendix C Laboratory Analytical Reports



Figures

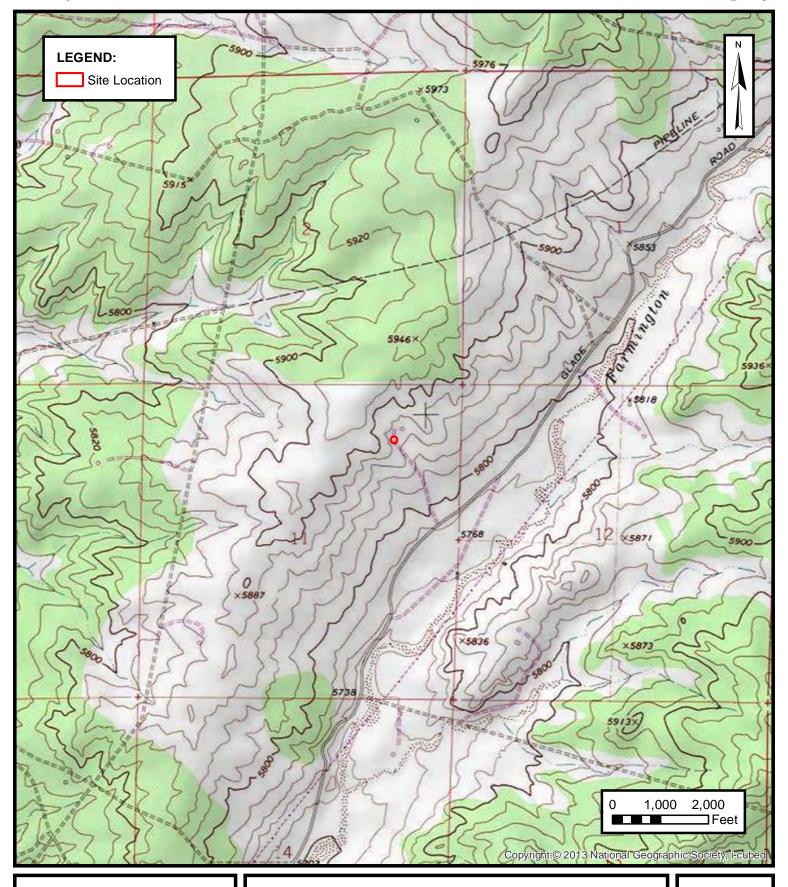




SITE LOCATION

HILCORP ENERGY COMPANY BELL FEDERAL GC B#1 San Juan County, New Mexico 36.832426° N, 108.167760° W

PROJECT NUMBER: 07A1988001

FIGURE

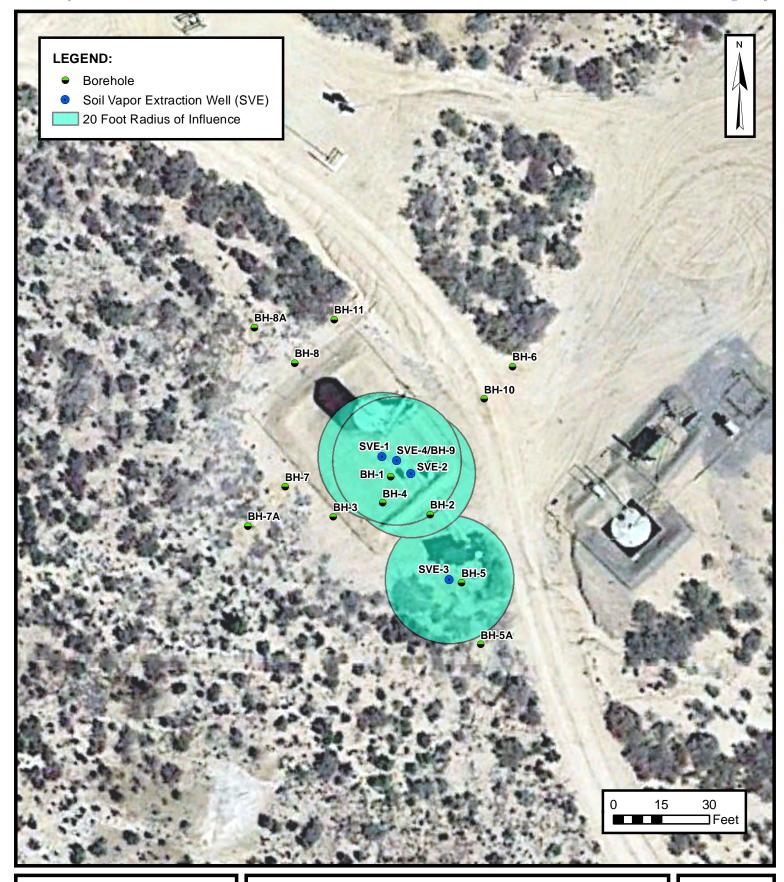



SVE SYSTEM CONFIGURATION

HILCORP ENERGY COMPANY BELL FEDERAL GC B#1 San Juan County, New Mexico 36.832426° N, 108.167760° W

PROJECT NUMBER: 07A1988001

FIGURE



Tables



TABLE 1

SOIL VAPOR EXTRACTION SYSTEM RUNTIME CALCULATIONS

Bell Federal GC B#1
Hilcorp Energy Company
San Juan County, New Mexico

Date	Total Operational Hours	Delta Hours
6/27/2025	28,803.9	
9/27/2025	29,837.5	1,033.6

Time Period	June 27 to June 30, 2025	July 1 to July 31, 2025	August 1 to August 31, 2025	September 1 to September 27, 2025
Days	3	31	31	27
Avg. Nominal Daylight Hours	14	14	13	12
Available Runtime Hours	42	434	403	324

Quarterly Available Daylight Runtime Hours Quarterly Runtime Hours Quarterly % Runtime 1,203 1,033.6 85.9%

Month	Days	Nominal Daylight Hours	Total Month Hours
January	31	10	310
February	28	10	280
March	31	11	341
April	30	12	360
May	31	13	403
June	30	14	420
July	31	14	434
August	31	13	403
September	30	12	360
October	31	11	341
November	30	10	300
December	31	9	279

Ensolum 1 of 1



TABLE 2 SOIL VAPOR EXTRACTION SYSTEM EMISSIONS ANALYTICAL RESULTS

Bell Federal GC B#1 Hilcorp Energy Company San Juan County, New Mexico

Date	Inlet PID (ppm)	Benzene (µg/L)	Toluene (μg/L)	Ethylbenzene (μg/L)	Total Xylenes (μg/L)	TVPH/GRO (μg/L)	Oxygen (%)	Carbon Dioxide (%)
1/24/2018	1,435	280	200	<5.0	38.0	30,000		
8/17/2018	1,873	160	380	21.0	320	18,000		
3/22/2019	1,607	490	920	24.0	480	NA		
6/18/2019	1,026	72.0	270	27.0	290	NA		
9/25/2019	1,762	220	480	21.0	440	35,000		
12/16/2019	1,902	130	840	21.0	220	22,000		
3/10/2020	1,171	120	380	19.0	330	31,000		
6/25/2020	978.0	180	430	25.0	480	45,000		
9/16/2020	1,766	186	433	18.0	497	32,100	18.2%	3.29%
12/8/2020	1,741	114	292	10.6	324	16,000	17.3%	4.45%
3/23/2021	1,252	45	86.3	2.3	95.4	7,930	20.2%	<0.500%
6/10/2021	165.8	8.5	20	< 0.50	20.0	5,700	17.3%	2.21%
9/8/2021	NM	130	240	5.9	150	33,000		
12/15/2021	1,374	95	160	11.0	220	24,098	16.32%	3.32%
3/16/2022	1,096	53	120	< 0.50	82	26,000	16.80%	3.01%
6/16/2022	708	24	69	<5.0	38	13,000	21.01%	0.82%
9/8/2022	545	50.2	129	4.99	612	10,500	17.70%	2.80%
12/7/2022	675	52	74	<5.00	35	13,000	16.98%	3.68%
3/9/2023	1,285	54	120	<2.5	54	15,000	16.88%	4.03%
6/23/2023	1,109	27	55	<2.5	38	13,000	17.03%	3.63%
8/24/2023	1,290	25	60	<5.0	38	9,600	16.74%	3.62%
11/20/2023	739.8	35	83	<2.5	40	9,500	18.18%	2.89%
3/7/2024	486.8	18	44	<5.0	21	4,800	17.63%	2.28%
6/10/2024	412.4	22	53	<2.5	37	5,900	19.22%	2.20%
9/18/2024	487.5	180	400	<20	170	4,700	18.78%	2.49%
11/20/2024	698.0	23	61	2.6	35	6,400	16.32%	2.71%
2/7/2025	417.3	13	28	<2.5	10	3,600	18.94%	2.31%
5/15/2025	336.7	7.6	17	<2.5	13	3,400	19.65%	1.63%
8/8/2025	218.7	68	140	<20	68	2,100	19.41%	1.65%

Notes:

GRO: gasoline range hydrocarbons TVPH: total volatile petroleum hydrocarbons

μg/L: microgram per liter %: percent
PID: photoionization detector --: not sampled

ppm: parts per million <: gray indicates result less than the stated laboratory reporting limit (RL)

Ensolum

Released to Imaging: 10/17/2025 3:11:18 PM



TABLE 3 SOIL VAPOR EXTRACTION SYSTEM MASS REMOVAL AND EMISSIONS Bell Federal GC B#1 Hilcorp Energy Company San Juan County, New Mexico

Laboratory Analysis									
Date	Inlet PID (ppm)	Benzene (μg/L)	Toluene (μg/L)	Ethylbenzene (μg/L)	Total Xylenes (μg/L)	TVPH (μg/L)			
1/24/2018	1,435	280	200	5.0	38	30,000			
8/17/2018	1,873	160	380	21	320	18,000			
3/22/2019	1,607	490	920	24	480				
6/18/2019	1,026	72	270	27	290				
9/25/2019	1,762	220	480	21	440	35,000			
12/16/2019	1,902	130	840	21	220	22,000			
3/10/2020	1,171	120	380	19	330	31,000			
6/25/2020	978	180	430	25	480	45,000			
9/16/2020	1,766	186	433	18	497	32,100			
12/8/2020	1,741	114	292	11	324	16,000			
3/23/2021	1,252	45	86	2	95	7,930			
6/10/2021	166	9	20	0.50	20	5,700			
9/8/2021		130	240	6	150	33,000			
12/15/2021	1,374	95	160	11	220	24,098			
3/16/2022	1,096	53	120	0.50	82	26,000			
6/16/2022	708	24	69	5.0	38	13,000			
9/8/2022	545	50	129	4.99	612	10,500			
12/7/2022	675	52	74	5.0	35	13,000			
3/9/2023	1,285	54	120	2.5	54	15,000			
6/23/2023	1,109	27	55	2.5	38	13,000			
8/24/2023	1,290	25	60	5.0	38	9,600			
11/20/2023	740	35	83	2.5	40	9,500			
3/7/2024	487	18	44	5.0	21	4,800			
6/10/2024	412	22	53	2.5	37	5,900			
9/18/2024	488	180	400	20	170	4,700			
11/20/2024	698	23	61	2.6	35	6,400			
2/7/2025	417	13	28	2.5	10	3,600			
5/15/2025	337	7.6	17	2.5	13	3,400			
8/8/2025	219	68	140	20	68	2,100			
Average	1,020	99	227	10	179	16,308			

Vapor Extraction Summary

Date	Flow Rate (cfm)	Total System Flow (cf)	Delta Flow (cf)	Benzene (lb/hr)	Toluene (lb/hr)	Ethylbenzene (lb/hr)	Total Xylenes (lb/hr)	TVPH (lb/hr)
1/24/2018	40	164,400	164,400	0.042	0.030	0.001	0.0057	4.5
8/17/2018	33	5,240,130	5,075,730	0.027	0.036	0.0016	0.022	3.0
3/22/2019	32	9,176,130	3,936,000	0.039	0.078	0.0027	0.048	
6/18/2019	32	11,096,130	1,920,000	0.034	0.071	0.0031	0.046	
9/25/2019	33	13,610,730	2,514,600	0.018	0.046	0.0030	0.045	3.3
12/16/2019	32	15,513,450	1,902,720	0.021	0.079	0.0025	0.039	3.4
3/10/2020	29	17,246,490	1,733,040	0.014	0.066	0.0022	0.030	2.9
6/25/2020	29	19,123,950	1,877,460	0.016	0.044	0.0024	0.044	4.1
9/16/2020	31	20,825,850	1,701,900	0.021	0.050	0.0025	0.057	4.5
12/8/2020	30	22,049,850	1,224,000	0.017	0.041	0.0016	0.046	2.7
3/23/2021	30	23,122,650	1,072,800	0.0089	0.021	0.00073	0.024	1.3
6/10/2021	33	23,514,690	392,040	0.0033	0.0066	0.00017	0.0071	0.84
9/8/2021	33	23,831,490	316,800	0.0085	0.0160	0.00039	0.010	2.4
12/15/2021	33	26,136,210	2,304,720	0.014	0.025	0.0010	0.023	3.5
3/16/2022	33	27,701,202	1,564,992	0.0091	0.017	0.00071	0.019	3.1
6/16/2022	25	29,520,102	1,818,900	0.0036	0.009	0.00026	0.0056	1.8
9/8/2022	31	31,835,244	2,315,142	0.0043	0.011	0.00058	0.038	1.4
12/7/2022	29	34,162,320	2,327,076	0.0055	0.011	0.00054	0.035	1.3
3/9/2023	29	36,239,184	2,076,864	0.0057	0.011	0.00041	0.0048	1.5
6/23/2023	29	38,718,336	2,479,152	0.0044	0.0095	0.00027	0.0050	1.5
8/24/2023	29	40,107,552	1,389,216	0.0028	0.0062	0.0004	0.0041	1.2
11/20/2023	28	41,872,560	1,765,008	0.0031	0.0075	0.0004	0.0041	1.0
3/7/2024	27	43,380,942	1,508,382	0.0027	0.0064	0.0004	0.0031	0.72
6/10/2024	27	44,988,306	1,607,364	0.0020	0.0049	0.0004	0.0029	0.54
9/18/2024	32	47,237,970	2,249,664	0.012	0.027	0.0013	0.012	0.63



		SOIL VAPOR	Hile	TABLE 3 SYSTEM MASS Bell Federal GC B# corp Energy Comp uan County, New M	1 any	EMISSIONS		
11/20/2024	32	48,529,170	1,291,200	0.012	0.028	0.0014	0.012	0.66
2/7/2025	32	49,846,290	1,317,120	0.002	0.005	0.0003	0.003	0.60
5/15/2025	32	51,933,522	2,087,232	0.001	0.003	0.0003	0.001	0.42
8/8/2025	32	53,764,050	1,830,528	0.005	0.009	0.0013	0.005	0.33
			Average	0.012	0.027	0.001	0.021	2.0

Mass Recovery

Date	Total SVE System Hours	Delta Hours	Benzene (pounds)	Toluene (pounds)	Ethylbenzene (pounds)	Total Xylenes (pounds)	TVPH (pounds)	TVPH (tons)
1/24/2018	69	69	2.9	2.0	0.051	0.39	307	0.15
8/17/2018	2,632	2,564	70	92	4.1	57	7,593	3.8
3/22/2019	4,682	2,050	80	159	5.5	98		
6/18/2019	5,682	1,000	33.6	71	3.1	46		
9/25/2019	6,952	1,270	23	59	3.8	57	4,154	2.1
12/16/2019	7,943	991	21	78	2.5	39	3,380	1.7
3/10/2020	8,939	996	14	66	2.2	30	2,863	1.4
6/25/2020	10,018	1,079	18	47	2.6	47	4,447	2.2
9/16/2020	10,933	915	19	46	2.3	52	4,090	2.0
12/8/2020	11,613	680	11.4	28	1.1	31	1,835	0.92
3/23/2021	12,209	596	5.3	12.6	0.43	14.0	800	0.40
6/10/2021	12,407	198	0.66	1.30	0.035	1.41	167	0.083
9/8/2021	12,567	160	1.4	2.6	0.06	1.7	382	0.19
12/15/2021	13,731	1,164	16	29	1.2	27	4,101	2.1
3/16/2022	14,521	790	7.2	14	0.561	14.7	2,444	1.2
6/16/2022	15,734	1,213	4.4	11	0.31	6.8	2,211	1.1
9/8/2022	16,979	1,245	5.4	14	0.72	46.9	1,696	0.8
12/7/2022	18,316	1,337	7.4	15	0.72	46.9	1,704	0.9
3/9/2023	19,510	1,194	6.9	13	0.49	5.8	1,812	0.9
6/23/2023	20,935	1,425	6.3	14	0.39	7.1	2,164	1.1
8/24/2023	21,733	798	2.3	5.0	0.32	3.3	979	0.49
11/20/2023	22,784	1,051	3.3	7.9	0.41	4.3	1,051	0.53
3/7/2024	23,715	931	2.5	6.0	0.35	2.9	672	0.34
6/10/2024	24,707	992	2.0	4.9	0.38	2.9	536	0.27
9/18/2024	25,879	1,172	14	32	1.6	15	743	0.37
11/20/2024	26,551	673	8.2	19	0.9	8.2	447	0.22
2/7/2025	27,237	686	1.5	3.7	0.2	1.8	411	0.21
5/15/2025	28,324	1,087	1.3	2.9	0.3	1.5	455	0.23
8/8/2025	29,278	953	4.3	9.0	1.3	4.6	314	0.16
	Total Ma	ss Recovery to Date	392	863	38	674	51,758	25.9

Notes:

cf: cubic feet
cfm: cubic feet per minute
µg/L: micrograms per liter
lb/hr: pounds per hour

--: not sampled

PID: photoionization detector ppm: parts per million

TVPH: total volatile petroleum hydrocarbons

gray: laboratory reporting limit used for calculating emissions

Ensolum 2 of 2



APPENDIX A

Field Notes

	CVID	***************************************		
SVE ALARMS:	SVES	YSTEM - MONTHLY O&M		
TE ALAKMS:		KO TANK HIGH LEVEL		
			TOTAL CONTRACTOR OF THE PARTY O	MER SETTINGS
				Timer Setting
SVE SYSTEM	READING	TDATE	Month	8 AM to 7 PM
Blower Hours (take photo)	28919.4	TIME	January February	8 AM to 7 PM
Pre K/O Vacuum (TWC)	13	1318	March	8 AM to 8 PM
hermal Anemometer Flow (fpm)	892.3		April	8 AM to 9 PM
Thermal Anemometer Temp (C)	28.95		May	7 AM to 9 PM
Inlet PID	376.9		June	6 AM to 9 PM
Exhaust PID	328,3		July	6 AM to 9 PM
Solar Panel Angle			August	7 AM to 9 PM
K/O Tank Drum Level			September	8 AM to 9 PM
K/O Liquid Drained (gallons)			October	8 AM to 8 PM
Timer Setting			November	9 AM to 8 PM
Heat Trace (on/off)			December	8 AM to 6 PM
	CVE CVCT	EM - QUARTERLY SAMPLI	NC	
SAMPLE ID:	STESISI	SAMPLE TIME:	110	
SAITI LE ID.				
Analytes: T	TVPH (8015) VOCs (8260) Fix			
Analytes: TOPERATING WELLS Change in Well Operation:	TVPH (8015), VOCs (8260), Fix			
OPERATING WELLS	VACUUM (IWC)		FLOW (CFM)	ADJUSTMENTS
OPERATING WELLS Change in Well Operation:	VACUUM (IWC)	PID HEADSPACE (PPM)	FLOW (CFM)	ADJUSTMENTS
OPERATING WELLS Change in Well Operation: LOCATION		PID HEADSPACE (PPM)	FLOW (CFM)	ADJUSTMENTS
Change in Well Operation: LOCATION SVE01 SVE02 SVE03	VACUUM (IWC)	PID HEADSPACE (PPM)	FLOW (CFM)	ADJUSTMENTS
Change in Well Operation: LOCATION SVE01 SVE02	VACUUM (IWC)	PID HEADSPACE (PPM)	FLOW (CFM)	ADJUSTMENTS
Change in Well Operation: LOCATION SVE01 SVE02 SVE03 SVE04	VACUUM (IWC) 15.75 16.31 16.53	PID HEADSPACE (PPM) 175.7 468.1 1188		ADJUSTMENTS
Change in Well Operation: LOCATION SVE01 SVE02 SVE03 SVE04	VACUUM (IWC)	PID HEADSPACE (PPM) 175.7 468.1 1188	FLOW (CFM) ECOVERED VOLUM	
Change in Well Operation: LOCATION SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION SVE-1	VACUUM (IWC) 15.75 16.31 16.53	PID HEADSPACE (PPM) 175.7 468.1 1188		ADJUSTMENTS
Change in Well Operation: LOCATION SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION SVE-1 SVE-2RS	VACUUM (IWC) 15.75 16.31 16.53	PID HEADSPACE (PPM) 175.7 468.1 1188		
Change in Well Operation: LOCATION SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION SVE-1 SVE-2RS SVE-4	VACUUM (IWC) 15.75 16.31 16.53	PID HEADSPACE (PPM) 175.7 468.1 1188		
Change in Well Operation: LOCATION SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION SVE-1 SVE-2RS SVE-4 SVE-11S	VACUUM (IWC) 15.75 16.31 16.53	PID HEADSPACE (PPM) 175.7 468.1 1188		
Change in Well Operation: LOCATION SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION SVE-1 SVE-2RS SVE-4 SVE-13S	VACUUM (IWC) 15.75 16.31 16.53	PID HEADSPACE (PPM) 175.7 468.1 1188		
Change in Well Operation: LOCATION SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION SVE-1 SVE-1 SVE-2RS SVE-4 SVE-11S SVE-13S SVE-14S	VACUUM (IWC) 15.75 16.31 16.53 DEPTH TO PRODUCT	PID HEADSPACE (PPM) 175.7 468.1 1188		
Change in Well Operation: LOCATION SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION SVE-1 SVE-1 SVE-2RS SVE-4 SVE-11S SVE-13S SVE-14S	VACUUM (IWC) 15.75 16.31 16.53 DEPTH TO PRODUCT	PID HEADSPACE (PPM) 175.7 468.1 1188		
Change in Well Operation: LOCATION SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION SVE-1 SVE-1 SVE-2RS SVE-4 SVE-11S SVE-13S SVE-14S	VACUUM (IWC) 15.75 16.31 16.53 DEPTH TO PRODUCT	PID HEADSPACE (PPM) 175.7 468.1 1188		
Change in Well Operation: LOCATION SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION SVE-1 SVE-1 SVE-2RS SVE-4 SVE-11S SVE-13S	VACUUM (IWC) 15.75 16.31 16.53 DEPTH TO PRODUCT	PID HEADSPACE (PPM) 175.7 468.1 1188		
Change in Well Operation: LOCATION SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION SVE-1 SVE-1 SVE-2RS SVE-4 SVE-11S SVE-13S SVE-14S	VACUUM (IWC) 15.75 16.31 16.53 DEPTH TO PRODUCT	PID HEADSPACE (PPM) 175.7 468.1 1188		
Change in Well Operation: LOCATION SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION SVE-1 SVE-1 SVE-2RS SVE-4 SVE-11S SVE-13S SVE-14S	VACUUM (IWC) 15.75 16.31 16.53 DEPTH TO PRODUCT	PID HEADSPACE (PPM) 175.7 468.1 1188		

RELL FEDERAL CC DI CVE CVCTEM

TIME ONSITE:		TIME OFFSITE:		
	SVE S	YSTEM - MONTHLY O&M		
SVE ALARMS:		KO TANK HIGH LEVEL		
				- crembics
				R SETTINGS Timer Setting
SVE SYSTEM	READING	TIME	Month	8 AM to 7 PM
Blower Hours (take photo)	7916-7	TIME	January	8 AM to 7 PM
Pre K/O Vacuum (IWC)	27187.5	1173	February March	8 AM to 8 PM
hermal Anemometer Flow (fpm)	924.2		April	8 AM to 9 PM
Thermal Anemometer Temp (C)	30.15		May	7 AM to 9 PM
Inlet PID	327,9		June	6 AM to 9 PM
Exhaust PID	288,6		July	6 AM to 9 PM
Solar Panel Angle	77.0		August	7 AM to 9 PM
K/O Tank Drum Level	S. A. S. M. S.		September	8 AM to 9 PM
K/O Liquid Drained (gallons)			October	8 AM to 8 PM
Timer Setting			November	9 AM to 8 PM
Heat Trace (on/off)			December	8 AM to 6 PM
	SVE SYST	EM - QUARTERLY SAMPLI	ING	
SAMPLE ID:		SAMPLE TIME:		
	VPH (8015), VOCs (8260), Fix	xed Gas (CO/CO2/O2)		
OPERATING WELLS Change in Well Operation:				
Change in Well Operation:	VACUUM (IWC)	PID HEADSPACE (PPM)	FLOW (CFM)	ADILISTMENTS
Change in Well Operation: LOCATION	VACUUM (IWC)	PID HEADSPACE (PPM)	FLOW (CFM)	ADJUSTMENTS
Change in Well Operation: LOCATION SVE01		160.8	FLOW (CFM)	ADJUSTMENTS
Change in Well Operation: LOCATION SVE01 SVE02	15.72	160.8	FLOW (CFM)	ADJUSTMENTS
Change in Well Operation: LOCATION SVE01 SVE02 SVE03	15.72	160.8	FLOW (CFM)	ADJUSTMENTS
Change in Well Operation: LOCATION SVE01 SVE02	15.72	160.8	FLOW (CFM)	ADJUSTMENTS
Change in Well Operation: LOCATION SVE01 SVE02 SVE03 SVE04	15.72 16.32 16.55	160.8 471.2 1158		ADJUSTMENTS
Change in Well Operation: LOCATION SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY	15.72	160.8 471.2 1158	FLOW (CFM) ECOVERED VOLUM	
Change in Well Operation: LOCATION SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION	15.72 16.32 16.55	160.8 471.2 1158		ADJUSTMENTS COMMENTS
Change in Well Operation: LOCATION SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION SVE-1	15.72 16.32 16.55	160.8 471.2 1158		
Change in Well Operation: LOCATION SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION SVE-1 SVE-2RS	15.72 16.32 16.55	160.8 471.2 1158		
Change in Well Operation: LOCATION SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION SVE-1 SVE-2RS SVE-4	15.72 16.32 16.55	160.8 471.2 1158		
Change in Well Operation: LOCATION SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION SVE-1 SVE-2RS SVE-4 SVE-11S	15.72 16.32 16.55	160.8 471.2 1158		
Change in Well Operation: LOCATION SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION SVE-1 SVE-2RS SVE-4 SVE-11S SVE-13S	15.72 16.32 16.55	160.8 471.2 1158		
Change in Well Operation: LOCATION SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION SVE-1 SVE-2RS SVE-4 SVE-11S SVE-13S SVE-14S	15.72 16.32 16.55 DEPTH TO PRODUCT	160.8 471.2 1158		
Change in Well Operation: LOCATION SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION SVE-1 SVE-2RS SVE-4 SVE-11S SVE-13S SVE-14S	15.72 16.32 16.55 DEPTH TO PRODUCT	160.8 471.2 1158		
Change in Well Operation: LOCATION SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION SVE-1 SVE-2RS SVE-4 SVE-11S SVE-13S	15.72 16.32 16.55 DEPTH TO PRODUCT	160.8 471.2 1158		
Change in Well Operation: LOCATION SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION SVE-1 SVE-2RS SVE-4 SVE-11S SVE-13S SVE-14S	15.72 16.32 16.55 DEPTH TO PRODUCT	160.8 471.2 1158		
Change in Well Operation: LOCATION SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION SVE-1 SVE-2RS SVE-4 SVE-11S SVE-13S SVE-14S	15.72 16.32 16.55 DEPTH TO PRODUCT	160.8 471.2 1158		
Change in Well Operation: LOCATION SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION SVE-1 SVE-2RS SVE-4 SVE-11S SVE-13S SVE-14S	15.72 16.32 16.55 DEPTH TO PRODUCT	160.8 471.2 1158		

DATE: TIME ONSITE:	8-8	O&M PERSONNEL TIME OFFSITE		
	SVE SV	STEM - MONTHLY O&M		
	SVESI	SIEWI- MONTHLI OWN		
SVE ALARMS:		KO TANK HIGH LEVEL		
				IER SETTINGS
ONTE ONOTENA	DELERIC	, my to	Month	Timer Setting
SVE SYSTEM	READING	TIME	January	8 AM to 7 PM
Blower Hours (take photo)	24277.5	1153	February	8 AM to 7 PM
Pre K/O Vacuum (IWC)	13		March	8 AM to 8 PM
Thermal Anemometer Flow (fpm)	910,8		April	8 AM to 9 PM
Thermal Anemometer Temp (C)	29.75		May	7 AM to 9 PM
Inlet PID	218.7		June	6 AM to 9 PM
Exhaust PID	280:9		July	6 AM to 9 PM
Solar Panel Angle			August	7 AM to 9 PM
K/O Tank Drum Level			September	8 AM to 9 PM
K/O Liquid Drained (gallons)			October	8 AM to 8 PM
Timer Setting			November	9 AM to 8 PM
Heat Trace (on/off)			December	8 AM to 6 PM
Change in Well Operation:				
LOCATION	VACUUM (IWC)	PID HEADSPACE (PPM)	FLOW (CFM)	ADJUSTMENTS
SVE01				
SVE02	13.72	146.9		
SVE03	14.22	307.8		
SVE04	14.54	1323		
PRODUCT RECOVERY				
LOCATION	DEPTH TO PRODUCT	DEPTH TO WATER	ECOVERED VOLUM	COMMENTS
SVE-1				
SVE-2RS				
SVE-4		S CANTER LAW TO THE REAL PROPERTY.		
SVE-11S				
SVE-13S				
SVE-14S				
COMMENTS/OTHER MAINTEN	ANCE:			

	BIW	EEKLY O&M FORM		
DATE: TIME ONSITE:	8-25	O&M PERSONNEL TIME OFFSITE	B Sindail	
	SVE S	YSTEM - MONTHLY O&N	1	
SVE ALARMS:		KO TANK HIGH LEVEL		
				IMER SETTINGS
SVE SYSTEM	DEADDIG		Month	Timer Setting
Blower Hours (take photo)	READING	TIME	January	8 AM to 7 PM
Pre K/O Vacuum (IWC)	29468.2	1141	February	8 AM to 7 PM
Thermal Anemometer Flow (fpm)	13		March	8 AM to 8 PM
Thermal Anemometer Temp (C)	958.6		April	8 AM to 9 PM
	30,15		May	7 AM to 9 PM
Inlet PID	257.7		June	6 AM to 9 PM
Exhaust PID	31003		July	6 AM to 9 PM
Solar Panel Angle			August	7 AM to 9 PM
K/O Tank Drum Level			September	8 AM to 9 PM
K/O Liquid Drained (gallons)			October	8 AM to 8 PM
Timer Setting			November	9 AM to 8 PM
Heat Trace (on/off)			December	8 AM to 6 PM
OPERATING WELLS Change in Well Operation:	FVPH (8015), VOCs (8260), Fixe	SAMPLE TIME: ed Gas (CO/CO2/O2)		
LOCATION	VACUUM (IWC)	PID HEADSPACE (PPM)	FLOW (CFM)	ADJUSTMENTS
SVE01			12011 (01111)	TESTOSTIVIETO
SVE02	13.88	141.2		
SVE03	14.31	328.9		
SVE04	14,52	1208		
RODUCT RECOVERY LOCATION	DEPTH TO PRODUCT		ECOVERED VOLUM	COMMENTS
SVE-1		ZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZZ	DOO VEICED VOLUM	COMMENTS
SVE-2RS				
SVE-4				
SVE-11S				
SVE-13S				
SVE-14S				
COMMENTS/OTHER MAINTENAN	NCE:			

SVE ALARMS: SVE SYSTEM Blower Hours (take photo) Pre K/O Vacuum (IWC) Thermal Anemometer Flow (fpm) Thermal Anemometer Temp (C) Inlet PID Exhaust PID Solar Panel Angle K/O Tank Drum Level K/O Liquid Drained (gallons)	READING 9635.6 13 947.2 29.85 210.1 2 48.8	TIME OFFSITE SYSTEM - MONTHLY O&N KO TANK HIGH LEVEL TIME 1030	TIME Month January	R SETTINGS Timer Setting
SVE SYSTEM Blower Hours (take photo) 2 Pre K/O Vacuum (IWC) Thermal Anemometer Flow (fpm) Thermal Anemometer Temp (C) Inlet PID Exhaust PID Solar Panel Angle K/O Tank Drum Level	READING 9635.6 13 947.2 29.85 210.1	KO TANK HIGH LEVEL TIME	TIME Month January	
SVE SYSTEM Blower Hours (take photo) 2 Pre K/O Vacuum (IWC) Thermal Anemometer Flow (fpm) Thermal Anemometer Temp (C) Inlet PID Exhaust PID Solar Panel Angle K/O Tank Drum Level	9635.6 13 947.2 29.85 210.1	TIME	Month January	
Blower Hours (take photo) Pre K/O Vacuum (IWC) Thermal Anemometer Flow (fpm) Thermal Anemometer Temp (C) Inlet PID Exhaust PID Solar Panel Angle K/O Tank Drum Level	9635.6 13 947.2 29.85 210.1		Month January	
Blower Hours (take photo) Pre K/O Vacuum (IWC) Thermal Anemometer Flow (fpm) Thermal Anemometer Temp (C) Inlet PID Exhaust PID Solar Panel Angle K/O Tank Drum Level	9635.6 13 947.2 29.85 210.1		Month January	
Blower Hours (take photo) Pre K/O Vacuum (IWC) Thermal Anemometer Flow (fpm) Thermal Anemometer Temp (C) Inlet PID Exhaust PID Solar Panel Angle K/O Tank Drum Level	9635.6 13 947.2 29.85 210.1		January	A MANUEL OF THE O
Pre K/O Vacuum (IWC) Thermal Anemometer Flow (fpm) Thermal Anemometer Temp (C) Inlet PID Exhaust PID Solar Panel Angle K/O Tank Drum Level	13 947.2 29.85 210.1			8 AM to 7 PM
Thermal Anemometer Flow (fpm) Thermal Anemometer Temp (C) Inlet PID Exhaust PID Solar Panel Angle K/O Tank Drum Level	13 947.2 29.85 210.1		February	8 AM to 7 PM
Thermal Anemometer Temp (C) Inlet PID Exhaust PID Solar Panel Angle K/O Tank Drum Level	29.85		March	8 AM to 8 PM
Inlet PID Exhaust PID Solar Panel Angle K/O Tank Drum Level	29.85		April	8 AM to 9 PM
Exhaust PID Solar Panel Angle K/O Tank Drum Level			May	7 AM to 9 PM
Solar Panel Angle K/O Tank Drum Level	248.8		June	6 AM to 9 PM
K/O Tank Drum Level			July	6 AM to 9 PM
K/O Liquid Drained (gallons)			August	7 AM to 9 PM
IVO LIUUIU DIXINEGI (Gallone)			September	8 AM to 9 PM
Timer Setting			October	8 AM to 8 PM
Heat Trace (on/off)	*		November	9 AM to 8 PM
Ticat Trace (011/011)			December	8 AM to 6 PM
Change in Well Operation:		I DVD VVD I D CD I		
- COLTYON	VACITIM (TWC)	I DILL LILLA INCDA CE (DD) A	77 0 0 0 0 0	
LOCATION	VACUUM (IWC)	PID HEADSPACE (PPM)	FLOW (CFM)	ADJUSTMENTS
SVE01			FLOW (CFM)	ADJUSTMENTS
SVE01 SVE02	13.76 14.27	128.3	FLOW (CFM)	ADJUSTMENTS
SVE01	13.76		FLOW (CFM)	ADJUSTMENTS
SVE01 SVE02 SVE03 SVE04	13.76	128.3	FLOW (CFM)	ADJUSTMENTS
SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY	13.76	128.3 375.2 1189		
SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION	13.76	128.3 375.2 1189	FLOW (CFM) ECOVERED VOLUM	
SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION SVE-1	13.76	128.3 375.2 1189		ADJUSTMENTS COMMENTS
SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION SVE-1 SVE-2RS	13.76	128.3 375.2 1189		
SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION SVE-1 SVE-2RS SVE-4	13.76	128.3 375.2 1189		
SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION SVE-1 SVE-2RS SVE-4 SVE-11S	13.76	128.3 375.2 1189		
SVE01 SVE02 SVE03 SVE04 PRODUCT RECOVERY	13.76	128.3 375.2 1189		ADJUSTMENTS
SVE01 SVE02 SVE03 SVE04 RODUCT RECOVERY LOCATION SVE-1 SVE-2RS SVE-4	13.76	128.3 375.2 1189		

	BIW	EEKLY O&M FORM		
DATE:	9-27	O&M PERSONNEL TIME OFFSITE	BSinclair	
	SVE SY	STEM - MONTHLY O&M		
SVE ALARMS:		KO TANK HIGH LEVEL		
		KO TANK IIIOH EE VEE	TEXT A	ER SETTINGS
				Timer Setting
SVE SYSTEM			Month	8 AM to 7 PM
Blower Hours (take photo)	READING	TIME	January	8 AM to 7 PM
FIE K/() Vacuum (Titro)	29837.5	1013	February	8 AM to 8 PM
hermal Anemometer Flow (fpm)			March	8 AM to 9 PM
Thermal Anemometer Temp (C)			April	7 AM to 9 PM
Inlet PIP			May	6 AM to 9 PM
Inlet PID	231.8		June	6 AM to 9 PM
Exhaust PID	292.5		July	
Solar Panel Angle			August	7 AM to 9 PM
K/O Tank Drum Level			September	8 AM to 9 PM
K/O Liquid Drained (gallons)			October	8 AM to 8 PM
Timer Setting			November	9 AM to 8 PM
Heat Trace (on/off)			December	8 AM to 6 PM
	SVE SYSTE	EM - QUARTERLY SAMPL		
SAMPLE ID:		SAMPLE TIME:		
	TVPH (8015), VOCs (8260), Fixe	ed Gas (CO/CO2/O2)		
OPERATING WELLS				
Change in Well Operation:				
LOCATION	VACUUM (IWC)	PID HEADSPACE (PPM)	FLOW (CFM)	ADJUSTMENTS
SVE01				
SVE02	13.75	153.7		
SVE03	14.28	351.6		
SVE04	14.55	1236		
RODUCT RECOVERY				
LOCATION	DEPTH TO PRODUCT	DEPTH TO WATER	ECOVERED VOLUM	COMMENTS
SVE-1				
SVE-2RS				
SVE-4				
SVE-11S				
SVE-13S				
SVE-14S				
OMMENTS/OTHER MAINTENA	NCE:			



APPENDIX B

Project Photographs

PROJECT PHOTOGRAPHS

Bell Federal GC B#1 San Juan County, New Mexico Hilcorp Energy Company

Photograph 1

Runtime meter taken on June 27, 2025 at 10:09 AM Hours = 28,803.9



Photograph 2

Runtime meter taken on September 27, 2025 at 10:13 AM Hours = 29,837.5





APPENDIX C

Laboratory Analytical Reports

Environment Testing

ANALYTICAL REPORT

PREPARED FOR

Attn: Mitch Killough Hilcorp Energy PO BOX 4700 Farmington, New Mexico 87499

Generated 8/25/2025 2:33:55 PM

JOB DESCRIPTION

Bell Fed 6C B1

JOB NUMBER

885-30624-1

Eurofins Albuquerque 4901 Hawkins NE Albuquerque NM 87109

Eurofins Albuquerque

Job Notes

The test results in this report relate only to the samples as received by the laboratory and will meet all requirements of the methodology, with any exceptions noted. This report shall not be reproduced except in full, without the express written approval of the laboratory. All questions should be directed to the Eurofins Environment Testing South Central, LLC Project Manager.

Authorization

Generated 8/25/2025 2:33:55 PM

Authorized for release by Michelle Garcia, Project Manager michelle.garcia@et.eurofinsus.com (505)345-3975

Page 2 of 25 8/25/2025

2

6

R

9

4.0

Client: Hilcorp Energy

Laboratory Job ID: 885-30624-1

Project/Site: Bell Fed 6C B1

Table of Contents

Cover Page	1
Table of Contents	3
Definitions/Glossary	4
Case Narrative	5
Client Sample Results	6
QC Sample Results	8
QC Association Summary	12
Lab Chronicle	13
Certification Summary	14
Subcontract Data	17
Chain of Custody	24
Receipt Checklists	25

Definitions/Glossary

Job ID: 885-30624-1 Client: Hilcorp Energy

Project/Site: Bell Fed 6C B1

Glossary

%R

Abbreviation These commonly used abbreviations may or may not be present in this report. Ŭ Listed under the "D" column to designate that the result is reported on a dry weight basis

Percent Recovery

CFL Contains Free Liquid CFU Colony Forming Unit CNF Contains No Free Liquid

DER Duplicate Error Ratio (normalized absolute difference)

Dilution Factor Dil Fac

DL Detection Limit (DoD/DOE)

Indicates a Dilution, Re-analysis, Re-extraction, or additional Initial metals/anion analysis of the sample DL, RA, RE, IN

DLC Decision Level Concentration (Radiochemistry)

EDL Estimated Detection Limit (Dioxin) LOD Limit of Detection (DoD/DOE) Limit of Quantitation (DoD/DOE) LOQ

MCL EPA recommended "Maximum Contaminant Level" MDA Minimum Detectable Activity (Radiochemistry) MDC Minimum Detectable Concentration (Radiochemistry)

MDL Method Detection Limit Minimum Level (Dioxin) MI MPN Most Probable Number Method Quantitation Limit MQL

NC Not Calculated

ND Not Detected at the reporting limit (or MDL or EDL if shown)

NEG Negative / Absent POS Positive / Present PQL

Practical Quantitation Limit

PRES Presumptive **Quality Control** QC

RER Relative Error Ratio (Radiochemistry)

RL Reporting Limit or Requested Limit (Radiochemistry)

RPD Relative Percent Difference, a measure of the relative difference between two points

TEF Toxicity Equivalent Factor (Dioxin) **TEQ** Toxicity Equivalent Quotient (Dioxin)

TNTC Too Numerous To Count

Eurofins Albuquerque

Case Narrative

Client: Hilcorp Energy Job ID: 885-30624-1 Project: Bell Fed 6C B1

Job ID: 885-30624-1 Eurofins Albuquerque

Job Narrative 885-30624-1

The analytical test results presented in this report meet all requirements of the associated regulatory program listed on the Accreditation/Certification Summary Page, unless otherwise noted. Data qualifiers and/or narrative comments are included to explain any exceptions, if applicable. Regulated compliance samples (e.g. SDWA, NPDES) must comply with associated agency requirements/permits.

- Matrix-specific batch QC (e.g., MS, MSD, SD) may not be reported when insufficient sample volume is available or when site-specific QC samples are not submitted. In such cases, a Laboratory Control Sample Duplicate (LCSD) may be analyzed to provide precision data for the batch.
- For samples analyzed using surrogate and/or isotope dilution analytes, any recoveries falling outside of established acceptance criteria are re-prepared and/or re-analyzed to confirm results, unless the deviation is due to sample dilution or otherwise explained in the case narrative.

Receipt

The sample was received on 8/9/2025 7:50 AM. Unless otherwise noted below, the sample arrived in good condition, and, where required, properly preserved and on ice.

Subcontract Work

Method Fixed Gases: This method was subcontracted to Energy Laboratories, Inc. The subcontract laboratory certification is different from that of the facility issuing the final report. The subcontract report is appended in its entirety.

GC/MS VOA

No additional analytical or quality issues were noted, other than those described above or in the Definitions/ Glossary page.

Gasoline Range Organics

No additional analytical or quality issues were noted, other than those described above or in the Definitions/ Glossary page.

Eurofins Albuquerque

- -

_

6

_

9

10

11

Client Sample Results

Client: Hilcorp Energy Job ID: 885-30624-1

Project/Site: Bell Fed 6C B1

Client Sample ID: SVE-1

Lab Sample ID: 885-30624-1

Matrix: Air

Date Collected: 08/08/25 12:00 Date Received: 08/09/25 07:50 Sample Container: Tedlar Bag 1L

Analyte	Result Qualifier	RL	Unit	D Prepared	Analyzed	Dil Fa
1,1,1,2-Tetrachloroethane		20	ug/L		08/15/25 14:42	
1,1,1-Trichloroethane	ND	20	ug/L		08/15/25 14:42	2
1,1,2,2-Tetrachloroethane	ND	40	ug/L		08/15/25 14:42	2
I,1,2-Trichloroethane	ND	20	ug/L		08/15/25 14:42	2
I,1-Dichloroethane	ND	20	ug/L		08/15/25 14:42	2
I,1-Dichloroethene	ND	20	ug/L		08/15/25 14:42	2
I,1-Dichloropropene	ND	20	ug/L		08/15/25 14:42	2
I,2,3-Trichlorobenzene	ND	20	ug/L		08/15/25 14:42	2
I,2,3-Trichloropropane	ND	40	ug/L		08/15/25 14:42	2
I,2,4-Trichlorobenzene	ND	20	ug/L		08/15/25 14:42	
I,2,4-Trimethylbenzene	ND	20	ug/L		08/15/25 14:42	2
,2-Dibromo-3-Chloropropane	ND	40	ug/L		08/15/25 14:42	:
,2-Dibromoethane (EDB)	ND	20	ug/L		08/15/25 14:42	2
,2-Dichlorobenzene	ND	20	ug/L		08/15/25 14:42	2
,2-Dichloroethane (EDC)	ND	20	ug/L		08/15/25 14:42	:
,2-Dichloropropane	ND	20	ug/L		08/15/25 14:42	
,3,5-Trimethylbenzene	ND	20	ug/L		08/15/25 14:42	
,3-Dichlorobenzene	ND	20	ug/L		08/15/25 14:42	
,3-Dichloropropane	ND	20	ug/L ug/L		08/15/25 14:42	
,4-Dichlorobenzene	ND	20			08/15/25 14:42	:
	ND ND	80	ug/L		08/15/25 14:42	
-Methylnaphthalene ,2-Dichloropropane			ug/L			
	ND ND	40	ug/L		08/15/25 14:42 08/15/25 14:42	:
-Butanone -Chlorotoluene	ND ND	200 20	ug/L		08/15/25 14:42	:
			ug/L			
-Hexanone	ND	200	ug/L		08/15/25 14:42	:
-Methylnaphthalene	ND	80	ug/L		08/15/25 14:42	
-Chlorotoluene	ND	20	ug/L		08/15/25 14:42	
-Isopropyltoluene	ND	20	ug/L		08/15/25 14:42	
-Methyl-2-pentanone	ND	200	ug/L		08/15/25 14:42	
Acetone	ND	200	ug/L		08/15/25 14:42	
Benzene	56	20	ug/L		08/15/25 14:42	:
Bromobenzene	ND	20	ug/L		08/15/25 14:42	
romodichloromethane	ND	20	ug/L		08/15/25 14:42	
Dibromochloromethane	ND	20	ug/L		08/15/25 14:42	
romoform	ND	20	ug/L		08/15/25 14:42	
romomethane	ND	60	ug/L		08/15/25 14:42	
Carbon disulfide	ND	200	ug/L		08/15/25 14:42	
Carbon tetrachloride	ND	20	ug/L		08/15/25 14:42	
Chlorobenzene	ND	20	ug/L		08/15/25 14:42	
Chloroethane	ND	40	ug/L		08/15/25 14:42	
Chloroform	ND	20	ug/L		08/15/25 14:42	:
Chloromethane	ND	60	ug/L		08/15/25 14:42	
is-1,2-Dichloroethene	ND	20	ug/L		08/15/25 14:42	
s-1,3-Dichloropropene	ND	20	ug/L		08/15/25 14:42	
Dibromomethane	ND	20	ug/L		08/15/25 14:42	
Dichlorodifluoromethane	ND	20	ug/L		08/15/25 14:42	
Ethylbenzene	ND	20	ug/L		08/15/25 14:42	
Hexachlorobutadiene	ND	20	ug/L		08/15/25 14:42	

Eurofins Albuquerque

2

7

9

10

Client Sample Results

Client: Hilcorp Energy Job ID: 885-30624-1

Project/Site: Bell Fed 6C B1

Toluene-d8 (Surr)

4-Bromofluorobenzene (Surr)

Client Sample ID: SVE-1 Lab Sample ID: 885-30624-1

Matrix: Air

Date Received: 08/09/25 07:50 Sample Container: Tedlar Bag 1L

Date Collected: 08/08/25 12:00

Method: SW846 8260B - Volati	le Organic Comp	ounds (GC/	MS) (Continued)					
Analyte	Result	Qualifier	RL	Unit	D	Prepared	Analyzed	Dil Fac
Isopropylbenzene	ND		20	ug/L			08/15/25 14:42	20
Methyl-tert-butyl Ether (MTBE)	ND		20	ug/L			08/15/25 14:42	20
Methylene Chloride	ND		60	ug/L			08/15/25 14:42	20
n-Butylbenzene	ND		60	ug/L			08/15/25 14:42	20
N-Propylbenzene	ND		20	ug/L			08/15/25 14:42	20
Naphthalene	ND		40	ug/L			08/15/25 14:42	20
sec-Butylbenzene	ND		20	ug/L			08/15/25 14:42	20
Styrene	ND		20	ug/L			08/15/25 14:42	20
tert-Butylbenzene	ND		20	ug/L			08/15/25 14:42	20
Tetrachloroethene (PCE)	ND		20	ug/L			08/15/25 14:42	20
Toluene	140		20	ug/L			08/15/25 14:42	20
trans-1,2-Dichloroethene	ND		20	ug/L			08/15/25 14:42	20
trans-1,3-Dichloropropene	ND		20	ug/L			08/15/25 14:42	20
Trichloroethene (TCE)	ND		20	ug/L			08/15/25 14:42	20
Trichlorofluoromethane	ND		20	ug/L			08/15/25 14:42	20
Vinyl chloride	ND		20	ug/L			08/15/25 14:42	20
Xylenes, Total	68		30	ug/L			08/15/25 14:42	20
Surrogate	%Recovery	Qualifier	Limits			Prepared	Analyzed	Dil Fac
1,2-Dichloroethane-d4 (Surr)	82		70 - 130		_		08/15/25 14:42	20

Dibromofluoromethane (Surr)	78		70 - 130				08/15/25 14:42	20
– Method: SW846 8015D - Gasolin	e Range Organ	ics (GRO) (GC)					
Analyte	Result	Qualifier	RL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics [C6 - C10]	2100		100	ug/L			08/15/25 15:07	20
Surrogate	%Recovery	Qualifier	Limits			Prepared	Analyzed	Dil Fac
4-Bromofluorobenzene (Surr)	91		15 - 150		=		08/15/25 15:07	20

70 - 130

70 - 130

97

87

Eurofins Albuquerque

08/15/25 14:42

08/15/25 14:42

20

QC Sample Results

Client: Hilcorp Energy Job ID: 885-30624-1

Project/Site: Bell Fed 6C B1

Method: 8260B - Volatile Organic Compounds (GC/MS)

Lab Sample ID: MB 885-32470/6

Matrix: Air

Analysis Batch: 32470

Client Sample ID: Method Blank Prep Type: Total/NA

ep Type: Total/NA

6

2

9

10

12

Analyte	Result	Qualifier	RL	Unit	D	Prepared	Analyzed	Dil Fac
1,1,1,2-Tetrachloroethane	ND		1.0	ug/L			08/15/25 13:03	1
1,1,1-Trichloroethane	ND		1.0	ug/L			08/15/25 13:03	1
1,1,2,2-Tetrachloroethane	ND		2.0	ug/L			08/15/25 13:03	1
1,1,2-Trichloroethane	ND		1.0	ug/L			08/15/25 13:03	
1,1-Dichloroethane	ND		1.0	ug/L			08/15/25 13:03	1
1,1-Dichloroethene	ND		1.0	ug/L			08/15/25 13:03	1
1,1-Dichloropropene	ND		1.0	ug/L			08/15/25 13:03	1
1,2,3-Trichlorobenzene	ND		1.0	ug/L			08/15/25 13:03	1
1,2,3-Trichloropropane	ND		2.0	ug/L			08/15/25 13:03	1
1,2,4-Trichlorobenzene	ND		1.0	ug/L			08/15/25 13:03	1
1,2,4-Trimethylbenzene	ND		1.0	ug/L			08/15/25 13:03	1
1,2-Dibromo-3-Chloropropane	ND		2.0	ug/L			08/15/25 13:03	1
1,2-Dibromoethane (EDB)	ND		1.0	ug/L			08/15/25 13:03	1
1,2-Dichlorobenzene	ND		1.0	ug/L			08/15/25 13:03	1
1,2-Dichloroethane (EDC)	ND		1.0	ug/L			08/15/25 13:03	1
1,2-Dichloropropane	ND		1.0	ug/L			08/15/25 13:03	1
1,3,5-Trimethylbenzene	ND		1.0	ug/L			08/15/25 13:03	1
1,3-Dichlorobenzene	ND		1.0	ug/L			08/15/25 13:03	1
1,3-Dichloropropane	ND		1.0	ug/L			08/15/25 13:03	1
1,4-Dichlorobenzene	ND		1.0	ug/L			08/15/25 13:03	1
1-Methylnaphthalene	ND		4.0	ug/L			08/15/25 13:03	1
2,2-Dichloropropane	ND		2.0	ug/L			08/15/25 13:03	
2-Butanone	ND		10	ug/L			08/15/25 13:03	1
2-Chlorotoluene	ND		1.0	ug/L			08/15/25 13:03	1
2-Hexanone	ND		10	ug/L ug/L			08/15/25 13:03	
2-Methylnaphthalene	ND		4.0	ug/L			08/15/25 13:03	1
4-Chlorotoluene	ND		1.0	ug/L			08/15/25 13:03	1
4-Isopropyltoluene	ND		1.0				08/15/25 13:03	
	ND		1.0	ug/L ug/L			08/15/25 13:03	1
4-Methyl-2-pentanone Acetone	ND		10				08/15/25 13:03	1
				ug/L				
Benzene	ND ND		1.0	ug/L			08/15/25 13:03	1
Bromobenzene			1.0	ug/L			08/15/25 13:03	1
Bromodichloromethane	ND		1.0	ug/L			08/15/25 13:03	
Dibromochloromethane	ND ND		1.0	ug/L			08/15/25 13:03 08/15/25 13:03	1
Bromoform			1.0	ug/L				1
Bromomethane	ND		3.0	ug/L			08/15/25 13:03	
Carbon disulfide	ND		10	ug/L			08/15/25 13:03	1
Carbon tetrachloride	ND		1.0	ug/L			08/15/25 13:03	1
Chlorobenzene	ND		1.0	ug/L			08/15/25 13:03	1
Chloroethane	ND		2.0	ug/L			08/15/25 13:03	1
Chloroform	ND		1.0	ug/L 			08/15/25 13:03	1
Chloromethane	ND		3.0	ug/L			08/15/25 13:03	
cis-1,2-Dichloroethene	ND		1.0	ug/L			08/15/25 13:03	1
cis-1,3-Dichloropropene	ND		1.0	ug/L			08/15/25 13:03	1
Dibromomethane	ND		1.0	ug/L			08/15/25 13:03	
Dichlorodifluoromethane	ND		1.0	ug/L			08/15/25 13:03	1
Ethylbenzene	ND		1.0	ug/L			08/15/25 13:03	1
Hexachlorobutadiene	ND		1.0	ug/L			08/15/25 13:03	1

Eurofins Albuquerque

6

QC Sample Results

Job ID: 885-30624-1 Client: Hilcorp Energy

Project/Site: Bell Fed 6C B1

Method: 8260B - Volatile Organic Compounds (GC/MS) (Continued)

Lab Sample ID: MB 885-32470/6 Matrix: Air

Analysis Batch: 32470

Methyl-tert-butyl Ether (MTBE)

Analyte

Isopropylbenzene

Methylene Chloride

Trichlorofluoromethane

Vinyl chloride

Xylenes, Total

n-Butylbenzene

Client Sample ID: Method Blank

Prep Type: Total/NA

мв мв Result Qualifier RL Unit D Dil Fac Prepared Analyzed ND 1.0 08/15/25 13:03 ug/L ug/L ND 1.0 08/15/25 13:03 ND 08/15/25 13:03 3.0 ug/L ND 3.0 ug/L 08/15/25 13:03 ND 1.0 ug/L 08/15/25 13:03

ug/L

ug/L

ug/L

N-Propylbenzene Naphthalene ND 2.0 ug/L 08/15/25 13:03 sec-Butylbenzene ND 1.0 ug/L 08/15/25 13:03 Styrene ND 1.0 ug/L 08/15/25 13:03 tert-Butylbenzene ND 1.0 ug/L 08/15/25 13:03 Tetrachloroethene (PCE) ND 1.0 ug/L 08/15/25 13:03 Toluene ND 1.0 ug/L 08/15/25 13:03 ND 08/15/25 13:03 trans-1,2-Dichloroethene 1.0 ug/L ND trans-1,3-Dichloropropene 1.0 ug/L 08/15/25 13:03 Trichloroethene (TCE) ND 1.0 ug/L 08/15/25 13:03

1.0

1.0

1.5

MB MB

ND

ND

ND

Surrogate	%Recovery Qualifier	Limits	Pre	epared	Analyzed	Dil Fac
1,2-Dichloroethane-d4 (Surr)	94	70 - 130			08/15/25 13:03	1
Toluene-d8 (Surr)	87	70 - 130			08/15/25 13:03	1
4-Bromofluorobenzene (Surr)	82	70 - 130			08/15/25 13:03	1
Dibromofluoromethane (Surr)	86	70 - 130			08/15/25 13:03	1

Lab Sample ID: LCS 885-32470/5

Matrix: Air

Analyte 1,1-Dichloroet Benzene Chlorobenzen Toluene Trichloroethen

Analysis Batch: 32470

Client Sample ID: Lab Control Sample Prep Type: Total/NA

08/15/25 13:03

08/15/25 13:03

08/15/25 13:03

	Spike	LCS	LCS				%Rec	
	Added	Result	Qualifier	Unit	D	%Rec	Limits	
ethene	20.0	20.3		ug/L		101	70 - 130	
	20.0	21.7		ug/L		109	70 - 130	
ne	20.0	21.5		ug/L		108	70 - 130	
	20.0	22.0		ug/L		110	70 - 130	
ene (TCE)	20.0	19.3		ug/L		97	70 - 130	

LCS LCS

Surrogate	%Recovery	Qualifier	Limits
1,2-Dichloroethane-d4 (Surr)	95		70 - 130
Toluene-d8 (Surr)	89		70 - 130
4-Bromofluorobenzene (Surr)	86		70 - 130
Dibromofluoromethane (Surr)	87		70 - 130

Lab Sample ID: 885-30624-1 DU

Matrix: Air

Analysis Batch: 32470								-	
	Sample	Sample	DU	DU					RPD
Analyte	Result	Qualifier	Result	Qualifier	Unit	D		RPD	Limit
1,1,1,2-Tetrachloroethane	ND		ND		ug/L		 	NC	20
1,1,1-Trichloroethane	ND		ND		ug/L			NC	20

Eurofins Albuquerque

Client Sample ID: SVE-1

Prep Type: Total/NA

Page 9 of 25

Lab Sample ID: 885-30624-1 DU

QC Sample Results

Client: Hilcorp Energy Job ID: 885-30624-1

Project/Site: Bell Fed 6C B1

Method: 8260B - Volatile Organic Compounds (GC/MS) (Continued)

Matrix: Air

Client Sample ID: SVE-1

Prep Type: Total/NA

5	RPD		
	Limit	RPD	
6	20	NC	
	20	NC	
	20	NC	
	20	NC	
0	20	NC	
0	20	NC	

	Sample	Sample	DU	DU				RPI
Analyte	Result	Qualifier	Result	Qualifier	Unit	D	RPD	Lim
1,1,2,2-Tetrachloroethane	ND		ND		ug/L		NC	2
1,1,2-Trichloroethane	ND		ND		ug/L		NC	2
1,1-Dichloroethane	ND		ND		ug/L		NC	2
1,1-Dichloroethene	ND		ND		ug/L		NC	2
1,1-Dichloropropene	ND		ND		ug/L		NC	2
1,2,3-Trichlorobenzene	ND		ND		ug/L		NC	2
1,2,3-Trichloropropane	ND		ND		ug/L		NC	2
1,2,4-Trichlorobenzene	ND		ND		ug/L		NC	2
1,2,4-Trimethylbenzene	ND		ND		ug/L		NC	2
1,2-Dibromo-3-Chloropropane	ND		ND		ug/L		NC	2
1,2-Dibromoethane (EDB)	ND		ND		ug/L		NC	2
1,2-Dichlorobenzene	ND		ND		ug/L		NC	2
1,2-Dichloroethane (EDC)	ND		ND		ug/L		NC	2
1,2-Dichloropropane	ND		ND		ug/L		NC	2
1,3,5-Trimethylbenzene	ND		ND		ug/L		NC	2
1,3-Dichlorobenzene	ND		ND		ug/L		NC	2
1,3-Dichloropropane	ND		ND		ug/L		NC	2
1,4-Dichlorobenzene	ND		ND		ug/L		NC	2
1-Methylnaphthalene	ND		ND		ug/L		NC	2
2,2-Dichloropropane	ND		ND		ug/L		NC	2
2-Butanone	ND		ND		ug/L		NC	2
2-Chlorotoluene	ND		ND		ug/L		NC	2
2-Hexanone	ND		ND		ug/L		NC	2
2-Methylnaphthalene	ND		ND		ug/L		NC	2
4-Chlorotoluene	ND		ND		ug/L		NC	2
4-Isopropyltoluene	ND		ND		ug/L		NC NC	2
4-Methyl-2-pentanone	ND		ND		ug/L ug/L		NC	2
Acetone	ND		ND ND		ug/L ug/L		NC NC	2
Benzene	56		50.7		ug/L ug/L		9	2
Bromobenzene	ND		ND				NC NC	
Bromodichloromethane			ND ND		ug/L		NC NC	2
	ND				ug/L			2
Dibromochloromethane Bromoform	ND		ND ND		ug/L		NC	2
	ND				ug/L		NC	2
Bromomethane	ND		ND		ug/L		NC	2
Carbon disulfide	ND		ND		ug/L		NC	2
Carbon tetrachloride	ND		ND		ug/L		NC	2
Chlorobenzene	ND		ND		ug/L		NC	2
Chloroethane	ND		ND		ug/L		NC	2
Chloroform	ND		ND		ug/L		NC	2
Chloromethane	ND		ND		ug/L		NC	2
cis-1,2-Dichloroethene	ND		ND		ug/L		NC	2
cis-1,3-Dichloropropene	ND		ND		ug/L		NC	2
Dibromomethane	ND		ND		ug/L		NC	2
Dichlorodifluoromethane	ND		ND		ug/L		NC	2
Ethylbenzene	ND		ND		ug/L		NC	2
Hexachlorobutadiene	ND		ND		ug/L		NC	2
Isopropylbenzene	ND		ND		ug/L		NC	2
Methyl-tert-butyl Ether (MTBE)	ND		ND		ug/L		NC	2
Methylene Chloride	ND		ND		ug/L		NC	2

QC Sample Results

Client: Hilcorp Energy Job ID: 885-30624-1

Project/Site: Bell Fed 6C B1

Method: 8260B - Volatile Organic Compounds (GC/MS) (Continued)

Lab Sample ID: 885-30624-1 DU Client Sample ID: SVE-1 Prep Type: Total/NA

Matrix: Air

Analysis Batch: 32470

randiyolo Batom 62 m 6								
	Sample	Sample	DU	DU				RPD
Analyte	Result	Qualifier	Result	Qualifier	Unit	D	RPD	Limit
n-Butylbenzene	ND		ND		ug/L		NC	20
N-Propylbenzene	ND		ND		ug/L		NC	20
Naphthalene	ND		ND		ug/L		NC	20
sec-Butylbenzene	ND		ND		ug/L		NC	20
Styrene	ND		ND		ug/L		NC	20
tert-Butylbenzene	ND		ND		ug/L		NC	20
Tetrachloroethene (PCE)	ND		ND		ug/L		NC	20
Toluene	140		120		ug/L		12	20
trans-1,2-Dichloroethene	ND		ND		ug/L		NC	20
trans-1,3-Dichloropropene	ND		ND		ug/L		NC	20
Trichloroethene (TCE)	ND		ND		ug/L		NC	20
Trichlorofluoromethane	ND		ND		ug/L		NC	20
Vinyl chloride	ND		ND		ug/L		NC	20
Xylenes, Total	68		58.2		ug/L		16	20

DU DU Surrogate %Recovery Qualifier Limits 84 70 - 130 1,2-Dichloroethane-d4 (Surr) Toluene-d8 (Surr) 97 70 - 130 4-Bromofluorobenzene (Surr) 70 - 130 88 78 70 - 130 Dibromofluoromethane (Surr)

Method: 8015D - Gasoline Range Organics (GRO) (GC)

Lab Sample ID: MB 885-32441/6 Client Sample ID: Method Blank Matrix: Air

Analysis Batch: 32441

	IVID	IVID						
Analyte	Result	Qualifier	RL	Unit	D	Prepared	Analyzed	Dil Fac
Gasoline Range Organics [C6 - C10]	ND		5.0	ug/L			08/15/25 13:32	1

мв мв Surrogate %Recovery Qualifier Limits Prepared Analyzed Dil Fac 4-Bromofluorobenzene (Surr) 93 15 - 150 08/15/25 13:32

Lab Sample ID: LCS 885-32441/4 Client Sample ID: Lab Control Sample

Matrix: Air

Analysis Batch: 32441

•		Spike	LCS	LCS					%Rec	
Analyte		Added	Result	Qualifier	Unit	I	D	%Rec	Limits	
Gasoline Range Organics [C6 -		50.0	44.7		ua/L			89	70 - 130	

C10]

	203	LUJ	
Surrogate	%Recovery	Qualifier	Limits
4-Bromofluorobenzene (Surr)	186		15 - 150

Eurofins Albuquerque

Prep Type: Total/NA

Prep Type: Total/NA

QC Association Summary

Client: Hilcorp Energy Job ID: 885-30624-1

Project/Site: Bell Fed 6C B1

GC/MS VOA

Analysis Batch: 32470

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method Prep Batch
885-30624-1	SVE-1	Total/NA	Air	8260B
MB 885-32470/6	Method Blank	Total/NA	Air	8260B
LCS 885-32470/5	Lab Control Sample	Total/NA	Air	8260B
885-30624-1 DU	SVE-1	Total/NA	Air	8260B

GC VOA

Analysis Batch: 32441

Lab Sample ID	Client Sample ID	Prep Type	Matrix	Method	Prep Batch
885-30624-1	SVE-1	Total/NA	Air	8015D	
MB 885-32441/6	Method Blank	Total/NA	Air	8015D	
LCS 885-32441/4	Lab Control Sample	Total/NA	Air	8015D	

2

3

4

6

0

10

11

Lab Chronicle

Client: Hilcorp Energy Job ID: 885-30624-1

Project/Site: Bell Fed 6C B1

Client Sample ID: SVE-1 Lab Sample ID: 885-30624-1

Matrix: Air

Date Collected: 08/08/25 12:00 Date Received: 08/09/25 07:50

	Batch	Batch		Dilution	Batch			Prepared
Prep Type	Type	Method	Run	Factor	Number	Analyst	Lab	or Analyzed
Total/NA	Analysis	8260B		20	32470	СМ	EET ALB	08/15/25 14:42
Total/NA	Analysis	8015D		20	32441	JP	EET ALB	08/15/25 15:07

Laboratory References:

= , 1120 South 27th Street, Billings, MT 59101, TEL (406)252-6325

EET ALB = Eurofins Albuquerque, 4901 Hawkins NE, Albuquerque, NM 87109, TEL (505)345-3975

Eurofins Albuquerque

Accreditation/Certification Summary

Client: Hilcorp Energy Job ID: 885-30624-1

Project/Site: Bell Fed 6C B1

Laboratory: Eurofins Albuquerque

Unless otherwise noted, all analytes for this laboratory were covered under each accreditation/certification below.

Authority	Pi	rogram	Identification Number	Expiration Date
New Mexico		ate	NM9425, NM0901	02-27-26
The following analytes a	are included in this repor	t, but the laboratory is not certi	fied by the governing authority. This lis	t may include analytes
for which the agency do	es not offer certification			
Analysis Method	Prep Method	Matrix	Analyte	
8015D		Air	Gasoline Range Organics	[C6 - C10]
8260B		Air	1,1,1,2-Tetrachloroethane	
8260B		Air	1,1,1-Trichloroethane	
8260B		Air	1,1,2,2-Tetrachloroethane	
8260B		Air	1,1,2-Trichloroethane	
8260B		Air	1,1-Dichloroethane	
8260B		Air	1,1-Dichloroethene	
8260B		Air	1,1-Dichloropropene	
8260B		Air	1,2,3-Trichlorobenzene	
8260B		Air	1,2,3-Trichloropropane	
8260B		Air	1,2,4-Trichlorobenzene	
8260B		Air	1,2,4-Trimethylbenzene	
8260B		Air	1,2-Dibromo-3-Chloroprop	ane
8260B		Air	1,2-Dibromoethane (EDB)	
8260B		Air	1,2-Dichlorobenzene	
8260B		Air	1,2-Dichloroethane (EDC)	
8260B		Air	1,2-Dichloropropane	
8260B		Air	1,3,5-Trimethylbenzene	
8260B		Air	1,3-Dichlorobenzene	
8260B		Air	1,3-Dichloropropane	
8260B		Air	1,4-Dichlorobenzene	
8260B		Air	1-Methylnaphthalene	
8260B		Air	2,2-Dichloropropane	
8260B		Air	2-Butanone	
8260B		Air	2-Chlorotoluene	
8260B		Air	2-Hexanone	
8260B		Air	2-Methylnaphthalene	
8260B		Air	4-Chlorotoluene	
8260B		Air	4-Isopropyltoluene	
8260B		Air	4-Methyl-2-pentanone	
8260B		Air	Acetone	
8260B		Air	Benzene	
8260B		Air	Bromobenzene	
8260B		Air	Bromodichloromethane	
8260B		Air	Bromoform	
8260B		Air	Bromomethane	
8260B		Air	Carbon disulfide	
8260B		Air	Carbon tetrachloride	
8260B		Air	Chlorobenzene	
8260B		Air	Chloroethane	
8260B		Air	Chloroform	
8260B		Air	Chloromethane	
8260B		Air	cis-1,2-Dichloroethene	
8260B		Air	cis-1,3-Dichloropropene	
8260B		Air	Dibromochloromethane	

Eurofins Albuquerque

-0

2

4

5

ا

9

11

Accreditation/Certification Summary

Client: Hilcorp Energy Job ID: 885-30624-1

Project/Site: Bell Fed 6C B1

Laboratory: Eurofins Albuquerque (Continued)

Unless otherwise noted, all analytes for this laboratory were covered under each accreditation/certification below.

hority	rity Program			Expiration Date
	are included in this report, bu	t the laboratory is not certif	ied by the governing authority. This li	st may include analyte
Analysis Method	Prep Method	Matrix	Analyte	
8260B		Air	Dibromomethane	
8260B		Air	Dichlorodifluoromethane	
8260B		Air	Ethylbenzene	
8260B		Air	Hexachlorobutadiene	
8260B		Air	Isopropylbenzene	
8260B		Air	Methylene Chloride	
8260B		Air	Methyl-tert-butyl Ether (M	ITBE)
8260B		Air	Naphthalene	
8260B		Air	n-Butylbenzene	
8260B		Air	N-Propylbenzene	
8260B		Air	sec-Butylbenzene	
8260B		Air	Styrene	
8260B		Air	tert-Butylbenzene	
8260B		Air	Tetrachloroethene (PCE)	
8260B		Air	Toluene	
8260B		Air	trans-1,2-Dichloroethene	
8260B		Air	trans-1,3-Dichloropropen	е
8260B		Air	Trichloroethene (TCE)	
8260B		Air	Trichlorofluoromethane	
8260B		Air	Vinyl chloride	
8260B		Air	Xylenes, Total	
on	NELAI	0	NM100001	02-26-26

The following analytes are included in this report, but the laboratory is not certified by the governing authority. This list may include analytes for which the agency does not offer certification.

Analysis Method	Prep Method	Matrix	Analyte
8015D		Air	Gasoline Range Organics [C6 - C10]
8260B		Air	1,1,1,2-Tetrachloroethane
8260B		Air	1,1,1-Trichloroethane
8260B		Air	1,1,2,2-Tetrachloroethane
8260B		Air	1,1,2-Trichloroethane
8260B		Air	1,1-Dichloroethane
8260B		Air	1,1-Dichloroethene
8260B		Air	1,1-Dichloropropene
8260B		Air	1,2,3-Trichlorobenzene
8260B		Air	1,2,3-Trichloropropane
8260B		Air	1,2,4-Trichlorobenzene
8260B		Air	1,2,4-Trimethylbenzene
8260B		Air	1,2-Dibromo-3-Chloropropane
8260B		Air	1,2-Dibromoethane (EDB)
8260B		Air	1,2-Dichlorobenzene
8260B		Air	1,2-Dichloroethane (EDC)
8260B		Air	1,2-Dichloropropane
8260B		Air	1,3,5-Trimethylbenzene
8260B		Air	1,3-Dichlorobenzene
8260B		Air	1,3-Dichloropropane
8260B		Air	1,4-Dichlorobenzene

Eurofins Albuquerque

Accreditation/Certification Summary

Client: Hilcorp Energy Job ID: 885-30624-1 Project/Site: Bell Fed 6C B1

Laboratory: Eurofins Albuquerque (Continued)

Unless otherwise noted, all analytes for this laboratory were covered under each accreditation/certification below.

ority	y Program		Identification Number Expiration	Date
	are included in this report, bu	ut the laboratory is not certif	ied by the governing authority. This list may include a	nalyte
Analysis Method	Prep Method	Matrix	Analyte	
8260B		Air	1-Methylnaphthalene	
8260B		Air	2,2-Dichloropropane	
8260B		Air	2-Butanone	
8260B		Air	2-Chlorotoluene	
8260B		Air	2-Hexanone	
8260B		Air	2-Methylnaphthalene	
8260B		Air	4-Chlorotoluene	
8260B		Air	4-Isopropyltoluene	
8260B		Air	4-Methyl-2-pentanone	
8260B		Air	Acetone	
8260B		Air	Benzene	
8260B		Air	Bromobenzene	
8260B		Air	Bromodichloromethane	
8260B		Air	Bromoform	
8260B		Air	Bromomethane	
8260B		Air	Carbon disulfide	
8260B		Air	Carbon tetrachloride	
8260B		Air	Chlorobenzene	
8260B		Air	Chloroethane	
8260B		Air	Chloroform	
8260B		Air	Chloromethane	
8260B		Air	cis-1,2-Dichloroethene	
8260B		Air	cis-1,3-Dichloropropene	
8260B		Air	Dibromochloromethane	
8260B		Air	Dibromomethane	
8260B		Air	Dichlorodifluoromethane	
8260B		Air		
8260B		Air	Ethylbenzene Hexachlorobutadiene	
8260B		Air	Isopropylbenzene	
8260B 8260B		Air	Methyl tert butyl Ether (MTRE)	
		Air	Methyl-tert-butyl Ether (MTBE)	
8260B		Air	Naphthalene n-Butylbenzene	
8260B		Air	•	
8260B		Air	N-Propylbenzene	
8260B		Air	sec-Butylbenzene	
8260B		Air	Styrene	
8260B		Air	tert-Butylbenzene	
8260B		Air	Tetrachloroethene (PCE)	
8260B		Air	Toluene	
8260B		Air	trans-1,2-Dichloroethene	
8260B		Air	trans-1,3-Dichloropropene	
8260B		Air	Trichloroethene (TCE)	
8260B		Air	Trichlorofluoromethane	
8260B		Air	Vinyl chloride	
8260B		Air	Xylenes, Total	

Eurofins Albuquerque

Billings, MT 406.252.6325 . Casper, WY 307.235.0515 Gillette, WY 307.686.7175 . Helena, MT 406.442.0711

ANALYTICAL SUMMARY REPORT

August 18, 2025

Eurofins TestAmerica - Albuquerque 4901 Hawkins St NE Ste D Albuquerque, NM 87109-4372

Quote ID: B15626 Work Order: B25081200

Project Name: 88501698, Bell Fed 6C B1

Energy Laboratories Inc Billings MT received the following 1 sample for Eurofins TestAmerica - Albuquerque on 8/13/2025 for analysis.

Lab ID	Client Sample ID	Collect Date Receive Date	e Matrix	Test
B25081200-001	SVE-1 (885-30624-1)	08/08/25 12:00 08/13/25	Air	Air Correction Calculations Appearance and Comments Calculated Properties GPM @ std cond,/1000 cu. ft., moist. Free Natural Gas Analysis Specific Gravity @ 60/60

The analyses presented in this report were performed by Energy Laboratories, Inc., 1120 So. 27th Street, Billings, MT 59101, unless otherwise noted. Any exceptions or problems with the analyses are noted in the report package. Any issues encountered during sample receipt are documented in the Work Order Receipt Checklist.

The results as reported relate only to the item(s) submitted for testing. This report shall be used or copied only in its entirety. Energy Laboratories, Inc. is not responsible for the consequences arising from the use of a partial report.

Energy Laboratories, Inc. verifies the reported results for the analysis has been technically reviewed and approved for release.

If you have any questions regarding these test results, please contact your Project Manager.

Trust our People. Trust our Data. www.energylab.com

Billings, MT 406.252.6325 . Casper, WY 307.235.0515 Gillette, WY 307.686.7175 • Helena, MT 406.442.0711

LABORATORY ANALYTICAL REPORT

Prepared by Billings, MT Branch

Eurofins TestAmerica - Albuquerque Client:

Project: 88501698, Bell Fed 6C B1

Lab ID: B25081200-001 Client Sample ID: SVE-1 (885-30624-1)

Report Date: 08/18/25 Collection Date: 08/08/25 12:00 DateReceived: 08/13/25

Matrix: Air

Analyses	Result	Unite	Qualifiers	RL	MCL/ QCL	Method	Analysis Date / By
analyses	Result	Ullits	Qualifiers	NL .	QUL	Wethou	Allalysis Date / By
GAS CHROMATOGRAPHY ANALYSIS F	REPORT						
Oxygen	19.41	Mol %		0.01		GPA 2261-13	08/14/25 10:45 / jrj
Nitrogen	78.90	Mol %		0.01		GPA 2261-13	08/14/25 10:45 / jrj
Carbon Dioxide	1.65	Mol %		0.01		GPA 2261-13	08/14/25 10:45 / jrj
lydrogen Sulfide	<0.01	Mol %		0.01		GPA 2261-13	08/14/25 10:45 / jrj
lethane	<0.01	Mol %		0.01		GPA 2261-13	08/14/25 10:45 / jrj
thane	<0.01	Mol %		0.01		GPA 2261-13	08/14/25 10:45 / jrj
ropane	<0.01	Mol %		0.01		GPA 2261-13	08/14/25 10:45 / jrj
sobutane	<0.01	Mol %		0.01		GPA 2261-13	08/14/25 10:45 / jrj
-Butane	<0.01	Mol %		0.01		GPA 2261-13	08/14/25 10:45 / jrj
sopentane	<0.01	Mol %		0.01		GPA 2261-13	08/14/25 10:45 / jrj
-Pentane	<0.01	Mol %		0.01		GPA 2261-13	08/14/25 10:45 / jrj
exanes plus	0.04	Mol %		0.01		GPA 2261-13	08/14/25 10:45 / jrj
ropane	< 0.001	gpm		0.001		GPA 2261-13	08/14/25 10:45 / jrj
sobutane	< 0.001	gpm		0.001		GPA 2261-13	08/14/25 10:45 / jrj
-Butane	< 0.001	gpm		0.001		GPA 2261-13	08/14/25 10:45 / jrj
opentane	< 0.001	gpm		0.001		GPA 2261-13	08/14/25 10:45 / jrj
-Pentane	< 0.001	gpm		0.001		GPA 2261-13	08/14/25 10:45 / jrj
exanes plus	0.017	gpm		0.001		GPA 2261-13	08/14/25 10:45 / jrj
PM Total	0.017	gpm		0.001		GPA 2261-13	08/14/25 10:45 / jrj
PM Pentanes plus	0.017	gpm		0.001		GPA 2261-13	08/14/25 10:45 / jrj
ALCULATED PROPERTIES							
ross BTU per cu ft @ Std Cond. (HHV)	2			1		GPA 2261-13	08/14/25 10:45 / jrj
et BTU per cu ft @ std cond. (LHV)	2			1		GPA 2261-13	08/14/25 10:45 / jrj
seudo-critical Pressure, psia	548			1		GPA 2261-13	08/14/25 10:45 / jrj
seudo-critical Temperature, deg R	243			1		GPA 2261-13	08/14/25 10:45 / jrj
pecific Gravity @ 60/60F	1.00			0.001		D3588-17	08/14/25 10:45 / jrj
ıir, %	88.68			0.01		GPA 2261-13	08/14/25 10:45 / jrj
- The analysis was not corrected for air.							
OMMENTS							

- BTU, GPM, and specific gravity are corrected for deviation from ideal gas behavior.

- GPM = gallons of liquid at standard conditions per 1000 cu. ft. of moisture free gas @ standard conditions.

- To convert BTU to a water-saturated basis @ standard conditions, multiply by 0.9825.

- Standard conditions: 60 F & 14.73 psi on a dry basis.

RL - Analyte Reporting Limit MCL - Maximum Contaminant Level Report

Definitions: QCL - Quality Control Limit ND - Not detected at the Reporting Limit (RL)

08/14/25 10:45 / jrj



Billings, MT 406.252.6325 . Casper, WY 307.235.0515 Gillette, WY 307.686.7175 . Helena, MT 406.442.0711

QA/QC Summary Report

Prepared by Billings, MT Branch

Work C	Order: B25081200							Repo	ort Date:	: 08/18/25	
Analyte		Count	Result	Units	RL	%REC	Low Limit	High Limit	RPD	RPDLimit	Qual
Method:	GPA 2261-13									Batch:	R447557
Lab ID:	B25081200-001ADUP	12 Sar	mple Duplic	ate			Run: GC78	90_250814A		08/14/	25 11:34
Oxygen			19.3	Mol %	0.01				0.8	20	
Nitrogen			79.0	Mol %	0.01				0.2	20	
Carbon D	Dioxide		1.66	Mol %	0.01				0.6	20	
Hydrogen	Sulfide		<0.01	Mol %	0.01					20	
Methane			< 0.01	Mol %	0.01					20	
Ethane			<0.01	Mol %	0.01					20	
Propane			<0.01	Mol %	0.01					20	
Isobutane	e		< 0.01	Mol %	0.01					20	
n-Butane			< 0.01	Mol %	0.01					20	
Isopentar	ne		< 0.01	Mol %	0.01					20	
n-Pentan	е		< 0.01	Mol %	0.01					20	
Hexanes	plus		0.04	Mol %	0.01				0.0	20	
Lab ID:	LCS081425	11 Lat	oratory Co	ntrol Sample			Run: GC78	90_250814A		08/14/	25 14:06
Oxygen			0.64	Mol %	0.01	130	70	130			
Nitrogen			6.19	Mol %	0.01	105	70	130			
Carbon D	Dioxide		0.97	Mol %	0.01	97	70	130			
Methane			76.5	Mol %	0.01	100	70	130			
Ethane			6.05	Mol %	0.01	100	70	130			
Propane			5.01	Mol %	0.01	100	70	130			
Isobutane	e		1.51	Mol %	0.01	76	70	130			
n-Butane			2.00	Mol %	0.01	100	70	130			
Isopentar	ne		0.47	Mol %	0.01	94	70	130			
n-Pentan	е		0.50	Mol %	0.01	100	70	130			
Hexanes	plus		0.20	Mol %	0.01	97	70	130			

Qualifiers:

RL - Analyte Reporting Limit

ND - Not detected at the Reporting Limit (RL)

Billings, MT 406.252.6325 • Casper, WY 307.235.0515 Gillette, WY 307.686.7175 • Helena, MT 406.442.0711

Work Order Receipt Checklist

Eurofins TestAmerica - Albuquerque B25081200

_ogin completed by:	Leslie S. Cadreau		Date	Received: 8/13/2025
Reviewed by:	darcy		Re	ceived by: SW
Reviewed Date:	8/13/2025		Car	rier name: FedEx NDA
Shipping container/cooler in	good condition?	Yes √	No 🗌	Not Present
Custody seals intact on all sl	hipping container(s)/cooler(s)?	Yes ✓	No 🗌	Not Present
Custody seals intact on all s	ample bottles?	Yes	No 🗌	Not Present ✓
Chain of custody present?		Yes ✓	No 🗌	
Chain of custody signed whe	en relinquished and received?	Yes ✓	No 🗌	
Chain of custody agrees with	h sample labels?	Yes 🗸	No 🗌	
Samples in proper container	/bottle?	Yes 🗸	No 🗌	
Sample containers intact?		Yes 🗸	No 🗌	
Sufficient sample volume for	r indicated test?	Yes ✓	No 🗌	
All samples received within h Exclude analyses that are c such as pH, DO, Res Cl, Su	onsidered field parameters	Yes ✓	No 🗌	
Гетр Blank received in all s	hipping container(s)/cooler(s)?	Yes	No 🗹	Not Applicable
Container/Temp Blank tempe	erature:	18.0°C No Ice		
Containers requiring zero he bubble that is <6mm (1/4").	adspace have no headspace or	Yes	No 🗌	No VOA vials submitted ✓
Vater - pH acceptable upon	receipt?	Yes	No 🗌	Not Applicable

Standard Reporting Procedures:

Lab measurement of analytes considered field parameters that require analysis within 15 minutes of sampling such as pH, Dissolved Oxygen and Residual Chlorine, are qualified as being analyzed outside of recommended holding time.

Solid/soil samples are reported on a wet weight basis (as received) unless specifically indicated. If moisture corrected, data units are typically noted as –dry. For agricultural and mining soil parameters/characteristics, all samples are dried and ground prior to sample analysis.

The reference date for Radon analysis is the sample collection date. The reference date for all other Radiochemical analyses is the analysis date. Radiochemical precision results represent a 2-sigma Total Measurement Uncertainty.

For methods that require zero headspace or require preservation check at the time of analysis due to potential interference, the pH is verified at analysis. Nonconforming sample pH is documented as part of the analysis and included in the sample analysis comments.

Trip Blanks and/or Blind Duplicate samples are assigned the earliest collection time for the associated requested analysis in order to evaluate the holding time unless specifically indicated.

Contact and Corrective Action Comments:

None

Billings, MT 406.252.6325 • Casper, WY 307.235.0515 Gillette, WY 307.686.7175 • Helena, MT 406.442.0711

Laboratory Certifications and Accreditations

Current certificates are available at www.energylab.com website:

	Agency	Number			
	Alaska	17-023			
	California	3087			
	Colorado	MT00005			
	Department of Defense (DoD)/ISO17025	ADE-2588			
Billings, MT	Florida (Primary NELAP)	E87668			
	Idaho	MT00005			
d	Louisiana	05079			
ANAB	Montana	CERT0044			
A C C R E D I T E D	Nebraska	NE-OS-13-04			
TESTING LABORIATORY	Nevada	NV-C24-00250			
escon.	North Dakota	R-007			
A STATE OF THE STA	National Radon Proficiency	109383-RMP			
TNI	Oregon	4184			
CONTROL	South Dakota	ARSD 74:04:07			
	Texas	TX-C24-00302			
	US EPA Region VIII	Reciprocal			
	USDA Soil Permit	P330-20-00170			
	Washington	C1039			
	Alaska	20-006			
	California	3021			
	Colorado	WY00002			
	Florida (Primary NELAP)	E87641			
	Idaho	WY00002			
Section (allow)	Louisiana	05083			
asper, WY	Montana	CERTO002			
De Michigan	Nebraska	NE-OS-08-04			
	Nevada	NV-C24-00245			
PROPERTOR	North Dakota	R-125			
	Oregon	WY200001			
	South Dakota	WY00002			
	Texas	T104704181-23-21			
	US EPA Region VIII	WY00002			
	USNRC License	49-26846-01			
	Washington	C1012			
illette, WY	US EPA Region VIII	WY00006			
	Colorado	MT00945			
lelena, MT	Montana	CERT0079			
	Nevada	NV-C24-00119			
	US EPA Region VIII	Reciprocal			
	USDA Soil Permit	P330-20-00090			

Eurofins Albuquerque

4901 Hawkins NE

Albuquerque, NM 87109 Phone: 505-345-3975, Fay: 505-345-4107

Chain of Custody Record

DOM:	MEN.	
	- 1	
		\$

P 91			-	
	PII	rn	TIP	36
4.0	Lu			

Environment Testing

Received by OCD: 10/13/2025 2:02:09 PM

Client Information (Sub Contract Lab)	Sampler: N/A				b PM: arcia, Michelle						Carrier Tracking No(s): N/A			COC No: 885-6080.1	
Client Contact:	Phone:	Phone: E				Mail: Sta						State of Origin:			
Shipping/Receiving Company:	N/A	N/A r					chelle.garcia@et.eurofinsus.com New M Accreditations Required (See note):							Page 1 of 1	
Energy Laboratories, Inc.									New Me	xico				885-30624-1	
Address: 1120 South 27th Street,	Due Date Request 8/18/2025	ted:						A	nalvsis	Rea	uested			Preservation	Codes:
City: Billings	TAT Requested (d														
State, Zip:		N/A													
MT, 59101															
Phone: 406-252-6325(Tel)	PO #: N/A				ااءا										
Email:	WO #:					s	1						and the		
N/A Project Name:	N/A Project #:				S S	Gas					1.1		55		
Bell Fed 6C B1	88501698				(es c	pex							containe		
Site: N/A	SSOW#: N/A				SD	. is							o Jo		
		Sample	Sample Type (C=comp,	Matrix (W=water, S=solid, O=waste/oil,	Field Filtered Sample (Yes or Perform MS/MSD (Yes or No)	SUB - Subcontract - Fixed Gases							Number		
Sample Identification - Client ID (Lab ID)	Sample Date	Time	G=grab)	BT=Tissue, A=A	Fie Fie	SUB							Total	Specia	Instructions/Note:
		><	Preserva	tion Code:									\rightarrow		
SVE-1 (885-30624-1)	8/8/25	12:00 Mountain	G	Air		X							1	See Attached I	nstructions Q 1700
														Desc	0.100
					11						_				
						-		+		\vdash					
<u> </u>					-		-	-							
					1										
												7			
						+									
Note: Since laboratory accreditations are subject to change, Eurofins Er laboratory does not currently maintain accreditation in the State of Origli accreditation status should be brought to Eurofins Environment Testing	i listed above for analysis/test	s/matrix being	analyzed, the	amples mus	t be shipp	ed bac	k to the E	urofins E	nvironmen	t Testin	a South Cer	ntral LLC lat	oratory or ot	her instructions will	be provided. Any change
Possible Hazard Identification					Sa	mple	Dispos	sal (A					are retain	ed longer than	1 month)
Unconfirmed					- 1	\square_R	Return To	Clien	t I	Dis	sposal By	Lab	Arch	ive For	Months
Deliverable Requested: I, II, III, IV, Other (specify)	Primary Delivera	able Rank: 2	2		Sp	ecial	Instruct	ions/Q	C Require	ement	s:				
Empty Kit Relinquished by:		Date:			Time:						Metho	of Shipmer	it		
Relinquished by	Date/Time: 125		1400	Company		Rece	eived by:					Date/Ti	me:		Company
Relinquished by:	Date/Time:		100	Company		Rece	eived by:					Date/Ti	me:		Company
Relinquished by:	Date/Time:			Company		Rece	eived by:			Date/Time:			me:		Company
Custody Seals Intact: Custody Seal No.:						15	Received by: Skylas Walke 82						0755		







Received by OCD: 10/13/2025 2:02:09 PM

ICOC No: 885-6080

Containers

Container Type Tedlar Bag 1L Count

Preservative None

Subcontract Method Instructions

Sample IDs	Method	Method Description	Method Comments	
1	SUBCONTRACT	SUB - Subcontract - Fixed Gases	Fixed Gases	

	-
	ĕ
	10
	2
٠	
	7
	0
	\sim
	()
	• -
	-
	9
	-
	1.
	~
	_
ı.	N
L	0
	\sim
	S
1	٠.
1	2
L	9
ı	1
?	
L	
Ŀ	0
ı	0
١	_
Ł	-
L	
ı	Z
١.	_
ı	
ı	
1	
J	
ı	
i	
ı	
ı	
•	
ı	
ı	

Chain-of-Custody Client: Hilcorp Mailing Address:	Standard Project Nam	Turn-Around Time: Standard Rush Project Name: Bell Fed 6 C Bl Project #:			HALL ENVIRONM ANALYSIS LABOR www.hallenvironmental.com 885-30624 C 4901 Hawkins NE - Albuquerque, NM 87109 Tel. 505-345-3975 Fax 505-345-4107 Analysis Request							30624 CC	oc	Received by OCD: 10/13/202		
Accreditation: NELAC Other EDD (Type)	4 (Full Validation) Sampler: Br On Ice: # of Coolers: Cooler Temp	Yes O(Including CF): Preservative	U. •	BTEX / MTBE / TMB's (8021)	TPH:8015D(GRO / DRO / MRO)	8081 Pesticides/8082 PCB's EDB (Method 504.1)	PAHs by 8310 or 8270SIMS		10 ₃ , NO ₂ , PO ₄ , SO ₄	6200 (VOA) 8270 (Semi-VOA)	esent/Absent)	80U TVPH	- ixed gas 02 & CO2			25 2:02:09 PM
Page 24 of 25		Type		ш		Ф Ш			V							
Date Time Relinquished by 8/8/25/135/ Ph. Sun Date Time Relinquished by If necessary, samples submitted to Hal	Received by Received by SCM I Environmental may be subcontracted to other	Via CUVIZIENZ	Date Time 8/8/25 135/ Date Time 49/25 0750 This serves as notice of thi	Rem			ontracte	d data v	vill be cl	early no	otated o	n the an	nalytical r	eport		Page 45 of

Login Sample Receipt Checklist

Client: Hilcorp Energy Job Number: 885-30624-1

Login Number: 30624 List Source: Eurofins Albuquerque

List Number: 1

Creator: McQuiston, Steven

Question	Answer	Comment
Radioactivity wasn't checked or is = background as measured by a survey meter.</td <td>True</td> <td></td>	True	
The cooler's custody seal, if present, is intact.	True	
Sample custody seals, if present, are intact.	True	
The cooler or samples do not appear to have been compromised or tampered with.	True	
Samples were received on ice.	True	
Cooler Temperature is acceptable.	True	
Cooler Temperature is recorded.	True	
COC is present.	True	
COC is filled out in ink and legible.	True	
COC is filled out with all pertinent information.	True	
Is the Field Sampler's name present on COC?	True	
There are no discrepancies between the containers received and the COC.	True	
Samples are received within Holding Time (excluding tests with immediate HTs)	True	
Sample containers have legible labels.	True	
Containers are not broken or leaking.	True	
Sample collection date/times are provided.	True	
Appropriate sample containers are used.	True	
Sample bottles are completely filled.	True	
Sample Preservation Verified.	N/A	
There is sufficient vol. for all requested analyses, incl. any requested MS/MSDs	True	
Containers requiring zero headspace have no headspace or bubble is <6mm (1/4").	True	
Multiphasic samples are not present.	True	
Samples do not require splitting or compositing.	True	
Residual Chlorine Checked.	N/A	

.

Sante Fe Main Office Phone: (505) 476-3441

General Information Phone: (505) 629-6116

Online Phone Directory https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

Action 514685

CONDITIONS

Operator:	OGRID:
HILCORP ENERGY COMPANY	372171
1111 Travis Street	Action Number:
Houston, TX 77002	514685
	Action Type:
	[REPORT] Alternative Remediation Report (C-141AR)

CONDITIONS

_	Condition	Condition Date
Ву		
nvelez	1. Continue O&M & sampling as stated in report. 2. Submit next quarterly report by January 15, 2026.	10/17/2025