District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office. For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Below-Grade Tank, or
14 205 Proposed Alternative Method Permit or Closure Plan Application
Type of action: Below grade tank registration Permit of a pit or proposed alternative method Closure of a pit, below-grade tank, or proposed alternative method MAR 15 2016 MAR 15 2016 Closure plan only submitted for an existing permitted or non-permitted pit, below-grade tank, or proposed alternative method
Instructions: Please submit one application (Form C-144) per individual pit, below-grade tank or alternative request
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.
Operator: BP America Production Company OGRID #: 778
Address: 200 Energy Court, Farmington, NM 87401
Facility or well name: Neil A 009
API Number: 3004511001 OCD Permit Number:
U/L or Qtr/Qtr N Section 4 Township 31N Range 11W County: San Juan
Center of Proposed Design: Latitude <u>36.922460</u> Longitude <u>-107.999316</u> NAD: □1927 ⊠ 1983
Surface Owner: 🛛 Federal 🗌 State 🗋 Private 🗋 Tribal Trust or Indian Allotment
 2. Pit: Subsection F, G or J of 19.15.17.11 NMAC Temporary: Drilling Workover Permanent Emergency Cavitation P&A Multi-Well Fluid Management Low Chloride Drilling Fluid yes no Lined Unlined Liner type: Thickness mil LLDPE HDPE PVC Other
□ String-Reinforced Liner Seams: □ Welded □ Factory □ Other Volume: bbl Dimensions: L x W x D
3. 3. Below-grade tank: Subsection I of 19.15.17.11 NMAC TANK A Volume: 45 bbl Type of fluid: Produced water
Tank Construction material: Steel
Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off
□ Visible sidewalls and liner □ Visible sidewalls only □ Other <u>Single walled/double bottom; no visible sidewalls</u>
Liner type: Thickness mil
 Alternative Method: Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Screen Netting Other Monthly inspections (If netting or screening is not physically feasible) Stages: subsection C of 19.15.17.11 NMAC 12*x 24*, 2* Itetering, providing Operator's name, site location, and emergency telephone numbers Signed in compliance with 19.15.16 & NMAC Stages: subsection C of 19.15.17.11 NMAC 12*x 24*, 2* Itetering, providing Operator's name, site location, and emergency telephone numbers Signed in compliance with 19.15.16 & NMAC Stages: Subsection C of 19.15.17.10 NMAC Data obtained for consideration of approval. Exception(5): Requests must be submitted to the Sama 'P Environmental Bureau office for consideration of approval. Exception(6): Requests must be submitted to the Sama 'P Environmental Bureau office for consideration of approval. Exception(6): Requests must be submitted to the Sama 'P Environmental Bureau office for consideration of approval. Exception(6): Requests must be submitted to the Sama 'P Environmental Bureau office for consideration of approval. Exception(6): Requests must be submitted to the Sama 'P Environmental Bureau office for consideration of approval. Exception(6): Requests must be submitted to the Sama 'P Environmental Bureau office for consideration of approval. Exception(6): Requests must be submitted to the Sama 'P Environmental Bureau office for consideration of approval. Yes No Nitructions: The demonstrate compliance (or each stilling criteria below in the application. Recommendations of acceptable source material are provided below. Stills criteria does not apply to drying pads or above-grade tanks. Yes No Nitruction of the State Engineer - WATERS database search; USOS; Data obtained from nearby wells Ground water is less than 25 feet below the hotom of a I monorary in graved tanks. Yes No Nithe office of the State Engineer - WATERS database search; USOS; Data obtained from the municipal from the municipal tree well field covered ander a municipal ordinance adopedor pursuant UNMSI 1078, Sciento 3-27-	 s. Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet Alternate. Please specify	hospital,
□ 12*x 24*, 2* Cettering, providing Operator's name, site location, and emergency telephone numbers □ Signed in compliance with 19.15.16.8 NMAC Arriances and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Preace okek a bat of fone or more of the following is requested, if not leave blank: □ Exception(s): Requests must be submitted to the appropriate division district for consideration of approval. □ Stifting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each stiling criteria below in the application. Recommendations of acceptable source material are provided below. Siting criteria does not apply to drying pads or above-grade tanks. General siting □ Yes No □ String office of the State Engineer - iWATERS database search: USGS; Data obtained from nearby wells □ No Within incorporate municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance apple to below grade tanks) □ Yes No • Written confirmation or verification from the NumENDA-Mining and Mineral Division □ Yes No Within 100 feet of a sontification of a pape to below grade tanks) □ Yes No • Written confirmation or verification from the NumENDA-Mining and Mineral Division □ Yes No Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole,	 6. Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other Monthly inspections (If netting or screening is not physically feasible) 	
Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please sheek a box if one or more of the following is requested, if not leave blank: Consideration of approval. Consideration of a consideration of a consideration of approval. Consideration of the State Engineer of the Engineer of the State Engineer of the State Engineer of the State Engineer of the State Engineer of the Engineer of the Engineer of the State Engineer of the Engineer of	 <u>Signs</u>: Subsection C of 19.15.17.11 NMAC 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers Signed in compliance with 19.15.16.8 NMAC 	
Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Siting criteria does not apply to drying pads or above-grade tanks. General siting		
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank.	9. <u>Siting Criteria (regarding permitting)</u> : 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Siting criteria does not apply to drying pads or above-grade tanks.	ptable source
. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells NA Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit, NA Yes No NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells NA Yes No Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) Yes No . Written confirmation or verification from the municipality; Written approval obtained from the municipality Yes No Within a unstable area. (Does not apply to below grade tanks) Yes No . Fengineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map Yes No Within a 100-year floodplain. (Does not apply to below grade tanks) Yes No . FEMA map Yes No Below Grade Tanks Yes No Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). Yes No . Topographic map; Visual inspecti	General siting	
Ground water is tess that so receiver of the outdom of a reinformaty pincter management pincter in WATERS database search; USGS; Data obtained from nearby wells NA Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) Yes No • Written confirmation or verification from the municipality; Written approval obtained from the municipality Yes No • Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division Yes No • Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division Yes No • Writhin an unstable area. (Does not apply to below grade tanks) Yes No • Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map Yes No • FEMA map Yes No Yes No Below Grade Tanks Yes No • Topographic map; Visual inspection (certification) of the proposed site Yes No Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). Yes No • Topographic map; Visual inspection (certification) of the proposed site Yes No Within 100 feet of a spring or a fresh water well used for public or livestock consumption;.	Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank	
adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) Image: Control of the contro	Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	
 Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division Within an unstable area. (Does not apply to below grade tanks) Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map Within a 100-year floodplain. (Does not apply to below grade tanks) FEMA map Below Grade Tanks Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter) Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, in the ordinary high-water mark). (Applies to low chloride temporary pits.) 	 Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) Written confirmation or verification from the municipality; Written approval obtained from the municipality 	🗌 Yes 🗌 No
 Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map Within a 100-year floodplain. (Does not apply to below grade tanks) FEMA map Below Grade Tanks Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter) Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) 	 Within the area overlying a subsurface mine. (Does not apply to below grade tanks) Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division 	Yes No
Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map Below Grade Tanks Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark) Topographic map; Visual inspection (certification) of the proposed site Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption; NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 mg/liter) Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.)		Yes No
 Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter) Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) 	Within a 100-year floodplain. (Does not apply to below grade tanks)	Yes No
 from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter) Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) 	Below Grade Tanks	
 NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter) Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) 	 Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site 	Yes No
Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.)	 Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site 	Yes No
or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.)	Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)	
	 Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) Topographic map; Visual inspection (certification) of the proposed site 	Yes No

 Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 	Yes No
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	Yes No
 Within 100 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site 	Yes No
Temporary Pit Non-low chloride drilling fluid	
Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes No
 Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 	Yes No
 Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site 	Yes No
 Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site 	Yes No
Permanent Pit or Multi-Well Fluid Management Pit	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).	Yes No
- Topographic map; Visual inspection (certification) of the proposed site	
 Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 	Yes No
Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application.	
 NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site 	Yes No
 Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site 	Yes No
 10. Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 N Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the dou attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19. 	cuments are
and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:	
11. Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the dot attached.	
Previously Approved Design (attach copy of design) API Number: or Permit Number:	

^{12.} <u>Permanent Pits Permit Application Checklist</u> : Subsection B of 19.15.17.9 NMAC <i>Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the attached.</i>	documents are
 Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment 	
 Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC 	
 Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan 	
 Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H₂S, Prevention Plan 	
 Emergency Response Plan Oil Field Waste Stream Characterization 	
 Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC 	
^{13.} Proposed Closure: 19.15.17.13 NMAC	
Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-well F	Juid Management Pit
Alternative Proposed Closure Method: Waste Excavation and Removal	and management 1 it
 Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method 	
 Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC 	
15. <u>Siting Criteria (regarding on-site closure methods only)</u> : 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sou provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. I 19.15.17.10 NMAC for guidance.	
Ground water is less than 25 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	□ Yes □ No □ NA
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Ground water is more than 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Yes No
 Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site 	Yes No
Written confirmation or verification from the municipality; Written approval obtained from the municipality	Yes No
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	Yes No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	
Form C-144 Oil Conservation Division Page 4 c	£6

adopted pursuant to NMSA 1978, Section 3-27-3, as amended.	
- Written confirmation or verification from the municipality; Written approval obtained from the municipality	Yes No
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	Yes No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological	
Society; Topographic map	Yes No
Within a 100-year floodplain. - FEMA map	Yes No
 16. On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure particle of the following items mus	7.11 NMAC 9.15.17.11 NMAC
17. Operator Application Certification:	1
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and bel	lief.
Name (Print): Title:	
Signature: Date:	
e-mail address: Telephone:	
e-mail address: Telephone: <u>OCD Approva</u> l: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature: Approval Date: 0312 Title: Cov; connontal Specified OCD Permit Number:	24/2016
18. OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature:	g the closure report.
18. OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature:	g the closure report. t complete this

Oil Conservation Division

Operator Closure Certification:

I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.

	A	·
Name	Print	
rame	(r rm	. J.

Signature:

22.

Steve Moskal

Title: Field Environmental Coordinator

Date: March 9, 2016

e-mail address: steven.moskal@bp.com

Telephone: (505) 326-9497

BP AMERICA PRODUCTION COMPANY SAN JUAN BASIN, NORTHWEST NEW MEXICO

BELOW-GRADE TANK CLOSURE PLAN

<u>Neil A 009</u> <u>API No. 3004511001</u> Unit Letter N, Section 4, T31N, R11W

This plan will address the standard protocols and procedures for closure of below-grade tanks (BGTs) on BP America Production Company (BP) well sites. As stipulated in Paragraph A of 19.15.17.13 NMAC, BP shall close a BGT within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the New Mexico Oil Conservation Division (NMOCD) requires because of imminent danger to fresh water, public health, safety or the environment. If deviations from this plan are necessary, any specific changes will be included on form C-144 and approved by the NMOCD. BP shall close an existing BGT that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008, if not retrofit with a BGT that complies with the BP NMOCD approved BGT design attached to the BP Design and Construction Plan. BP shall close an existing BGT that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC, if not previously retrofitted to comply with the BP NMOCD approve BGT Design attached to the BP Design and Construction Plan, prior to any sale or change in operator pursuant to 19.15.9.9 NMAC. BP shall close the permitted BGT within 60 days of cessation of the BGTs operation or as required by the transitional provisions of Subsection B, D, or E of 19.15.17.17 NMAC.

General Closure Plan

- BP shall notify the surface owner by certified mail that it plans to close a BGT. Evidence of mailing of the notice to the address of the surface owner shown in the county tax records demonstrates compliance with this requirement. Notice is attached.
- 2. BP shall notify the division District III office verbally or by other means at least 72 hours, but not more than one (1) week, prior to any closure operation. The notice shall include the operator's name, and the location to be closed by unit letter, section, township and range. If the BGT closure is associated with a particular well, then the notice shall also include the well's name, number and API number. Notice was provided. NMOCD was not on site during the removal of the BGT, but

Notice was provided. NMOCD was not on site during the removal of the BGT, but approval for removal during their absence was granted.

- 3. BP shall remove liquids and sludge from the BGT prior to implementing a closure method and dispose of the liquids and sludge in a NMOCD's division-approved facility. The facilities to be used are:
 - a. BP Crouch Mesa Landfarm, Permit NM-02-003 (Solids)
 - b. JFJ Landfarm, Permit NM-01-010(B) (Solids and Sludge)
 - c. Basin Disposal, Permit NM-01-0005 (Liquids)
 - d. Envirotech Inc Soil Remediation Facility, Permit NM-01-0011 (Solids and Sludge)

- e. BP Operated E.E. Elliott SWD #1, API 30-045-27799 (Liquids)
- f. BP Operated 13 GCU SWD #1, API 30-045-28601 (Liquids)
- g. BP Operated GCU 259 SWD, API 30-045-20006 (Liquids)
- h. BP Operated GCU 306 SWD, API 30-045-24286 (Liquids)
- i. BP Operated GCU 307 SWD, API 30-045-24248 (Liquids)
- j. BP Operated GCU 328 SWD, API 30-045-24735 (Liquids)
- k. BP Operated Pritchard SWD #1, API 30-045-28351 (Liquids)

All liquids and sludge in the BGT were removed and sent to one of the above NMOCD approved facilities for disposal.

4. BP shall remove the BGT and dispose of it in a NMOCD approved facility or recycle, reuse, or reclaim it in a manner that the NMOCD approves. If a liner is present and must be disposed of it will be cleaned by scraping any soils or other attached materials on the liner to a de minimus amount and disposed at a permitted solid waste facility, pursuant to Subparagraph (m) of Paragraph (1) of Subsection C of 19.15.35.8 NMAC. Documentation as to the final disposition of the removed BGT will be provided in the final closure report.

The BGT was transported for recycling.

5. BP shall remove any on-site equipment associated with a BGT unless the equipment is required for well production.

All equipment associated with the BGT has been removed.

6. BP shall test the soils beneath the BGT to determine whether a release has occurred. BP shall collect at a minimum: a five (5) point composite sample and individual grab samples from any area that is wet, discolored or showing other evidence of a release and analyze for BTEX, TPH and chlorides. The testing methods for those constituents are as follows;

Constituents	Testing Method 45 bbl BGT	Release Verification (mg/Kg)	Sample results
Benzene	US EPA Method SW-846 8021B or 8260B	0.2	< 0.039
Total BTEX	US EPA Method SW-846 8021B or 8260B	50	< 0.077
TPH	US EPA Method SW-846 418.1 or 8015 extended	100	<u><49</u>
Chlorides	US EPA Method 300.0 or 4500B	250 or background	<30

Notes: mg/Kg = milligram per kilogram, BTEX = benzene, toluene, ethylbenzene, and total xylenes, TPH = total petroleum hydrocarbons. Other EPA methods that the division approves may be applied to all constituents listed. Chloride closure standards will be determined by which ever concentration level is greatest.

> Soil under the BGT was sampled for TPH, BTEX and chloride. BTEX, TPH and chloride concentrations were below the stated limits. The field report and laboratory reports are attached.

7. BP shall notify the division District III office of its results on form C-141.

C-141 is attached.

- If it is determined that a release has occurred, then BP will comply with 19.15.30 NMAC and 19.15.29 NMAC, as appropriate.
 Sampling results indicate no significant release has occurred.
- 9. If the sampling demonstrates that a release has not occurred or that any release does not exceed the concentrations specified above, then BP shall backfill the excavation, with compacted, non-waste containing, earthen material; construct a division-prescribed soil cover, re-contour and re-vegetate the location. The location will be reclaimed if it is not with in the active process area

Sampling results determine no significant release has occurred. Area was backfilled with clean, earthen material.

10. BP shall reclaim the BGT location and all areas associated with the BGT including associated access roads to a safe and stable condition that blends with the surrounding undisturbed area. BP shall substantially restore the impacted surface area to the condition that existed prior to oil and gas operations by placement of the soil cover as provided in Subsection H of 19.15.17.13 NMAC, re-contour the location and associated areas to a contour that approximates the original contour and blends with the surrounding topography and re-vegetate according to Subsection I of 19.15.17.13 NMAC.

The area has been backfilled and will be reclaimed once the well has been plugged and abandoned.

11. The soil cover for closures where the BGT has been removed or remediated to the NMOCD's satisfaction shall consist of the background thickness of topsoil or one foot of suitable material to establish vegetation at the site, whichever is greater. The soil cover will be constructed to the site's existing grade and all practicable efforts will be made to prevent ponding of water and erosion of the cover material.

The area has been backfilled and will be reclaimed once the well has been plugged and abandoned.

12. BP shall seed the disturbed area the first growing season after closure of the BGT. Seeding will be accomplished by drilling on the contour whenever practical or by other division-approved methods. Vegetative cover will be, at a minimum, 70% of the native perennial vegetative cover (un-impacted by overgrazing, fire or other intrusion damaging to native vegetation), consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintenance of that cover through two successive growing seasons. During the two growing seasons that prove viability, there shall be no artificial irrigation of the vegetation.

The area has been backfilled and will be reclaimed once the well has been plugged and abandoned.

13. BP shall seed, plant and re-seed pursuant to Paragraph (3) of Subsection I of 19.15.17.13 NMAC, until the location successfully achieves the required vegetative cover.

The area has been backfilled and will be reclaimed once the well has been plugged and abandoned. 14. Pursuant to Paragraph (5) of Subsection I of 19.15.17.13 NMAC, BP shall notify the NMOCD when it has seeded or planted and when it successfully achieves revegetation.

BP will notify NMOCD when re-vegetation is successful.

- 15. Within 60 days of closure completion, BP shall submit a closure report on NMOCD's form C-144, and will include the following;
 - a. proof of closure notification (surface owner and NMOCD)
 - b. sampling analytical reports; information required by 19.15.17 NMAC;
 - c. disposal facility name and permit number
 - d. details on back-filling, capping, covering, and where applicable re-vegetation application rates and seeding techniques and
 - e. site reclamation, photo documentation. Closure report on C-144 form is included including photos of reclamation completion.
- 16. BP shall certify that all information in the report and attachments is accurate, truthful, and compliant with all applicable closure requirements and conditions specified in the approved closure plan.

Certification section of C-144 has been completed.

2

State of New Mexico Energy Minerals and Natural Resources

Form C-141 Revised August 8, 2011

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 Submit 1 Copy to appropriate District Office in accordance with 19.15.29 NMAC.

			Rel	ease Notifi	cation	and Co	orrective A	ction			14.5
						OPERA'	TOR	C	Initia	al Report	Final Re
Name of Company: BP						Contact: Ste					1914-191-191-191-191-191-191-191-191-191
		Court, Farm	ington, N	M 87401			No.: 505-326-94				
Facility Na	me: Neil A	009				Facility Typ	be: Natural gas	well	Sec. 1		
Surface Ov	vner: Feder	ral		Mineral	Owner: 1	Federal			API No	. 30045110	001
				LOC	ATION	N OF RE	LEASE				
Unit Letter N	Section 4	Township 31N	Range 11W	Feet from the 990	North/ South	South Line	Feet from the 1,600	East/We West	est Line	County: S	an Juan
			Lat	itude <u>36.92</u> NAT		Longitu	ude <u>-107.99</u> EASE	9316			
Type of Rel	ease: none	1. 1. 1. 1.					Release: unknov	vn N	Volume F	Recovered: N	N/A
		w grade tank -	-45 bbl			Date and H	Iour of Occurrent				covery: none
Was Immed	iate Notice		Yes 🗵	No 🗌 Not R	equired	If YES, To	Whom?				
By Whom?	1.12.12	5 year - 1 1 1				Date and H	Iour		144-		
Was a Wate	rcourse Rea	ched?	Yes 🗵	No	1. 10	If YES, Vo	olume Impacting	the Waterc	course.		
Describe Ca	use of Probl	em and Reme	dial Actio	n Taken * Samnl	ing of the	soil beneath	the BGT was do	ne during	removal	Soil analys	is resulted for
				n Taken.* Sampl ld reports and lab			the BGT was do ached.	ne during 1	removal.	Soil analys	sis resulted for
ВТЕХ, ТРН	and chlorid	e below stand	ards. Fie	ld reports and lab	ooratory r	esults are atta					
BTEX, TPH Describe Are I hereby cert regulations a public health should their or the enviro	and chlorid ea Affected ify that the all operators or the envi operations h	and Cleanup A information g are required t ronment. The nave failed to addition, NMC	Action Tal iven above o report al acceptane adequately OCD accep	Id reports and lab ken.* No action n e is true and comp nd/or file certain ce of a C-141 rep v investigate and p	boratory r becessary. blete to the release no ort by the remediate	esults are atta Final labora the best of my otifications are NMOCD m e contaminati	ached. tory analysis sup knowledge and u nd perform correc arked as "Final R	ported clos inderstand ctive action eport" doe eat to grou	sure of th that purs ns for rele s not reli ind water	e BGT locat muant to NM eases which eve the open , surface wa	tion. OCD rules and may endanger rator of liability tter, human health
BTEX, TPH Describe Are I hereby cert regulations a public health should their or the enviro	and chlorid ea Affected ify that the all operators or the envi operations h	and Cleanup A information g are required t ronment. The nave failed to a	Action Tal iven above o report al acceptane adequately OCD accep	Id reports and lab ken.* No action n e is true and comp nd/or file certain ce of a C-141 rep v investigate and p	boratory r becessary. blete to the release no ort by the remediate	esults are atta Final labora the best of my otifications are NMOCD m e contaminati	tory analysis sup knowledge and u nd perform correc arked as "Final R on that pose a thr	ported clos inderstand ctive actior eport" doe eat to grou responsibi	sure of th that purs as for releas not reli ind water lity for co	e BGT locat suant to NM eases which eve the oper surface wa ompliance w	tion. OCD rules and may endanger rator of liability ater, human health vith any other
BTEX, TPH Describe Are I hereby cert regulations a public health should their or the enviro	and chlorid ea Affected ify that the all operators or the envi operations h onment. In a c, or local la	and Cleanup A information g are required t ronment. The nave failed to addition, NMC	Action Tal iven above o report al acceptane adequately OCD accep	Id reports and lab ken.* No action n e is true and comp nd/or file certain ce of a C-141 rep v investigate and p	boratory r becessary. blete to the release no ort by the remediate	esults are atta Final labora the best of my otifications are NMOCD m e contaminati	tory analysis sup knowledge and u nd perform correc arked as "Final R on that pose a thr e the operator of	ported clos inderstand ctive actior eport" doe eat to grou responsibi	sure of th that purs as for releas not reli ind water lity for co	e BGT locat suant to NM eases which eve the oper surface wa ompliance w	tion. OCD rules and may endanger rator of liability ater, human health vith any other
BTEX, TPH Describe Ard I hereby cert regulations a public health should their or the enviro federal, state	and chlorid ea Affected ify that the all operators or the envi operations h onment. In a e, or local la	and Cleanup A information gi are required t ronment. The nave failed to a addition, NMC ws and/or regu	Action Tal iven above o report al acceptane adequately OCD accep	Id reports and lab ken.* No action n e is true and comp nd/or file certain ce of a C-141 rep v investigate and p	boratory r becessary. blete to the release no ort by the remediate report do	Final labora e best of my otifications at NMOCD m contaminations not reliev	tory analysis sup knowledge and u nd perform correc arked as "Final R on that pose a thr e the operator of	ported closs inderstand ctive action eport" doe reat to grou responsibi SERVA	sure of th that purs as for releas not reli ind water lity for co	e BGT locat suant to NM eases which eve the oper surface wa ompliance w	tion. OCD rules and may endanger rator of liability ater, human health vith any other
BTEX, TPH Describe Ard I hereby cert regulations a public health should their or the enviro federal, state Signature:	and chlorid ea Affected ify that the all operators or the envi operations h onment. In a e, or local la	and Cleanup A information gi are required t ronment. The nave failed to a addition, NMC ws and/or regu	Action Tal iven above o report an acceptane adequately OCD accep ulations.	Id reports and lab ken.* No action n e is true and comp nd/or file certain ce of a C-141 rep v investigate and p	boratory r becessary. blete to the release no ort by the remediate report do	Final labora e best of my otifications at NMOCD m contaminations not reliev	ached. tory analysis sup knowledge and u nd perform correc arked as "Final R on that pose a thr te the operator of <u>OIL CON</u> Environmental S	ported clos inderstand ctive actior eport" doe eat to grou responsibi SERVA pecialist:	sure of th that purs as for releas not reli ind water lity for co	e BGT locat muant to NM eases which teve the oper surface wa ompliance w DIVISIC	tion. OCD rules and may endanger rator of liability ater, human health vith any other
BTEX, TPH Describe Ard I hereby cert regulations a public health should their or the enviro federal, state Signature: Printed Nam Title: Field I	and chlorid ea Affected ify that the all operators or the envi operations h onment. In a e, or local la definition e: Steve Mo Environmen	and Cleanup A information gr are required to ronment. The nave failed to a addition, NMC ws and/or regr 20000 bskal	Action Tal iven above o report an adequately OCD acceptantely DCD acceptantely adequately DCD acceptantely adequately adoquately ado	Id reports and lab ken.* No action n e is true and comp nd/or file certain ce of a C-141 rep v investigate and p	boratory r becessary. blete to the release no ort by the remediate report do	esults are atta . Final labora ne best of my otifications are e NMOCD m e contaminati oes not reliev Approved by	ached. tory analysis sup knowledge and u nd perform correc arked as "Final R on that pose a thr e the operator of <u>OIL CON</u> Environmental S te:	ported clos inderstand ctive actior eport" doe eat to grou responsibi SERVA pecialist:	sure of the that purs as for releases not reliand water lity for control of the TION	e BGT locat muant to NM eases which teve the oper surface wa ompliance w DIVISIC	tion. OCD rules and may endanger rator of liability tter, human health vith any other <u>DN</u>
BTEX, TPH Describe Ard I hereby cert regulations a public health should their or the enviro federal, state Signature: Printed Nam Title: Field I E-mail Addr Date: Marcl	and chlorid ea Affected ify that the all operators or the envi operations h onment. In a or local lai e: Steve Mo Environmen ess: steven	and Cleanup A information gi are required t ronment. The nave failed to a addition, NMC ws and/or regu Diskal	Action Tal iven above o report an adequately OCD acception alations.	Id reports and lab ken.* No action n e is true and comp nd/or file certain ce of a C-141 rep v investigate and p	boratory r becessary. blete to the release no ort by the remediate report do	Approval Dat	ached. tory analysis sup knowledge and u nd perform correc arked as "Final R on that pose a thr e the operator of <u>OIL CON</u> Environmental S te:	ported clos inderstand ctive actior eport" doe eat to grou responsibi SERVA pecialist:	sure of the that purs as for releases not reliand water lity for control of the TION	e BGT locat muant to NM eases which eve the open surface wa ompliance w DIVISIC	tion. OCD rules and may endanger rator of liability tter, human health vith any other <u>DN</u>

BP	BLAGG ENGINEERING, INC.	API# 3004511001
CLIENT:	P.O. BOX 87, BLOOMFIELD, NM 87413 (505) 632-1199	(if applicble):
FIELD REPORT:	(circle one): BGT CONFIRMATION / RELEASE INVESTIGATION / OTHER:	PAGE #: _1_ of _1_
1/4 -1/4/FOOTAGE: 990'S / 1,600	31N RNG: 11W PM: NM CNTY: SJ ST: NM O'W SE/SW LEASE TYPE: FEDERAL/ STATE / FEE / INDIAN	DATE STARTED: 01/18/16 DATE FINISHED: ENVIRONMENTAL
LEASE #: SF078051 REFERENCE POINT 1) 45 BGT (SW/DB) 2) 3)	PROD. FORMATION: MV CONTRACTOR: MBF - S. GLYNN WELL HEAD (W.H.) GPS COORD.: 36.92255 X 107.99913 GPS COORD.: 36.922460 X 107.999316 DISTANCE/BE GPS COORD.: DISTANCE/BE DISTANCE/BE GPS COORD.: DISTANCE/BE DISTANCE/BE	ARING FROM W.H.:
A) SAMPLING DATA:	CHAIN OF CUSTODY RECORD(S) # OR LAB USED: HALL	ARING FROM W.H.:
SAIVIP LING DATA. 1) SAMPLE ID: 5PC - TB @ 5 2) SAMPLE ID:	(45) SAMPLE DATE: 01/18/16 SAMPLE TIME: 1050 LAB ANALYSIS: 801 SAMPLE DATE: SAMPLE TIME: LAB ANALYSIS:	15B/8021B/300.0 (CI) NA
APPARENT EVIDENCE OF A RELEASE OBSERVE	OOSE [FIRM] DENSE / VERY DENSE HC ODOR DETECTED: YES NO EXPLANATION - ET / SATURATED / SUPER SATURATED ANY AREAS DISPLAYING WETNESS: YES / NO EXPLANATION - # OF PTS. 5	ANATION - RECENT SNOW MELT.
SOIL IMPACT DIMENSION ESTIMATION:	NA ft. X NA ft. X NA ft. EXCAVATION ES	STIMATION (Cubic Yards) : NA
100		CD TPH CLOSURE STD: 100 ppm
PBGTL T.B. ~ 5' B.G.		MCALIB. READ. = NA ppm MCALIB. READ. = NA ppm MCALIB. GAS = NA ppm MCALIB. CALL STATES MCALIB. READ. = NA ppm MCALIB. CALL STATES MCALIB. READ. = NA ppm MCALIB. CALL STATES MCALIB. CAL
T.B. = TANK BOTTOM; PBGTL = PREVIOUS BEL	OW-GRADE TANK LOCATION; SPD = SAMPLE POINT DESIGNATION; R.W. = RETAINING WALL; NA - NOT E WALL; DW - DOUBLE WALL; SB - SINGLE BOTTOM; DB - DOUBLE BOTTOM.	Magnetic declination: 10° E

Analytical Report	
Lab Order 1601615	

Hall Environmental Analysis Laboratory, Inc.

Lab Order 1601615 Date Reported: 1/20/2016

CLIENT: Blagg Engineering Project: Neil A # 9

1601615-001

Lab ID:

Client Sample ID: 5PC - TB @ 5' (45) Collection Date: 1/18/2016 10:50:00 AM Matrix: MEOH (SOIL) Received Date: 1/19/2016 7:45:00 AM

Analyses	Result	RL Qu	al Units	DF	Date Analyzed	Batch
EPA METHOD 300.0: ANIONS		1.1			Analyst	LGT
Chloride	ND	30	mg/Kg	20	1/19/2016 12:09:33 PM	23289
EPA METHOD 8015M/D: DIESEL RAN	GE ORGANIC	S			Analyst:	KJH
Diesel Range Organics (DRO)	ND	9.7	mg/Kg	1	1/19/2016 10:20:56 AM	23279
Motor Oil Range Organics (MRO)	ND	49	mg/Kg	1	1/19/2016 10:20:56 AM	23279
Surr: DNOP	86.2	70-130	%REC	1	1/19/2016 10:20:56 AM	23279
EPA METHOD 8015D: GASOLINE RAN	NGE				Analyst:	NSB
Gasoline Range Organics (GRO)	ND	3.9	mg/Kg	1	1/19/2016 10:17:09 AM	23266
Surr: BFB	90.9	66.2-112	%REC	1	1/19/2016 10:17:09 AM	23266
EPA METHOD 8021B: VOLATILES					Analyst:	NSB
Benzene	ND	0.039	mg/Kg	1	1/19/2016 10:17:09 AM	23266
Toluene	ND	0.039	mg/Kg	1	1/19/2016 10:17:09 AM	23266
Ethylbenzene	ND	0.039	mg/Kg	1	1/19/2016 10:17:09 AM	23266
Xylenes, Total	ND	0.077	mg/Kg	1	1/19/2016 10:17:09 AM	23266
Surr: 4-Bromofluorobenzene	104	80-120	%REC	1	1/19/2016 10:17:09 AM	23266

Refer to the QC Summary report and sample login checklist for flagged QC data and preservation information.

Qualifiers:

.

- Value exceeds Maximum Contaminant Level.
- D Sample Diluted Due to MatrixH Holding times for preparation or analysis exceeded
- ri rioloning times for preparation of analysis exceede
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- S % Recovery outside of range due to dilution or matrix
- B Analyte detected in the associated Method Blank
- E Value above quantitation range
- J Analyte detected below quantitation limits Page 1 of 5
- P Sample pH Not In Range
- RL Reporting Detection Limit

Chain-of-Custody Record			Turn-Around	Rush_	SAME				-	AN	AL	Y	519	5 L	A	80	R/	NT					
lailing A	ddress:	P.O. 80	X 87		NEIL A #	9		49	01 1	lawl		w.ha						n 3710	5				
		BLOOM	FIELD, NM 87413	Project #:								975		1	Contraction of the								
hone #:		(505) 63	2-1199									Д	Inal	ysis	Red	ques	st						
mail or F	ax#(1.25		Project Mana	ger:									1		1-1	1	500.1)			T		
A/QC Pa 3 Stand			Level 4 (Full Validation)		NELSON V	ELEZ	80218)	(Aluo s	/ MRO)			(SMISC		Anions (F,Cl,NO3,NO2,PO4,SO4)	PO4,SC	2 PCB's			1.1		1	9	
ccredita	tion:			Sampler:	NELSON V	ELEZ ny	L.	(Ga	/ DRO	(F.	11				808			300.0 / water			du		
NELAP Other			On Ice: Yes D No]≢	TPH	(GRO/I	418	vod 504.) or 827(etals.	CI,NO ₃ ,N	N.		(VC	000			e se	Dr N)		
1 EDD (Type)		Sample Temperature: 2.3			1	BE +	pot		icide					(VC	N-II		4	a l	ISOC	2			
Date	Time	Matrix	Sample Request ID	Container Type and #	Preservative Type	HEAL NO.	BTEX ME	BTEX + MTBE + TPH (Gas only)	TPH 80158 (GRO	TPH (Method 418.1)	EDB (Method 504.1)	PAH (8310 or 8270SIMS)	RCRA 8 Metals	Anions (F,	8081 Pesticides / 8082 PCB's	8250B (VOA)	8270 (Semi-VOA)	Chioride (soil	Curl some	Grab sample	5 pt. composite sample	Air Bubbles (Y or N)	
1/18/16	1050	SOIL	5PC-TB @ 5 '(45)	4 02 1	Cool	-001	V	0	٧				1					٧		1	V		
																	4 1		-			_	
		1									14 14 14 14 14 14 14 14 14 14 14 14 14 1			13						+		_	
														1114			1						
-							1.1.												-	+	+	-	
					1															+	1		
	-	1						-				1			-					+	+	-	
Nate 1/18/16 Nate:	Time: 1423 Time:	Relinquish	lait	Received by AMUSTUL Received by: Out	Waiter	Date Time 18/16 1423 Date Time 9/16 0745	BI	State of the	RECT	al, 2	00 E		Sec. C.				1000	M 87	401 ONEVI	62	_		

If some submitted to Hall Environmental may be subcontracted to other accredited laboratories. This serves as notice of this possibility. Any sub-contracted data will be clearly notated on the analytical report.

QC SUMMARY REPORT Hall Environmental Analysis Laboratory, Inc.

WO#: 1601615

20-Jan-16

Client: Blagg Engineering

Project: Neil A	# 9
Sample ID MB-23289	SampType: MBLK TestCode: EPA Method 300.0: Anions
Client ID: PBS	Batch ID: 23289 RunNo: 31548
Prep Date: 1/19/2016	Analysis Date: 1/19/2016 SeqNo: 965595 Units: mg/Kg
Analyte	Result PQL SPK value SPK Ref Val %REC LowLimit HighLimit %RPD RPDLimit Qual
Chloride	ND 1.5
Sample ID LCS-23289	SampType: LCS TestCode: EPA Method 300.0: Anions
Client ID: LCSS	Batch ID: 23289 RunNo: 31548
Prep Date: 1/19/2016	Analysis Date: 1/19/2016 SeqNo: 965596 Units: mg/Kg
Analyte	Result PQL SPK value SPK Ref Val %REC LowLimit HighLimit %RPD RPDLimit Qual
Chloride	14 1.5 15.00 0 92.4 90 110

Qualifiers:

- * Value exceeds Maximum Contaminant Level.
- Sample Diluted Due to Matrix D
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- % Recovery outside of range due to dilution or matrix S
- В Analyte detected in the associated Method Blank
- E Value above quantitation range
- J Analyte detected below quantitation limits
- RL Reporting Detection Limit

Page 2 of 5

Р Sample pH Not In Range

QC SUMMARY REPORT

WO#: 1601615

20-Jan-16

Client: Blagg E Project: Neil A	Engineering # 9		1.1							
Sample ID LCS-23279 Client ID: LCSS		ype: LC			tCode: El		8015M/D: Di	esel Rang	e Organics	
Prep Date: 1/19/2016	Analysis D				SeqNo: 9		Units: mg/H	٢g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Diesel Range Organics (DRO)	42	10	50.00	0	83.5	65.8	136	1.1	1. 1. 1.	
Surr: DNOP	4.0		5.000	1.000	80.8	70	130		in the second	
Sample ID MB-23279	SampT	ype: MI	BLK	Tes	tCode: El	PA Method	8015M/D: Di	esel Rang	e Organics	
Client ID: PBS	Batch	n ID: 23	279	F	RunNo: 3	1519				
Prep Date: 1/19/2016	Analysis D	ate: 1/	19/2016	5	SeqNo: 9	64690	Units: mg/k	(g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Diesel Range Organics (DRO)	ND	10				1.0				1
Motor Oil Range Organics (MRO)	ND	50								
Surr: DNOP	8.5		10.00		84.7	70	130			

Qualifiers:

- * Value exceeds Maximum Contaminant Level.
- D Sample Diluted Due to Matrix
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- S % Recovery outside of range due to dilution or matrix
- B Analyte detected in the associated Method Blank
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH Not In Range
- RL Reporting Detection Limit

Page 3 of 5

QC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#: 1601615

20-Jan-16

Client: Blagg Project: Neil A	Engineering # 9			
Sample ID MB-23266 Client ID: PBS Prep Date: 1/18/2016	SampType: MBLK Batch ID: 23266 Analysis Date: 1/19/2016	TestCode: EPA Method RunNo: 31526 SeqNo: 965257	8015D: Gasoline Range Units: mg/Kg	Ð
Analyte	Result PQL SPK value	SPK Ref Val %REC LowLimit	HighLimit %RPD	RPDLimit Qual
Gasoline Range Organics (GRO) Surr: BFB	ND 5.0 870 1000	87.2 66.2	112	
Sample ID LCS-23266 Client ID: LCSS	SampType: LCS Batch ID: 23266	TestCode: EPA Method RunNo: 31526	8015D: Gasoline Range	9
Prep Date: 1/18/2016	Analysis Date: 1/19/2016	SeqNo: 965258	Units: mg/Kg	
Analyte	Result PQL SPK value	SPK Ref Val %REC LowLimit	HighLimit %RPD	RPDLimit Qual
Gasoline Range Organics (GRO) Surr: BFB	25 5.0 25.00 960 1000	0 101 79.6 95.8 66.2	122 112	

Qualifiers:

- * Value exceeds Maximum Contaminant Level.
- D Sample Diluted Due to Matrix
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- S % Recovery outside of range due to dilution or matrix
- B Analyte detected in the associated Method Blank
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH Not In Range
- RL Reporting Detection Limit

Page 4 of 5

QC SUMMARY REPORT

Hall	Environmenta	Analysis	Laboratory,	Inc.

WO#: 1601615

20-Jan-16

Client:	Blagg Engineering
Project:	Neil A # 9


Sample ID MB-23266	Samp	Type: MI	BLK	Tes	tCode: E	PA Method	8021B: Vola	tiles		
Client ID: PBS	Batc	h ID: 23	266	F	RunNo: 3	1526				
Prep Date: 1/18/2016	Analysis [Date: 1/	19/2016	SeqNo: 965266			Units: mg/k	(g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	ND	0.050							1.1	
Toluene	ND	0.050								
Ethylbenzene	ND	0.050								
Xylenes, Total	ND	0.10								
Surr: 4-Bromofluorobenzene	0.99		1.000		99.4	80	120		Sec. 1	
Sample ID LCS-23266	Samp	Type: LC	s	Tes	tCode: E	PA Method	8021B: Vola	tiles		
Client ID: LCSS	Batch ID: 23266			RunNo: 31526						
Prep Date: 1/18/2016	Analysis [Date: 1/	19/2016	S	eqNo: 9	65267	Units: mg/H	(g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	1.0	0.050	1.000	0	102	80	120			
Toluene	0.96	0.050	1.000	0	95.6	80	120			
Ethylbenzene	0.95	0.050	1.000	0	94.9	80	120			
Xylenes, Total	2.9	0.10	3.000	0	95.5	80	120			
Surr: 4-Bromofluorobenzene	1.1		1.000		105	80	120			

Qualifiers:

- * Value exceeds Maximum Contaminant Level.
- D Sample Diluted Due to Matrix
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- S % Recovery outside of range due to dilution or matrix
- B Analyte detected in the associated Method Blank
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH Not In Range
- RL Reporting Detection Limit

Page 5 of 5

TEL: 505-345-39	4901 Hawki buquergue, NM 2	ns NE 17109 Samj -4197	ole Log-In Chec	k List
Client Name BLAGG Work Order Number	ar: 1601615		RoptNo: 1	- 11
Received by/date: TA 011914		~		
Logged By: Lindsay Mangin 1/19/2018 7:45:00 Al	M	July 1	to and the second	1.1
Completed By Lindsay Mangin 1/19/2018 8:05:33 Al	M	Alligo		
Reviewed By: 01/19/16		0.0		
Chain of Custody				
1. Custody seals intact on sample bottles?	Yes 🗆	No 🗆	Not Present	
2. Is Chain of Custody complete?	Yes M	No D.	Not Present	
3. How was the sample delivered?	Courier			
Log In				
4. Was an attempt made to cool the samples?	Yes 🗹	No 🗆	NA 🗆	
5. Woro all samples received at a temperature of >0° C to 6,0°C	Yes 🗹	No 🖸		
6. Sample(s) in proper container(s)?	Yes 🗹	No 🗆		
7. Sufficient sample volume for indicated test(s)?	Yes M	No EL		
8. Are samples (except VOA and ONG) properly preserved?	Yes 1	No 🛛		
9. Was preservative added to bottles?	Yes	No W	NA 🖾	
10. VOA vials have zero headspace?	Yes	No 🖂	No VOA Viais	
11, Were any sample containers received broken?	Yes	No 🗹	# of preserved	10.00
12. Overs paperwork match bottle tabels? (Note discrepancies on chain of custody)	Yes 🔟	No	bottles checked	unless noted)
13 Are matrices correctly identified on Chain of Custody?	Yes	No 🗌	Adjusted?	
14. Is it clear what analyses were requested?	Yes Y	No	Tel State State	
15. Were all holding times able to be met? (If no, notify customer for authorization.)	Yes 12	No	Checked by	-
Special Handling (if applicable)				
16. Was client notified of all discrepancies with this order?	Yes	No 🗍	NA 12	
Person Notified Date	-	at the second		
By Whom: Via	eMail	Phone T Fax	In Person	
Regarding				
Client Instructions:				
17. Additional remarks				
18. Cooler Information Cooler No Temp °C Condition Seal Intact Seal No	Seal Date	Signed By		
1 2.3 Good Yes		1		

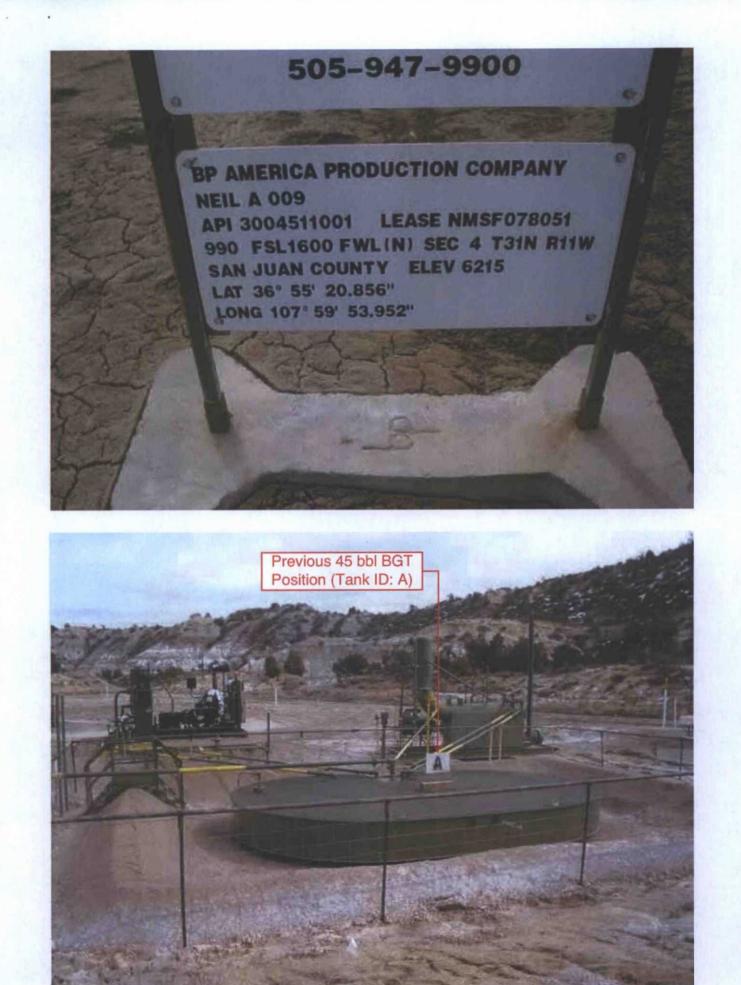

BP America Production Company 200 Energy Court Farmington, NM 87401 Phone: (505) 326-9200

January 11, 2016

Bureau of Land Management Katherina Diemer 6251 College Suite A Farmington, NM 87402

VIA CERTIFIED MAIL – RETURN RECEIPT REQUESTED

Re: Notification of plans to close/remove a below grade tank Well Name: NEIL A 009 API #: 3004511001

Dear Mrs. Diemer,

As part of the NM "Pit Rule": 19.15.17.13 Closure Requirements, Paragraph J. BP America Production Company (BP) is required to notify the surface owner of BP's plans to close/remove a below grade tank. BP wishes to inform you of our plans to close/remove the below grade tank on its well pad located on your surface. BP plans to commence this work on or about January 14, 2016. If there aren't any unforeseen problems, the work should be completed within 10 working days.

As a point of clarification, BP will be closing the below grade tank and either operating without one or replacing it with an above ground tank, the well site will continue to operate.

Unless you have questions about this notice, there is no need to respond to this letter. If you do have any questions or concerns, please contact me at (505)-326-9214.

Sincerely,

Charlie Davis

BP America Production Company

Moskal, Steven

From:
Sent:
To:
Cc:
Subject:

Moskal, Steven Wednesday, January 13, 2016 2:53 PM 'Smith, Cory, EMNRD'; Railsback, Farrah (CH2M HILL) jeffcblagg@aol.com; Fields, Vanessa, EMNRD; blagg_njv@yahoo.com RE: BP Pit Close Notification - NEIL A 009

Cory – It looks like we will try and do both the Neil A 009 and the Neil A 023 on Monday January 18, 2016. Sampling is scheduled to begin around 11:00 AM. The sites are located next to one another and can be removed simultaneously.

Farrah - Can you get the notifications out to the appropriate parties?

Thank you, Steve

From: Smith, Cory, EMNRD [mailto:Cory.Smith@state.nm.us]
Sent: Tuesday, January 12, 2016 9:52 AM
To: Moskal, Steven
Cc: jeffcblagg@aol.com; Fields, Vanessa, EMNRD
Subject: RE: BP Pit Close Notification - NEIL A 009

Steve,

Do you have an estimated time frame?

Thanks,

From: Railsback, Farrah (CH2M HILL) [mailto:Farrah.Railsback@bp.com]
Sent: Monday, January 11, 2016 10:43 AM
To: Smith, Cory, EMNRD; Fields, Vanessa, EMNRD
Cc: jeffcblagg@aol.com; blagg_njv@yahoo.com; Moskal, Steven
Subject: BP Pit Close Notification - NEIL A 009

BP America Production Company 200 Energy Court Farmington, NM 87401 Phone: (505) 326-9200

SENT VIA E-MAIL TO: CORY.SMITH@STATE.NM.US; VANESSA.FIELDS@STATE.NM.US

New Mexico Oil Conservation Division 1000 Rio Brazos Road Aztec, New Mexico 87410

RE: Notice of Proposed Below-Grade Tank (BGT) Closure

NEIL A 009 API 30-045-11001 (N) Section 4 – T31N – R11W San Juan County, New Mexico

Dear Mr. Cory Smith and Mrs. Vanessa Fields,

In regards to the captioned subject and requirements of the NMOCD pit rule, this letter is notification that BP is planning to close a 45 bbl BGT that will no longer be operational at this well site. We anticipate this work to start on or around January 14, 2016.

Should you have any questions, please feel free to contact BP at our Farmington office.

Sincerely,

Steven Moskal BP Field Environmental Coordinator

(505) 326-9497