District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division

1220 South St. Francis Dr. Santa Fe NM 87505

Form C-144 Revised June 6, 2013

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office. For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office

Santa Pe, 1919 67303 to the appropriate 1910CD District Office.
Pit, Below-Grade Tank, or
14195 Proposed Alternative Method Permit or Closure Plan Application
Type of action: Below grade tank registration Permit of a pit or proposed alternative method Closure of a pit, below-grade tank, or proposed alternative method Modification to an existing permit/or registration Closure plan only submitted for an existing permitted or non-permitted pit, below-grade tank, or proposed alternative method
Instructions: Please submit one application (Form C-144) per individual pit, below-grade tank or alternative request
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.
L.
Operator: BP America Production Company OGRID #: 778
Address: 200 Energy Court, Farmington, NM 87401
Facility or well name: Gallegos Canyon Unit 229
API Number: 3004511626 OCD Permit Number:
U/L or Qtr/Qtr H Section 21 Township 28N Range 12W County: San Juan
Center of Proposed Design: Latitude 36.65015 Longitude -108.11044 NAD: □1927 ⋈ 1983
Surface Owner: Federal State Private Tribal Trust or Indian Allotment
Pit: Subsection F, G or J of 19.15.17.11 NMAC Temporary: Drilling Workover Drilling Cavitation P&A Multi-Well Fluid Management Low Chloride Drilling Fluid yes no Lined Unlined Liner type: Thickness mil LLDPE HDPE PVC Other String-Reinforced Volume: bbl Dimensions: L x W x D
3.
■ Below-grade tank: Subsection I of 19.15.17.11 NMAC ■ TANK A
Volume: 95 bbl Type of fluid: Produced water
Tank Construction material: Steel
☐ Secondary containment with leak detection ☐ Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☐ Other _Single walled/double bottom; no visible sidewalls
Liner type: Thicknessmil

Alternative Method:

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, schools).	hospital,
institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet	
Alternate. Please specify	
6	
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other	
☐ Monthly inspections (If netting or screening is not physically feasible)	
7. Signs: Subsection C of 19.15.17.11 NMAC	
☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers	
☐ Signed in compliance with 19.15.16.8 NMAC	
Variances and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.	
Please check a box if one or more of the following is requested, if not leave blank: Variance(s): Requests must be submitted to the appropriate division district for consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	
9. Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of access material are provided below. Siting criteria does not apply to drying pads or above-grade tanks.	ptable source
General siting	
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within the area overlying a subsurface mine. (Does not apply to below grade tanks) - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
Within an unstable area. (Does not apply to below grade tanks) - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ☐ No
Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map	Yes No
Below Grade Tanks	
Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)	
Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No

Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 100 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pit Non-low chloride drilling fluid	
Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
	L les L No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Permanent Pit or Multi-Well Fluid Management Pit	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa	
lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of	
 initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site 	☐ Yes ☐ No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 N Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the docattached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19. and 19.15.17.13 NMAC	NMAC
Previously Approved Design (attach copy of design) API Number: or Permit Number:	
Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the doc attached. Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC A List of wells with approved application for permit to drill associated with the pit. Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19. and 19.15.17.13 NMAC Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC	
☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC ☐ Previously Approved Design (attach copy of design) API Number: or Permit Number:	
of Territorianical	

Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the	documents are
attached. ☐ Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC ☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC ☐ Climatological Factors Assessment ☐ Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Quality Control/Quality Assurance Construction and Installation Plan ☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC ☐ Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Nuisance or Hazardous Odors, including H₂S, Prevention Plan ☐ Emergency Response Plan ☐ Oil Field Waste Stream Characterization ☐ Monitoring and Inspection Plan ☐ Erosion Control Plan ☐ Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC	
13. Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.	
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-well F Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method	Fluid Management Pit
closure plan. Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sou provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. In 19.15.17.10 NMAC for guidance.	
Ground water is less than 25 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	

adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological	
Society; Topographic map	☐ Yes ☐ No
Within a 100-year floodplain FEMA map	☐ Yes ☐ No
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.17.13 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards can Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	7.11 NMAC 9.15.17.11 NMAC
17. Operator Application Certification:	
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and be	lief.
Name (Print): Title:	
Signature: Date:	No. of the last
e-mail address: Telephone:	1
OCD Approval: Permit Application (including closure plan Closure Plan (anly) OCD Conditions (see attachment) OCD Representative Signature: Approval Date: 3 OCD Permit Number:	24/16
Closure Report (required within 60 days of closure completion): 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submittin The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not section of the form until an approved closure plan has been obtained and the closure activities have been completed. Closure Completion Date: 1/8/2016	
Closure Method:	oon systems only)
Waste Excavation and Removal ☐ On-Site Closure Method ☐ Alternative Closure Method ☐ Waste Removal (Closed-I If different from approved plan, please explain.	oop systems omy)

22. Operator Closure Certification:	
I hereby certify that the information and attachments submitted wit	th this closure report is true, accurate and complete to the best of my knowledge and losure requirements and conditions specified in the approved closure plan.
Name (Print): Steve Moskal	Title: Field Environmental Coordinator
Signature: Mashm	Date: March 2, 2016
e-mail address: steven.moskal@bp.com	Telephone: (505) 326-9497
e-man address. steven.moskan@op.com	Telephone. (303) 320-3431

BP AMERICA PRODUCTION COMPANY

SAN JUAN BASIN, NORTHWEST NEW MEXICO

BELOW-GRADE TANK CLOSURE PLAN

Gallegos Canyon Unit #229 API No. 3004511626 Unit Letter H, Section 21, T28N, R12W

This plan will address the standard protocols and procedures for closure of below-grade tanks (BGTs) on BP America Production Company (BP) well sites. As stipulated in Paragraph A of 19.15.17.13 NMAC, BP shall close a BGT within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the New Mexico Oil Conservation Division (NMOCD) requires because of imminent danger to fresh water, public health, safety or the environment. If deviations from this plan are necessary, any specific changes will be included on form C-144 and approved by the NMOCD. BP shall close an existing BGT that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008, if not retrofit with a BGT that complies with the BP NMOCD approved BGT design attached to the BP Design and Construction Plan. BP shall close an existing BGT that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC, if not previously retrofitted to comply with the BP NMOCD approve BGT Design attached to the BP Design and Construction Plan, prior to any sale or change in operator pursuant to 19.15.9.9 NMAC. BP shall close the permitted BGT within 60 days of cessation of the BGTs operation or as required by the transitional provisions of Subsection B, D, or E of 19.15.17.17 NMAC.

General Closure Plan

- BP shall notify the surface owner by certified mail that it plans to close a BGT. Evidence of mailing of the notice to the address of the surface owner shown in the county tax records demonstrates compliance with this requirement.
 Notice is attached.
- 2. BP shall notify the division District III office verbally or by other means at least 72 hours, but not more than one (1) week, prior to any closure operation. The notice shall include the operator's name, and the location to be closed by unit letter, section, township and range. If the BGT closure is associated with a particular well, then the notice shall also include the well's name, number and API number.

Notice was provided. NMOCD was on site during the removal of the BGT.

- 3. BP shall remove liquids and sludge from the BGT prior to implementing a closure method and dispose of the liquids and sludge in a NMOCD's division-approved facility. The facilities to be used are:
 - a. BP Crouch Mesa Landfarm, Permit NM-02-003 (Solids)
 - b. JFJ Landfarm, Permit NM-01-010(B) (Solids and Sludge)
 - c. Basin Disposal, Permit NM-01-0005 (Liquids)
 - d. Envirotech Inc Soil Remediation Facility, Permit NM-01-0011 (Solids and Sludge)
 - e. BP Operated E.E. Elliott SWD #1, API 30-045-27799 (Liquids)

- f. BP Operated 13 GCU SWD #1, API 30-045-28601 (Liquids)
- g. BP Operated GCU 259 SWD, API 30-045-20006 (Liquids)
- h. BP Operated GCU 306 SWD, API 30-045-24286 (Liquids)
- i. BP Operated GCU 307 SWD, API 30-045-24248 (Liquids)
- j. BP Operated GCU 328 SWD, API 30-045-24735 (Liquids)
- k. BP Operated Pritchard SWD #1, API 30-045-28351 (Liquids)

All liquids and sludge in the BGT were removed and sent to one of the above NMOCD approved facilities for disposal.

4. BP shall remove the BGT and dispose of it in a NMOCD approved facility or recycle, reuse, or reclaim it in a manner that the NMOCD approves. If a liner is present and must be disposed of it will be cleaned by scraping any soils or other attached materials on the liner to a de minimus amount and disposed at a permitted solid waste facility, pursuant to Subparagraph (m) of Paragraph (1) of Subsection C of 19.15.35.8 NMAC. Documentation as to the final disposition of the removed BGT will be provided in the final closure report.

The BGT was transported for recycling.

5. BP shall remove any on-site equipment associated with a BGT unless the equipment is required for well production.

All equipment associated with the BGT has been removed.

6. BP shall test the soils beneath the BGT to determine whether a release has occurred. BP shall collect at a minimum: a five (5) point composite sample and individual grab samples from any area that is wet, discolored or showing other evidence of a release and analyze for BTEX, TPH and chlorides. The testing methods for those constituents are as follows;

Constituents	Testing Method	Release Verification	Sample
	95 bbl BGT	(mg/Kg)	results
Benzene	US EPA Method SW-846 8021B or 8260B	0.2	< 0.052
Total BTEX	US EPA Method SW-846 8021B or 8260B	50	< 0.010
TPH	US EPA Method SW-846 418.1 or 8015 extended	100	<49
Chlorides	US EPA Method 300.0 or 4500B	250 or background	<30

Notes: mg/Kg = milligram per kilogram, BTEX = benzene, toluene, ethylbenzene, and total xylenes, TPH = total petroleum hydrocarbons. Other EPA methods that the division approves may be applied to all constituents listed. Chloride closure standards will be determined by which ever concentration level is greatest.

Soil under the BGT was sampled for TPH, BTEX and chloride. BTEX, TPH and chloride concentrations were below the stated limits. The field report and laboratory reports are attached.

7. BP shall notify the division District III office of its results on form C-141. C-141 is attached.

8. If it is determined that a release has occurred, then BP will comply with 19.15.30 NMAC and 19.15.29 NMAC, as appropriate.

Sampling results indicate no significant release has occurred.

9. If the sampling demonstrates that a release has not occurred or that any release does not exceed the concentrations specified above, then BP shall backfill the excavation, with compacted, non-waste containing, earthen material; construct a division-prescribed soil cover, re-contour and re-vegetate the location. The location will be reclaimed if it is not with in the active process area

Sampling results determine no significant release has occurred. Area was backfilled with clean, earthen material.

10. BP shall reclaim the BGT location and all areas associated with the BGT including associated access roads to a safe and stable condition that blends with the surrounding undisturbed area. BP shall substantially restore the impacted surface area to the condition that existed prior to oil and gas operations by placement of the soil cover as provided in Subsection H of 19.15.17.13 NMAC, re-contour the location and associated areas to a contour that approximates the original contour and blends with the surrounding topography and re-vegetate according to Subsection I of 19.15.17.13 NMAC.

The area has been backfilled and will be reclaimed once the well has been plugged and abandoned.

11. The soil cover for closures where the BGT has been removed or remediated to the NMOCD's satisfaction shall consist of the background thickness of topsoil or one foot of suitable material to establish vegetation at the site, whichever is greater. The soil cover will be constructed to the site's existing grade and all practicable efforts will be made to prevent ponding of water and erosion of the cover material.

The area has been backfilled and will be reclaimed once the well has been plugged and abandoned.

12. BP shall seed the disturbed area the first growing season after closure of the BGT. Seeding will be accomplished by drilling on the contour whenever practical or by other division-approved methods. Vegetative cover will be, at a minimum, 70% of the native perennial vegetative cover (un-impacted by overgrazing, fire or other intrusion damaging to native vegetation), consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintenance of that cover through two successive growing seasons. During the two growing seasons that prove viability, there shall be no artificial irrigation of the vegetation.

The area has been backfilled and will be reclaimed once the well has been plugged and abandoned.

 BP shall seed, plant and re-seed pursuant to Paragraph (3) of Subsection I of 19.15.17.13 NMAC, until the location successfully achieves the required vegetative cover.

The area has been backfilled and will be reclaimed once the well has been plugged and abandoned.

 Pursuant to Paragraph (5) of Subsection I of 19.15.17.13 NMAC, BP shall notify the NMOCD when it has seeded or planted and when it successfully achieves revegetation.

BP will notify NMOCD when re-vegetation is successful.

- Within 60 days of closure completion, BP shall submit a closure report on NMOCD's form C-144, and will include the following;
 - a. proof of closure notification (surface owner and NMOCD)
 - b. sampling analytical reports; information required by 19.15.17 NMAC;
 - c. disposal facility name and permit number
 - d. details on back-filling, capping, covering, and where applicable re-vegetation application rates and seeding techniques and
 - e. site reclamation, photo documentation.

 Closure report on C-144 form is included including photos of reclamation completion.
- 16. BP shall certify that all information in the report and attachments is accurate, truthful, and compliant with all applicable closure requirements and conditions specified in the approved closure plan.

Certification section of C-144 has been completed.

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Revised August 8, 2011

Form C-141

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe. NM 87505

Submit 1 Copy to appropriate District Office in accordance with 19.15.29 NMAC.

			Rele	ease Notifi	catio	n and Co	orrective A	ction			1
						OPERA'	ГOR	☐ Initi	al Report	\boxtimes	Final Report
Name of C	ompany: B	P				Contact: Ste	eve Moskal		LUN III		
		Court, Farmi	ington, N	M 87401		Telephone 1	No.: 505-326-94	197			
		os Canyon U					e: Natural gas		ale of the		
	-			1		0		LANGE	2004511	(0)	
Surface Ov	vner: State			Mineral (Owner:	State		API No	0. 3004511	626	
				LOC	ATIO	N OF RE	LEASE				
Unit Letter H	Section 21	Township 28N	Range 12W	Feet from the 1,850	North North	n/South Line	Feet from the 790	East/West Line East	County: S	an Juar	1
		Lati	itude36	6.65015		_ Longitude	-108.11044				
				NAT	FURE	OF REL	EASE				2
Type of Rele							Release: unknow		Recovered: 1		
Source of Ro	elease: below	v grade tank –	- 95 bbl			Date and I	Iour of Occurrent	Date and	Hour of Dis	covery	: none
Was Immed	ate Notice C		Yes 🗵	No Not R	Required	If YES, To	Whom?				
By Whom?					- 7.30	Date and I	Iour	1401164			
Was a Water	course Reac		Yes 🗵] No		If YES, Vo	olume Impacting	the Watercourse.			
If a Waterco	urse was Imp	pacted, Descr	ibe Fully.*							Ā	
Describe Ca BTEX, TPH	use of Proble and chloride	em and Reme e below stand	dial Actionards. Fie	n Taken.* Sampl ld reports and lab	ing of the	ne soil beneath results are atta	the BGT was do ached.	ne during removal.	Soil analys	sis resu	lted for
Describe Are	ea Affected a	and Cleanup A	Action Tak	en.* No action n	necessary	y. Final labora	tory analysis supp	ported closure of th	ne BGT loca	tion.	
regulations a public health should their or the enviro	all operators or the envir operations has onment. In a	are required to ronment. The ave failed to a	o report are acceptant adequately OCD accep	nd/or file certain ce of a C-141 rep investigate and	release r ort by th remedia	notifications a ne NMOCD m te contaminati	nd perform correct arked as "Final R on that pose a thr	understand that pur ctive actions for rel deport" does not rel reat to ground wate responsibility for c	eases which ieve the ope r, surface wa	may en rator of iter, hu	ndanger f liability man health
Signature:	the	Nie					OIL CON	SERVATION	DIVISIO	<u>N</u>	
	e: Steve Mo	skal				Approved by	Environmental S	pecialist:			
Title: Field I	Environment	al Coordinate	r			Approval Da	te:	Expiration	Date:		
E-mail Addr	nature: Manage Moskal e: Field Environmental Coordinator nail Address: steven.moskal@bp.com					Conditions of	Approval:		Attached		14

Phone: 505-326-9497

Date: March 2, 2016

^{*} Attach Additional Sheets If Necessary

CLIENT: BP	P.O. BOX 87, BLC	GINEERING, INC DOMFIELD, NM 632-1199		API #: 3004511 TANK ID (if applicble): A	
FIELD REPORT:	(circle one): BGT CONFIRMATION / RE	ELEASE INVESTIGATION / OT	THER:	PAGE #: _1_ o	f 1
SITE INFORMATION	I: SITE NAME: GCU # 22	.9		DATE STARTED: 01/0	08/16
QUAD/UNIT: H SEC: 21 TWP:	28N RNG: 12W PM:	NM CNTY: SJ	ST: NM	DATE FINISHED:	
1/4-1/4/FOOTAGE: 1,850'N / 79	O'E SE/NE LEASE TYPE	FEDERAL/STATE/	FEE INDIAN	ENVIRONMENTAL	
LEASE #: I-149-IND-8475	PROD. FORMATION: DK CONT	RACTOR: -			JV
REFERENCE POINT	: WELL HEAD (W.H.) GPS CO	OORD.: 36 6499	3 X 108 11076	GL ELEV.: 5	5,595'
1) 95 BGT (SW/DB)	GPS COORD.: 36.65			RING FROM W.H.: 118', N	
2)	GPS COORD.:		DISTANCE/BEA	RING FROM W.H.:	FH I
3)	GPS COORD.:			RING FROM W.H.:	
4)	GPS COORD.:	METAL	DISTANCE/BEA	RING FROM W.H.:	4
SAMPLING DATA:	CHAIN OF CUSTODY RECORD(S) # OR LA	AB USED: HALL			OVM READING
1) SAMPLE ID: 5PC - TB @ 5		1 LF Vilon Box	LAB ANALYSIS: 801	5B/8021B/300.0 (CI)	(ppm) NA
2) SAMPLE ID:			LAB ANALYSIS:	02/002/2000/0/	1.07
3) SAMPLE ID:				A THE PARTY OF THE	
	SAMPLE DATE:	F 5 (5 (5)	LAB ANALYSIS:		
SOIL DESCRIPTION			Marie San San Carlo		
COHESION (ALL OTHERS): NON COHESIVE SUBITILIZATION CONSISTENCY (NON COHESIVE SOILS): LCC MOISTURE: DRY (SLIGHTLY MOIST) MOIST / MOIST	DOSE FIRM DENSE / VERY DENSE HC ET / SATURATED / SUPER SATURATED OF PTS. 5 NO EXPLANATION - LOST INTEGRITY OF EQUIPMENT: YES D AND/OR OCCURRED: YES NO EXPLANATION		EXPLANATION -		
SOIL IMPACT DIMENSION ESTIMATION:	NA ft. X NA ft.	X NA ft.	EXCAVATION EST	TIMATION (Cubic Yards) :	NA
DEPTH TO GROUNDWATER: <50' N	EAREST WATER SOURCE: >1,000'	NEAREST SURFACE WATER:	<1,000' NMOO	D TPH CLOSURE STD: 10	0 ppm
SITE SKETCH	BGT Located: off on site	PLOT PLAN circle	e: attached OVM	CALIB. READ. = NA pp	m RF =0.52
TO W.H. NOTES: BGT = BELOW-GRADE TANK; E.D. = EXCAVATIO	WOODEN X X X X X X X X X X X X X X X X X X X		N TIME WR VI PR OTTAIL A - S.P.D.	MISCELL. NO O: EF #: P-266 D: VHIXONEVB2 J #: ermit date(s): 06/10 CD Appr. date(s): 10/08 k OVM = Organic Vapor Meroppm = parts per million	NA TES 0/10 8/15 ter N N
T.B. = TANK BOTTOM; PBGTL = PREVIOUS BEL	OW-GRADE TANK LOCATION; SPD = SAMPLE POINT	DESIGNATION; R.W. = RETAINING V		lagnetic declination: 10	°E
APPLICABLE OR NOT AVAILABLE; SW-SINGLE NOTES: GOOGLE EARTH IMAGE	EWALL; DW-DOUBLE WALL; SB-SINGLE BOTTOM; ERY DATE: 03/15/2015.	DB-DOUBLE BOTTOM. ONSITE: 01/08/1			



Hall Environmental Analysis Laboratory 4901 Hawkins NE Albuquerque, NM 87109 TEL: 505-345-3975 FAX: 505-345-4107 Website: www.hallenvironmental.com

March 02, 2016

Nelson Velez

Blagg Engineering

P. O. Box 87

Bloomfield, NM 87413 TEL: (505) 320-3489

FAX

RE: GCU #229

OrderNo.: 1601271

Dear Nelson Velez:

Hall Environmental Analysis Laboratory received 1 sample(s) on 1/9/2016 for the analyses presented in the following report.

This report is a revised report and it replaces the original report issued January 12, 2016.

These were analyzed according to EPA procedures or equivalent. To access our accredited tests please go to www.hallenvironmental.com or the state specific web sites. See the sample checklist and/or the Chain of Custody for information regarding the sample receipt temperature and preservation. Data qualifiers or a narrative will be provided if the sample analysis or analytical quality control parameters require a flag. All samples are reported as received unless otherwise indicated.

Please don't hesitate to contact HEAL for any additional information or clarifications.

Sincerely,

Andy Freeman

Laboratory Manager

andyl

4901 Hawkins NE

Albuquerque, NM 87109

Analytical Report

Lab Order 1601271

Date Reported: 3/2/2016

Hall Environmental Analysis Laboratory, Inc.

CLIENT: Blagg Engineering

Client Sample ID: 5PC-TB @5'(95)

Project: GCU #229 Collection Date:

Collection Date: 1/8/2016 1:45:00 PM

Lab ID: 1601271-001

Matrix: MEOH (SOIL) Received Date: 1/9/2016 9:15:00 AM

Analyses	Result	PQL (Qual Units	DF	Date Analyzed	Batch
EPA METHOD 300.0: ANIONS					Analyst:	LGT
Chloride	ND	30	mg/Kg	20	1/11/2016 11:54:18 AM	23146
EPA METHOD 8015M/D: DIESEL RA	NGE ORGANIC	S			Analyst:	KJH
Diesel Range Organics (DRO)	ND	9.7	mg/Kg	1	1/11/2016 10:37:24 AM	23140
Motor Oil Range Organics (MRO)	ND	49	mg/Kg	1	1/11/2016 10:37:24 AM	23140
Surr: DNOP	103	70-130	%Rec	1	1/11/2016 10:37:24 AM	23140
EPA METHOD 8015D: GASOLINE RA	ANGE				Analyst:	NSB
Gasoline Range Organics (GRO)	ND	3.5	mg/Kg	1	1/11/2016 10:00:29 AM	23132
Surr: BFB	84.0	66.2-112	%Rec	1	1/11/2016 10:00:29 AM	23132
EPA METHOD 8021B: VOLATILES					Analyst:	NSB
Benzene	ND	0.035	mg/Kg	1	1/11/2016 10:00:29 AM	23132
Toluene	ND	0.035	mg/Kg	1	1/11/2016 10:00:29 AM	23132
Ethylbenzene	ND	0.035	mg/Kg	1	1/11/2016 10:00:29 AM	23132
Xylenes, Total	ND	0.071	mg/Kg	1	1/11/2016 10:00:29 AM	23132
Surr: 4-Bromofluorobenzene	113	80-120	%Rec	1	1/11/2016 10:00:29 AM	23132

Refer to the QC Summary report and sample login checklist for flagged QC data and preservation information.

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- D Sample Diluted Due to Matrix
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- S % Recovery outside of range due to dilution or matrix
- B Analyte detected in the associated Method Blank
- E Value above quantitation range
- J Analyte detected below quantitation limits Page 1 of 5
- P Sample pH Not In Range
- RL Reporting Detection Limit
- W Sample container temperature is out of limit as specified

Hall Environmental Analysis Laboratory, Inc.

WO#: 1601271

02-Mar-16

Client:

Blagg Engineering

Project:

GCU #229

Sample ID MB-23146

Prep Date: 1/11/2016

SampType: MBLK

TestCode: EPA Method 300.0: Anions

Client ID:

PBS

Batch ID: 23146 Analysis Date: 1/11/2016

PQL

RunNo: 31376

HighLimit

SegNo: 960460

Units: mg/Kg

%RPD

%RPD

RPDLimit

Qual

Analyte Chloride

Result

ND 1.5

SampType: LCS

TestCode: EPA Method 300.0: Anions

Client ID: LCSS

Batch ID: 23146

RunNo: 31376

Prep Date: 1/11/2016

Sample ID LCS-23146

Analysis Date: 1/11/2016

SPK value SPK Ref Val %REC

SeqNo: 960461

Units: mg/Kg HighLimit

Qual

Page 2 of 5

Analyte

PQL 14

15.00

LowLimit

0

SPK value SPK Ref Val %REC LowLimit

RPDLimit

Chloride

1.5

94.8

90

110

Qualifiers:

- Sample Diluted Due to Matrix
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- Sample pH Not In Range

J

- Reporting Detection Limit
- Sample container temperature is out of limit as specified

Analyte detected in the associated Method Blank

Analyte detected below quantitation limits

% Recovery outside of range due to dilution or matrix

Hall Environmental Analysis Laboratory, Inc.

WO#: 1601271

02-Mar-16

Client:

Blagg Engineering

Sample ID MB-23140	Samp	Type: MI	BLK	TestCode: EPA Method 8015M/D: Diesel Range Organics						
Client ID: PBS	Batc	h ID: 23	140	F	RunNo: 3	1353				
Prep Date: 1/11/2016	Analysis [Date: 1	/11/2016		SeqNo: 9	59934	Units: mg/l	(g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Diesel Range Organics (DRO)	ND	10							Transfer.	
Motor Oil Range Organics (MRO)	ND	50								
Surr: DNOP	9.2		10.00		91.7	70	130		ted i	
Sample ID LCS-23140	Samp	Type: LC	s	Tes	tCode: El	PA Method	8015M/D: Di	esel Rang	e Organics	
Client ID: LCSS	Batc	h ID: 23	140	F	RunNo: 3	1353				
Prep Date: 1/11/2016	Analysis [Date: 1	11/2016	5	SeqNo: 9	59935	Units: mg/h	(g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Diesel Range Organics (DRO)	44	10	50.00	0	88.2	65.8	136	177		101
Surr: DNOP	4.4		5.000	7.11	89.0	70	130	0.00		
Sample ID 1601271-001AM	S Samp	Гуре: М	S	Tes	tCode: El	PA Method	8015M/D: Di	esel Rang	e Organics	9.
Client ID: 5PC-TB @5'(95)	Batc	h ID: 23	140	RunNo: 31353						
Prep Date: 1/11/2016	Analysis [Date: 1/	11/2016	5	SeqNo: 9	60007	Units: mg/k	(g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Diesel Range Organics (DRO)	44	9.9	49.60	0	87.8	31.2	162	127	11.50	
Surr: DNOP	4.5		4.960		90.0	70	130			100
Sample ID 1601271-001AM	SD Samp	Гуре: М	SD	Tes	tCode: El	PA Method	8015M/D: Di	esel Range	e Organics	
Client ID: 5PC-TB @5'(95)	Batc	h ID: 23	140	F	RunNo: 3	1353				
Prep Date: 1/11/2016	Analysis [Date: 1/	11/2016		SeqNo: 9	80008	Units: mg/F	(g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Diesel Range Organics (DRO)	44	9.4	47.04	0	93.2	31.2	162	0.701	31.7	F
Surr: DNOP	4.5		4.704		95.9	70	130	0	0	

Qualifiers:

Value exceeds Maximum Contaminant Level.

D Sample Diluted Due to Matrix

Н Holding times for preparation or analysis exceeded

ND Not Detected at the Reporting Limit

R RPD outside accepted recovery limits

% Recovery outside of range due to dilution or matrix

Analyte detected in the associated Method Blank

E Value above quantitation range

Analyte detected below quantitation limits

Page 3 of 5

Sample pH Not In Range

Reporting Detection Limit

Sample container temperature is out of limit as specified

Hall Environmental Analysis Laboratory, Inc.

950

WO#: 16

1601271 02-Mar-16

Client:

Blagg Engineering

Project:

Surr: BFB

GCU #229

Sample ID MB-23132	SampType: MBI	TestCode: EPA Method 8015D: Gasoline Range							
Client ID: PBS Prep Date: 1/8/2016	Batch ID: 23132 Analysis Date: 1/11/2016			RunNo: 3 SeqNo: 9	750 VIDEO	Units: mg/Kg			
Analyte			SPK Ref Val	%REC		HighLimit	%RPD	RPDLimit	Qual
Gasoline Range Organics (GRO) Surr: BFB	ND 5.0 840	1000		83.6	66.2	112			
Sample ID LCS-23132	SampType: LCS		Tes	tCode: E	PA Method	8015D: Gaso	line Rang	е	
Client ID: LCSS	Batch ID: 231:	32	F	RunNo: 3	1359				
Prep Date: 1/8/2016	Analysis Date: 1/1	1/2016	5	SeqNo: 9	60304	Units: mg/K	g		
Analyte	Result PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Gasoline Range Organics (GRO)	24 5.0	25.00	0	96.8	79.6	122			

94.6

66.2

112

1000

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- D Sample Diluted Due to Matrix
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- S % Recovery outside of range due to dilution or matrix
- B Analyte detected in the associated Method Blank
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH Not In Range
- RL Reporting Detection Limit
- W Sample container temperature is out of limit as specified

Page 4 of 5

Hall Environmental Analysis Laboratory, Inc.

WO#: 1601271

02-Mar-16

Client:

Blagg Engineering

Project:

GCU #229

Sample ID MB-23132 Client ID: PBS		ype: ME n ID: 23		Tes							
Prep Date: 1/8/2016	Analysis [Date: 1/	11/2016	8	SeqNo: 9	60313	Units: mg/k	(g			
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual	
Benzene	ND	0.050						711			
Toluene	ND	0.050									
Ethylbenzene	ND	0.050									
Xylenes, Total	ND	0.10									
Surr: 4-Bromofluorobenzene	1.1		1.000		113	80	120				

Sample ID LCS-23132	Samp	Type: LC	s	Tes	tCode: E	PA Method	8021B: Vola	tiles		
Client ID: LCSS	Batc	h ID: 23	132	F	RunNo: 3	1359				
Prep Date: 1/8/2016	Analysis [Date: 1/	11/2016	5	SeqNo: 9	60314	Units: mg/F	(g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	0.91	0.050	1.000	0	91.3	80	120			
Toluene	0.95	0.050	1.000	0	94.8	80	120			
Ethylbenzene	0.95	0.050	1.000	0	95.1	80	120			
Xylenes, Total	2.9	0.10	3.000	0	97.9	80	120			
Surr: 4-Bromofluorobenzene	1.1		1.000		114	80	120			

Qualifiers:

* Value exceeds Maximum Contaminant Level.

D Sample Diluted Due to Matrix

H Holding times for preparation or analysis exceeded

ND Not Detected at the Reporting Limit

R RPD outside accepted recovery limits

S % Recovery outside of range due to dilution or matrix

B Analyte detected in the associated Method Blank

E Value above quantitation range

J Analyte detected below quantitation limits

P Sample pH Not In Range

RL Reporting Detection Limit

W Sample container temperature is out of limit as specified

Page 5 of 5




Hall Environmental Analysis Laboratory 4901 Hawkins NE Albuquerque, NM 87109


TEL: 505-345-3975 FAX: 505-345-4107 Website: www.hallenvironmental.com

Sample Log-In Check List

Client Name: BLAGG Work Order Number	er: 1601271		RcptNo: 1
Received by/date: 2M 01/04/16			The Control of the Co
Logged By: Joe Archuleta 1/9/2016 9:15:00 AM		Jear	
Completed By: Joe Archuleta 1/9/2016 9:56:21 AM		DEAT	
Reviewed By: OI/OGIVE			
Chain of Custody			
1. Custody seals intact on sample bottles?	Yes 🗌	No 🗌	Not Present ✓
2. Is Chain of Custody complete?	Yes 🗹	No 🗌	Not Present
3. How was the sample delivered?	Courier		
<u>Log In</u>			
4. Was an attempt made to cool the samples?	Yes 🗹	No 🗆	NA 🗆
5. Were all samples received at a temperature of >0° C to 6.0°C	Yes 🗹	No 🗆	NA 🗆
6. Sample(s) in proper container(s)?	Yes 🗹	No 🗆	
7. Sufficient sample volume for indicated test(s)?	Yes 🗸	No 🗆	
8. Are samples (except VOA and ONG) properly preserved?	Yes 🗹	No 🗆	
9. Was preservative added to bottles?	Yes	No 🗹	NA 🗆
10.VOA vials have zero headspace?	Yes 🗆	No 🗆	No VOA Vials
11. Were any sample containers received broken?	Yes	No 🗹	# of preserved
12. Does paperwork match bottle labels?	Yes 🗸	No 🗆	for pH:
(Note discrepancies on chain of custody)			(<2 or >12 unless noted) Adjusted?
13. Are matrices correctly identified on Chain of Custody?	Yes 🗹	No _	Adjusted?
14. Is it clear what analyses were requested?	Yes 🗸	No 🗆	Checked by:
15. Were all holding times able to be met? (If no, notify customer for authorization.)	Yes 🗹	No 📙	Checked by.
Special Handling (if applicable)			
16. Was client notified of all discrepancies with this order?	Yes 🗌	No 🗆	NA 🗹
Person Notified: Date		-	
By Whom: Via:	eMail	Phone Fax	☐ In Person
Regarding:		4 0 000 000	
Client Instructions:			
17. Additional remarks:			The state of the s
18. Cooler Information			
Cooler No Temp °C Condition Seal Intact Seal No	Seal Date	Signed By	
1 3.5 Good Yes			

	, > 0	2					ə			ətiso	5 pt. compo	>			F		-								
HALL FINATIONMENTAL	ANALYSIS I ABODATODY					L			_	Э	Grab sampl			+		-	+	+	+	-		-	1		87401 VHIXONEVB2
Ī	V	5	4901 Hawkins NE - Albuquerque, NM 87109	1	i,	(T'	ter - 300	ew/	0.00	E - 1	Chloride (soi	>		+	+	+	+	+	+	+	+	+			7401 THIXO
2	Ç	www.hallenvironmental.com	MW 8	Fax 505-345-4107	Ħ				(A	OV-	8270 (Semi						T	1		1	T		138		<
	} {	enta	ue, h	-345	Request						8260B (VO					L			T						Paykey:
	U	on muc	nerd	505							8081 Pestio								1	1			9		ming
2	V	nvir	pudl	Fax	Analysis	(1)	OS"Od	NOS		_	O,7) snoinA		_	-	_	-	-	+	-	+	-	-			, Far
_	:	halle	- A	r,	Ana	H	/cı	Allco	_		01E8) HA9 9M 8 A939		_	-	-	-	+	+	+	-		-			gy Court P-266
d	1 2	ww.	IS NE	Tel. 505-345-3975		H	121	_			EDB (Metho			1		+	+	+	+	+	+	-	+	BP:	ergy
I	•	5	wkir	5-345		H					TPH (Metho		_	+		+	+	+	+		-			emarks: BILL DIRECTLY TO BP:	E-M
_	1 [1 Ha	. 505			(ORM)			-	TPH 8015B (>	-	+	-		+	+		+				1	N/32
			490	Tel			(Ajuo s	(G9	HqT	+ 3	BTEX + MTB						+	T		T				Remarks: BILL DIRI	Steven Mo
	J L						SOZIB)	3) s 48	W		BTEX + MTB	>						T						Rem	Retrie
/		1						Mr			No.													Time	- VIS
MAIN	DAY						7	7:	No		HEAL No 2012 71													-	
	÷		229				I VELE	I VELEZ		0	ive //					-	+	+		+	-	*		Date	Pol/
	Rush		GCU # 229				NELSON VELEZ	NELSON	ZYes	ture	Preservative Type	Cool												14.16	1
-						anager	Z	Z	Ż	emperature		1				+	+	+	+		+	E			4
	☐ Standard	Project Name		Project #:		Project Manager		Sampler:	On Ice:	Sample Te	Container Type and #	4 02 3	1000											Received by:	Received by:
							Level 4 (Full Validation)				Sample Request ID	95)													
	S			113			II Vali				edne	@ 5' (95)					1							977	
	MERI			M 87			(Fu		1		e R	SPC-TB®												51	13
	AN	1		S, NR	66		vel 4	ļ.			amp	SPC					-							5	hed by:
	/ BI		X 87	FIEL	2-11						Š													S S	D D
	BLAGG ENGR. / BP AMERICA		P.O. BOX 87	BLOOMFIELD, NM 87413	(505) 632-1199				□ Other		Matrix	SOIL												Relinquished by	Relinquished by.
	BLAG		dress:			IX#:	kage:	on:		(bd/	Time	1345												Time:	Time:
	lient:		Mailing Address:		hone #:	mail or Fax#:	A/QC Package:	Accreditation:	J NELAP	EDD (Type)	Date	1/8/16												J/8/16	Solution of the solution of th

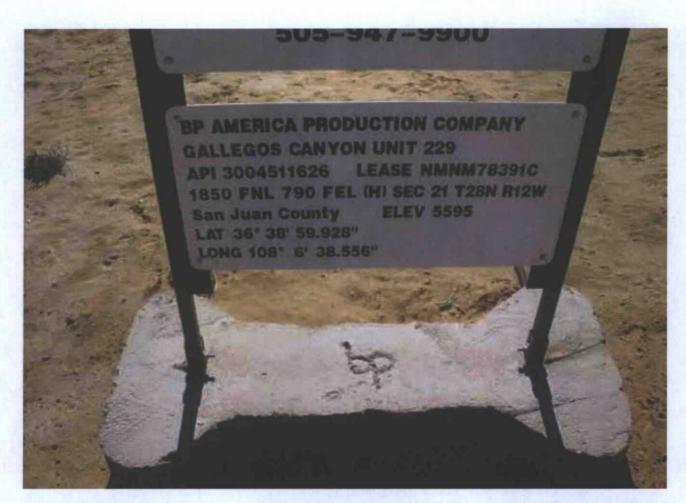

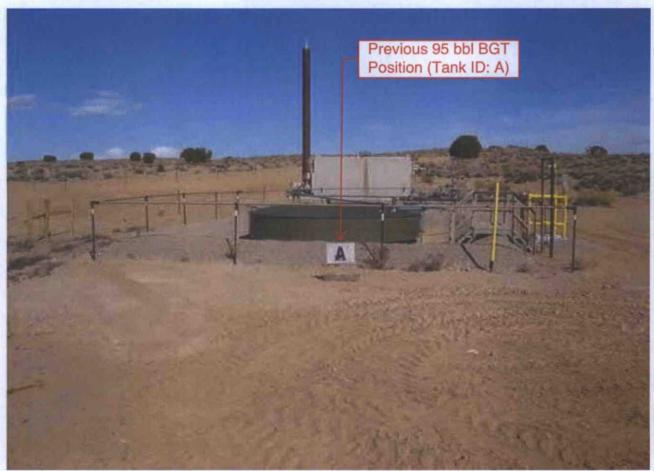

bp



BP America Production Company 200 Energy Court Farmington, NM 87401 Phone: (505) 326-9200

December 29, 2015

Mary A Garcia PO Box 1658 Kirtland, NM 87417-1658

VIA CERTIFIED MAIL – RETURN RECEIPT REQUESTED

Re: Notification of plans to close/remove a below grade tank Well Name: GALLEGOS CANYON UNIT 229

To Whom It May Concern,

As part of the NM "Pit Rule": 19.15.17.13 Closure Requirements, Paragraph J. BP America Production Company (BP) is required to notify the surface owner of BP's plans to close/remove a below grade tank. BP wishes to inform you of our plans to close/remove the below grade tank on its well pad located on your surface. BP plans to commence this work on or about January 8, 2016. If there aren't any unforeseen problems, the work should be completed within 10 working days.

As a point of clarification, BP will be closing the below grade tank and either operating without one or replacing it with an above ground tank, the well site will continue to operate.

Unless you have questions about this notice, there is no need to respond to this letter. If you do have any questions or concerns, please contact me at (505)-326-9214.

Sincerely,

Charlie Davis

BP America Production Company

Moskal, Steven

From:

Railsback, Farrah (CH2M HILL)

Sent:

Wednesday, December 30, 2015 1:59 PM

To:

Smith, Cory, EMNRD (Cory.Smith@state.nm.us)

Cc:

Moskal, Steven; 'blagg_njv@yahoo.com'; jeffcblagg@aol.com

Subject:

BP Pit Close Notification - GALLEGOS CANYON UNIT 229

BP America Production Company

200 Energy Court Farmington, NM 87401

Phone: (505) 326-9200

SENT VIA E-MAIL TO: CORY.SMITH@STATE.NM.US

December 30, 2015

New Mexico Oil Conservation Division 1000 Rio Brazos Road Aztec, New Mexico 87410

GALLEGOS CANYON UNIT 229 API 30-045-11626 (H) Section 21 – T28N – R12W San Juan County, New Mexico

Notice of Proposed Below-Grade Tank (BGT) Closure

Dear Mr. Cory Smith:

In regards to the captioned subject and requirements of the NMOCD pit rule, this letter is notification that BP is planning to close a 95 bbl BGT that will no longer be operational at this well site. We anticipate this work to start on or around January 6, 2016.

Should you have any questions, please feel free to contact BP at our Farmington office.

Sincerely,

RE:

Steven Moskal BP Field Environmental Coordinator

(505) 326-9497