Form 3160-3 (June 2015)			FORM APPI OMB No. 10	04-0137
UNITE	D STATES	Expires: Januar	y 31, 2018	
DEPARTMENT (BUREAU OF LAI	5. Lease Serial No.			
APPLICATION FOR PERI	6. If Indian, Allotee or Ti	ribe Name		
1a. Type of work: DRILL	REENTER		7. If Unit or CA Agreeme	ent, Name and No.
1b. Type of Well: Oil Well Gas V	Vell Other		8. Lease Name and Well	No
1c. Type of Completion: Hydraulic Fracturing	Single Zone	Multiple Zone	o. Lease Ivalle and Well	110.
			[329]	914]
2. Name of Operator	[6137]		9: API Well No. 30-0	25-48448
3a. Address	• •	No. (include area code)	10. Field and Pool, or Ex	ploratory
4. Location of Well (Report location clearly and in a	accordance with any State	requirements.*)	11. Sec., T. R. M. or Blk.	and Survey or Area
At surface	·			•
At proposed prod. zone				
14. Distance in miles and direction from nearest tow	n or post office*		12. County or Parish	13. State
15. Distance from proposed* location to nearest	16. No of ac	cres in lease 17. S	pacing Unit dedicated to this w	vell
property or lease line, ft. (Also to nearest drig. unit line, if any)				
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.	19. Propose	d Depth 20, B	LM/BIA Bond No. in file	
21. Elevations (Show whether DF, KDB, RT, GL, etc.	e.) 22. Approxi	mate date work will start*	23. Estimated duration	
	24. Attac	chments	1	
The following, completed in accordance with the rec (as applicable)	uirements of Onshore Oil	and Gas Order No. 1, and	the Hydraulic Fracturing rule p	er 43 CFR 3162.3-3
Well plat certified by a registered surveyor.		4. Bond to cover the oper	ations unless covered by an exis	sting bond on file (see
2. A Drilling Plan.3. A Surface Use Plan (if the location is on National	Forest System Lands, the	Item 20 above). 5. Operator certification.		
SUPO must be filed with the appropriate Forest So			information and/or plans as may	be requested by the
25. Signature	Name	(Printed/Typed)	Date	e
Title				
Approved by (Signature)	Name	(Printed/Typed)	Date	e
Title	Office	;		
Application approval does not warrant or certify that applicant to conduct operations thereon. Conditions of approval, if any, are attached.	the applicant holds legal	or equitable title to those ri	ghts in the subject lease which	would entitle the
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Sec of the United States any false, fictitious or fraudulen				epartment or agency
GCP Rec 01/27/2021	Process Comp.		1 K	Z
		TH CONDITION	02/04/2	021
SL	PROVED WI	III COM		
(Continued on page 2)	אייטמין או		*(Instru	ctions on page 2)

Approval Date: 01/08/2021

INSTRUCTIONS

GENERAL: This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

ITEM I: If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

ITEM 4: Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

ITEM 14: Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the wen, and any other required information, should be furnished when required by Federal agency offices.

ITEMS 15 AND 18: If well is to be, or has been directionany drilled, give distances for subsurface location of hole in any present or objective productive zone.

ITEM 22: Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

ITEM 24: If the proposal will involve hydraulic fracturing operations, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

PRINCIPAL PURPOSES: The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service wen or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

ROUTINE USE: Information from the record and/or the record win be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM conects this information to anow evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications. Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease. The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Conection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

Additional Operator Remarks

Location of Well


 $0. \ SHL: LOT \ 1 \ / \ 250 \ FNL \ / \ 900 \ FWL \ / \ TWSP: \ 23S \ / \ RANGE: \ 32E \ / \ SECTION: \ 30 \ / \ LAT: \ 32.2820093 \ / \ LONG: \ -103.7200557 \ (\ TVD: \ 0 \ feet, \ MD: \ 0 \ feet \)$ $PPP: \ LOT \ 1 \ / \ 100 \ FNL \ / \ 1160 \ FWL \ / \ TWSP: \ 23S \ / \ RANGE: \ 32E \ / \ SECTION: \ 30 \ / \ LAT: \ 32.2824251 \ / \ LONG: \ -103.7192146 \ (\ TVD: \ 11651 \ feet, \ MD: \ 11665 \ feet \)$ $BHL: \ LOT \ 4 \ / \ 20 \ FSL \ / \ 1160 \ FWL \ / \ TWSP: \ 23S \ / \ RANGE: \ 32E \ / \ SECTION: \ 31 \ / \ LAT: \ 32.2537307 \ / \ LONG: \ -103.7192284 \ (\ TVD: \ 11990 \ feet, \ MD: \ 21937 \ feet \)$

BLM Point of Contact

Name: Candy Vigil

Title: LIE

Phone: (575) 234-5982 Email: cvigil@blm.gov



Review and Appeal Rights

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.





APD ID: 10400059715

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

Submission Date: 08/10/2020

Operator Name: DEVON ENERGY PRODUCTION COMPANY LP

Well Name: RIGHT MEOW 30-31 FED COM Well Number: 621H

Well Type: OIL WELL Well Work Type: Drill

Highlighted data reflects the most recent changes

Show Final Text

Section 1 - Geologic Formations

Formation			True Vertical				Producing
ID	Formation Name	Elevation	Depth	Depth	Lithologies	Mineral Resources	
803939	UNKNOWN	3593	0	0	ALLUVIUM, OTHER : Surface	NONE	N
803940	RUSTLER	2568	1025	1025	SANDSTONE	NONE	N
803944	TOP SALT	2238	1355	1355	SALT	NONE	N
803942	BASE OF SALT	-792	4385	4385	SALT	NONE	N
803948	BELL CANYON	-1032	4625	4625	SANDSTONE	NATURAL GAS, OIL	N
803949	CHERRY CANYON	-1972	5565	5565	SANDSTONE	NATURAL GAS, OIL	N
803950	BRUSHY CANYON	-3232	6825	6825	SANDSTONE	NATURAL GAS, OIL	N
803951	BONE SPRING LIME	-4857	8450	8450	LIMESTONE	NATURAL GAS, OIL	N
803941	BONE SPRING	-5992	9585	9585	SANDSTONE	NATURAL GAS, OIL	N
803938	BONE SPRING 2ND	-6582	10175	10175	SANDSTONE	NATURAL GAS, OIL	N
803952	BONE SPRING LIME	-7132	10725	10725	LIMESTONE	NATURAL GAS, OIL	N
803953	BONE SPRING 3RD	-7882	11475	11475	SANDSTONE	NATURAL GAS, OIL	N
803954	WOLFCAMP	-8297	11890	11890	SANDSTONE	NATURAL GAS, OIL	Y
803955	STRAWN	-10072	13665	13665	LIMESTONE	NATURAL GAS, OIL	N

Section 2 - Blowout Prevention

Right Meow 30-31 Fed Com 621H

1. Geologic Formations

TVD of target	11990	Pilot hole depth	N/A
MD at TD:	21937	Deepest expected fresh water	

Basin

Dasin			
	Depth	Water/Mineral	
Formation	(TVD)	Bearing/Target	Hazards*
	from KB	Zone?	
Rustler	1025		
Salt	1355		
Base of Salt	4385		
Delaware	4625		
Bone Spring 1st	9585		
Bone Spring 2nd	10175		
Bone Spring 3rd	11475		
Wolfcamp	11890		

^{*}H2S, water flows, loss of circulation, abnormal pressures, etc.

2. Casing Program (Primary Design)

		Wt			Casing	Interval	Casing	Interval
Hole Size	Csg. Size	(PPF)	Grade	Conn	From (MD)	To (MD)	From (TVD)	To (TVD)
17 1/2	13 3/8	48.0	H40	STC	0	1050	0	1050
9 7/8	8 5/8	32.0	P110	TLW	0	11475	0	11475
7 7/8	5 1/2	17.0	P110	ВТС	0	21937	0	11990

[•] All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 IILB.1.h Must have table for continengcy casing.

Casing	# Sks	TOC	Wt. ppg	Yld (ft3/sack)	Slurry Description
Surface	798	Surf	13.2	1.44	Lead: Class C Cement + additives
Total	475	Surf	9	3.27	Lead: Class C Cement + additives
Int 1	465	4000' above	13.2	1.44	Tail: Class H / C + additives
Int 1	As Needed	Surf	13.2	1.44	Squeeze Lead: Class C Cement + additives
Intermediate	475	Surf	9	3.27	Lead: Class C Cement + additives
Squeeze	465	4000' above	13.2	1.44	Tail: Class H / C + additives
Production	117	9424	9.0	3.3	Lead: Class H /C + additives
1 roduction	1391	11424	13.2	1.4	Tail: Class H / C + additives

Casing String	% Excess
Surface	50%
Intermediate 1	30%
Intermediate 1 (Two Stage)	25%
Prod	10%

4. Pressure Control Equipment (Three String Design)

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Ty	ype	✓	Tested to:				
			Anı	nular	X	50% of rated working pressure				
Int 1	13-58"	5M	Blind	l Ram	X					
IIIL I	15-38	JIVI	Pipe	Ram		5M				
			Doub	le Ram	X	3101				
			Other*							
	13-5/8"						Annular (5M)		X	50% of rated working pressure
Don't sellen		53.6	Blind Ram		X					
Production		13-5/8" SIVI	13-5/8"	5M	SIM	Pipe	Ram		5M	
			Doub	le Ram	X	5M				
			Other*							
			Annular (5M)							
			Blind Ram							
			Pipe Ram			1				
			Double Ram							
			Other*							
N A variance is requested for	A variance is requested for the use of a diverter on the surface casing. See attached for schematic.									
Y A variance is requested to 1	A variance is requested to run a 5 M annular on a 10M system									

5. Mud Program (Three String Design)

Section	Туре	Weight (ppg)
Surface	FW Gel	8.5-9
Intermediate	DBE / Cut Brine	10-10.5
Production	OBM	10-10.5

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	PVT/Pason/Visual Monitoring
Ü	C

6. Logging and Testing Procedures

<u> </u>	6						
Logging, C	Logging, Coring and Testing						
	Will run GR/CNL from TD to surface (horizontal well - vertical portion of hole). Stated logs run will be in the						
X	Completion Report and sbumitted to the BLM.						
	No logs are planned based on well control or offset log information.						
	Drill stem test? If yes, explain.						
	Coring? If yes, explain.						

Additional logs planned		Interval
	Resistivity	Int. shoe to KOP
	Density	Int. shoe to KOP
X	CBL	Production casing
X	Mud log	Intermediate shoe to TD
	PEX	

7. Drilling Conditions

Condition	Specfiy what type and where?
BH pressure at deepest TVD	6547
Abnormal temperature	No

Mitigation measure for abnormal conditions. Describe. Lost circulation material/sweeps/mud scavengers.

Hydrogren Sulfide (H2S) monitors will be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered measured values and formations will be provided to the BLM.

N H2S is present
Y H2S plan attached.

8. Other facets of operation

Is this a walking operation? Potentially

- 1 If operator elects, drilling rig will batch drill the surface holes and run/cement surface casing; walking the rig to next wells on the pad.
- 2 The drilling rig will then batch drill the intermediate sections and run/cement intermediate casing; the wellbore will be isolated with a blind flange and pressure gauge installed for monitoring the well before walking to the next well.
- 3 The drilling rig will then batch drill the production hole sections on the wells with OBM, run/cement production casing, and install TA caps or tubing heads for completions.

NOTE: During batch operations the drilling rig will be moved from well to well however, it will not be removed

Right Meow 30-31 Fed Com 621H

from the pad until all wells have production casing run/cemented.

Will be pre-setting casing? Potentially

- 1 Spudder rig will move in and batch drill surface hole.
 - a. Rig will utilize fresh water based mud to drill surface hole to TD. Solids control will be handled entirely on a closed loop basis.,
- 2 After drilling the surface hole section, the spudder rig will run casing and cement following all of the applicable rules and regulations (OnShore Order 2, all COAs and NMOCD regulations).
- 3 The wellhead will be installed and tested once the surface casing is cut off and the WOC time has been reached.
- 4 A blind flange with the same pressure rating as the wellhead will be installed to seal the wellbore. Pressure will be monitored with a pressure gauge installed on the wellhead.
- 5 Spudder rig operations is expected to take 4-5 days per well on a multi-well pa.
- 6 The NMOCD will be contacted and notified 24 hours prior to commencing spudder rig operations.
- 7 Drilling operations will be performed with drilling rig. A that time an approved BOP stack will be nippled up and tested on the wellhead before drilling operations commences on each well.
 - a. The NMOCD will be contacted / notified 24 hours before the drilling rig moves back on to the pad with the pre-set surface casing.

Attachments	
X	Directional Plan
	Other, describe

WCDSC Permian NM

Lea County (NAD83 New Mexico East) Sec 30-T23S-R32E Right Meow 30-31 Fed Com 621H

Wellbore #1

Plan: Permit Plan 1

Standard Planning Report - Geographic

28 July, 2020

Database: EDM r5000.141_Prod US Company: WCDSC Permian NM

Project: Lea County (NAD83 New Mexico East)

Site: Sec 30-T23S-R32E

Well: Right Meow 30-31 Fed Com 621H

Wellbore: Wellbore #1

Design: Permit Plan 1

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Survey Calculation Method:

Well Right Meow 30-31 Fed Com 621H

RKB @ 3618.40ft RKB @ 3618.40ft

Grid

Minimum Curvature

Project Lea County (NAD83 New Mexico East)

Map System: US State Plane 1983
Geo Datum: North American Datum 1983
Map Zone: New Mexico Eastern Zone

System Datum:

Mean Sea Level

Site Sec 30-T23S-R32E

Northing: 461,886.45 usft Site Position: Latitude: 32.268239 -103.705203 735,483.05 usft Мар Easting: From: Longitude: Position Uncertainty: 0.00 ft Slot Radius: 13-3/16 " 0.34 **Grid Convergence:**

Well Right Meow 30-31 Fed Com 621H

 Well Position
 +N/-S
 0.00 ft
 Northing:
 466,869.56 usft
 Latitude:
 32.282009

 +E/-W
 0.00 ft
 Easting:
 730,863.63 usft
 Longitude:
 -103.720056

Position Uncertainty0.50 ftWellhead Elevation:Ground Level:3,593.40 ft

Wellbore #1 Wellbore Magnetics **Model Name** Sample Date Declination Dip Angle Field Strength (°) (°) (nT) 7/24/2020 6.69 60.05 47,636.74358486 IGRF2015

Permit Plan 1 Design Audit Notes: Version: Phase: **PROTOTYPE** Tie On Depth: 0.00 Vertical Section: Depth From (TVD) +N/-S +E/-W Direction (ft) (ft) (ft) (°) 0.00 0.00 0.00 178.20

Plan Survey Tool Program Date 7/28/2020

Depth From Depth To

(ft) (ft) Survey (Wellbore) Tool Name Remarks

1 0.00 21,937.11 Permit Plan 1 (Wellbore #1) MWD+HDGM

OWSG MWD + HDGM

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00	
3,238.73	2.39	52.43	3,238.66	3.03	3.94	1.00	1.00	0.00	52.43	
10,914.62	2.39	52.43	10,907.89	197.98	257.37	0.00	0.00	0.00	0.00	
11,073.78	0.00	0.00	11,067.00	200.00	260.00	1.50	-1.50	0.00	180.00	
11,423.82	0.00	0.00	11,417.04	200.00	260.00	0.00	0.00	0.00	0.00	
12,323.82	90.00	179.70	11,990.00	-372.95	262.98	10.00	10.00	0.00	179.70	PBHL - Right Meow 3
21,937.11	90.00	179.70	11,990.00	-9,986.11	312.99	0.00	0.00	0.00	0.00	

Database: EDM r5000.141_Prod US Company: WCDSC Permian NM

Project: Lea County (NAD83 New Mexico East)

Site: Sec 30-T23S-R32E

Well: Right Meow 30-31 Fed Com 621H

Wellbore: Wellbore #1

Design: Permit Plan 1

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Survey Calculation Method:

Well Right Meow 30-31 Fed Com 621H

RKB @ 3618.40ft RKB @ 3618.40ft

Grid

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
0.00	0.00	0.00	0.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
100.00	0.00	0.00	100.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
200.00	0.00	0.00	200.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
300.00	0.00	0.00	300.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
400.00	0.00	0.00	400.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
500.00	0.00	0.00	500.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
600.00	0.00	0.00	600.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
700.00	0.00	0.00	700.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
800.00	0.00	0.00	800.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
900.00	0.00	0.00	900.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
1,000.00 1,100.00	0.00	0.00 0.00	1,000.00 1,100.00	0.00 0.00	0.00 0.00	466,869.56 466,869.56	730,863.63 730,863.63	32.282009 32.282009	-103.720056 -103.720056
1,700.00	0.00	0.00	1,200.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
1,300.00	0.00	0.00	1,300.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
1,400.00	0.00	0.00	1,400.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
1,500.00	0.00	0.00	1,500.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
1,600.00	0.00	0.00	1,600.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
1,700.00	0.00	0.00	1,700.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
1,800.00	0.00	0.00	1,800.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
1,900.00	0.00	0.00	1,900.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
2,000.00	0.00	0.00	2,000.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
2,100.00	0.00	0.00	2,100.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
2,200.00	0.00	0.00	2,200.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
2,300.00	0.00	0.00	2,300.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
2,400.00	0.00	0.00	2,400.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
2,500.00	0.00	0.00	2,500.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
2,600.00	0.00	0.00	2,600.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
2,700.00	0.00	0.00	2,700.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
2,800.00	0.00	0.00	2,800.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
2,900.00	0.00	0.00	2,900.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
3,000.00	0.00	0.00	3,000.00	0.00	0.00	466,869.56	730,863.63	32.282009	-103.720056
3,100.00	1.00	52.43	3,099.99	0.53	0.69	466,870.09	730,864.32	32.282011	-103.720054
3,200.00	2.00	52.43	3,199.96	2.13	2.77	466,871.69	730,866.39	32.282015	-103.720047
3,238.73	2.39	52.43	3,238.66	3.03	3.94	466,872.59	730,867.57	32.282018	-103.720043
3,300.00	2.39	52.43	3,299.88	4.59	5.96	466,874.15	730,869.59	32.282022	-103.720037
3,400.00	2.39	52.43	3,399.79	7.13	9.27	466,876.69	730,872.89	32.282029	-103.720026
3,500.00	2.39	52.43	3,499.70	9.67	12.57	466,879.23	730,876.19	32.282036	-103.720015
3,600.00	2.39	52.43	3,599.62	12.21	15.87	466,881.77	730,879.50	32.282043	-103.720004
3,700.00	2.39	52.43	3,699.53	14.75	19.17	466,884.31	730,882.80	32.282050	-103.719994
3,800.00	2.39	52.43	3,799.44	17.29	22.47	466,886.85	730,886.10	32.282057	-103.719983
3,900.00	2.39	52.43	3,899.36	19.83	25.77	466,889.39	730,889.40	32.282064	-103.719972
4,000.00	2.39	52.43	3,999.27	22.37	29.08	466,891.93	730,892.70	32.282070	-103.719961
4,100.00	2.39	52.43	4,099.18	24.91	32.38	466,894.47	730,896.00	32.282077	-103.719951
4,200.00	2.39	52.43	4,199.10	27.45	35.68	466,897.01	730,899.31	32.282084	-103.719940
4,300.00	2.39	52.43	4,299.01	29.99	38.98	466,899.55	730,902.61	32.282091	-103.719929
4,400.00	2.39	52.43 52.43	4,398.92	32.53 35.06	42.28 45.58	466,902.09	730,905.91 730,909.21	32.282098	-103.719919
4,500.00	2.39	52.43 52.43	4,498.84	35.06 37.60	45.58 48.80	466,904.63	730,909.21 730,912.51	32.282105	-103.719908
4,600.00 4,700.00	2.39 2.39	52.43 52.43	4,598.75 4,698.66	37.60 40.14	48.89 52.19	466,907.16 466,909.70	730,912.51 730,915.81	32.282112 32.282119	-103.719897 -103.719886
4,700.00	2.39	52.43 52.43	4,098.00	40.14 42.68	52.19 55.49	466,912.24	730,915.81	32.282119	-103.719886
4,900.00	2.39	52.43	4,796.56	45.22	55.49 58.79	466,914.78	730,919.12	32.282133	-103.719865
5,000.00	2.39	52.43	4,998.40	47.76	62.09	466,917.32	730,925.72	32.282140	-103.719854
5,100.00	2.39	52.43	5,098.32	50.30	65.39	466,919.86	730,929.02	32.282147	-103.719843
5,200.00	2.39	52.43	5,198.23	52.84	68.70	466,922.40	730,932.32	32.282154	-103.719833
5,300.00	2.39	52.43	5,298.14	55.38	72.00	466,924.94	730,935.62	32.282161	-103.719822
3,300.00	2.08	JZ. 4 3	J,230.14	33.30	12.00	700,324.34	100,300.02	JZ.ZUZ 10 1	-103.7 19022

Database: EDM r5000.141_Prod US Company: WCDSC Permian NM

Project: Lea County (NAD83 New Mexico East)

Site: Sec 30-T23S-R32E

Well: Right Meow 30-31 Fed Com 621H

Wellbore: Wellbore #1

Design: Permit Plan 1

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Survey Calculation Method:

Well Right Meow 30-31 Fed Com 621H

RKB @ 3618.40ft RKB @ 3618.40ft

Grid

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
5,400.00	2.39	52.43	5,398.06	57.92	75.30	466,927.48	730,938.93	32.282167	-103.719811
5,500.00	2.39	52.43	5,497.97	60.46	78.60	466,930.02	730,942.23	32.282174	-103.719801
5,600.00	2.39	52.43	5,597.88	63.00	81.90	466,932.56	730,945.53	32.282181	-103.719790
5,700.00	2.39	52.43	5,697.79	65.54	85.20	466,935.10	730,948.83	32.282188	-103.719779
5,800.00	2.39	52.43	5,797.71	68.08	88.51	466,937.64	730,952.13	32.282195	-103.719768
5,900.00	2.39	52.43	5,897.62	70.62	91.81	466,940.18	730,955.43	32.282202	-103.719758
6,000.00	2.39 2.39	52.43 52.43	5,997.53	73.16 75.70	95.11	466,942.72	730,958.74	32.282209	-103.719747 -103.719736
6,100.00 6,200.00	2.39	52.43 52.43	6,097.45 6,197.36	78.24	98.41 101.71	466,945.26 466,947.80	730,962.04 730,965.34	32.282216 32.282223	-103.719735
6,300.00	2.39	52.43	6,297.27	80.78	105.01	466,950.34	730,968.64	32.282230	-103.719715
6,400.00	2.39	52.43	6,397.19	83.32	108.32	466,952.88	730,900.04	32.282237	-103.719704
6,500.00	2.39	52.43	6,497.10	85.86	111.62	466,955.42	730,975.24	32.282244	-103.719693
6,600.00	2.39	52.43	6,597.01	88.40	114.92	466,957.96	730,978.54	32.282251	-103.719682
6,700.00	2.39	52.43	6,696.93	90.94	118.22	466,960.50	730,981.85	32.282258	-103.719672
6,800.00	2.39	52.43	6,796.84	93.48	121.52	466,963.04	730,985.15	32.282264	-103.719661
6,900.00	2.39	52.43	6,896.75	96.02	124.82	466,965.58	730,988.45	32.282271	-103.719650
7,000.00	2.39	52.43	6,996.67	98.56	128.13	466,968.12	730,991.75	32.282278	-103.719640
7,100.00	2.39	52.43	7,096.58	101.10	131.43	466,970.66	730,995.05	32.282285	-103.719629
7,200.00	2.39	52.43	7,196.49	103.64	134.73	466,973.20	730,998.35	32.282292	-103.719618
7,300.00	2.39	52.43	7,296.41	106.18	138.03	466,975.74	731,001.66	32.282299	-103.719607
7,400.00	2.39	52.43	7,396.32	108.72	141.33	466,978.28	731,004.96	32.282306	-103.719597
7,500.00	2.39	52.43	7,496.23	111.26	144.63	466,980.82	731,008.26	32.282313	-103.719586
7,600.00	2.39	52.43	7,596.15	113.80	147.94	466,983.36	731,011.56	32.282320	-103.719575
7,700.00	2.39	52.43	7,696.06	116.34	151.24	466,985.90	731,014.86	32.282327	-103.719564
7,800.00	2.39	52.43	7,795.97	118.88	154.54	466,988.44	731,018.16	32.282334	-103.719554
7,900.00	2.39	52.43	7,895.89	121.42	157.84	466,990.98	731,021.47	32.282341	-103.719543
8,000.00	2.39	52.43	7,995.80	123.96	161.14	466,993.52	731,024.77	32.282348	-103.719532
8,100.00	2.39	52.43	8,095.71	126.49	164.44	466,996.06	731,028.07	32.282355	-103.719522
8,200.00	2.39	52.43	8,195.63	129.03	167.75	466,998.59	731,031.37	32.282361	-103.719511
8,300.00	2.39	52.43	8,295.54	131.57	171.05	467,001.13	731,034.67	32.282368	-103.719500
8,400.00	2.39	52.43	8,395.45	134.11	174.35	467,003.67	731,037.97	32.282375	-103.719489
8,500.00	2.39	52.43	8,495.36	136.65	177.65	467,006.21	731,041.28	32.282382	-103.719479
8,600.00	2.39	52.43	8,595.28	139.19	180.95	467,008.75	731,044.58	32.282389	-103.719468
8,700.00	2.39	52.43	8,695.19	141.73	184.25	467,011.29	731,047.88	32.282396	-103.719457
8,800.00	2.39	52.43	8,795.10	144.27	187.55	467,013.83	731,051.18	32.282403	-103.719446
8,900.00	2.39	52.43	8,895.02	146.81	190.86	467,016.37	731,054.48	32.282410	-103.719436
9,000.00	2.39	52.43	8,994.93	149.35	194.16	467,018.91	731,057.78	32.282417	-103.719425
9,100.00	2.39	52.43	9,094.84	151.89	197.46	467,021.45	731,061.09	32.282424	-103.719414 -103.719404
9,200.00	2.39	52.43	9,194.76	154.43	200.76	467,023.99	731,064.39	32.282431 32.282438	
9,300.00	2.39	52.43 52.43	9,294.67	156.97 150.51	204.06	467,026.53	731,067.69 731,070.99	32.282438 32.282445	-103.719393
9,400.00 9,500.00	2.39 2.39	52.43 52.43	9,394.58 9,494.50	159.51 162.05	207.36 210.67	467,029.07 467,031.61	731,070.99 731,074.29	32.282445 32.282452	-103.719382 -103.719371
9,600.00	2.39	52.43	9,494.50	164.59	210.67	467,031.61	731,074.29	32.282458	-103.719361
9,800.00	2.39	52.43	9,594.41	164.59	213.97	467,036.69	731,080.90	32.282465	-103.719350
9,800.00	2.39	52.43	9,794.24	169.67	220.57	467,039.23	731,084.20	32.282472	-103.719339
9,900.00	2.39	52.43	9,894.15	172.21	223.87	467,039.23	731,084.20	32.282472	-103.719328
10,000.00	2.39	52.43	9,994.06	174.75	227.17	467,044.31	731,090.80	32.282486	-103.719318
10,100.00	2.39	52.43	10,093.98	177.29	230.48	467,046.85	731,094.10	32.282493	-103.719307
10,200.00	2.39	52.43	10,193.89	179.83	233.78	467,049.39	731,097.40	32.282500	-103.719296
10,300.00	2.39	52.43	10,293.80	182.37	237.08	467,051.93	731,100.71	32.282507	-103.719285
10,400.00	2.39	52.43	10,393.72	184.91	240.38	467,054.47	731,104.01	32.282514	-103.719275
10,500.00	2.39	52.43	10,493.63	187.45	243.68	467,057.01	731,107.31	32.282521	-103.719264
10,600.00	2.39	52.43	10,593.54	189.99	246.98	467,059.55	731,110.61	32.282528	-103.719253
10,700.00	2.39	52.43	10,693.46	192.53	250.29	467,062.09	731,113.91	32.282535	-103.719243
10,800.00	2.39	52.43	10,793.37	195.07	253.59	467,064.63	731,117.21	32.282542	-103.719232

Database: EDM r5000.141_Prod US Company: WCDSC Permian NM

Project: Lea County (NAD83 New Mexico East)

Site: Sec 30-T23S-R32E

Well: Right Meow 30-31 Fed Com 621H

Wellbore: Wellbore #1

Design: Permit Plan 1

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Survey Calculation Method:

Well Right Meow 30-31 Fed Com 621H

RKB @ 3618.40ft RKB @ 3618.40ft

Grid

Planned Survey	,								
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
10,900.00	2.39	52.43	10,893.28	197.61	256.89	467,067.17	731,120.52	32.282549	-103.719221
10,914.62	2.39	52.43	10,907.89	197.98	257.37	467,067.54	731,121.00	32.282550	-103.719220
11,000.00	1.11	52.43	10,993.23	199.57	259.44	467,069.13	731,123.06	32.282554	-103.719213
11,073.78	0.00	0.00	11,067.00	200.00	260.00	467,069.56	731,123.63	32.282555	-103.719211
11,100.00	0.00	0.00	11,093.22	200.00	260.00	467,069.56	731,123.63	32.282555	-103.719211
11,200.00	0.00	0.00	11,193.22	200.00	260.00	467,069.56	731,123.63	32.282555	-103.719211
11,300.00	0.00	0.00	11,293.22	200.00	260.00	467,069.56	731,123.63	32.282555	-103.719211
11,400.00	0.00	0.00	11,393.22	200.00	260.00	467,069.56	731,123.63	32.282555	-103.719211
11,423.82	0.00	0.00	11,417.04	200.00	260.00	467,069.56	731,123.63	32.282555	-103.719211
11,424.00	0.00	179.70	11,417.22	200.00	260.00	467,069.56	731,123.63	32.282555	-103.719211
_	11424' MD, 50'	•		404.04	000.00	407.004.50	704 400 05	00.000544	100 710011
11,500.00	7.62	179.70	11,493.00	194.94	260.03	467,064.50	731,123.65	32.282541	-103.719211
11,600.00	17.62 24.12	179.70 179.70	11,590.46	173.13 149.98	260.14 260.26	467,042.69	731,123.77	32.282481 32.282418	-103.719211
11,665.00			11,651.16	149.90	200.20	467,019.54	731,123.89	32.202410	-103.719211
_	1665' MD, 100	•		124 72	260.34	467 004 00	724 422 07	20 000276	-103.719211
11,700.00 11,800.00	27.62 37.62	179.70 179.70	11,682.65 11,766.77	134.72 80.88	260.62	467,004.28 466,950.44	731,123.97 731,124.25	32.282376 32.282228	-103.719211
11,900.00	47.62	179.70	11,766.77	13.26	260.02	466,882.82	731,124.60	32.282042	-103.719211
12,000.00	57.62	179.70	11,900.90	-66.10	261.38	466,803.46	731,125.01	32.281824	-103.719211
12,100.00	67.62	179.70	11,946.84	-154.78	261.85	466,714.78	731,125.47	32.281580	-103.719211
12,200.00	77.62	179.70	11,976.67	-250.10	262.34	466,619.47	731,125.97	32.281318	-103.719212
12,300.00	87.62	179.70	11,989.50	-349.14	262.86	466,520.42	731,126.48	32.281046	-103.719212
12,323.82	90.00	179.70	11,990.00	-372.95	262.98	466,496.61	731,126.61	32.280980	-103.719212
12,400.00	90.00	179.70	11,990.00	-449.13	263.38	466,420.43	731,127.00	32.280771	-103.719212
12,500.00	90.00	179.70	11,990.00	-549.13	263.90	466,320.43	731,127.52	32.280496	-103.719212
12,600.00	90.00	179.70	11,990.00	-649.13	264.42	466,220.43	731,128.04	32.280221	-103.719212
12,700.00	90.00	179.70	11,990.00	-749.13	264.94	466,120.43	731,128.56	32.279946	-103.719213
12,800.00	90.00	179.70	11,990.00	-849.13	265.46	466,020.44	731,129.08	32.279671	-103.719213
12,900.00	90.00	179.70	11,990.00	-949.12	265.98	465,920.44	731,129.60	32.279396	-103.719213
13,000.00	90.00	179.70	11,990.00	-1,049.12	266.50	465,820.44	731,130.12	32.279121	-103.719213
13,100.00	90.00	179.70	11,990.00	-1,149.12	267.02	465,720.44	731,130.64	32.278847	-103.719213
13,200.00	90.00	179.70	11,990.00	-1,249.12	267.54	465,620.44	731,131.16	32.278572	-103.719213
13,300.00	90.00	179.70	11,990.00	-1,349.12	268.06	465,520.44	731,131.68	32.278297	-103.719214
13,400.00	90.00	179.70	11,990.00	-1,449.12	268.58	465,420.45	731,132.20	32.278022	-103.719214
13,500.00	90.00	179.70	11,990.00	-1,549.12	269.10	465,320.45	731,132.73	32.277747	-103.719214
13,600.00	90.00 90.00	179.70 179.70	11,990.00	-1,649.11 1,740.11	269.62 270.14	465,220.45	731,133.25 731,133.77	32.277472 32.277197	-103.719214 -103.719214
13,700.00 13,800.00	90.00	179.70	11,990.00 11,990.00	-1,749.11 -1,849.11	270.14	465,120.45 465,020.45	731,134.29	32.276922	-103.719214
13,900.00	90.00	179.70	11,990.00	-1,949.11	271.18	464,920.45	731,134.81	32.276648	-103.719214
14,000.00		179.70	11,990.00	-2,049.11	271.70	464,820.46	731,135.33	32.276373	-103.719215
14,100.00	90.00	179.70	11,990.00	-2,149.11	272.22	464,720.46	731,135.85	32.276098	-103.719215
14,200.00	90.00	179.70	11,990.00	-2,249.11	272.74	464,620.46	731,136.37	32.275823	-103.719215
14,300.00	90.00	179.70	11,990.00	-2,349.11	273.26	464,520.46	731,136.89	32.275548	-103.719215
14,400.00	90.00	179.70	11,990.00	-2,449.10	273.78	464,420.46	731,137.41	32.275273	-103.719215
14,500.00	90.00	179.70	11,990.00	-2,549.10	274.30	464,320.46	731,137.93	32.274998	-103.719216
14,600.00	90.00	179.70	11,990.00	-2,649.10	274.82	464,220.46	731,138.45	32.274723	-103.719216
14,700.00	90.00	179.70	11,990.00	-2,749.10	275.34	464,120.47	731,138.97	32.274449	-103.719216
14,800.00	90.00	179.70	11,990.00	-2,849.10	275.86	464,020.47	731,139.49	32.274174	-103.719216
14,900.00	90.00	179.70	11,990.00	-2,949.10	276.38	463,920.47	731,140.01	32.273899	-103.719216
15,000.00	90.00	179.70	11,990.00	-3,049.10	276.90	463,820.47	731,140.53	32.273624	-103.719216
15,100.00	90.00	179.70	11,990.00	-3,149.09	277.42	463,720.47	731,141.05	32.273349	-103.719217
15,200.00	90.00	179.70	11,990.00	-3,249.09	277.94	463,620.47	731,141.57	32.273074	-103.719217
15,300.00	90.00	179.70	11,990.00	-3,349.09	278.46	463,520.48	731,142.09	32.272799	-103.719217
15,400.00	90.00	179.70	11,990.00	-3,449.09	278.98	463,420.48	731,142.61	32.272524	-103.719217

Database: EDM r5000.141_Prod US Company: WCDSC Permian NM

Project: Lea County (NAD83 New Mexico East)

Site: Sec 30-T23S-R32E

Well: Right Meow 30-31 Fed Com 621H

Wellbore: Wellbore #1

Design: Permit Plan 1

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Survey Calculation Method:

Well Right Meow 30-31 Fed Com 621H

RKB @ 3618.40ft RKB @ 3618.40ft

Grid

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
15,500.00	90.00	179.70	11,990.00	-3,549.09	279.50	463,320.48	731,143.13	32.272250	-103.719217
15,600.00	90.00	179.70	11,990.00	-3,649.09	280.02	463,220.48	731,143.65	32.271975	-103.719217
15,700.00	90.00	179.70	11,990.00	-3,749.09	280.54	463,120.48	731,144.17	32.271700	-103.719218
15,800.00	90.00	179.70	11,990.00	-3,849.09	281.06	463,020.48	731,144.69	32.271425	-103.719218
15,900.00	90.00	179.70	11,990.00	-3,949.08	281.58	462,920.48	731,145.21	32.271150	-103.719218
16,000.00	90.00	179.70	11,990.00	-4,049.08	282.10	462,820.49	731,145.73	32.270875	-103.719218
16,100.00	90.00	179.70	11,990.00	-4,149.08	282.62	462,720.49	731,146.25	32.270600	-103.719218
16,200.00	90.00	179.70	11,990.00	-4,249.08	283.14	462,620.49	731,146.77	32.270325	-103.719219
16,300.00	90.00	179.70	11,990.00	-4,349.08	283.67	462,520.49	731,147.29	32.270051	-103.719219
16,400.00	90.00	179.70	11,990.00	-4,449.08	284.19	462,420.49	731,147.81	32.269776	-103.719219
16,500.00	90.00	179.70	11,990.00	-4,549.08	284.71	462,320.49	731,148.33	32.269501	-103.719219
16,600.00	90.00	179.70	11,990.00	-4,649.07	285.23	462,220.50	731,148.85	32.269226	-103.719219
16,700.00	90.00	179.70	11,990.00	-4,749.07	285.75	462,120.50	731,149.37	32.268951	-103.719219
16,800.00	90.00	179.70	11,990.00	-4,849.07	286.27	462,020.50	731,149.89	32.268676	-103.719220
16,900.00	90.00	179.70	11,990.00	-4,949.07	286.79	461,920.50	731,150.41	32.268401	-103.719220
16,980.00	90.00	179.70	11,990.00	-5,029.07	287.20	461,840.50	731,150.83	32.268181	-103.719220
Cross se	ection @ 1698	0' MD, 0' FNL	., 1160' FWL						
17,000.00	90.00	179.70	11,990.00	-5,049.07	287.31	461,820.50	731,150.93	32.268126	-103.719220
17,100.00	90.00	179.70	11,990.00	-5,149.07	287.83	461,720.50	731,151.45	32.267852	-103.719220
17,200.00	90.00	179.70	11,990.00	-5,249.07	288.35	461,620.50	731,151.97	32.267577	-103.719220
17,300.00	90.00	179.70	11,990.00	-5,349.06	288.87	461,520.51	731,152.49	32.267302	-103.719220
17,400.00	90.00	179.70	11,990.00	-5,449.06	289.39	461,420.51	731,153.01	32.267027	-103.719221
17,500.00	90.00	179.70	11,990.00	-5,549.06	289.91	461,320.51	731,153.53	32.266752	-103.719221
17,600.00	90.00	179.70	11,990.00	-5,649.06	290.43	461,220.51	731,154.05	32.266477	-103.719221
17,700.00	90.00	179.70	11,990.00	-5,749.06	290.95	461,120.51	731,154.57	32.266202	-103.719221
17,800.00	90.00	179.70	11,990.00	-5,849.06	291.47	461,020.51	731,155.09	32.265927	-103.719221
17,900.00	90.00	179.70	11,990.00	-5,949.06	291.99	460,920.52	731,155.61	32.265653	-103.719221
18,000.00	90.00	179.70	11,990.00	-6,049.06	292.51	460,820.52	731,156.13	32.265378	-103.719222
18,100.00	90.00	179.70	11,990.00	-6,149.05	293.03	460,720.52	731,156.65	32.265103	-103.719222
18,200.00	90.00	179.70	11,990.00	-6,249.05	293.55	460,620.52	731,157.17	32.264828	-103.719222
18,300.00	90.00	179.70	11,990.00	-6,349.05	294.07	460,520.52	731,157.70	32.264553	-103.719222
18,400.00	90.00	179.70	11,990.00	-6,449.05	294.59	460,420.52	731,158.22	32.264278	-103.719222
18,500.00	90.00	179.70	11,990.00	-6,549.05	295.11	460,320.52	731,158.74	32.264003	-103.719222
18,600.00	90.00	179.70	11,990.00	-6,649.05	295.63	460,220.53	731,159.26	32.263728	-103.719223
18,700.00	90.00	179.70	11,990.00	-6,749.05	296.15	460,120.53	731,159.78	32.263454	-103.719223
18,800.00	90.00	179.70	11,990.00	-6,849.04	296.67	460,020.53	731,160.30	32.263179	-103.719223
18,900.00	90.00	179.70	11,990.00	-6,949.04	297.19	459,920.53	731,160.82	32.262904	-103.719223
19,000.00	90.00	179.70	11,990.00	-7,049.04	297.71	459,820.53	731,161.34	32.262629	-103.719223
19.100.00	90.00	179.70	11,990.00	-7,149.04	298.23	459.720.53	731,161.86	32.262354	-103.719223
19,200.00	90.00	179.70	11,990.00	-7,249.04	298.75	459,620.54	731,162.38	32.262079	-103.719224
19,300.00	90.00	179.70	11,990.00	-7,349.04	299.27	459,520.54	731,162.90	32.261804	-103.719224
19,400.00	90.00	179.70	11,990.00	-7,449.04	299.79	459,420.54	731,163.42	32.261529	-103.719224
19,500.00	90.00	179.70	11,990.00	-7,549.04	300.31	459,320.54	731,163.94	32.261255	-103.719224
19,600.00	90.00	179.70	11,990.00	-7,649.03	300.83	459,220.54	731,164.46	32.260980	-103.719224
19,700.00	90.00	179.70	11,990.00	-7,749.03	301.35	459,120.54	731,164.98	32.260705	-103.719224
19,800.00	90.00	179.70	11,990.00	-7,849.03	301.87	459,020.55	731,165.50	32.260430	-103.719225
19,900.00	90.00	179.70	11,990.00	-7,949.03	302.39	458,920.55	731,166.02	32.260155	-103.719225
20,000.00	90.00	179.70	11,990.00	-8,049.03	302.39	458,820.55	731,166.54	32.259880	-103.719225
20,000.00	90.00	179.70	11,990.00	-8,149.03	303.43	458,720.55	731,167.06	32.259605	-103.719225
20,100.00	90.00	179.70	11,990.00	-8,249.03	303.43	458,620.55	731,167.58	32.259330	-103.719225
20,200.00	90.00	179.70	11,990.00	-8,249.03 -8,349.02	303.93	458,520.55	731,168.10	32.259055	-103.719225
			11,990.00					32.259055 32.258781	
20,400.00 20,500.00	90.00	179.70 170.70	,	-8,449.02 8 540.02	304.99 305.51	458,420.55 458,320.56	731,168.62		-103.719226
,	90.00	179.70	11,990.00	-8,549.02	305.51	458,320.56	731,169.14	32.258506	-103.719226
20,600.00	90.00	179.70	11,990.00	-8,649.02	306.03	458,220.56	731,169.66	32.258231	-103.719226

Database: EDM r5000.141_Prod US Company: WCDSC Permian NM

Project: Lea County (NAD83 New Mexico East)

Site: Sec 30-T23S-R32E

Well: Right Meow 30-31 Fed Com 621H

Wellbore: Wellbore #1

Design: Permit Plan 1

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Well Right Meow 30-31 Fed Com 621H

RKB @ 3618.40ft RKB @ 3618.40ft

Grid

Planned Survey	,								
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
20,700.00	90.00	179.70	11,990.00	-8,749.02	306.55	458,120.56	731,170.18	32.257956	-103.719226
20,800.00	90.00	179.70	11,990.00	-8,849.02	307.07	458,020.56	731,170.70	32.257681	-103.719226
20,900.00	90.00	179.70	11,990.00	-8,949.02	307.59	457,920.56	731,171.22	32.257406	-103.719226
21,000.00	90.00	179.70	11,990.00	-9,049.01	308.12	457,820.56	731,171.74	32.257131	-103.719227
21,100.00	90.00	179.70	11,990.00	-9,149.01	308.64	457,720.57	731,172.26	32.256856	-103.719227
21,200.00	90.00	179.70	11,990.00	-9,249.01	309.16	457,620.57	731,172.78	32.256582	-103.719227
21,300.00	90.00	179.70	11,990.00	-9,349.01	309.68	457,520.57	731,173.30	32.256307	-103.719227
21,400.00	90.00	179.70	11,990.00	-9,449.01	310.20	457,420.57	731,173.82	32.256032	-103.719227
21,500.00	90.00	179.70	11,990.00	-9,549.01	310.72	457,320.57	731,174.34	32.255757	-103.719227
21,600.00	90.00	179.70	11,990.00	-9,649.01	311.24	457,220.57	731,174.86	32.255482	-103.719228
21,700.00	90.00	179.70	11,990.00	-9,749.01	311.76	457,120.57	731,175.38	32.255207	-103.719228
21,800.00	90.00	179.70	11,990.00	-9,849.00	312.28	457,020.58	731,175.90	32.254932	-103.719228
21,900.00	90.00	179.70	11,990.00	-9,949.00	312.80	456,920.58	731,176.42	32.254657	-103.719228
21,937.10	90.00	179.70	11,990.00	-9,986.10	312.99	456,883.48	731,176.62	32.254555	-103.719228
PBHL &	LTP @ 21937'	MD, 320' FSL	., 1160' FWL						
21,937.11	90.00	179.70	11,990.00	-9,986.11	312.99	456,883.47	731,176.62	32.254555	-103.719228

Design Targets									
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (usft)	Easting (usft)	Latitude	Longitude
PBHL - Right Meow 30-3 - plan misses target of - Point	0.00 center by 1029	0.00 90.92ft at 0.0	0.00 Oft MD (0.0	-10,286.11 0 TVD, 0.00 N	314.55 , 0.00 E)	456,583.47	731,178.18	32.253731	-103.719229

Plan Annotations				
Measured	Vertical	Local Coor	dinates	
Depth	Depth	+N/-S	+E/-W	0
(ft)	(ft)	(ft)	(ft)	Comment
11,424.0	0 11,417.22	200.00	260.00	KOP @ 11424' MD, 50' FNL, 1160' FWL
11,665.0	0 11,651.16	149.98	260.26	FTP @ 11665' MD, 100' FNL, 1160' FWL
16,980.0	0 11,990.00	-5,029.07	287.20	Cross section @ 16980' MD, 0' FNL, 1160' FWL
21,937.1	0 11,990.00	-9,986.10	312.99	PBHL & LTP @ 21937' MD, 320' FSL, 1160' FWL



Devon Energy Center 333 West Sheridan Avenue Oklahoma City, Oklahoma 73102-5015


Hydrogen Sulfide (H₂S) Contingency Plan

For

Right Meow 30-31 Fed Com 621H

Sec-30 T-23S R-32E 250' FNL & 900' FWL LAT. = 32.2820093' N (NAD83) LONG = 103.7200557' W

Lea County NM

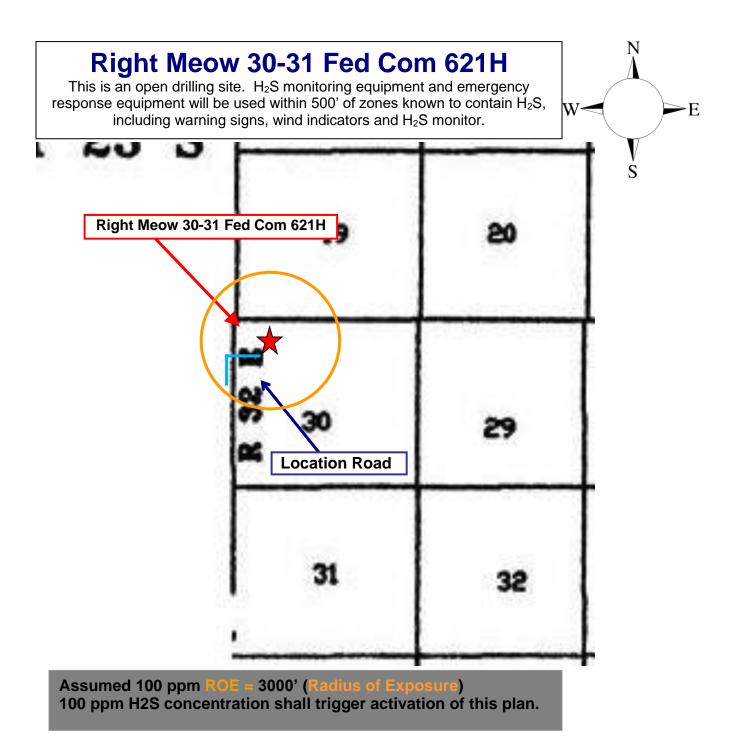

Escape

Crews shall escape upwind of escaping gas in the event of an emergency release of gas. Escape can be facilitated from the location entrance road. Crews should then block the entrance to the location from the lease road so as not to allow anyone traversing into a hazardous area. The blockade should be at a safe distance outside of the ROE. There are no homes or buildings in or near the ROE.

Assumed 100 ppm ROE = 3000'

100 ppm H₂S concentration shall trigger activation of this plan.

Emergency Procedures

In the event of a release of gas containing H₂S, the first responder(s) must

- Isolate the area and prevent entry by other persons into the 100 ppm ROE.
- Evacuate any public places encompassed by the 100 ppm ROE.
- Be equipped with H₂S monitors and air packs in order to control the release.
- Use the "buddy system" to ensure no injuries occur during the response
- Take precautions to avoid personal injury during this operation.
- Contact operator and/or local officials to aid in operation. See list of phone numbers attached.
- Have received training in the
 - Detection of H₂S, and
 - Measures for protection against the gas,
 - Equipment used for protection and emergency response.

Ignition of Gas Source

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO₂). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever there is an ignition of the gas

Characteristics of H₂S and SO₂

Common Name	Chemical Formula	Specific Gravity	Threshold Limit	Hazardous Limit	Lethal Concentration
Hydrogen Sulfide	H ₂ S	1.189 Air = 1	10 ppm	100 ppm/hr	600 ppm
Sulfur Dioxide	SO ₂	2.21 Air = 1	2 ppm	N/A	1000 ppm

Contacting Authorities

Devon Energy Corp. personnel must liaison with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available. The following call list of essential and potential responders has been prepared for use during a release. Devon Energy Corp. Company response must be in coordination with the State of New Mexico's 'Hazardous Materials Emergency Response Plan' (HMER)

Hydrogen Sulfide Drilling Operation Plan

I. HYDROGEN SULFIDE (H2S) TRAINING

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

- 1. The hazards and characteristics of hydrogen sulfide (H₂S)
- 2. The proper use and maintenance of personal protective equipment and life support systems.
- 3. The proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
- 4. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

- The effects of H₂S metal components. If high tensile tubulars are to be used, personnel will be trained in their special maintenance requirements.
- 2. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
- 3. The contents and requirements of the H₂S Drilling Operations Plan and Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H₂S zone (within 3 days or 500 feet) and weekly H₂S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H₂S Drilling Operations Plan and the Public Protection Plan.

II. HYDROGEN SULFIDE TRAINING

Note: All H₂S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonably expected to contain H₂S.

1. Well Control Equipment

- A. Flare line
- B. Choke manifold Remotely Operated
- C. Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit
- D. Auxiliary equipment may include if applicable: annular preventer and rotating head.
- E. Mud/Gas Separator

2. Protective equipment for essential personnel:

30-minute SCBA units located at briefing areas, as indicated on well site diagram, with escape units available in the top doghouse. As it may be difficult to communicate audibly while wearing these units, hand signals shall be utilized.

3. H₂S detection and monitoring equipment:

Portable H₂S monitors positioned on location for best coverage and response. These units have warning lights which activate when H₂S levels reach 10 ppm and audible sirens which activate at 15 ppm. Sensor locations:

- Bell nipple
- Possum Belly/Shale shaker
- Rig floor
- Choke manifold
- Cellar

Visual warning systems:

- A. Wind direction indicators as shown on well site diagram
- B. Caution/ Danger signs shall be posted on roads providing direct access to locations. Signs will be painted a high visibility yellow with black lettering of sufficient size to be reasonable distance from the immediate location. Bilingual signs will be used when appropriate.

4. Mud program:

The mud program has been designed to minimize the volume of H₂S circulated to surface. Proper mud weight, safe drilling practices and the use of H₂S scavengers will minimize hazards when penetrating H₂S bearing zones.

5. Metallurgy:

- A. All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold lines, and valves shall be H₂S trim.
- B. All elastomers used for packing and seals shall be H₂S trim.

6. Communication:

- Company personnel have/use cellular telephones in the field.
- B. Land line (telephone) communications at Office


7. Well testing:

- A. Drill stem testing will be performed with a minimum number of personnel in the immediate vicinity, which are necessary to safety and adequately conduct the test. The drill stem testing will be conducted during daylight hours and formation fluids will not be flowed to the surface. All drill-stem-testing operations conducted in an H₂S environment will use the closed chamber method of testing.
- B. There will be no drill stem testing.

Devon En	ergy Corp. Company Call List	
Drilling Su	pervisor – Basin – Mark Kramer	405-823-4796
EHS Profe	essional – Laura Wright	405-439-8129
LIIOTIOIC	SSIONAL - Laura Wright	403-433-0123
Agency	Call List	
<u>Lea</u>	Hobbs	000 0004
County (575)	Lea County Communication Authority	393-3981
<u>(575)</u>	State Police	392-5588
	City Police	397-9265
	Sheriff's Office	393-2515
	Ambulance	911
	Fire Department	397-9308
	LEPC (Local Emergency Planning Committee)	393-2870
	NMOCD	393-6161
	US Bureau of Land Management	393-3612
Eddy	Carlsbad	
County	State Police	885-3137
(575)	City Police	885-2111
	Sheriff's Office	887-7551
	Ambulance	911
	Fire Department	885-3125
	LEPC (Local Emergency Planning Committee)	887-3798
	US Bureau of Land Management	887-6544
	NM Emergency Response Commission (Santa Fe)	(505) 476-9600
	24 HR	(505) 827-9126
	National Emergency Response Center	(800) 424-8802
	National Pollution Control Center: Direct	(703) 872-6000
	For Oil Spills	(800) 280-7118
	Emergency Services	(000) = 00 : : : 0
	Wild Well Control	(281) 784-4700
	Cudd Pressure Control (915) 699-0139	(915) 563-3356
	Halliburton	(575) 746-2757
	B. J. Services	(575) 746-3569
Give	Native Air – Emergency Helicopter – Hobbs (TX & NM)	(800) 642-7828
GPS	Flight For Life - Lubbock, TX	(806) 743-9911
position:	Aerocare - Lubbock, TX	(806) 747-8923
P00:00:11.	Med Flight Air Amb - Albuquerque, NM	(575) 842-4433
	Lifeguard Air Med Svc. Albuquerque, NM	(800) 222-1222
	Poison Control (24/7)	(575) 272-3115
	Oil & Gas Pipeline 24 Hour Service	(800) 364-4366
	NOAA – Website - www.nhc.noaa.gov	(000) 004-4000
	110701 - WODSIG - WWW.HHO.HOda.gov	

Prepared in conjunction with Dave Small



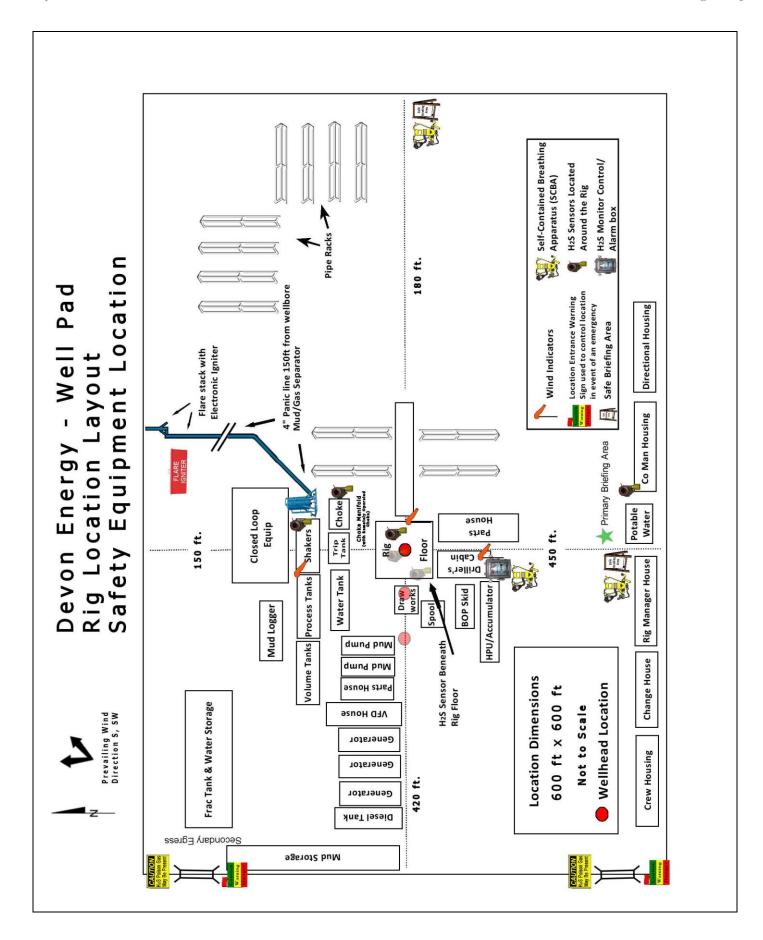

PECOS DISTRICT SURFACE USE CONDITIONS OF APPROVAL

Right Meow 30 Well Pads, Central Tank Battery, Access Roads, Buried Flowlines (Composite Flowline and Composite Gas Lift Line), Electric Lines **Devon Energy Production Co.**

Right Meow 3 Surface Bottom Hole	Section Section	FED 30 31	331H T23S, T23S,	R32E R32E	Well Pad 250 20	fNL, FSL,	870 600	FWL, FWL,	Lea County Lea County
Right Meow 3 Surface Bottom Hole	Section Section	FED 30 31	121H T23S, T23S,	R32E R32E	Well Pad 7 550 20	fNL, FSL,	870 800	FWL, FWL,	Lea County Lea County
Right Meow 3 Surface Bottom Hole	Section Section	FED 30 31	622H T23S, T23S,	R32E R32E	Well Pad 2 250 20	FNL, FSL,	1865 2410	FWL, FWL,	Lea County Lea County
Right Meow 3 Surface Bottom Hole	Section Section	FED 30 31	531H T23S, T23S,	R32E R32E	Well Pad 7 550 20	fNL, FSL,	900 1200	FWL, FWL,	Lea County Lea County
Right Meow 3 Surface Bottom Hole	Section Section	FED 30 31	711H T23S, T23S,	R32E R32E	Well Pad 250 20	FNL, FSL,	840 500	FWL, FWL,	Lea County Lea County
Right Meow 3 Surface Bottom Hole	Section Section	FED 30 31	621H T23S, T23S,	R32E R32E	Well Pad 250 20	fNL, FSL,	900 1160	FWL, FWL,	Lea County Lea County
Surface	Section Section	30	T23S,	R32E	250	FNL, FSL,		,	
Surface Bottom Hole Right Meow 3 Surface	Section Section Section Section	30 31 FED 30	T23S, T23S, 521H T23S,	R32E R32E R32E	250 20 Well Pad 7 550	FNL, FSL, I FNL, FSL,	1160 840	FWL,	Lea County Lea County
Surface Bottom Hole Right Meow 3 Surface Bottom Hole Right Meow 3 Surface	Section Section Section Section Section Section Section	30 31 FED 30 31 FED 30	T23S, T23S, 521H T23S, T23S, 712H T23S,	R32E R32E R32E R32E	250 20 Well Pad 250 Well Pad 250	FNL, FSL, I FNL, FSL, 2 FNL, FSL,	1160 840 350 1805	FWL, FWL, FWL,	Lea County Lea County Lea County

Right Meow 30)	FED	522H		Well Pad 2				
Surface	Section	30	T23S,	R32E	550	FNL,	1805	FWL,	Lea County
Bottom Hole	Section	31	T23S,	R32E	20	FSL,	1860	FWL,	Lea County
Right Meow 30)	FED	122H		Well Pad 2				
Surface	Section	30	,		550	FNL,	1835	•	Lea County
Bottom Hole	Section	31	T23S,	R32E	20	FSL,	2150	FWL,	Lea County

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

☐ General Provisions
Permit Expiration
Archaeology, Paleontology, and Historical Sites
Noxious Weeds
Special Requirements
Lesser Prairie-Chicken Timing Stipulations
Ground-level Abandoned Well Marker
Hydrology
☐ Construction
Notification
Topsoil
Closed Loop System
Federal Mineral Material Pits
Well Pads
Roads
☐ Road Section Diagram
Production (Post Drilling)
Well Structures & Facilities
Pipelines
Electric Lines
☐ Interim Reclamation
Final Abandonment & Reclamation

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

<u>Timing Limitation Stipulation / Condition of Approval for lesser prairie-chicken:</u>

Oil and gas activities including 3-D geophysical exploration, and drilling will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Additionally, no new drilling will be allowed within up to 200 meters of leks known at the time of permitting. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 feet from the source of the noise.

Timing Limitation Exceptions:

The Carlsbad Field Office will publish an annual map of where the LPC timing and noise stipulations and conditions of approval (Limitations) will apply for the identified year (between March 1 and June 15) based on the latest survey information. The LPC Timing Area map will identify areas which are Habitat Areas (HA), Isolated Population Area (IPA), and Primary Population Area (PPA). The LPC Timing Area map will also have an area in red crosshatch. The red crosshatch area is the only area where an operator is required to submit a request for exception to the LPC Limitations. If an operator is operating outside the red crosshatch area, the LPC Limitations do not apply for that year and an exception to LPC Limitations is not required.

<u>Ground-level Abandoned Well Marker to avoid raptor perching</u>: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well. For more installation details, contact the Carlsbad Field Office at 575-234-5972.

Avian Power line Protection:

Power lines shall be constructed and designed in accordance to standards outlined in "Suggested Practices for Avian Protection on Power lines: The State of the Art in 2006" Edison Electric Institute, APLIC, and the California Energy Commission 2006. The holder shall assume the burden and expense of proving that pole designs not shown in the above publication deter raptor perching, roosting, and nesting. Such proof shall be provided by a raptor expert approved by the Authorized Officer. The BLM reserves the right to require modification or additions to all power line structures placed on this right-of-way, should they be necessary to ensure the safety of large perching birds. The holder without liability or expense shall make such modifications and/or additions to the United States.

Hydrology:

The entire well pad(s) will be bermed to prevent oil, salt, and other chemical contaminants from leaving the well pad. The compacted berm shall be constructed at a minimum of 12 inches with impermeable mineral material (e.g. caliche). Topsoil shall not be used to construct the berm. No water flow from the uphill side(s) of the pad shall be allowed to enter the well pad. The integrity of the berm shall be maintained around the surfaced pad throughout the life of the well and around the downsized pad after interim reclamation has been completed. Any water erosion that may occur due to the construction of the well pad during the life of the well will be quickly corrected and proper measures will be taken to prevent future erosion. Stockpiling of topsoil is required. The top soil shall be stockpiled in an appropriate location to prevent loss of soil due to water or wind erosion and not used for berming or erosion control. If fluid collects within the bermed area, the fluid must be vacuumed into a safe container and disposed of properly at a state approved facility.

Tank battery locations will be lined and bermed. A 20 mil permanent liner will be installed with a 4 oz. felt backing to prevent tears or punctures. Tank battery berms must be large enough to contain 1 ½ times the content of the largest tank or 24 hour production, whichever is greater. Automatic shut off, check valves, or similar systems will be installed for tanks to minimize the effects of catastrophic line failures used in production or drilling.

When crossing ephemeral drainages the pipeline(s) will be buried to a minimum depth of 48 inches from the top of pipe to ground level. Erosion control methods such as gabions and/or rock aprons should be placed on both up and downstream sides of the pipeline crossing. In addition, curled (weed free) wood/straw fiber wattles/logs and/or silt fences should be placed on the downstream side for sediment control during construction and maintained until soils and vegetation have stabilized. Water bars should be placed within the ROW to divert and dissipate surface runoff. A pipeline access road is not permitted to cross these ephemeral drainages. Traffic should be diverted to a preexisting route. Additional seeding may be required in floodplains and drainages to restore energy dissipating vegetation.

Prior to pipeline installation/construction a leak detection plan will be developed. The method(s) could incorporate gauges to detect pressure drops, situating valves and lines so they can be visually inspected periodically or installing electronic sensors to alarm when a leak is present. The leak detection plan will incorporate an automatic shut off system that will be installed for proposed pipelines to minimize the effects of an undesirable event.

Any water erosion that may occur due to the construction of overhead electric line and during the life of the power line will be quickly corrected and proper measures will be taken to prevent future erosion. A power pole should not be placed in drainages, playas, wetlands, riparian areas, or floodplains and must span across the features at a distance away that would not promote further erosion.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Page 7 of 22

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS

Road Width

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (24) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed thirty (30) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 24' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outsloping and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch



All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

400 foot road with 4% road slope:
$$\frac{400'}{4\%}$$
 + 100' = 200' lead-off ditch interval

Cattle guards

An appropriately sized cattle guard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattle guards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattle guards that are in place and are utilized during lease operations.

Fence Requirement

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Construction Steps

- 1. Salvage topsoil
- 3. Redistribute topsoil
- 2. Construct road
- 4. Revegetate slopes

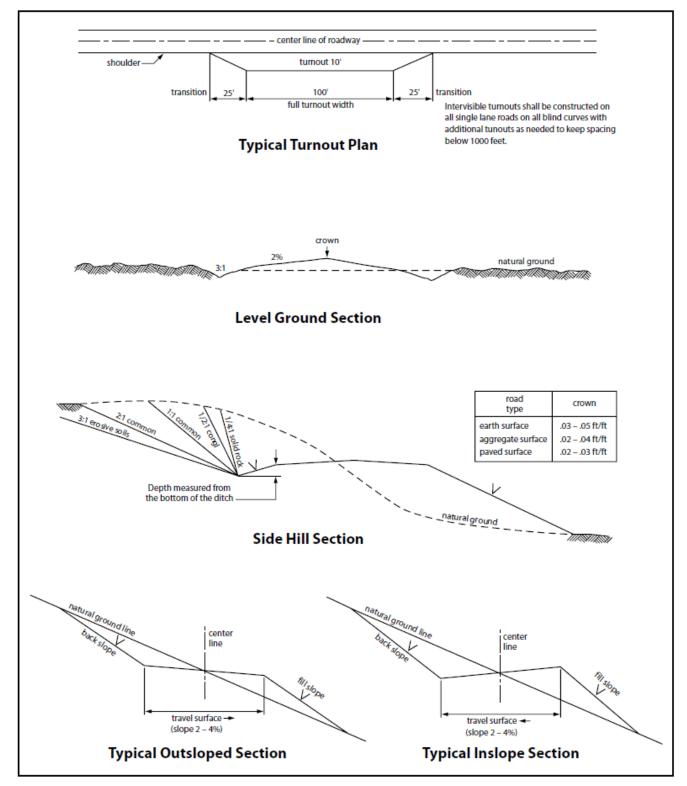


Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

VII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

B. PIPELINES

BURIED PIPELINE STIPULATIONS

A copy of the application (Grant, APD, or Sundry Notice) and attachments, including conditions of approval, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

- 1. The Holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
- 2. The Holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
- 3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C.6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

- 4. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil or other pollutant, wherever found, shall be the responsibility of holder, regardless of fault. Upon failure of holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he deems necessary to control and clean up the discharge and restore the area, including where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of the holder. Such action by the Authorized Officer shall not relieve holder of any responsibility as provided herein.
- 5. All construction and maintenance activity will be confined to the authorized right-of-way.
- 6. The pipeline will be buried with a minimum cover of 36 inches between the top of the pipe and ground level.
- 7. The maximum allowable disturbance for construction in this right-of-way will be **30** feet:
 - Blading of vegetation within the right-of-way will be allowed: maximum width of blading operations will not exceed <u>30</u> feet. The trench is included in this area. (*Blading is defined as the complete removal of brush and ground vegetation.*)
 - Clearing of brush species within the right-of-way will be allowed: maximum width of clearing operations will not exceed <u>30</u> feet. The trench and bladed area are included in this area. (Clearing is defined as the removal of brush while leaving ground vegetation (grasses, weeds, etc.) intact. Clearing is best accomplished by holding the blade 4 to 6 inches above the ground surface.)
 - The remaining area of the right-of-way (if any) shall only be disturbed by compressing the vegetation. (*Compressing can be caused by vehicle tires, placement of equipment, etc.*)
- 8. The holder shall stockpile an adequate amount of topsoil where blading is allowed. The topsoil to be stripped is approximately ___6__ inches in depth. The topsoil will be segregated from other spoil piles from trench construction. The topsoil will be evenly distributed over the bladed area for the preparation of seeding.
- 9. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

- 10. Vegetation, soil, and rocks left as a result of construction or maintenance activity will be randomly scattered on this right-of-way and will not be left in rows, piles, or berms, unless otherwise approved by the Authorized Officer. The entire right-of-way shall be recontoured to match the surrounding landscape. The backfilled soil shall be compacted and a 6 inch berm will be left over the ditch line to allow for settling back to grade.
- 11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.
- 12. The holder will reseed all disturbed areas. Seeding will be done according to the attached seeding requirements, using the following seed mix.

() seed mixture 1	() seed mixture 3
() seed mixture 2	() seed mixture 4
(X) seed mixture 2/LPC	() Aplomado Falcon Mixture

- 13. All above-ground structures not subject to safety requirements shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be color which simulates "Standard Environmental Colors" **Shale Green**, Munsell Soil Color No. 5Y 4/2.
- 14. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. All signs and information thereon will be posted in a permanent, conspicuous manner, and will be maintained in a legible condition for the life of the pipeline.
- 15. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder before maintenance begins. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway. As determined necessary during the life of the pipeline, the Authorized Officer may ask the holder to construct temporary deterrence structures.
- 16. Any cultural and/or paleontological resources (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

- 17. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes associated roads, pipeline corridor and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.
- 18. <u>Escape Ramps</u> The operator will construct and maintain pipeline/utility trenches [that are not otherwise fenced, screened, or netted] to prevent livestock, wildlife, and humans from becoming entrapped. At a minimum, the operator will construct and maintain escape ramps, ladders, or other methods of avian and terrestrial wildlife escape in the trenches according to the following criteria:
 - a. Any trench left open for eight (8) hours or less is not required to have escape ramps; however, before the trench is backfilled, the contractor/operator shall inspect the trench for wildlife, remove all trapped wildlife, and release them at least 100 yards from the trench.
 - b. For trenches left open for eight (8) hours or more, earthen escape ramps (built at no more than a 30 degree slope and spaced no more than 500 feet apart) shall be placed in the trench.

STANDARD STIPULATIONS FOR SURFACE INSTALLED PIPELINES

A copy of the application (Grant, Sundry Notice, APD) and attachments, including stipulations, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

- 1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
- 2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR, Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
- 3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the

Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to activity of the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

- 4. The holder shall be liable for damage or injury to the United States to the extent provided by 43 CFR Sec. 2883.1-4. The holder shall be held to a standard of strict liability for damage or injury to the United States resulting from pipe rupture, fire, or spills caused or substantially aggravated by any of the following within the right-of-way or permit area:
 - a. Activities of the holder including, but not limited to construction, operation, maintenance, and termination of the facility.
 - b. Activities of other parties including, but not limited to:
 - (1) Land clearing.
 - (2) Earth-disturbing and earth-moving work.
 - (3) Blasting.
 - (4) Vandalism and sabotage.
 - c. Acts of God.

The maximum limitation for such strict liability damages shall not exceed one million dollars (\$1,000,000) for any one event, and any liability in excess of such amount shall be determined by the ordinary rules of negligence of the jurisdiction in which the damage or injury occurred.

This section shall not impose strict liability for damage or injury resulting primarily from an act of war or from the negligent acts or omissions of the United States.

- 5. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil, salt water, or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil, salt water, or other pollutant, wherever found, shall be the responsibility of the holder, regardless of fault. Upon failure of the holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he deems necessary to control and clean up the discharge and restore the area, including, where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of the holder. Such action by the Authorized Officer shall not relieve the holder of any responsibility as provided herein.
- 6. All construction and maintenance activity will be confined to the authorized right-of-way width of ______ feet. If the pipeline route follows an existing road or buried pipeline right-of-way, the surface pipeline must be installed no farther than 10 feet

from the edge of the road or buried pipeline right-of-way. If existing surface pipelines prevent this distance, the proposed surface pipeline must be installed immediately adjacent to the outer surface pipeline. All construction and maintenance activity will be confined to existing roads or right-of-ways.

- 7. No blading or clearing of any vegetation will be allowed unless approved in writing by the Authorized Officer.
- 8. The holder shall install the pipeline on the surface in such a manner that will minimize suspension of the pipeline across low areas in the terrain. In hummocky of duney areas, the pipeline will be "snaked" around hummocks and dunes rather then suspended across these features.
- 9. The pipeline shall be buried with a minimum of <u>24</u> inches under all roads, "two-tracks," and trails. Burial of the pipe will continue for 20 feet on each side of each crossing. The condition of the road, upon completion of construction, shall be returned to at least its former state with no bumps or dips remaining in the road surface.
- 10. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.
- 11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.
- 12. Excluding the pipe, all above-ground structures not subject to safety requirement shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be a color which simulates "Standard Environmental Colors" **Shale Green**, Munsell Soil Color No. 5Y 4/2; designated by the Rocky Mountain Five State Interagency Committee.
- 13. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. Signs will be maintained in a legible condition for the life of the pipeline.
- 14. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway.

- 15. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the authorized officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the authorized officer. An evaluation of the discovery will be made by the authorized officer to determine appropriate cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the authorized officer after consulting with the holder.
- 16. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, powerline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.
- 17. Surface pipelines must be less than or equal to 4 inches and a working pressure below 125 psi.

C. ELECTRIC LINES

STANDARD STIPULATIONS FOR OVERHEAD ELECTRIC DISTRIBUTION LINES

A copy of the grant and attachments, including stipulations, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

- 1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
- 2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR, Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as

Page 18 of 22

a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.

- 3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.
- 4. There will be no clearing or blading of the right-of-way unless otherwise agreed to in writing by the Authorized Officer.
- 5. Power lines shall be constructed and designed in accordance to standards outlined in "Suggested Practices for Avian Protection on Power lines: The State of the Art in 2006" Edison Electric Institute, APLIC, and the California Energy Commission 2006. The holder shall assume the burden and expense of proving that pole designs not shown in the above publication deter raptor perching, roosting, and nesting. Such proof shall be provided by a raptor expert approved by the Authorized Officer. The BLM reserves the right to require modification or additions to all powerline structures placed on this right-of-way, should they be necessary to ensure the safety of large perching birds. Such modifications and/or additions shall be made by the holder without liability or expense to the United States.

Raptor deterrence will consist of but not limited to the following: triangle perch discouragers shall be placed on each side of the cross arms and a nonconductive perching deterrence shall be placed on all vertical poles that extend past the cross arms.

- 6. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting the fence. No permanent gates will be allowed unless approved by the Authorized Officer.
- 7. The BLM serial number assigned to this authorization shall be posted in a permanent, conspicuous manner where the power line crosses roads and at all serviced facilities. Numbers will be at least two inches high and will be affixed to the pole nearest the road crossing and at the facilities served.
- 8. Upon cancellation, relinquishment, or expiration of this grant, the holder shall comply with those abandonment procedures as prescribed by the Authorized Officer.

- 9. All surface structures (poles, lines, transformers, etc.) shall be removed within 180 days of abandonment, relinquishment, or termination of use of the serviced facility or facilities or within 180 days of abandonment, relinquishment, cancellation, or expiration of this grant, whichever comes first. This will not apply where the power line extends service to an active, adjoining facility or facilities.
- 10. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

11. Special Stipulations:

- For reclamation remove poles, lines, transformer, etc. and dispose of properly.
- Fill in any holes from the poles removed.

VIII. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

Page 20 of 22

IX. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Seed Mixture for LPC Sand/Shinnery Sites

The holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be <u>no</u> primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed will be done in accordance with State law(s) and within nine (9) months prior to purchase. Commercial seed will be either certified or registered seed. The seed container will be tagged in accordance with State law(s) and available for inspection by the authorized officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). The holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. The seeding will be repeated until a satisfactory stand is established as determined by the authorized officer. Evaluation of growth will not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

<u>Species</u>	<u>lb/acre</u>
Plains Bristlegrass	5lbs/A
Sand Bluestem	5lbs/A
Little Bluestem	3lbs/A
Big Bluestem	6lbs/A
Plains Coreopsis	2lbs/A
Sand Dropseed	1lbs/A

^{*}Pounds of pure live seed:

Pounds of seed \mathbf{x} percent purity \mathbf{x} percent germination = pounds pure live seed

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME: Devon Energy Production Company LP

LEASE NO.: NMNM014157

LOCATION: Section 30, T.23 S., R.32 E., NMPM

COUNTY: Lea County, New Mexico

WELL NAME & NO.: Right Meow 30-31 Fed Com 621H

SURFACE HOLE FOOTAGE: 250'/N & 900'/W **BOTTOM HOLE FOOTAGE** 20'/S & 1160'/W

WELL NAME & NO.: Right Meow 30-31 Fed Com 711H

SURFACE HOLE FOOTAGE: 250'/N & 840'/W **BOTTOM HOLE FOOTAGE** 20'/S & 500'/W

COA

H2S	© Yes	□ No	
Potash	■ None	☐ Secretary	C R-111-P
Cave/Karst Potential	© Low	☐ Medium	□ High
Cave/Karst Potential	Critical		
Variance	None	☑ Flex Hose	C Other
Wellhead	Conventional	Multibowl	□ Both
Other	☐ 4 String Area	☐ Capitan Reef	□WIPP
Other	Fluid Filled	▼ Cement Squeeze	☐ Pilot Hole
Special Requirements	☐ Water Disposal	™ COM	□ Unit

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H2S) Drilling Plan shall be activated 500 feet prior to drilling into the **Triste Draw**, **Bone Spring Sands**, **Mesa Verde** formation. As a result, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING

- 1. The 13-3/8 inch surface casing shall be set at approximately 1075 feet (a minimum of 25 feet (Lea County) into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature

- survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
- d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Intermediate casing must be kept fluid filled to meet BLM minimum collapse requirement.

- 2. The minimum required fill of cement behind the 8-5/8 inch intermediate casing is:
 - Cement to surface. If cement does not circulate see B.1.a, c-d above. Cement excess is less than 25%, more cement might be required.

Operator has proposed to pump down 13-3/8" X 8-5/8" annulus. Operator must run a CBL from TD of the 8-5/8" casing to surface. Submit results to BLM.

- 3. The minimum required fill of cement behind the 5-1/2 inch production casing is:
 - Cement should tie-back at least 200 feet into previous casing string.
 Operator shall provide method of verification.
 Cement excess is less than 25%, more cement might be required.

C. PRESSURE CONTROL

- 1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
- 2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M)** psi.
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.

- c. Manufacturer representative shall install the test plug for the initial BOP test.
- d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)
 - Eddy County
 Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220, (575) 361-2822
- 1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
- 2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
- 3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

- 1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
- 2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing intergrity test can be done (prior to the cement setting up) immediately after bumping the plug.
- 3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing intergrity test can be done (prior to the cement setting up) immediately after bumping the plug.
- 4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
- 5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
- 6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
- 7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
- 8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.
- B. PRESSURE CONTROL

- 1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
- 2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
- 3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
- 4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- 5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not

- hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.
- C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone: (575) 393-6161 Fax: (575) 393-0720

<u>District II</u> 811 S. First St., Artesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720

District III

1000 Rio Brazos Road, Aztec, NM 87410 Phone: (505) 334-6178 Fax: (505) 334-6170 District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505 Phone: (505) 476-3460 Fax: (505) 476-3462 State of New Mexico

Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION 1220 South St. Francis Dr.

Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

AMENDED REPORT


WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Numbe						
30-025-48448	[98248]	[98248] WC-025 G-08 S243217P:UPR WOI				
⁴ Property Code	⁵ Pr	⁵ Property Name				
329914	RIGHT MEO	RIGHT MEOW 30-31 FED COM				
⁷ OGRID No.	8 OI	8 Operator Name				
6137	DEVON ENERGY PRO	ODUCTION COMPANY, L.P.	3593.4			

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
1	30	23 S	32 E		250	NORTH	900	WEST	LEA
¹¹ Bottom Hole Location If Different From Surface									
UL or lot no.	Section	Township	Range	Lot Idn	ot Idn Feet from the North/South line Feet from the East/West line				
4	31	23 S	32 E		20	SOUTH	1160	WEST	LEA
12 Dedicated Acre	s 13 Joint	or Infill	Consolidation	n Code			15 Order No.		
691.6									

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

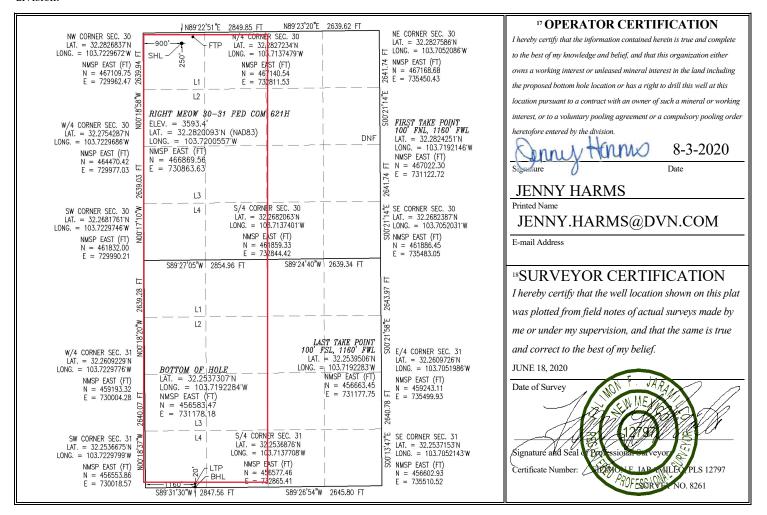

Intent	X	As Drill	ed											
API#	30-025	-48448												
Oper	ator Nan	ne:		Property Name:							Well Number			
DEVON ENERGY PRODUCTION CO., L.P.					L.P.		RIGHT	MEOV	V 30-3	1 FEI	D CO	М	621H	
Kick O UL	ff Point (Section 30	KOP) Township 23S	Range 32 E	Lot	Feet 50 FNL	Fr -	rom N/S	Feet 116	0 FWL	From	ı E/W	County LEA		
Latitu	de	l		<u> </u>	Longitu							NAD		
32.2	2825550	JU			-10	3.7192	1100					83		
	ake Poin													
UL	Section 30	Township 23S	Range 32E	Lot 1	Feet 100	Fr N	om N/S I ORTH	Feet 116		From WE :	i E/W ST	County LEA	County LEA	
Latitu	^{de} 32.282	4251			Longitu		19214	6				NAD 83		
UL	Section 31	Township 23S	Range 32E	Lot 4	Feet 100	From N SOUT	I/S Fee Γ H 11	et . 60	From WES	E/W T	Count LEA	ту		
Latitu		539506			Longitu		71922	83			NAD	83		
		defining w	ell for the	Horizo	ontal Spa	cing Uni	it?	YES						
	l is yes p ng Unit.	lease prov	ide API if	availa	able, Ope	erator N	lame an	d well	numb	er fo	r Defii	ning well	for Horizontal	
Oper	ator Nan	ne:	<u> </u>			Proper	ty Name	::					Well Number	

KZ 06/29/2018

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy, Minerals and Natural Resources Department

Submit Original to Appropriate District Office

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

GAS CAPTURE PLAN

Date: August 3, 2020	
□ Original	Devon & OGRID No.: Devon Energy Production Co., L.P. 6137
☐ Amended - Reason for Amendment:	-

This Gas Capture Plan outlines actions to be taken by the Devon to reduce well/production facility flaring/venting for new completion (new drill, recomplete to new zone, re-frac) activity.

Note: Form C-129 must be submitted and approved prior to exceeding 60 days allowed by Rule (Subsection A of 19.15.18.12 NMAC).

Well(s)/Production Facility - Name of facility

The well(s) that will be located at the production facility are shown in the table below.

The well(s) that will be located	d at the production facili	ity are shown in t	he table	below.				1	
Well Name	API		SHL FOOT	AGES			Expected MCF/D	Flared or Vented	СТВ
RIGHT MEOW 30-31 FED		30-23S-32E	840	FWL	550	FNL			Right Meow 30
COM 521H									CTB 1
RIGHT MEOW 30-31 FED		30-23S-32E	870	FWL	550	FNL			Right Meow 30
COM 121H		30 233 32L	070	1 00 0	330	1142			CTB 1
RIGHT MEOW 30-31 FED		30-23S-32E	900	FWL	550	FNL			Right Meow 30
COM 531H		3U-233-32E	900	FVVL	550	FINL			CTB 1
RIGHT MEOW 30-31 FED		30-23S-32E	940	FWL	250	FNL			Right Meow 30
COM 711H		30-235-32E	840	FVVL	250	FINL			CTB 1
RIGHT MEOW 30-31 FED		20 225 225	070	E\A/I	250	- N.I.			Right Meow 30
COM 331H		30-23S-32E	870	FWL	250	FNL			CTB 1
RIGHT MEOW 30-31 FED		20 225 225	000	E\A/!	250	- FAII			Right Meow 30
COM 621H	30-025-48448	30-23S-32E	900	FWL	250	FNL			CTB 1
RIGHT MEOW 30-31 FED		20 225 225	4005	E\A/I		- FAII			Right Meow 30
COM 522H		30-23S-32E	1805	FWL	550	FNL			CTB 1
RIGHT MEOW 30-31 FED		20 225 225	4025	5\A/I		ENII			Right Meow 30
COM 122H		30-23S-32E	1835	FWL	550	FNL			CTB 1
RIGHT MEOW 30-31 FED		20 225 225	4065	5\A/I	550	- N.I.			Right Meow 30
COM 532H		30-23S-32E	1865	FWL	550	FNL			CTB 1
RIGHT MEOW 30-31 FED		22 222 225	4005		250				Right Meow 30
COM 712H		30-23S-32E	1805	FWL	250	FNL			CTB 1
RIGHT MEOW 30-31 FED		20 225 225	4025	5\4/I	250	- N.I.			Right Meow 30
COM 332H		30-23S-32E	1835	FWL	250	FNL			CTB 1
RIGHT MEOW 30-31 FED		20 225 225	4065	514 <i>(</i> 1	250	- N.I.			Right Meow 30
COM 622H		30-23S-32E	1865	FWL	250	FNL			CTB 1

Gathering System and Pipeline Notification

Well(s) will be connected to a production facility after flowback operations are complete, if DCP system is in place. The gas produced from production facility is dedicated to <u>DCP</u> and will be connected to <u>DCP</u> low/high pressure gathering system located in Lea County, New Mexico. It will require 0' of pipeline to connect the facility to low/high pressure gathering system. <u>Devon</u> provides (periodically) to <u>DCP</u> a drilling, completion and estimated first production date for wells that are scheduled to be drilled in the foreseeable future. In addition, <u>Devon</u> and <u>DCP</u> have periodic conference calls to discuss changes to drilling and completion schedules. Gas from these wells will be processed at <u>DCP</u> Processing Plant located in the reference table. The actual flow of the gas will be based on compression operating parameters and gathering system pressures.

Flowback Strategy

After the fracture treatment/completion operations, well(s) will be produced to temporary production tanks and gas will be flared or vented. During flowback, the fluids and sand content will be monitored. When the produced fluids contain minimal sand, the wells will be turned to production facilities. Gas sales should start as soon as the wells start flowing through the production facilities, unless there are operational issues on <u>DCP</u> system at that time. Based on current information, it is <u>Devon's</u> belief the system can take this gas upon completion of the well(s).

Safety requirements during cleanout operations from the use of underbalanced air cleanout systems may necessitate that sand and non-pipeline quality gas be vented and/or flared rather than sold on a temporary basis.

Alternatives to Reduce Flaring

Below are alternatives considered from a conceptual standpoint to reduce the amount of gas flared.

- Power Generation On lease
 - Only a portion of gas is consumed operating the generator, remainder of gas will be flared
- Compressed Natural Gas On lease
 - o Gas flared would be minimal, but might be uneconomical to operate when gas volume declines
- NGL Removal On lease
 - Plants are expensive, residue gas is still flared, and uneconomical to operate when gas volume declines

Reference Table:

DCP Plant locations Artesia Sec. 7, T18S, R28E, Eunice Sec. 5, T21S, R36E Linam Sec. 6, T19S, R37E Zia II Sec. 19, T19S, R32E

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III
1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

CONDITIONS

Action 15880

CONDITIONS OF APPROVAL

Operator:			OGRID:	Action Number:	Action Type:
DEVON ENERGY PRODUCTION COMPAN	333 West Sheridan Ave.	Oklahoma City, OK73102	6137	15880	FORM 3160-3

OCD Reviewe	Condition
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string