District I 1625 N. French Dr., Hobbs, NM 88240 District II 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr.

Santa Fe, NM 87505

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office.

For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Form C-144

Revised June 6, 2013

Pit, Below-Grade Tank, or
Proposed Alternative Method Permit or Closure Plan Application Oll. CONS. DIV DIST. 3
Type of action: Below grade tank registration Permit of a pit or proposed alternative method Closure of a pit, below-grade tank, or proposed alternative method MAR 15 2016 Modification to an existing permit/or registration Closure plan only submitted for an existing permitted or non-permitted pit, below-grade tank, or proposed alternative method
Instructions: Please submit one application (Form C-144) per individual pit, below-grade tank or alternative request
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the
environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinands.
Operator: BP America Production Company OGRID #: 778
Address: 200 Energy Court, Farmington, NM 87401
Facility or well name: Neil A 023
API Number: 3004528007 OCD Permit Number:
U/L or Qtr/Qtr M Section 4 Township 31N Range 11W County: San Juan
Center of Proposed Design: Latitude 36.922219 Longitude -108.000043 NAD: ☐1927 ☐ 1983 Surface Owner: ☐ Federal ☐ State ☐ Private ☐ Tribal Trust or Indian Allotment
2.
Pit: Subsection F, G or J of 19.15.17.11 NMAC
Temporary: Drilling Workover
Permanent ☐ Emergency ☐ Cavitation ☐ P&A ☐ Multi-Well Fluid Management ☐ Low Chloride Drilling Fluid ☐ yes ☐ no ☐ Lined ☐ Unlined ☐ Liner type: Thickness ☐ mil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other ☐ Other ☐ Drilling Fluid ☐ yes ☐ no ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other ☐ Drilling Fluid ☐ yes ☐ no ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other ☐ Drilling Fluid ☐ yes ☐ no ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other ☐ Drilling Fluid ☐ yes ☐ no ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other ☐ Drilling Fluid ☐ yes ☐ no ☐ Drilling Fluid ☐ yes ☐ Drilling Fluid ☐
String-Reinforced
Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x D
3. Subsection I of 19.15.17.11 NMAC TANK A
Volume: 95 bbl Type of fluid: Produced water
Tank Construction material: Steel
☐ Secondary containment with leak detection ☐ Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☐ Other Single walled/double bottom; no visible sidewalls
Liner type: Thickness mil HDPE PVC Other



Alternative Method:

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)	
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church)	hospital,
Four foot height, four strands of barbed wire evenly spaced between one and four feet	
Alternate. Please specify	to Auth
6.	
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)	
☐ Screen ☐ Netting ☐ Other ☐ Monthly inspections (If netting or screening is not physically feasible)	
Signs: Subsection C of 19.15.17.11 NMAC	
☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers	
☐ Signed in compliance with 19.15.16.8 NMAC	
8.	
Variances and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.	
Please check a box if one or more of the following is requested, if not leave blank:	
 □ Variance(s): Requests must be submitted to the appropriate division district for consideration of approval. □ Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. 	
9. <u>Siting Criteria (regarding permitting)</u> : 19.15.17.10 NMAC <u>Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accematerial are provided below.</u> Siting criteria does not apply to drying pads or above-grade tanks.	ptable source
General siting	
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within the area overlying a subsurface mine. (Does not apply to below grade tanks) - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
Within an unstable area. (Does not apply to below grade tanks) - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	☐ Yes ☐ No
Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map	☐ Yes ☐ No
Below Grade Tanks	
Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)	
Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No

Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial	☐ Yes ☐ No
application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 100 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pit Non-low chloride drilling fluid	
Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).	
- Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Permanent Pit or Multi-Well Fluid Management Pit	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa	
lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application.	□ Vas □ Na
- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	Yes No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 Natructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the docattached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19. and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:	NMAC
II. Marki Wall Florid Management Bit Charleting Coloration Dec 10 15 170 NIMAC	No. of Land
Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the doc attached. Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC A List of wells with approved application for permit to drill associated with the pit. Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 and 19.15.17.13 NMAC Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC	
☐ Previously Approved Design (attach copy of design) API Number: or Permit Number:	: <u> </u>

Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC	documents are
13. Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-well F Alternative Alternative Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method	luid Management Pit
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be closure plan. Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. In 19.15.17.10 NMAC for guidance.	
Ground water is less than 25 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	The state of the last

Page 4 of 6

adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	
	☐ Yes ☐ No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
Within an unstable area.	
 Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	☐ Yes ☐ No
Within a 100-year floodplain FEMA map	☐ Yes ☐ No
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.17.13 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	11 NMAC 15.17.11 NMAC ot be achieved)
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and believed.	ef.
Name (Print): Title:	
Signature: Date:	
e-mail address: Telephone:	
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature: Approval Date: 0317 Title: Constant Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment) OCD Permit Number:	3412016
19.	
Closure Report (required within 60 days of closure completion): 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting The closure report is required to be submitted to the division within 60 days of the completion of the closure activities, Please do not section of the form until an approved closure plan has been obtained and the closure activities have been completed.	
Closure Report (required within 60 days of closure completion): 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not	
Closure Report (required within 60 days of closure completion): 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not section of the form until an approved closure plan has been obtained and the closure activities have been completed.	complete this

	h this closure report is true, accurate and complete to the best of my knowledge and osure requirements and conditions specified in the approved closure plan.
Name (Print): Steve Moskal	Title: Field Environmental Coordinator
Signature: Musiku	Date: March 9, 2016
e-mail address: steven.moskal@bp.com	Telephone:(505) 326-9497

BP AMERICA PRODUCTION COMPANY SAN JUAN BASIN, NORTHWEST NEW MEXICO

orni verni brioni, rioterni vibor ribir

BELOW-GRADE TANK CLOSURE PLAN

Neil A 023 API No. 3004528007 Unit Letter M, Section 4, T31N, R11W

This plan will address the standard protocols and procedures for closure of below-grade tanks (BGTs) on BP America Production Company (BP) well sites. As stipulated in Paragraph A of 19.15.17.13 NMAC, BP shall close a BGT within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the New Mexico Oil Conservation Division (NMOCD) requires because of imminent danger to fresh water, public health, safety or the environment. If deviations from this plan are necessary, any specific changes will be included on form C-144 and approved by the NMOCD. BP shall close an existing BGT that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008, if not retrofit with a BGT that complies with the BP NMOCD approved BGT design attached to the BP Design and Construction Plan. BP shall close an existing BGT that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC, if not previously retrofitted to comply with the BP NMOCD approve BGT Design attached to the BP Design and Construction Plan, prior to any sale or change in operator pursuant to 19.15.9.9 NMAC. BP shall close the permitted BGT within 60 days of cessation of the BGTs operation or as required by the transitional provisions of Subsection B, D, or E of 19.15.17.17 NMAC.

General Closure Plan

- BP shall notify the surface owner by certified mail that it plans to close a BGT.
 Evidence of mailing of the notice to the address of the surface owner shown in the county tax records demonstrates compliance with this requirement.
 Notice is attached.
- 2. BP shall notify the division District III office verbally or by other means at least 72 hours, but not more than one (1) week, prior to any closure operation. The notice shall include the operator's name, and the location to be closed by unit letter, section, township and range. If the BGT closure is associated with a particular well, then the notice shall also include the well's name, number and API number.

Notice was provided. NMOCD was on site during the removal of the BGT.

- 3. BP shall remove liquids and sludge from the BGT prior to implementing a closure method and dispose of the liquids and sludge in a NMOCD's division-approved facility. The facilities to be used are:
 - a. BP Crouch Mesa Landfarm, Permit NM-02-003 (Solids)
 - b. JFJ Landfarm, Permit NM-01-010(B) (Solids and Sludge)
 - c. Basin Disposal, Permit NM-01-0005 (Liquids)
 - d. Envirotech Inc Soil Remediation Facility, Permit NM-01-0011 (Solids and Sludge)
 - e. BP Operated E.E. Elliott SWD #1, API 30-045-27799 (Liquids)

- f. BP Operated 13 GCU SWD #1, API 30-045-28601 (Liquids)
- g. BP Operated GCU 259 SWD, API 30-045-20006 (Liquids)
- h. BP Operated GCU 306 SWD, API 30-045-24286 (Liquids)
- i. BP Operated GCU 307 SWD, API 30-045-24248 (Liquids)
- j. BP Operated GCU 328 SWD, API 30-045-24735 (Liquids)
- k. BP Operated Pritchard SWD #1, API 30-045-28351 (Liquids)

All liquids and sludge in the BGT were removed and sent to one of the above NMOCD approved facilities for disposal.

4. BP shall remove the BGT and dispose of it in a NMOCD approved facility or recycle, reuse, or reclaim it in a manner that the NMOCD approves. If a liner is present and must be disposed of it will be cleaned by scraping any soils or other attached materials on the liner to a de minimus amount and disposed at a permitted solid waste facility, pursuant to Subparagraph (m) of Paragraph (1) of Subsection C of 19.15.35.8 NMAC. Documentation as to the final disposition of the removed BGT will be provided in the final closure report.

The BGT was transported for recycling.

5. BP shall remove any on-site equipment associated with a BGT unless the equipment is required for well production.

All equipment associated with the BGT has been removed.

6. BP shall test the soils beneath the BGT to determine whether a release has occurred. BP shall collect at a minimum: a five (5) point composite sample and individual grab samples from any area that is wet, discolored or showing other evidence of a release and analyze for BTEX, TPH and chlorides. The testing methods for those constituents are as follows;

Constituents	Testing Method 95 bbl BGT	Release Verification (mg/Kg)	Sample results
Benzene	US EPA Method SW-846 8021B or 8260B	0.2	< 0.047
Total BTEX	US EPA Method SW-846 8021B or 8260B	50	< 0.095
TPH	US EPA Method SW-846 418.1 or 8015 extended	100	<49
Chlorides	US EPA Method 300.0 or 4500B	250 or background	35

Notes: mg/Kg = milligram per kilogram, BTEX = benzene, toluene, ethylbenzene, and total xylenes, TPH = total petroleum hydrocarbons. Other EPA methods that the division approves may be applied to all constituents listed. Chloride closure standards will be determined by which ever concentration level is greatest.

Soil under the BGT was sampled for TPH, BTEX and chloride. BTEX, TPH and chloride concentrations were below the stated limits. The field report and laboratory reports are attached.

7. BP shall notify the division District III office of its results on form C-141. C-141 is attached.

8. If it is determined that a release has occurred, then BP will comply with 19.15.30 NMAC and 19.15.29 NMAC, as appropriate.

Sampling results indicate no significant release has occurred.

9. If the sampling demonstrates that a release has not occurred or that any release does not exceed the concentrations specified above, then BP shall backfill the excavation, with compacted, non-waste containing, earthen material; construct a division-prescribed soil cover, re-contour and re-vegetate the location. The location will be reclaimed if it is not with in the active process area

Sampling results determine no significant release has occurred. Area was backfilled with clean, earthen material.

10. BP shall reclaim the BGT location and all areas associated with the BGT including associated access roads to a safe and stable condition that blends with the surrounding undisturbed area. BP shall substantially restore the impacted surface area to the condition that existed prior to oil and gas operations by placement of the soil cover as provided in Subsection H of 19.15.17.13 NMAC, re-contour the location and associated areas to a contour that approximates the original contour and blends with the surrounding topography and re-vegetate according to Subsection I of 19.15.17.13 NMAC.

The area has been backfilled and will be reclaimed once the well has been plugged and abandoned.

11. The soil cover for closures where the BGT has been removed or remediated to the NMOCD's satisfaction shall consist of the background thickness of topsoil or one foot of suitable material to establish vegetation at the site, whichever is greater. The soil cover will be constructed to the site's existing grade and all practicable efforts will be made to prevent ponding of water and erosion of the cover material.

The area has been backfilled and will be reclaimed once the well has been plugged and abandoned.

12. BP shall seed the disturbed area the first growing season after closure of the BGT. Seeding will be accomplished by drilling on the contour whenever practical or by other division-approved methods. Vegetative cover will be, at a minimum, 70% of the native perennial vegetative cover (un-impacted by overgrazing, fire or other intrusion damaging to native vegetation), consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintenance of that cover through two successive growing seasons. During the two growing seasons that prove viability, there shall be no artificial irrigation of the vegetation.

The area has been backfilled and will be reclaimed once the well has been plugged and abandoned.

13. BP shall seed, plant and re-seed pursuant to Paragraph (3) of Subsection I of 19.15.17.13 NMAC, until the location successfully achieves the required vegetative cover.

The area has been backfilled and will be reclaimed once the well has been plugged and abandoned.

 Pursuant to Paragraph (5) of Subsection I of 19.15.17.13 NMAC, BP shall notify the NMOCD when it has seeded or planted and when it successfully achieves revegetation.

BP will notify NMOCD when re-vegetation is successful.

- 15. Within 60 days of closure completion, BP shall submit a closure report on NMOCD's form C-144, and will include the following;
 - a. proof of closure notification (surface owner and NMOCD)
 - b. sampling analytical reports; information required by 19.15.17 NMAC;
 - c. disposal facility name and permit number
 - d. details on back-filling, capping, covering, and where applicable re-vegetation application rates and seeding techniques and
 - e. site reclamation, photo documentation.

 Closure report on C-144 form is included including photos of reclamation completion.
- 16. BP shall certify that all information in the report and attachments is accurate, truthful, and compliant with all applicable closure requirements and conditions specified in the approved closure plan.

Certification section of C-144 has been completed.

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Form C-141 Revised August 8, 2011

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 Submit 1 Copy to appropriate District Office in accordance with 19.15.29 NMAC.

Release Notification and Corrective Action

						OPERA	TOR		Initia	al Report	\times	Final Rep
Name of Co	mpany: B	P				Contact: Ste	eve Moskal			A SEC		
Address: 20	0 Energy	Court, Farm	ington, N	M 87401		Telephone 1	No.: 505-326-94	197				
Facility Na						Facility Typ	e: Natural gas	well	L NAV			
Surface Ow	ner: Feder	al		Mineral C)wner: l	Federal			API No	. 30045280	007	
				LOC	TION	OF RE	EASE					
Unit Letter	Section	Township	Range	Feet from the		South Line	Feet from the	East/W	est Line	County: Sa	an Juan	
M	4	31N	11W	930	South		1,260	West				
			Lat	itude 36.922	2219	Longitu	ide108.00	00043				
				NAT	URE	OF REL	EASE					
Type of Rele	ase: none			11122	CICL		Release: unknow	vn	Volume F	Recovered: N	N/A	
		w grade tank -	- 95 bbl				Iour of Occurrence			Hour of Dis		none
Was Immedia	ate Notice (Given?			d file	If YES, To	Whom?			- 10		
			Yes 🗵	No Not R	equired							
By Whom?						Date and I			la la			
Was a Water	course Read		Yes 🗵	No		If YES, Vo	lume Impacting	the Water	course.			
If a Watercon	irce was Im	pacted, Descr	ibe Fully	*								
				n Taken.* Sampli ld reports and lab				ne during	removal.	Soil analys	is result	ted for
Describe Are	a Affected	and Cleanup	Action Tal	ken.* No action no	ecessary.	Final labora	tory analysis supp	ported clo	sure of th	e BGT locat	ion.	
regulations al public health should their of or the environ	or the environment. In a	are required to ronment. The lave failed to	o report and acceptant adequately OCD accep	e is true and comp nd/or file certain r ce of a C-141 repo investigate and r otance of a C-141	elease no ort by the emediate	otifications a NMOCD m contaminati	nd perform correct arked as "Final R on that pose a thr	ctive action eport" do reat to gro	ons for rele es not reli ound water	eases which eve the oper , surface wa	may enerator of iter, hun	danger liability nan health
	110						OIL CON	SERV	ATION	DIVISIO	N	New S
Signature:	Mus	nin										
Printed Name	e: Steve Mo	skal			1	Approved by	Environmental S	pecialist:				aff k
Title: Field E	nvironment	tal Coordinate	r		1	Approval Da	e:	Е	xpiration l	Date:		
E-mail Addre	ess: steven.r	moskal@bp.co	om		(Conditions of	Approval:			Attached		
Date: March	9, 2016		Phone: 5	05-326-9497						1		

^{*} Attach Additional Sheets If Necessary

CLIENT: BP	BLAGG ENGINEERING, INC. P.O. BOX 87, BLOOMFIELD, NM 87413	API#: 3004528007
	(505) 632-1199	(if applicble):
FIELD REPORT:	(circle one): BGT CONFIRMATION / RELEASE INVESTIGATION / OTHER:	PAGE#: 1 of 1
SITE INFORMATION	I: SITE NAME: NEIL A # 23	DATE STARTED: 01/18/16
QUAD/UNIT: M SEC: 4 TWP:	31N RNG: 11W PM: NM CNTY: SJ ST: NI	M DATE FINISHED:
1/4-1/4/FOOTAGE: 930'S / 1,26		N ENVIRONMENTAL
LEASE #: SF078051	PROD. FORMATION: MV CONTRACTOR: MBF - S. GLYNN	SPECIALIST(S): NJV
REFERENCE POINT		016 GLELEV.: 6,233'
1) 95 BGT (SW/DB)		ICE/BEARING FROM W.H.: 89.5', S11E
2)	GPS COORD.:DISTAN	ICE/BEARING FROM W.H.:
3)	GPS COORD.: DISTAN	ICE/BEARING FROM W.H.:
4)	GPS COORD.: DISTAN	ICE/BEARING FROM W.H.:
SAMPLING DATA:	CHAIN OF CUSTODY RECORD(S) # OR LAB USED: HALL	OVM READING (ppm)
1) SAMPLE ID: 5PC - TB @ 5	(95) SAMPLE DATE: 01/18/16 SAMPLETIME: 1300 LAB ANALYSIS:	8015B/8021B/300.0 (CI) NA
2) SAMPLE ID:	SAMPLE DATE: SAMPLE TIME: LAB ANALYSIS:	
3) SAMPLE ID:	SAMPLE DATE: SAMPLE TIME: LAB ANALYSIS:	
4) SAMPLE ID:	SAMPLE DATE: SAMPLE TIME: LAB ANALYSIS:	La Maria Richard School
SOIL DESCRIPTION	SOIL TYPE: SAND SILT/SILTY CLAY/CLAY/GRAVEL/OTHER	
	DE ODAY	STIC / COHESIVE / MEDIUM PLASTIC / HIGHLY PLASTIC
COHESION (ALL OTHERS): NON COHESIVE (SLIGHTL	The state of the s	
CONSISTENCY (NON COHESIVE SOILS): LO MOISTURE: DRY/SLIGHTLY MOIST MOIST		
SAMPLE TYPE: GRAB (COMPOSITE)		EXPLANATION - PECENT SNOW MELT
DISCOLORATION/STAINING OBSERVED: YES	NO EXPLANATION -	TLOUT OHOW MELL
	S: LOST INTEGRITY OF EQUIPMENT: YES NO EXPLANATION -	
APPARENT EVIDENCE OF A RELEASE OBSERVE	ED AND/OR OCCURRED: YES NO EXPLANATION: YES NO EXPLANATION - 105 BBL SHALLOW LOW PROFILE ABOVE-GRAD	SE TANK TO BE SET ATOR BOT DOSITION
OTHER:	TES NO EAFONNATION - 105 BBL SHALLOW LOW PROFILE ABOVE-GRAD	E IANK TO BE SET ATOP BGT POSITION.
SOIL IMPACT DIMENSION ESTIMATION	NA ft. X NA ft. X NA ft. EXCAVATIO	NECTIVATION (O. H. VI.)
100	IEAREST WATER SOURCE: >1,000' NEAREST SURFACE WATER: <200'	N ESTIMATION (Cubic Yards) : NA NMOCD TPH CLOSURE STD: 100 ppm
SITE SKETCH		
OTTE ORETOTT	BGT Located : off on site PLOT PLAN circle: attached	OVM CALIB. READ. = NA ppm RF = 0.52
	ТО	OVM CALIB. GAS = NA ppm TIME: NA am/pm DATE: NA
	W.H.	
		MISCELL. NOTES
	FENCE	WO:
	BERM	REF#: P - 270
		VID: VHIXONEVB2 PJ#:
		Permit date(s): 06/08/10
SEPARATOR	// (x x x) // PBGTL	OCD Appr. date(s): 10/08/15
	T.B.~5'	Tank OVM = Organic Vapor Meter ppm = parts per million
	B.G.	A BGT Sidewalls Visible: Y /N
Balling Bloom Brown	X - S.P.D.	BGT Sidewalls Visible: Y / N
	ON DEPRESSION; B.G. = BELOW GRADE; B = BELOW, T.H. = TEST HOLE; ~ = APPROX.; W.H. = WELL HEAD;	BGT Sidewalls Visible: Y / N
	LOW-GRADE TANK LOCATION; SPD = SAMPLE POINT DESIGNATION; R.W. = RETAINING WALL; NA - NOT E WALL; DW - DOUBLE WALL; SB - SINGLE BOTTOM; DB - DOUBLE BOTTOM.	Magnetic declination: 10° E
NOTES: GOOGLE EARTH IMAG		

Analytical Report

Lab Order 1601614

Date Reported: 1/20/2016

Hall Environmental Analysis Laboratory, Inc.

CLIENT: Blagg Engineering

Client Sample ID: 5PC - TB @ 5' (95)

Collection Date: 1/18/2016 1:00:00 PM

Project: Lab ID: 1601614-001

Neil A # 23

Matrix: MEOH (SOIL)

Received Date: 1/19/2016 7:45:00 AM

Analyses	Result	RL Qu	al Units	DF	Date Analyzed	Batch
EPA METHOD 300.0: ANIONS					Analyst	LGT
Chloride	35	30	mg/Kg	20	1/19/2016 11:57:08 AM	23289
EPA METHOD 8015M/D: DIESEL RAN	GE ORGANIC	S			Analyst	KJH
Diesel Range Organics (DRO)	ND	9.7	mg/Kg	1	1/19/2016 9:59:18 AM	23279
Motor Oil Range Organics (MRO)	ND	49	mg/Kg	1	1/19/2016 9:59:18 AM	23279
Surr: DNOP	87.8	70-130	%REC	1	1/19/2016 9:59:18 AM	23279
EPA METHOD 8015D: GASOLINE RAI	NGE				Analyst	NSB
Gasoline Range Organics (GRO)	ND	4.7	mg/Kg	1	1/19/2016 9:53:34 AM	23266
Surr: BFB	90.8	66.2-112	%REC	1	1/19/2016 9:53:34 AM	23266
EPA METHOD 8021B: VOLATILES					Analyst	NSB
Benzene	ND	0.047	mg/Kg	1	1/19/2016 9:53:34 AM	23266
Toluene	ND	0.047	mg/Kg	1	1/19/2016 9:53:34 AM	23266
Ethylbenzene	ND	0.047	mg/Kg	1	1/19/2016 9:53:34 AM	23266
Xylenes, Total	ND	0.095	mg/Kg	1	1/19/2016 9:53:34 AM	23266
Surr: 4-Bromofluorobenzene	108	80-120	%REC	1	1/19/2016 9:53:34 AM	23266

Refer to the QC Summary report and sample login checklist for flagged QC data and preservation information.

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- Sample Diluted Due to Matrix
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- S % Recovery outside of range due to dilution or matrix
- Analyte detected in the associated Method Blank
- E Value above quantitation range
- Analyte detected below quantitation limits Page 1 of 5 J
- Sample pH Not In Range
- RL Reporting Detection Limit

_	The second of the	IL STREET, SQUARE	tody Record	Turn-Around	Time:	SAME				H	A	LL	EN	IV	IR	0	N	1EI	NTA	L	
lient:		P.O. BO	/ BP AMERICA	Standard Project Name	NEIL A # 2	DAY)	•	49	01 H	,	wv	v.hal	lenv	iron	mei	ntal	con	A service	TO	RY	
			FIELD, NM 87413	Project #:			1		1	5-34							410				
hone #:		(505) 63											naly				-	H	1	100	
mail or f	ax#;	Ra period		Project Mana	ger;		7	2.4						7				न	7 94	-	-
AQC Pa			Level 4 (Full Validation)		NELSON VE	ELEZ	* (8021B)	(Ajuo s	/ MRO)			15)		PO4,50	2 PCB's			water - 300.1)		9	
ccreditar	T. C. Service	☐ Other	***	Sampler: On Ice:	NELSON VE	LEZ 97 V	HARBS (TPH (Ga	J DRO	(18.1)	504.1)	SZZOSIN		D3,NO2,	s / 808	8	(A)	-300.07 w		composite sample	(N)
EDD (Type)			Sample Temp	erature: 2.	3	1	3E +	(GRC	pod 4	por	3 10	etals	Ž,	cide	A)	I-VC	JII - 3	e e	osit	ιχο
Date	Time	Matrix	Sample Request ID	Container Type and #	Preservative Type	HEALNO. 1601614	BTEX +-MIH	BTEX + MTBE + TPH (Gas only)	TPH 80158 (GRO / DRO	TPH (Method 418.1)	EDB (Method 504.1)	PAH (8310 or 827051MS)	RCRA 8 Metals	Anians (F,CI,NOs,NO2,PO4,SO4)	8081 Pesticides / 8082 PCB's	8260B (VOA)	8270 (Semi-VOA)	Chloride (soil	Grab sample	5 pt. comp	Air Bubbles (Y or N)
1/18/16	1300	SOIL	5PC - TB @ 5 '(95)	4021	Cool	-601	٧	İ	٧				i					٧		٧	
									maria de la companya		1										
																			-		
							1			\$5. d		-							+		
											1										
					FIG. 11			15		ju j	1		4								
1/18/16 1/8/16	Time: 1/23 Time: 1/23	Relinquishe	In Up	Received by: Mustur Received by: Out-A	Waller 1	Date Time 18/10 1423 Date Time	Bi	eve N	RECT /losk	LY TO al, 20	O En	ergy	SE. A.	t, Fa				V1 874	01 NEVB2		

QC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#:

1601614

20-Jan-16

Client:

Blagg Engineering

Project:

Neil A # 23

Sample ID MB-23289

SampType: MBLK

TestCode: EPA Method 300.0: Anions

Client ID:

Batch ID: 23289

RunNo: 31548

Prep Date: 1/19/2016

Analysis Date: 1/19/2016

PQL

SPK value SPK Ref Val %REC LowLimit

0

SeqNo: 965595

Units: mg/Kg

HighLimit

%RPD

RPDLimit

Qual

Analyte Chloride

ND 1.5

Result

Sample ID LCS-23289

SampType: LCS

TestCode: EPA Method 300.0: Anions

Client ID: LCSS

Batch ID: 23289

RunNo: 31548

Prep Date: 1/19/2016

Analysis Date: 1/19/2016

SeqNo: 965596

Units: mg/Kg

HighLimit

RPDLimit Qual

Analyte Chloride

PQL SPK value SPK Ref Val %REC LowLimit

15.00

92.4

%RPD

Qualifiers:

Value exceeds Maximum Contaminant Level.

Sample Diluted Due to Matrix D

Holding times for preparation or analysis exceeded H

Not Detected at the Reporting Limit

R RPD outside accepted recovery limits

% Recovery outside of range due to dilution or matrix

Analyte detected in the associated Method Blank

Value above quantitation range

Analyte detected below quantitation limits

Sample pH Not In Range

RL Reporting Detection Limit

Page 2 of 5

QC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#:

1601614

20-Jan-16

Client:

Blagg Engineering

Sample ID	LCS-23279	SampT	ype: LC	cs	Tes	tCode: E	PA Method	8015M/D: Di	esel Rang	e Organics	
Client ID:	LCSS	Batcl	n ID: 23	279	F	RunNo: 3	1519				
Prep Date:	1/19/2016	Analysis D	Date: 1/	/19/2016	5	SeqNo: 9	64688	Units: mg/k	(g		
Analyte		Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Diesel Range C	Organics (DRO)	42	10	50.00	0	83.5	65.8	136	hale of	Jewy J.	
Surr: DNOP		4.0	1.2	5.000		80.8	70	130			
Sample ID	MB-23279	SampT	ype: MI	BLK	Tes	tCode: E	PA Method	8015M/D: Di	esel Rang	e Organics	
Client ID:	PBS	Batcl	n ID: 23	279	F	RunNo: 3	1519				
Prep Date:	1/19/2016	Analysis D	Date: 1/	/19/2016		SeqNo: 9	64690	Units: mg/k	(g		
Analyte		Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Diesel Range (Organics (DRO)	ND	10				741 70				L
Motor Oil Rang	e Organics (MRO)	ND	50								
Surr: DNOP		8.5		10.00		84.7	70	130	100		1
Sample ID	1601614-001AMS	Samp1	ype: MS	S	Tes	tCode: E	PA Method	8015M/D: Di	esel Rang	e Organics	49.5
Client ID:	5PC - TB @ 5' (95)	Batcl	h ID: 23	279	F	RunNo: 3	1519				
Prep Date:	1/19/2016	Analysis D	Date: 1	/19/2016	5	SeqNo: 9	64918	Units: mg/k	(g		
Analyte		Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Diesel Range C	Organics (DRO)	43	10	50.76	0	85.3	31.2	162			
Surr: DNOP		4.3		5.076		85.4	70	130			
Sample ID	1601614-001AMSD	Samp	ype: MS	SD	Tes	tCode: E	PA Method	8015M/D: Di	esel Rang	e Organics	
Client ID:	5PC - TB @ 5' (95)	Batcl	h ID: 23	279	F	RunNo: 3	1519				
Prep Date:	1/19/2016	Analysis D	Date: 1	/19/2016		SeqNo: 9	64919	Units: mg/k	(g		
Analyte		Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Diesel Range (Organics (DRO)	40	10	49.95	0	79.7	31.2	162	8.32	31.7	I I I

Qualifiers:

- * Value exceeds Maximum Contaminant Level.
- D Sample Diluted Due to Matrix
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- S % Recovery outside of range due to dilution or matrix
- B Analyte detected in the associated Method Blank
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH Not In Range
- RL Reporting Detection Limit

Page 3 of 5

OC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#:

1601614

20-Jan-16

Client:

Blagg Engineering

Project:

Neil A # 23

Sample	ID	MB-23266
--------	----	----------

SampType: MBLK

TestCode: EPA Method 8015D: Gasoline Range

Client ID: PBS Batch ID: 23266

RunNo: 31526

Prep Date: 1/18/2016

Analysis Date: 1/19/2016

SeqNo: 965257

Units: mg/Kg

Analyte

Result PQL 5.0 SPK value SPK Ref Val %REC LowLimit

RPDLimit Qual

Qual

Gasoline Range Organics (GRO)

ND

HighLimit

%RPD

Surr: BFB

870

1000

SPK value SPK Ref Val

87.2

112

Sample ID LCS-23266

Prep Date: 1/18/2016

SampType: LCS

RunNo: 31526

TestCode: EPA Method 8015D: Gasoline Range

Client ID: LCSS

Batch ID: 23266 Analysis Date: 1/19/2016

PQL

5.0

SeqNo: 965258

Units: mg/Kg

LowLimit

66.2

HighLimit %RPD **RPDLimit**

Analyte Gasoline Range Organics (GRO) Surr. BFB

Result 25 960

25.00 1000

101 95.8

%REC

0

79.6 66.2

112

122

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- D Sample Diluted Due to Matrix
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- RPD outside accepted recovery limits R
- % Recovery outside of range due to dilution or matrix S
- В Analyte detected in the associated Method Blank
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH Not In Range
- Reporting Detection Limit RL

Page 4 of 5

QC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#:

1601614

20-Jan-16

Client:

Blagg Engineering

Project:

Neil A # 23

Sample ID MB-23266	SampType: MBLK Batch ID: 23266		Tes							
Client ID: PBS			RunNo: 31526							
Prep Date: 1/18/2016	Analysis [Date: 1/	19/2016	5	SeqNo: 9	65266	Units: mg/k	(g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	ND	0.050								
Toluene	ND	0.050								
Ethylbenzene	ND	0.050								
Xylenes, Total	ND	0.10								
Surr: 4-Bromofluorobenzene	0.99		1.000		99.4	80	120			

Sample ID LCS-23266	SampType: LCS Batch ID: 23266		Tes							
Client ID: LCSS			F	RunNo: 3	1526					
Prep Date: 1/18/2016	Analysis [Date: 1/	19/2016	SeqNo: 965267			Units: mg/k	(g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	1.0	0.050	1.000	0	102	80	120			
Toluene	0.96	0.050	1.000	0	95.6	80	120			
Ethylbenzene	0.95	0.050	1.000	0	94.9	80	120			
Xylenes, Total	2.9	0.10	3.000	0	95.5	80	120			
Surr: 4-Bromofluorobenzene	1.1		1.000		105	80	120			

Qualifiers:


- * Value exceeds Maximum Contaminant Level.
- D Sample Diluted Due to Matrix
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- S % Recovery outside of range due to dilution or matrix
- B Analyte detected in the associated Method Blank
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH Not In Range
- RL Reporting Detection Limit


Page 5 of 5



Hall Environmental Analysis Laboratory 4901 Hawkins NE
Albuquerque, NM 87109
TEL: 505-345-3975 FAX: 505-345-4107
Website: www.hallenvironmental.com

Glient Name: BLAGG Work Order N	lumber: 1601614		RoptNo. 1
Received by/date: CA 01/19/16			
Logged By: Lindsay Mangin 1/19/2016 7:45:	00 AM	of yelligo	
Completed By: Lindsay Mengin 1/19/2016 7:58:	04 AM	Andy Alligo	
Reviewed By: On Oilight		000	
Chain of Custody			The Laboratory of the Control of the
1. Custody seals intact on sample bottles?	Yes	No 🗆	Not Present
2, Is Chain of Custody complete?	Yes 🔽	No.	Not Present
3. How was the sample delivered?	Courier		
Log In			
4. Was an attempt made to cool the samples?	Yes 🗹	No 🗆	NA 🗆
5. Were all samples received at a temperature of >0°C to 6.0°	C Yes 🗸	No 🗆	NA 🗇
6. Sample(s) in proper container(s)?	Yes 🕡	No 🗆	
7. Sufficient sample volume for indicated test(s)?	Yes 🔽	No. 🗆	
8. Are samples (except VOA and ONG) properly preserved?	Yes 🗹	No 🗔	
9. Was preservative added to bottles?	Yes 🗌	No 🗹	NA 🗆
10.VOA vials have zero headspace?	Yes 🗌	No 🗆	No VOA Visis 🔽
11 Were any sample containers received broken?	Yes	No 🗹	# of preserved
	and the	T	bottles checked
12. Does paperwork match bottle labels? (Note discrepancies on chain of custody)	Yes 🗹	No L	for pH: {<2 or >12 unless no
13, Are matrices correctly identified on Chain of Custody?	Yes V	No 🗆	Adjusted?
14, is it clear what analyses were requested?	Yes 🗹	No 🗆	
15. Were all holding times able to be met? (If no, notify customer for authorization.)	Yes 🔽	No. 🗆	Checked by
Special Handling (if applicable)			
16. Was client notified of all discrepancies with this order?	Yes 📙	No L	NA M
Person Notified:	Date	Villa de Villa	
	Via: eMail	Phone Fax	In Person
Regarding:			
Client Instructions:			
17, Additional remarks:			
18. Cooler Information	and the second second second	1 30 70 100	
Cooler No Temp C Condition Seal Intact Seal	No Seal Date	Signed By	

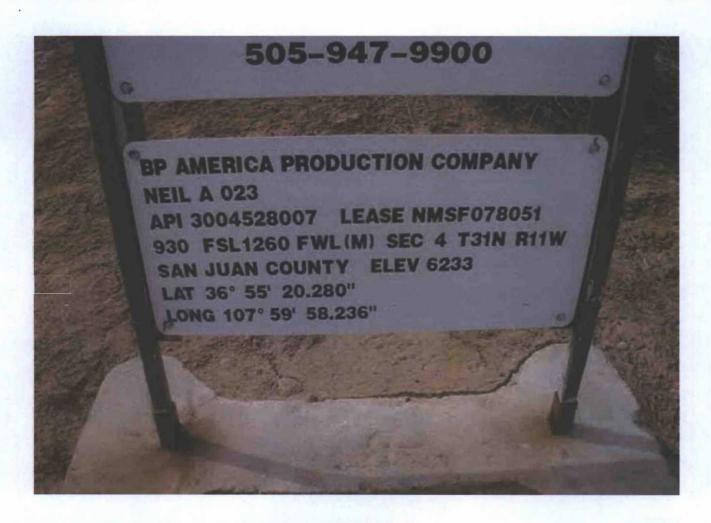

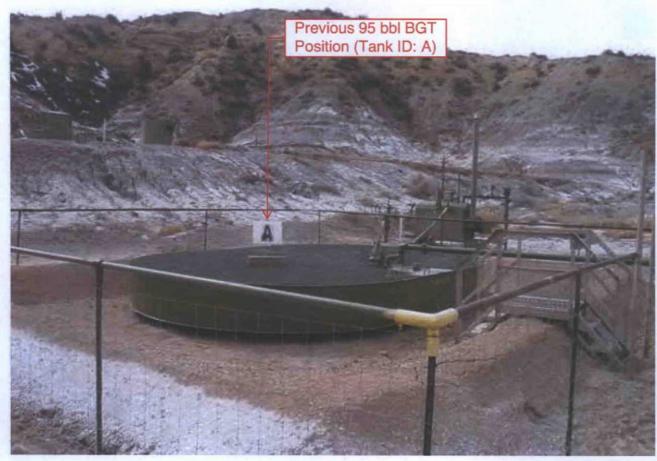



BP America Production Company 200 Energy Court Farmington, NM 87401 Phone: (505) 326-9200

January 13, 2016

Bureau of Land Management Katherina Diemer 6251 College Suite A Farmington, NM 87402

VIA CERTIFIED MAIL - RETURN RECEIPT REQUESTED

Re: Notification of plans to close/remove a below grade tank

Well Name: NEIL A 023 API #: 3004528007

Dear Mrs. Diemer,

As part of the NM "Pit Rule": 19.15.17.13 Closure Requirements, Paragraph J. BP America Production Company (BP) is required to notify the surface owner of BP's plans to close/remove a below grade tank. BP wishes to inform you of our plans to close/remove the below grade tank on its well pad located on your surface. BP plans to commence this work on or about January 18, 2016. If there aren't any unforeseen problems, the work should be completed within 10 working days.

As a point of clarification, BP will be closing the below grade tank and either operating without one or replacing it with an above ground tank, the well site will continue to operate.

Unless you have questions about this notice, there is no need to respond to this letter. If you do have any questions or concerns, please contact me at (505)-326-9214.

Sincerely,

Charlie Davis

BP America Production Company

Moskal, Steven

From:

Railsback, Farrah (CH2M HILL)

Sent:

Wednesday, January 13, 2016 4:01 PM

To:

Smith, Cory, EMNRD; Fields, Vanessa, EMNRD (Vanessa.Fields@state.nm.us)

Cc:

jeffcblagg@aol.com; blagg_njv@yahoo.com; Moskal, Steven

Subject:

BP Pit Close Notification - NEIL A 023

BP America Production Company

200 Energy Court Farmington, NM 87401 Phone: (505) 326-9200

SENT VIA E-MAIL TO: CORY.SMITH@STATE.NM.US; VANESSA.FIELDS@STATE.NM.US

January 13, 2016

New Mexico Oil Conservation Division 1000 Rio Brazos Road Aztec, New Mexico 87410

RE: Notice of Proposed Below-Grade Tank (BGT) Closure

NEIL A 023 API 30-045-28007 (M) Section 4 – T31N – R11W San Juan County, New Mexico

Dear Mr. Cory Smith and Mrs. Vanessa Fields,

In regards to the captioned subject and requirements of the NMOCD pit rule, this letter is notification that BP is planning to close a 95 bbl BGT that will no longer be operational at this well site. We anticipate this work to start on or around January 18, 2016.

Should you have any questions, please feel free to contact BP at our Farmington office.

Sincerely,

Steven Moskal

BP Field Environmental Coordinator

(505) 326-9497