District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office. For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Below-Grade Tank, or
14202 Proposed Alternative Method Permit or Closure Plan Application
Type of action: Below grade tank registration Permit of a pit or proposed alternative method Closure of a pit, below-grade tank, or proposed alternative method MAR 1 5 2016 MAR 1 5 2016 MAR 1 5 2016 Closure plan only submitted for an existing permitted or non-permitted pit, below-grade tank, or proposed alternative method
Instructions: Please submit one application (Form C-144) per individual pit, below-grade tank or alternative request
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.
Operator: BP America Production Company OGRID #: 778
Address: 200 Energy Court, Farmington, NM 87401
Facility or well name:Gallegos Canyon Unit 165
API Number: 3004507171 OCD Permit Number:
U/L or Qtr/Qtr <u>H</u> Section <u>29</u> Township <u>28N</u> Range <u>12W</u> County: <u>San Juan</u>
Center of Proposed Design: Latitude <u>36.63495</u> Longitude <u>-108.12868</u> NAD: □1927 ⊠ 1983
Surface Owner: 🛛 Federal 🗋 State 🗋 Private 🗋 Tribal Trust or Indian Allotment
2. Pit: Subsection F, G or J of 19.15.17.11 NMAC Temporary: Drilling Workover Permanent Emergency Cavitation P&A Multi-Well Fluid Management Low Chloride Drilling Fluid Lined Unlined Liner type: Thickness mil LLDPE HDPE PVC
□ String-Reinforced Liner Seams: □ Welded □ Factory □ Other Volume: bbl Dimensions: L x W x D
3. Subsection I of 19.15.17.11 NMAC TANK A Volume: 95 bbl Type of fluid: Produced water
Tank Construction material: Steel
Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off
□ Visible sidewalls and liner □ Visible sidewalls only □ Other _Single walled/double bottom; visible sidewalls
Liner type: Thicknessmil
 <u>Alternative Method</u>: Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

5. Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet Alternate. Please specify	hospital,
Variances and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Variance(s): Requests must be submitted to the appropriate division district for consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	
9. <u>Siting Criteria (regarding permitting)</u> : 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Siting criteria does not apply to drying pads or above-grade tanks.	ptable source
General siting	
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank. - □ NM Office of the State Engineer - iWATERS database search; □ USGS; □ Data obtained from nearby wells Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	□ Yes □ No □ NA □ Yes □ No □ NA
 Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) Written confirmation or verification from the municipality; Written approval obtained from the municipality 	Yes No
 Within the area overlying a subsurface mine. (Does not apply to below grade tanks) Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division 	Yes No
 Within an unstable area. (Does not apply to below grade tanks) Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	🗌 Yes 🗌 No
Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map	Yes No
Below Grade Tanks	
 Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No
 Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)	
 Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) Topographic map; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No

watering purposes, or 300 ret of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site Yet Within 100 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Yet Temporary Pit Non-low chloride drilling fluid Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Yet - Topographic map; Visual inspection (certification) of the proposed site Yet Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Yet - Topographic map; Visual inspection (certification) of the proposed site Yet Within 300 feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; Yet - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site Yet Within 300 feet of a continuously flowing watercourse, or 200 feet of any other signiffcant watercour	s 🗌 No
watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. If it NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site Yet Within 100 feet of a vetland. It Yet US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Yet Minin 100 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Yet Yothin 500 forct of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well used by less than five households for domestic or stock watering purposes stice Yet	
• US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Yet Temporary Pit Non-low chloride drilling fluid Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakeded, sinkhole, or playa lake (messured from the ordinary high-water mark). Yet Yet You alke (messured from the ordinary high-water mark). Yet • Visual inspection (certification) of the proposed site Yet Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well used by less than five households for domestic or stock watering purposes, or lot feet of any other fresh water well used by less than five households for domestic or stock watering purposes, or lot feet of any other fresh water well used by less than five households for domestic or stock watering purposes, or lot feet of a wetland. Yet • US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Yet Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Yet Within 500 feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. Yet Within 500 feet of a spring or a fresh water well used for domestic or stock watering pur	s 🗌 No
Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Y G Within 300 feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site Y G Within 300 feet of a continuously flowing watercourse, or 200 feet of any other respination (certification) of the proposed site Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Y G Within 300 feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Y G Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site Y G Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial appli	s 🗌 No
or playa lake (measured from the ordinary high-water mark).	
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Ye Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; Ye Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Ye Permanent Pit or Multi-Well Fluid Management Pit Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Ye Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Ye Within 100 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Ye Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. Ye Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Ye Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certificat	
• Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Ya Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; Ya Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Ya Permanent Pit or Multi-Well Fluid Management Pit Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). • Topographic map; Visual inspection (certification) of the proposed site Ya Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Ya • Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. Ya • Within 500 feet of a wetland. • US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Ya Within 500 feet of a wetland. • US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Ya Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application. Attachment Checklist: Subsection B	S I NO
watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site Yee Permanent Pit or Multi-Well Fluid Management Pit Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site We Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application. Attachment Checklist: Subsection B of 19.15.17.9 NMAC Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of 19.15.17.10 NMAC Hydrogeologic Report (Below-grade Tanks) - based upon the requiremen	s 🗌 No
US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Permanent Pit or Multi-Well Fluid Management Pit Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Within 500 feet of a wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Within 500 feet of a wetland. Us Fish and Wildlife Wetland Identification the proportiant requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - bas	s 🗌 No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa Image: Im	s 🗌 No
lake (measured from the ordinary high-water mark).	
Topographic map; Visual inspection (certification) of the proposed site Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Vee Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Sting Criteria Compliance Demonstrations - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.10 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC	
 Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site Yee Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Yee Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Compliance Demonstrations - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 International transments of 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number: or Permit Number:	s 🗌 No
initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site Image: Vertication of the proposed site Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Image: Vertication of the proposed site 10. Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.91 and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:	s 🗌 No
 NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Ye 	
US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Vet <u>Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist</u> : Subsection B of 19.15.17.9 NMAC <u>Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:</u>	s 🗌 No
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.10 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 I and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number: or Permit Number: 	s 🗌 No
	VMAC
Multi-wen Fluid Management Fit Checking: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents attached. Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC A List of wells with approved application for permit to drill associated with the pit. Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 and 19.15.17.13 NMAC Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:	

 <u>Permanent Pits Permit Application Checklist</u>: Subsection B of 19.15.17.9 NMAC <i>Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the</i> 	documents are		
attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment			
 Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H₂S, Prevention Plan 			
Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan			
 Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC 			
13.			
<u>Proposed Closure</u> : 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.			
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-well F	luid Management Pit		
Alternative Proposed Closure Method: Waste Excavation and Removal			
 Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) 			
In-place Burial On-site Trench Burial Alternative Closure Method			
closure plan. Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC			
15. Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC	Survey and		
Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. I 19.15.17.10 NMAC for guidance.			
 Ground water is less than 25 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells 	□ Yes □ No □ NA		
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Yes NA			
Ground water is more than 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells			
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark) Topographic map; Visual inspection (certification) of the proposed site			
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image			
Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site			
Written confirmation or verification from the municipality; Written approval obtained from the municipality	Yes No		
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site			
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance			
Form C-144 Oil Conservation Division Page 4 o	£6		

 adopted pursuant to NMSA 1978, Section 3-27-3, as amended. Written confirmation or verification from the municipality; Written approval obtained from the municipality 	Yes No
 Within the area overlying a subsurface mine. Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division 	Yes No
 Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological 	
Society; Topographic map	Yes No
Within a 100-year floodplain. - FEMA map	Yes No
16. On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plate by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.17.13 Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannol Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsectio	11 NMAC 15.17.11 NMAC
17. Operator Application Certification:	
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and believed and be	ef.
Name (Print): Title:	
Signature: Date:	
e-mail address: Telephone:	
18. OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature: Ocsoc Approval Date: OS/C Title: Economental Occalist OCD Permit Number:	salsar
Title: <u>Conconnental Opecialist</u> OCD Permit Number:	
^{19.} <u>Closure Report (required within 60 days of closure completion)</u> : 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not section of the form until an approved closure plan has been obtained and the closure activities have been completed.	
Closure Completion Date: 1/19/2016	<u>1951-000</u> 2-000
20. Closure Method: Image: State Excavation and Removal On-Site Closure Method Image: State Excavation and Removal On-Site Closure Method Image: State Excavation and Removal On-Site Closure Method Image: State Excavation and Removal Image: State Excavation and Removal Image: State Excavation and Removal Image: State Excavation and Removal Image: State Excavation and Removal Image: State Excavation and Removal plan, please explain. Image: State Excavation and Removal plan, please explain. Image: State Excavation and Removal plan, please explain.	op systems only)
 21. <u>Closure Report Attachment Checklist</u>: Instructions: Each of the following items must be attached to the closure report. Please ind mark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division) Proof of Deed Notice (required for on-site closure for private land only) Plot Plan (for on-site closures and temporary pits) 	licate, by a check

Oil Conservation Division

Operator Closure	Certification:	
		d with this closure report is true, accurate and complete to the best of my knowledge and ble closure requirements and conditions specified in the approved closure plan.
bellel. I also certify	v that the closure complies with all applicat	bie closure requirements and conditions specified in the approved closure plan.
Name (Print):	Steve Moskal	Title: Field Environmental Coordinator
Signature:	Atamas	Date: March 10, 2016
e-mail address: st	even.moskal@bp.com	Telephone: (505) 326-9497

BP AMERICA PRODUCTION COMPANY SAN JUAN BASIN, NORTHWEST NEW MEXICO

BELOW-GRADE TANK CLOSURE PLAN

<u>Gallegos Canyon Unit 165</u> <u>API No. 3004507171</u> <u>Unit Letter H, Section 29, T28N, R12W</u>

This plan will address the standard protocols and procedures for closure of below-grade tanks (BGTs) on BP America Production Company (BP) well sites. As stipulated in Paragraph A of 19.15.17.13 NMAC, BP shall close a BGT within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the New Mexico Oil Conservation Division (NMOCD) requires because of imminent danger to fresh water, public health, safety or the environment. If deviations from this plan are necessary, any specific changes will be included on form C-144 and approved by the NMOCD. BP shall close an existing BGT that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008, if not retrofit with a BGT that complies with the BP NMOCD approved BGT design attached to the BP Design and Construction Plan. BP shall close an existing BGT that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC, if not previously retrofitted to comply with the BP NMOCD approve BGT Design attached to the BP Design and Construction Plan, prior to any sale or change in operator pursuant to 19.15.9.9 NMAC. BP shall close the permitted BGT within 60 days of cessation of the BGTs operation or as required by the transitional provisions of Subsection B, D, or E of 19.15.17.17 NMAC.

General Closure Plan

- 1. BP shall notify the surface owner by certified mail that it plans to close a BGT. Evidence of mailing of the notice to the address of the surface owner shown in the county tax records demonstrates compliance with this requirement. **Notice is attached.**
- 2. BP shall notify the division District III office verbally or by other means at least 72 hours, but not more than one (1) week, prior to any closure operation. The notice shall include the operator's name, and the location to be closed by unit letter, section, township and range. If the BGT closure is associated with a particular well, then the notice shall also include the well's name, number and API number.

Notice was provided. NMOCD was on site during the removal of the BGT.

- 3. BP shall remove liquids and sludge from the BGT prior to implementing a closure method and dispose of the liquids and sludge in a NMOCD's division-approved facility. The facilities to be used are:
 - a. BP Crouch Mesa Landfarm, Permit NM-02-003 (Solids)
 - b. JFJ Landfarm, Permit NM-01-010(B) (Solids and Sludge)
 - c. Basin Disposal, Permit NM-01-0005 (Liquids)
 - d. Envirotech Inc Soil Remediation Facility, Permit NM-01-0011 (Solids and Sludge)
 - e. BP Operated E.E. Elliott SWD #1, API 30-045-27799 (Liquids)

- f. BP Operated 13 GCU SWD #1, API 30-045-28601 (Liquids)
- g. BP Operated GCU 259 SWD, API 30-045-20006 (Liquids)
- h. BP Operated GCU 306 SWD, API 30-045-24286 (Liquids)
- i. BP Operated GCU 307 SWD, API 30-045-24248 (Liquids)
- j. BP Operated GCU 328 SWD, API 30-045-24735 (Liquids)
- k. BP Operated Pritchard SWD #1, API 30-045-28351 (Liquids)

All liquids and sludge in the BGT were removed and sent to one of the above NMOCD approved facilities for disposal.

4. BP shall remove the BGT and dispose of it in a NMOCD approved facility or recycle, reuse, or reclaim it in a manner that the NMOCD approves. If a liner is present and must be disposed of it will be cleaned by scraping any soils or other attached materials on the liner to a de minimus amount and disposed at a permitted solid waste facility, pursuant to Subparagraph (m) of Paragraph (1) of Subsection C of 19.15.35.8 NMAC. Documentation as to the final disposition of the removed BGT will be provided in the final closure report.

The BGT was transported for recycling.

BP shall remove any on-site equipment associated with a BGT unless the equipment is required for well production.
 All acquipment associated with the BCT has been removed.

All equipment associated with the BGT has been removed.

6. BP shall test the soils beneath the BGT to determine whether a release has occurred. BP shall collect at a minimum: a five (5) point composite sample and individual grab samples from any area that is wet, discolored or showing other evidence of a release and analyze for BTEX, TPH and chlorides. The testing methods for those constituents are as follows;

Constituents	Testing Method 95 bbl BGT	Release Verification (mg/Kg)	Sample results
Benzene	US EPA Method SW-846 8021B or 8260B	0.2	< 0.042
Total BTEX	US EPA Method SW-846 8021B or 8260B	50	< 0.083
TPH	US EPA Method SW-846 418.1 or 8015 extended	100	<51
Chlorides	US EPA Method 300.0 or 4500B	250 or background	<30

Notes: mg/Kg = milligram per kilogram, BTEX = benzene, toluene, ethylbenzene, and total xylenes, TPH = total petroleum hydrocarbons. Other EPA methods that the division approves may be applied to all constituents listed. Chloride closure standards will be determined by which ever concentration level is greatest.

Soil under the BGT was sampled for TPH, BTEX and chloride. BTEX, TPH and chloride concentrations were below the stated limits. The field report and laboratory reports are attached.

 BP shall notify the division District III office of its results on form C-141. C-141 is attached.

- If it is determined that a release has occurred, then BP will comply with 19.15.30 NMAC and 19.15.29 NMAC, as appropriate.
 Sampling results indicate no significant release has occurred.
- 9. If the sampling demonstrates that a release has not occurred or that any release does not exceed the concentrations specified above, then BP shall backfill the excavation, with compacted, non-waste containing, earthen material; construct a division-prescribed soil cover, re-contour and re-vegetate the location. The location will be reclaimed if it is not with in the active process area

Sampling results determine no significant release has occurred. Area was backfilled with clean, earthen material.

10. BP shall reclaim the BGT location and all areas associated with the BGT including associated access roads to a safe and stable condition that blends with the surrounding undisturbed area. BP shall substantially restore the impacted surface area to the condition that existed prior to oil and gas operations by placement of the soil cover as provided in Subsection H of 19.15.17.13 NMAC, re-contour the location and associated areas to a contour that approximates the original contour and blends with the surrounding topography and re-vegetate according to Subsection I of 19.15.17.13 NMAC.

The area has been backfilled and will be reclaimed once the well has been plugged and abandoned.

11. The soil cover for closures where the BGT has been removed or remediated to the NMOCD's satisfaction shall consist of the background thickness of topsoil or one foot of suitable material to establish vegetation at the site, whichever is greater. The soil cover will be constructed to the site's existing grade and all practicable efforts will be made to prevent ponding of water and erosion of the cover material.

The area has been backfilled and will be reclaimed once the well has been plugged and abandoned.

12. BP shall seed the disturbed area the first growing season after closure of the BGT. Seeding will be accomplished by drilling on the contour whenever practical or by other division-approved methods. Vegetative cover will be, at a minimum, 70% of the native perennial vegetative cover (un-impacted by overgrazing, fire or other intrusion damaging to native vegetation), consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintenance of that cover through two successive growing seasons. During the two growing seasons that prove viability, there shall be no artificial irrigation of the vegetation.

The area has been backfilled and will be reclaimed once the well has been plugged and abandoned.

13. BP shall seed, plant and re-seed pursuant to Paragraph (3) of Subsection I of 19.15.17.13 NMAC, until the location successfully achieves the required vegetative cover.

The area has been backfilled and will be reclaimed once the well has been plugged and abandoned. 14. Pursuant to Paragraph (5) of Subsection I of 19.15.17.13 NMAC, BP shall notify the NMOCD when it has seeded or planted and when it successfully achieves revegetation.

BP will notify NMOCD when re-vegetation is successful.

- 15. Within 60 days of closure completion, BP shall submit a closure report on NMOCD's form C-144, and will include the following;
 - a. proof of closure notification (surface owner and NMOCD)
 - b. sampling analytical reports; information required by 19.15.17 NMAC;
 - c. disposal facility name and permit number
 - d. details on back-filling, capping, covering, and where applicable re-vegetation application rates and seeding techniques and
 - e. site reclamation, photo documentation. Closure report on C-144 form is included including photos of reclamation completion.
- 16. BP shall certify that all information in the report and attachments is accurate, truthful, and compliant with all applicable closure requirements and conditions specified in the approved closure plan.

Certification section of C-144 has been completed.

State of New Mexico Energy Minerals and Natural Resources

Form C-141 Revised August 8, 2011

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 Submit 1 Copy to appropriate District Office in accordance with 19.15.29 NMAC.

API No. 3004507171

Release Notification and Corrective Action

	OPERATOR		Initial Report	\boxtimes	Final Report
Name of Company: BP	Contact: Steve Moskal	1.1			
Address: 200 Energy Court, Farmington, NM 87401	Telephone No.: 505-326-9497				
Facility Name: Gallegos Canyon Unit165	Facility Type: Natural gas well		a set of the set of the		

Surface Owner: Federal

LOCATION OF RELEASE

Mineral Owner: Federal

Unit Letter HSection 29Township 28NRange 12WFeet from the 2,130North/South Line NorthFeet from the 790East/West Line EastCounty: San Juan

Latitude 36.63495 Longitude -108.12868

NATURE OF RELEASE

Type of Release: none	Volume of Release: unknown	Volume Recovered: N/A	
Source of Release: below grade tank - 95 bbl	Date and Hour of Occurrence: none	Date and Hour of Discovery: none	
Was Immediate Notice Given?	If YES, To Whom?		
By Whom?	Date and Hour		
Was a Watercourse Reached?	If YES, Volume Impacting the Watercourse.		
If a Watercourse was Impacted, Describe Fully.*			
Describe Area Affected and Cleanup Action Taken.* No action necessary	y. Final laboratory analysis supported	d closure of the BGT location.	
I hereby certify that the information given above is true and complete to the regulations all operators are required to report and/or file certain release republic health or the environment. The acceptance of a C-141 report by the should their operations have failed to adequately investigate and remediate or the environment. In addition, NMOCD acceptance of a C-141 report of the environment.	notifications and perform corrective a ne NMOCD marked as "Final Report te contamination that pose a threat to	actions for releases which may endanger " does not relieve the operator of liability ground water, surface water, human health	
federal, state, or local laws and/or regulations.			
Signature: Itersm	OIL CONSER	<u>EVATION DIVISION</u>	
Printed Name: Steve Moskal	Approved by Environmental Specia	list:	
Title: Field Environmental Coordinator	Approval Date: Expiration Date:		
E-mail Address: steven.moskal@bp.com	Conditions of Approval:	Attached	
Date: March 10, 2016 Phone: 505-326-9497			

* Attach Additional Sheets If Necessary

BP	API# 3004507171	
CLIENT: DT	P.O. BOX 87, BLOOMFIELD, NM 87413	TANKID
	(505) 632-1199	(if applicble): A
FIELD REPORT:	(circle one): BGT CONFIRMATION / RELEASE INVESTIGATION / OTHER:	PAGE #: _1_ of _1_
SITE INFORMATION		DATE STARTED: 01/19/16
QUAD/UNIT: H SEC: 29 TWP:	28N RNG: 12W PM: NM CNTY: SJ ST: NM	DATE FINISHED:
1/4 -1/4/FOOTAGE: 2,130'N / 79 LEASE #: SF078828A	O'E SE/NE LEASE TYPE: FEDERAL STATE / FEE / INDIAN STRIKE PROD. FORMATION: DK CONTRACTOR: MBF - B. SCHUMAN	ENVIRONMENTAL SPECIALIST(S): NJV
REFERENCE POINT		GL ELEV.: 5,599'
1) 95 BGT (SW/DB)	GPS COORD.: 36.63495 X 108.12868 DISTANCE/BE	
2)	GPS COORD.: DISTANCE/BE	ARING FROM W.H.:
3)	GPS COORD.: DISTANCE/BE	ARING FROM W.H.:
4)	GPS COORD.: DISTANCE/BE	ARING FROM W.H.:
SAMPLING DATA:	CHAIN OF CUSTODY RECORD(S) # OR LAB USED: HALL	OVM READING (ppm)
1) SAMPLE ID: 5PC - TB @ 5	(95) SAMPLE DATE: 01/19/16 SAMPLE TIME: 1405 LAB ANALYSIS: 801	
2) SAMPLE ID:	SAMPLE DATE: SAMPLE TIME: LAB ANALYSIS:	
3) SAMPLE ID:	SAMPLE DATE: SAMPLE TIME: LAB ANALYSIS:	
4) SAMPLE ID:	SAMPLE DATE: SAMPLE TIME: LAB ANALYSIS:	
APPARENT EVIDENCE OF A RELEASE OBSERVE EQUIPMENT SET OVER RECLAIMED AREA: OTHER: SOIL IMPACT DIMENSION ESTIMATION	ET / SATURATED / SUPER SATURATED # OF PTS	ANK TO BE SET ATOP BGT POSITION.
SITE SKETCH		CD TPH CLOSURE STD: 100 ppm MCALIB. READ. = NA ppm RF =0.52
NOTES: BGT = BELOW/GRADE TANK; E.D. = EXCAVATI	N BERM PBGTL T.B. ~ 5' B.G. VOODEN R.W. TO W.H. X - S.P.D. ON DEPRESSION; B.G. = BELOW; T.H. = TEST HOLE; ~= APPROX; W.H. = WELL HEAD; WOODEN C.S. = BELOW; CRADE; B = BELOW; T.H. = TEST HOLE; ~= APPROX; W.H. = WELL HEAD; WOODEN C.S. = DELOW GRADE; B = BELOW; T.H. = TEST HOLE; ~= APPROX; W.H. = WELL HEAD; WOODEN C.S. = DELOW GRADE; B = BELOW; T.H. = TEST HOLE; ~= APPROX; W.H. = WELL HEAD; WOODEN C.S. = DELOW GRADE; B = BELOW; T.H. = TEST HOLE; ~= APPROX; W.H. = WELL HEAD; WOODEN C.S. = DELOW GRADE; B = BELOW; T.H. = TEST HOLE; ~= APPROX; W.H. = WELL HEAD; WOODEN C.S. = DELOW GRADE; B = BELOW; T.H. = TEST HOLE; ~= APPROX; W.H. = WELL HEAD; WOODEN C.S. = DELOW GRADE; B = BELOW; T.H. = TEST HOLE; ~= APPROX; W.H. = WELL HEAD; WOODEN C.S. = DELOW GRADE; B = BELOW; T.H. = TEST HOLE; ~= APPROX; W.H. = WELL HEAD; WOODEN C.S. = DELOW GRADE; B = BELOW; T.H. = TEST HOLE; ~= APPROX; W.H. = WELL HEAD; WOODEN C.S. = DELOW GRADE; B = BELOW; T.H. = TEST HOLE; ~= APPROX; W.H. = WELL HEAD; WOODEN C.S. = DELOW GRADE; B = BELOW; T.H. = TEST HOLE; ~= APPROX; W.H. = WELL HEAD; WOODEN C.S. = DELOW GRADE; B = BELOW; T.H. = TEST HOLE; ~= APPROX; W.H. = WELL HEAD; WOODEN C.S. = DELOW GRADE; B = BELOW; T.H. = TEST HOLE; ~= APPROX; W.H. = WELL HEAD; D.N. = DECOMPANY; M.H. = WELC HEAD; D.S. = DECOMPANY; M.H. = DECOMPANY; M.H. = DECOMPANY; M.H. = DECOMPANY; M.H. = DECOMPANY;	MCALIB. GAS = NA ppm IE NA am/pm DATE NA MISCELL. NOTES NO: REF #: P - 262 MD: VHIXONEVB2 PJ #: Permit date(s): 06/14/10 DCD Appr. date(s): 11/20/15 ank OVM = Organic Vapor Meter ppm = parts per million A BGT Sidewalls Visible: Y / N BGT Sidewalls Visible: Y / N BGT Sidewalls Visible: Y / N Magnetic declination: 10° E
APPLICABLE OR NOT AVAILABLE; SW-SINGL NOTES: GOOGLE EARTH IMAG	E WALL; DW - DOUBLE WALL; SB - SINGLE BOTTOM; DB - DOUBLE BOTTOM.	
NOTES. GOUGLE LARTHINAG	ONSITE: 01/19/16	

Analytical Report Lab Order 1601681

Hall Environmental Analysis Laboratory, Inc.

CLIENT: Blagg Engineering

Date Reported: 1/21/2016 Client Sample ID: 5PC-TB @ 5' (95) Collection Date: 1/19/2016 2:05:00 PM

Project:	GCU #165			Collection	Date: 1/1	9/2016 2:05:00 PM	
Lab ID:	1601681-001	Matrix:	SOIL	Received	Date: 1/2	20/2016 7:55:00 AM	
Analyses		Result	RL Qu	al Units	DF	Date Analyzed	Batch
EPA MET	HOD 300.0: ANIONS					Analyst:	LGT
Chloride		ND	30	mg/Kg	20	1/20/2016 11:13:49 AM	23303
EPA MET	HOD 8015D MOD: GASOL	INE RANGE				Analyst:	DJF
Gasoline	Range Organics (GRO)	ND	4.2	mg/Kg	1	1/20/2016 11:51:10 AM	B31554
Surr: I	BFB	104	70-130	%REC	1	1/20/2016 11:51:10 AM	B31554
EPA MET	HOD 8015M/D: DIESEL RA	ANGE ORGANICS				Analyst:	том
Diesel R	ange Organics (DRO)	ND	10	mg/Kg	1	1/20/2016 10:25:51 AM	23302
Motor Oi	I Range Organics (MRO)	ND	51	mg/Kg	1	1/20/2016 10:25:51 AM	23302
Surr: I	DNOP	120	70-130	%REC	1	1/20/2016 10:25:51 AM	23302
EPA MET	HOD 8260B: VOLATILES	SHORT LIST				Analyst:	DJF
Benzene		ND	0.042	mg/Kg	1	1/20/2016 11:51:10 AM	23284
Toluene		ND	0.042	mg/Kg	1	1/20/2016 11:51:10 AM	23284
Ethylben	izene	ND	0.042	mg/Kg	1	1/20/2016 11:51:10 AM	23284
Xylenes,	Total	ND	0.083	mg/Kg	1	1/20/2016 11:51:10 AM	23284
Surr:	1,2-Dichloroethane-d4	105	70-130	%REC	1	1/20/2016 11:51:10 AM	23284
Surr: 4	4-Bromofluorobenzene	111	70-130	%REC	1	1/20/2016 11:51:10 AM	23284
Surr: I	Dibromofluoromethane	104	70-130	%REC	1	1/20/2016 11:51:10 AM	23284
Surr:	Toluene-d8	98.0	70-130	%REC	1	1/20/2016 11:51:10 AM	23284

Refer to the QC Summary report and sample login checklist for flagged QC data and preservation information.

Qualifiers:		Value exceeds Maximum Contaminant Level.	В	Analyte detected in the associated Method I	Blank
	D	Sample Diluted Due to Matrix	E	Value above quantitation range	
	Н	Holding times for preparation or analysis exceeded	J	Analyte detected below quantitation limits	Page 1 of 5
	ND	Not Detected at the Reporting Limit	Р	Sample pH Not In Range	rage rors
	R	RPD outside accepted recovery limits	RL	Reporting Detection Limit	
	S	% Recovery outside of range due to dilution or matrix			

				ĺ							Air Bubbles			-											
AL	8				đ	-	əl	awi	2S 93		Grab samp	>	-	+			-	-	-	-	_	_	_		32
HALL ENVIRONMENTAL	ANALYSIS LABORATORY								_	al	unes deres	_	┝	-			-		-	-	_		-		M 87401 VHIXONEVB2
П	S		109			(1.0	ater - 30	m/1	0.00	E - 11	Chloride (so	>	\vdash	+		-			-		-	-	-		HIXO
Z	ō	com	M 87	101		-	-		_	_	məs) 0728			-											NN 'L
ō	AB	ntal.	e, N	345-4	uest				-	(∀	8260B (VO			1											mington Paykey <u>:</u>
IR	-	nme	erqu	505-3	Req		5 PCB's	808	: / si	əpia	8081 Pesti														Pa
Z	SI	www.hallenvironmental.com	nbnc	Fax 505-345-4107	Analysis Request	(*(OS''Od	NOS	1'60	N'I	D, F) anoinA														urt, F
ш	7	allen	- Alt	1	Anal				-	-	RCRA 8 Me												-		2.6.2
	A	h.w.	NE	3975			(SV		-	_	0168) HA9								-			_		ä	Energ
Ĩ	AN	W	/kins	345-				_			EDB (Meth		-	-			-		_	_	_			TOB	2001
-			Haw	505-				-		-	трн (Meth 419М) нат	-	+	-			-		_	_			-	CULY	skal, e#:
-			4901 Hawkins NE - Albuquerque, NM 87109	Tel. 505-345-3975						_	BTEX + MTB	>	+	-	-				-				-	emarks: BILL DIRECTLY TO BP:	Steve Moskal, 200 Energy Court, Farmington, NM 87401 Reference #: <u>P- スダス</u> Paykey <u>: VHIXONE</u>
			7			-		_		1	BTEX + MTB	>	\vdash	-			-		-	-	-	-	-	Remarks: BILL DIRI	Steve
1		-		-			107000	5					-				-			-				A B	1
SAME	DAY						EZ	VELEZ ??	ON C		HEAL No.	102												Date Time	Date Time
ime:	G Rush		GCU # 165			Jer:	NELSON VELEZ	NELSON VE	WYes	emperature: (Preservative Type	Cool											-	/ Abulz	Nolta
Turn-Around Time:	Standard	Project Name:		Project #:		Project Manager:		Sampler:	のないない	Sample Tempt	KT 01 Z4/4 Container Type and #	4 oz 1												Received by:	Received by
Chain-of-Custody Record	BLAGG ENGR. / BP AMERICA		87	BLOOMFIELD, NM 87413	1199		Level 4 (Full Validation)				Sample Request ID	5PC-TB@ 5 ' (95)												by.	t Uade
of-Cust	G ENGR. /		P.O. BOX 87	BLOOMFI	(505) 632-1199				□ Other		Matrix	SOIL	-											Relinquished by:	Rekinquished by:
nain-o	BLAG		ddress:			ax#:	ckage: ard	tion:		(ype)	Time	1405												Time: 11 al 4	Time:
C	lient:		lailing Address:		hone #:	mail or Fax#:	A/QC Package:	ccreditation:	I NELAP	I EDD (Type)	Date	1/19/16												ate: 1/19/16	ate: 19 1

Hall Environmental	Analysis	Laboratory,	Inc.
--------------------	----------	-------------	------

WO#: 1601681 21-Jan-16

Client: Project:	Blagg GCU #	Engineering #165								
Sample ID Client ID: Prep Date:	MB-23303 PBS 1/20/2016	SampType: Batch ID: Analysis Date:	23303	F	tCode: EP RunNo: 31 SeqNo: 96	577	300.0: Anion Units: mg/K			
Analyte Chloride	-	Result PQ ND 1	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Sample ID Client ID:	LCS-23303 LCSS	SampType: Batch ID:			tCode: EP RunNo: 31		300.0: Anion	s		
Prep Date: Analyte	1/20/2016	Analysis Date: Result PQ	1/20/2016	SPK Ref Val	SeqNo: 96 %REC	6548 LowLimit	Units: mg/K HighLimit	g %RPD	RPDLimit	Qual
Chloride	1.1.1.1.1	14 1	.5 15.00	0	94.2	90	110			

Qualifiers:

- * Value exceeds Maximum Contaminant Level.
- D Sample Diluted Due to Matrix
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- S % Recovery outside of range due to dilution or matrix
- B Analyte detected in the associated Method Blank
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH Not In Range
- RL Reporting Detection Limit

Page 2 of 5

Hall Environmenta	l Analysis	Laboratory,	Inc.
-------------------	------------	-------------	------

WO#: 1601681 21-Jan-16

Sample ID MB-23302	Samp	Type: MI	BLK	Tes	tCode: E	PA Method	8015M/D: Di	esel Rang	e Organics	
Client ID: PBS	Batc	h ID: 23	302	F	RunNo: 3	31543				
Prep Date: 1/20/2016	Analysis [Date: 1/	20/2016	5	SeqNo: 9	65566	Units: mg/M	(g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Diesel Range Organics (DRO)	ND	10								
Motor Oil Range Organics (MRO)	ND	50								
Surr: DNOP	10		10.00		99.6	70	130			
Sample ID LCS-23302	Samp	Type: LC	s	Tes	tCode: E	PA Method	8015M/D: Di	esel Rang	e Organics	
Client ID: LCSS	Batc	h ID: 23	302	F	RunNo: 3	31543				
Prep Date: 1/20/2016	Analysis [Date: 1	20/2016	5	SeqNo: 9	65591	Units: mg/M	٢g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Diesel Range Organics (DRO)	39	10	50.00	0	78.5	65.8	136	P		
Surr: DNOP	4.0		5.000		79.5	70	130			

Qualifiers:

- * Value exceeds Maximum Contaminant Level.
- D Sample Diluted Due to Matrix
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- S % Recovery outside of range due to dilution or matrix
- B Analyte detected in the associated Method Blank
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH Not In Range
- RL Reporting Detection Limit

Page 3 of 5

DI DI

Hall Environmenta	l Anal	ysis]	Labora	tory,]	Inc.
-------------------	--------	--------	--------	---------	------

WO#: 1601681

21-Jan-16

Sample ID mb-23284		Type: MI					8260B: Volat	tiles Short	List	
Client ID: PBS	Batc	h ID: 23	284	F	RunNo: 3	1554				
Prep Date: 1/19/2016	Analysis Date: 1/20/2016			S	SeqNo: 9	66463	Units: mg/K	g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	ND	0.050								
Toluene	ND	0.050								
Ethylbenzene	ND	0.050								
Xylenes, Total	ND	0.10								
Surr: 1,2-Dichloroethane-d4	0.56		0.5000		111	70	130			
Surr: 4-Bromofluorobenzene	0.52		0.5000		105	70	130			
Surr: Dibromofluoromethane	0.55		0.5000		110	70	130			
Surr: Toluene-d8	0.49		0.5000		98.3	70	130	Sec. 2	Sec. 1	
Sample ID Ics-23284	Samp	Type: LC	S	Tes	tCode: El	PA Method	8260B: Volat	tiles Short	List	
Client ID: LCSS	Batc	h ID: 23	284	F	RunNo: 3	1554				
Prep Date: 1/19/2016	Analysis [Date: 1/	20/2016	S	SeqNo: 9	66464	Units: mg/K	(g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	0.96	0.050	1.000	0	96.3	70	130			
Toluene	1.0	0.050	1.000	0	103	70	130			
	0.51		0.5000		102	70	130			
Surr: 1,2-Dichloroethane-d4	0.01									
Surr: 1,2-Dichloroethane-d4 Surr: 4-Bromofluorobenzene	0.54		0.5000		109	70	130			
			0.5000 0.5000		109 103	70 70	130 130			

Qualifiers:

- * Value exceeds Maximum Contaminant Level.
- D Sample Diluted Due to Matrix
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- S % Recovery outside of range due to dilution or matrix
- B Analyte detected in the associated Method Blank
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH Not In Range
- RL Reporting Detection Limit

Page 4 of 5

Hall Environmental Analysis Laboratory, Inc.

WO#: 1601681 21-Jan-16


Sample ID rb		ype: ME					8015D Mod:	Gasoline	Range	
Client ID: PBS Prep Date:	Batc Analysis [h ID: B3 Date: 1/			RunNo: 3 SeqNo: 9		Units: mg/K	g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Gasoline Range Organics (GRO) Surr: BFB	ND 520	5.0	500.0		104	70	130			
Sample ID 2.5ug gro lcs	Samp	ype: LC	S	Tes	tCode: E	PA Method	8015D Mod:	Gasoline	Range	2
Client ID: LCSS	Batc	h ID: B3	1554	F	RunNo: 3	1554				
Prep Date:	Analysis [Date: 1/	20/2016	5	SeqNo: 9	66521	Units: mg/K	g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Gasoline Range Organics (GRO)	29	5.0	25.00	0	115	62.9	123	20170	1949	
Surr: BFB	520		500.0		104	70	130			

Qualifiers:

- * Value exceeds Maximum Contaminant Level.
- D Sample Diluted Due to Matrix
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- S % Recovery outside of range due to dilution or matrix
- B Analyte detected in the associated Method Blank
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH Not In Range
- RL Reporting Detection Limit

Page 5 of 5

ENVIRONMENTAL ANALYSIS LABORATORY	Environmental Analysis Laborate 4901 Hawkins Albuquerque, NM 871 505-345-3975 FAX: 505-345-41 ebsite: www.hallenvironmental.c	NE 109 Sam	ple Log-In Check List
Client Name: BLAGG Work C	Order Number: 1601681		RcptNo: 1
Received by/date: Ar of 120/16			
Logged By: Anne Thorne 1/20/2010	3 7:55:00 AM	ame Hann	
Completed By: Anne Thorne 1/20/2010	5	Anna Him	
Reviewed By: On 01/2.0	116	and free	
hain of Custody	µ•		
1. Custody seals intact on sample bottles?	Yes 🗖	No 🗌	Not Present
2. Is Chain of Custody complete?	Yes 🗹	No 🗌	Not Present
3. How was the sample delivered?	Courier		
.og In			
4. Was an attempt made to cool the samples?	Yes 🗹	No 🗌	NA
5. Were all samples received at a temperature of >0° C	to 6.0°C Yes 🗹	No 🗌	
Sample(s) in proper container(s)?	Yes 🗹	No 🗌	
7. Sufficient sample volume for indicated test(s)?	Yes 🗹	No 🗆	
8. Are samples (except VOA and ONG) properly preserve	ed? Yes 🗹	No 🗌	
9. Was preservative added to bottles?	Yes 🗌	No 🗹	NA 🗆
0.VOA vials have zero headspace?	Yes	No 🗌	No VOA Vials
1. Were any sample containers received broken?	Yes 🗆	No 🗹	
			# of preserved bottles checked
2. Does paperwork match bottle labels?	Yes 🖌	No 🗌	for pH: (<2 or >12 unless note
(Note discrepancies on chain of custody)	Yes 🗹	No 🗌	Adjusted?
 Are matrices correctly identified on Chain of Custody? Is it clear what analyses were requested? 	Yes 🗹	No 🗆	
5. Were all holding times able to be met?	Yes 🗹	No 🗆	Checked by:
(If no, notify customer for authorization.)			The second se
pecial Handling (if applicable)			
16. Was client notified of all discrepancies with this order	Yes 🗌	No 🗌	NA 🗹
Person Notified: By Whom:	Date Via: _ eMail _ F	Phone. 🗌 Fax	In Person
Regarding: Client Instructions:			
17. Additional remarks:			
8. Cooler Information		Olerad D.	
Cooler No Temp ^o C Condition Seal Intact	Seal No Seal Date	Signed By	

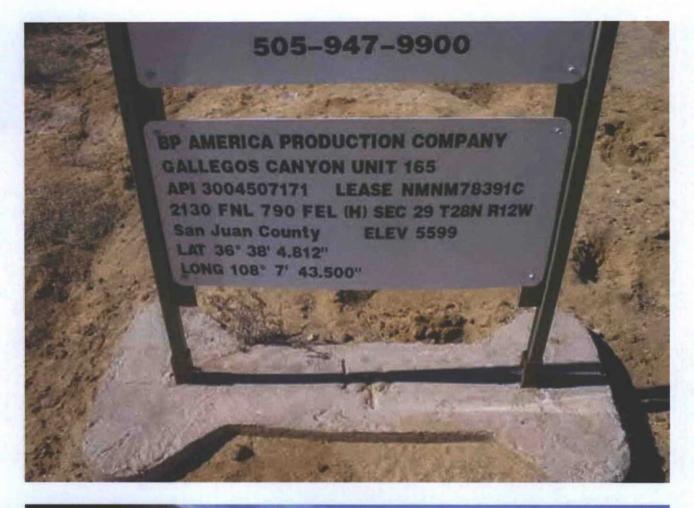



BP America Production Company 200 Energy Court Farmington, NM 87401 Phone: (505) 326-9200

January 13, 2016

bb

Bureau of Land Management Katherina Diemer 6251 College Suite A Farmington, NM 87402

VIA CERTIFIED MAIL – RETURN RECEIPT REQUESTED

Re: Notification of plans to close/remove a below grade tank Well Name: GALLEGOS CANYON UNIT 165 API #: 3004507171

Dear Mrs. Diemer,

As part of the NM "Pit Rule": 19.15.17.13 Closure Requirements, Paragraph J. BP America Production Company (BP) is required to notify the surface owner of BP's plans to close/remove a below grade tank. BP wishes to inform you of our plans to close/remove the below grade tank on its well pad located on your surface. BP plans to commence this work on or about January 18, 2016. If there aren't any unforeseen problems, the work should be completed within 10 working days.

As a point of clarification, BP will be closing the below grade tank and either operating without one or replacing it with an above ground tank, the well site will continue to operate.

Unless you have questions about this notice, there is no need to respond to this letter. If you do have any questions or concerns, please contact me at (505)-326-9214.

Sincerely,

Charlie Davis

BP America Production Company

Moskal, Steven

From: Sent: To: Cc: Subject: Railsback, Farrah (CH2M HILL) Wednesday, January 13, 2016 4:16 PM 'Smith, Cory, EMNRD'; Fields, Vanessa, EMNRD (Vanessa.Fields@state.nm.us) 'jeffcblagg@aol.com'; 'blagg_njv@yahoo.com'; Moskal, Steven BP Pit Close Notification - GCU 165

> BP America Production Company 200 Energy Court Farmington, NM 87401 Phone: (505) 326-9200

SENT VIA E-MAIL TO: CORY.SMITH@STATE.NM.US; VANESSA.FIELDS@STATE.NM.US

January 13, 2016

New Mexico Oil Conservation Division 1000 Rio Brazos Road Aztec, New Mexico 87410

RE: Notice of Proposed Below-Grade Tank (BGT) Closure

GALLEGOS CANYON UNIT 165 API 30-045-07171 (H) Section 29 – T28N – R12W San Juan County, New Mexico

Dear Mr. Cory Smith and Mrs. Vanessa Fields,

In regards to the captioned subject and requirements of the NMOCD pit rule, this letter is notification that BP is planning to close a 95 bbl BGT that will no longer be operational at this well site. We anticipate this work to start on or around January 18, 2016.

1

Should you have any questions, please feel free to contact BP at our Farmington office.

Sincerely,

BP Field Environmental Coordinator

(505) 326-9497