

Form 3160-3
(June 2015)FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER 1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other 1c. Type of Completion: <input type="checkbox"/> Hydraulic Fracturing <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		5. Lease Serial No. NMNM14847 6. If Indian, Allottee or Tribe Name 7. If Unit or CA Agreement, Name and No. 8. Lease Name and Well No. OZZY FEDERAL COM 18D 001H 9. API Well No. 30 015 48329
2. Name of Operator LONGFELLOW ENERGY LP 3a. Address , , 3b. Phone No. (include area code)		10. Field and Pool, or Exploratory EMPIRE/GLORIETA YESO 11. Sec., T. R. M. or Blk. and Survey or Area SEC 13/T17S/R28E/NMP
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface SESE / 270 FSL / 650 FEL / LAT 32.8293225 / LONG -104.1235233 At proposed prod. zone SESE / 1185 FSL / 20 FEL / LAT 32.830567 / LONG -104.1056687		12. County or Parish EDDY 13. State NM
14. Distance in miles and direction from nearest town or post office* 8 miles		15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 270 feet 16. No of acres in lease 17. Spacing Unit dedicated to this well 147.04
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 25 feet 19. Proposed Depth 4550 feet / 9632 feet 20. BLM/BIA Bond No. in file FED:		21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3697 feet 22. Approximate date work will start* 11/01/2020 23. Estimated duration 60 days
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|---|---|
| 1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification.
6. Such other site specific information and/or plans as may be requested by the BLM. |
|---|---|

25. Signature (Electronic Submission) Title President	Name (Printed/Typed) BRIAN WOOD / Ph: (672) 590-9933	Date 09/18/2020
Approved by (Signature) (Electronic Submission) Title Assistant Field Manager Lands & Minerals	Name (Printed/Typed) Cody Layton / Ph: (575) 234-5959 Office Carlsbad Field Office	Date 05/05/2021

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
 Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)



INSTRUCTIONS

GENERAL: This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

ITEM I: If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

ITEM 4: Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

ITEM 14: Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the well, and any other required information, should be furnished when required by Federal agency offices.

ITEMS 15 AND 18: If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective productive zone.

ITEM 22: Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

ITEM 24: If the proposal will involve hydraulic fracturing operations, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

PRINCIPAL PURPOSES: The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service well or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

ROUTINE USE: Information from the record and/or the record will be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM connects this information to an evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications. Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease. The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Connection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

Additional Operator Remarks

Location of Well

0. SHL: SESE / 270 FSL / 650 FEL / TWSP: 17S / RANGE: 28E / SECTION: 13 / LAT: 32.8293225 / LONG: -104.1235233 (TVD: 0 feet, MD: 0 feet)

PPP: LOT 4 / 1185 FSL / 0 FWL / TWSP: 17S / RANGE: 29E / SECTION: 18 / LAT: 32.830564 / LONG: -104.121419 (TVD: 4540 feet, MD: 4800 feet)

PPP: SESE / 702 FSL / 440 FEL / TWSP: 17S / RANGE: 28E / SECTION: 13 / LAT: 32.8305053 / LONG: -104.1228398 (TVD: 4151 feet, MD: 4182 feet)

BHL: SESE / 1185 FSL / 20 FEL / TWSP: 17S / RANGE: 29E / SECTION: 18 / LAT: 32.830567 / LONG: -104.1056687 (TVD: 4550 feet, MD: 9632 feet)

BLM Point of Contact

Name: Deborah Ham

Title: Legal Landlaw Examiner

Phone: (575) 234-5965

Email: dham@blm.gov

Review and Appeal Rights

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.

District I

1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

District III

1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico

Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.

Santa Fe, NM 87505

Form C-102

Revised August 1, 2011

Submit one copy to appropriate

District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-015- 48329		² Pool Code 96210		³ Pool Name EMPIRE; GLORIETA-YESO	
⁴ Property Code 330812		⁵ Property Name OZZY FEDERAL COM 18D			⁶ Well Number 001H
⁷ OGRID No. 372210		⁸ Operator Name LONGFELLOW ENERGY, LP			⁹ Elevation 3697.4

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	13	17 S	28 E		270	SOUTH	650	EAST	EDDY

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	18	17 S	29 E		1185	SOUTH	20	EAST	EDDY

¹² Dedicated Acres 147.04	¹³ Joint or Infill	¹⁴ Consolidation Code C	¹⁵ Order No.
--	-------------------------------	--	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

<p>NW CORNER SEC. 13 LAT. = 32.8431424°N LONG. = 104.1387095°W NMSP EAST (FT) N = 670523.36 E = 601110.01 N89°50'58"E 2663.82 FT</p> <p>NW CORNER SEC. 13 LAT. = 32.8431631°N LONG. = 104.1213595°W NMSP EAST (FT) N = 670541.18 E = 606438.49 N89°46'03"E 2666.00 FT</p> <p>NW CORNER SEC. 18 LAT. = 32.8418304°N LONG. = 104.1213621°W NMSP EAST (FT) N = 670056.28 E = 606438.68 S00°01'18"E 485.02 FT</p> <p>NE CORNER SEC. 18 LAT. = 32.8418330°N LONG. = 104.1056015°W NMSP EAST (FT) N = 670067.31 E = 611279.13 N89°51'10"E 2641.08 FT</p> <p>N/4 CORNER SEC. 13 LAT. = 32.8431478°N LONG. = 104.1300381°W NMSP EAST (FT) N = 670530.36 E = 603773.17</p> <p>N/4 CORNER SEC. 18 LAT. = 32.8418297°N LONG. = 104.1141987°W NMSP EAST (FT) N = 670060.53 E = 608638.71</p> <p>W/4 CORNER SEC. 13 LAT. = 32.8358282°N LONG. = 104.1385221°W NMSP EAST (FT) N = 667862.46 E = 601172.46</p> <p>E/4 CORNER SEC. 18 LAT. = 32.8345730°N LONG. = 104.1056028°W NMSP EAST (FT) N = 667426.00 E = 611284.41</p> <p>S/4 CORNER SEC. 13 LAT. = 32.8285531°N LONG. = 104.1298694°W NMSP EAST (FT) N = 665220.65 E = 603835.19</p> <p>SW CORNER SEC. 13 LAT. = 32.8285163°N LONG. = 104.1383286°W NMSP EAST (FT) N = 665202.37 E = 601236.82</p> <p>SE CORNER SEC. 13 LAT. = 32.8285895°N LONG. = 104.1214098°W NMSP EAST (FT) N = 665238.99 E = 606433.68</p> <p>SW CORNER SEC. 18 LAT. = 32.8273415°N LONG. = 104.1214155°W NMSP EAST (FT) N = 664784.94 E = 606432.86</p> <p>SE CORNER SEC. 18 LAT. = 32.8273104°N LONG. = 104.1056042°W NMSP EAST (FT) N = 664783.74 E = 611289.70</p> <p>SHL 270' FTP 650'</p> <p>SOO'03'34"W 2166.73 FT SOO'03'34"W 469.59 FT SOO'03'34"W 2182.16 FT SOO'03'34"W 2182.16 FT</p> <p>N89°53'22"E 2200.58 FT N89°51'10"E 2641.08 FT N89°52'40"W 2649.46 FT N89°52'40"W 2649.46 FT</p> <p>LAST TAKE POINT 1185' FSL, 100' FEL LAT. = 32.8305621°N LONG. = 104.1059290°W</p> <p>FIRST TAKE POINT 1172' FSL, 100' FWL LAT. = 32.8305621°N LONG. = 104.1210772°W</p> <p>BHL 20' LTP 1185'</p> <p>BOTTOM OF HOLE LAT. = 32.8305670°N LONG. = 104.1056687°W NMSP EAST (FT) N = 665968.50 E = 611267.33</p>		<p>17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</p> <p><i>Brian Wood</i> 9-16-20</p> <p>Signature _____ Date _____ BRIAN WOOD Printed Name _____ brian@permitswest.com E-mail Address _____ 505 466-8120</p> <p>18 SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</p> <p>AUGUST 11, 2020 Date of Survey _____</p> <p><i>William E. Jaramila</i> Signature and Seal of Professional Surveyor Certificate Number: _____ PLS 12797 SURVEY NO. 8393</p>
--	--	--

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit Original
to Appropriate
District Office

GAS CAPTURE PLAN

Date: 9-16-20

☒ Original

Operator & OGRID No.: Longfellow Energy, LP (372210)

☐ Amended - Reason for Amendment: _____

This Gas Capture Plan outlines actions to be taken by the Operator to reduce well/production facility flaring/venting for new completion (new drill, recomple to new zone, re-frac) activity.

Note: Form C-129 must be submitted and approved prior to exceeding 60 days allowed by Rule (Subsection A of 19.15.18.12 NMAC).

Well(s)/Production Facility – Name of facility

The well(s) that will be located at the production facility are shown in the table below.

Well Name & Number	API	SHL (ULSTR)	SHL Footages	Expected MCF/D	Flare or Vent	Comments
Ozzy Federal Com 18D 1H	30-015-	P-13-17s-28e	270' FSL & 650' FEL	225	<30 days	flare until well clean, then connect
Ozzy Federal Com 18D 2H	30-015-	P-13-17s-28e	245' FSL & 650' FEL	225	<30 days	flare until well clean, then connect
Ozzy Federal Com 18D 3H	30-015-	P-13-17s-28e	220' FSL & 650' FEL	225	<30 days	flare until well clean, then connect
Ozzy Federal Com 18D 4H	30-015-	P-13-17s-28e	195' FSL & 650' FEL	225	<30 days	flare until well clean, then connect

Gathering System and Pipeline Notification

Well(s) will be connected to a production facility after flowback operations are complete, if gas transporter system is in place. The gas produced from production facility is not yet dedicated, but will be connected to a 3rd party gathering system located in Eddy County, New Mexico. Gas will most likely be piped ≈900' west to Longfellow's Phillips AID State 2 (O-13-17s-28e) which is connected with DCP Operating Company, LP (36785). Operator will provide (periodically) to Gas Transporter a drilling, completion and estimated first production date for wells that are scheduled to be drilled in the foreseeable future. In addition, Operator and Gas Transporter have periodic conference calls to discuss changes to drilling and completion schedules. Gas from these wells will be processed at an unknown Processing Plant located in Eddy County, New Mexico. The actual flow of the gas will be based on compression operating parameters and gathering system pressures.

Flowback Strategy

After the fracture treatment/completion operations, well(s) will be produced to temporary production tanks and gas will be flared or vented. During flowback, the fluids and sand content will be monitored. When the produced fluids contain minimal sand, the wells will be turned to production facilities. Gas sales should start as soon as the wells start flowing through the production facilities, unless there are operational issues on Gas Transporter system at that time. Based on current information, it is Operator's belief the system can take this gas upon completion of the well(s).

Safety requirements during cleanout operations from the use of underbalanced air cleanout systems may necessitate that sand and non-pipeline quality gas be vented and/or flared rather than sold on a temporary basis.

Alternatives to Reduce Flaring

Below are alternatives considered from a conceptual standpoint to reduce the amount of gas flared.

- Power Generation – On lease
 - Only a portion of gas is consumed operating the generator, remainder of gas will be flared
- Compressed Natural Gas – On lease
 - Gas flared would be minimal, but might be uneconomical to operate when gas volume declines
- NGL Removal – On lease
 - Plants are expensive, residue gas is still flared, and uneconomical to operate when gas volume declines



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

05/07/2021

APD ID: 10400061970

Submission Date: 09/18/2020

Highlighted data
reflects the most
recent changes

Operator Name: LONGFELLOW ENERGY LP

Well Name: OZZY FEDERAL COM 18D

Well Number: 001H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
872735	QUATERNARY	3697	0	0	OTHER : Caliche	USEABLE WATER	N
872736	RUSTLER ANHYDRITE	3422	275	275	ANHYDRITE	NONE	N
872737	TOP SALT	3272	425	425	SALT	NONE	N
872738	BASE OF SALT	3047	650	651	SALT	NONE	N
872739	YATES	2859	838	840	DOLOMITE	NATURAL GAS, OIL	N
872740	SEVEN RIVERS	2583	1114	1118	GYPSUM	NONE	N
872741	QUEEN	2072	1625	1639	SANDSTONE	NATURAL GAS, OIL	N
872742	SAN ANDRES	1334	2363	2378	DOLOMITE	NATURAL GAS, OIL	N
872743	GLORIETA	-64	3761	3787	DOLOMITE	NATURAL GAS, OIL	N
872744	YESO	-139	3836	3864	OTHER : Paddock Dolomite	NATURAL GAS, OIL	N
872745	YESO	-454	4151	4183	OTHER : Blinbry Dolomite	NATURAL GAS, OIL	N

Section 2 - Blowout Prevention

Pressure Rating (PSI): 3M

Rating Depth: 5000

Equipment: A 3000-psi BOP stack (rated to 5000) consisting of annular preventer and double (blind and pipe) ram will be used below surface casing to TD.

Requesting Variance? YES

Variance request: Variance is requested to use a flex-hose. Test certificate for a typical hose is attached, Certificate for the hose in use will be available on the rig before drilling starts.

Testing Procedure: BOP/BOPE will be tested by an independent service company to 250-psi low and 3000-psi high per Onshore Order 2 requirements. The system may be upgraded to a higher pressure, but still tested as described above. If the system is upgraded, then all the installed components will be functional and tested. Pipe rams will be operationally checked each 24-hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOPE will include a speed head, Kelly cock and floor safety valve (inside BOP),

Operator Name: LONGFELLOW ENERGY LP**Well Name:** OZZY FEDERAL COM 18D**Well Number:** 001H

and choke lines and choke manifold. BOP and choke diagrams are attached.

Choke Diagram Attachment:

Ozzy_18D_1H_Choke_20200918034608.pdf

BOP Diagram Attachment:

Ozzy_18D_1H_BOP_20200918034614.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	12.25	9.625	NEW	API	N	0	1250	0	1245	3697	2452	1250	J-55	36	LT&C	1.125	1.125	DRY	1.8	DRY	1.8
2	PRODUCTION	8.75	7.0	NEW	API	N	0	3930	0	3902	3697	-205	3930	L-80	32	BUTT	1.125	1.125	DRY	1.8	DRY	1.8
3	PRODUCTION	8.75	5.5	NEW	API	Y	3930	9632	3902	4550	-205	-853	5702	L-80	20	BUTT	1.125	1.125	DRY	1.8	DRY	1.8

Casing Attachments**Casing ID:** 1 **String Type:** SURFACE**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**

Ozzy_18D_1H_Casing_Design_Assumptions_20200918034454.pdf

Operator Name: LONGFELLOW ENERGY LP**Well Name:** OZZY FEDERAL COM 18D**Well Number:** 001H**Casing Attachments****Casing ID:** 2 **String Type:** PRODUCTION**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**

Ozzy_18D_1H_Casing_Design_Assumptions_20200918034729.pdf

Casing ID: 3 **String Type:** PRODUCTION**Inspection Document:****Spec Document:****Tapered String Spec:**

Ozzy_18D_1H_Casing_Design_Assumptions_20200918034818.pdf

Casing Design Assumptions and Worksheet(s):

Ozzy_18D_1H_Casing_Design_Assumptions_20200918034837.pdf

Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	1250	400	1.65	12.8	660	100	35/65 Poz C	None
SURFACE	Tail		0	1250	164	1.34	14.8	219	100	Class C	None
PRODUCTION	Lead		1050	9632	270	1.65	12.6	445	50	35/65 Poz C	None
PRODUCTION	Tail		0	9632	1630	1.33	14.8	2167	50	Class C	None

Operator Name: LONGFELLOW ENERGY LP**Well Name:** OZZY FEDERAL COM 18D**Well Number:** 001H**Section 5 - Circulating Medium****Mud System Type:** Closed**Will an air or gas system be Used?** NO**Description of the equipment for the circulating system in accordance with Onshore Order #2:****Diagram of the equipment for the circulating system in accordance with Onshore Order #2:****Describe what will be on location to control well or mitigate other conditions:** All necessary mud products (LCM) will be on site to handle any abnormal hole condition that may be encountered while drilling this well.**Describe the mud monitoring system utilized:** An electronic/mechanical mud monitor with a minimum pit volume totalizer, stroke counter, and flow sensor will be used.**Circulating Medium Table**

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	1250	OTHER : Fresh water/gel	8.4	9							
1250	3930	OTHER : Fresh water/cut brine	8.3	9.2							
3930	9632	OTHER : Cut brine	8.6	9.2							

Section 6 - Test, Logging, Coring**List of production tests including testing procedures, equipment and safety measures:**

A mud logger will be used from GL to TD. Samples will be collected every 10 in the lateral pay zone.

No electric logs are planned at this time.

List of open and cased hole logs run in the well:

MUD LOG/GEOLOGICAL LITHOLOGY LOG,

Coring operation description for the well:

No core or drill stem test is planned.

Operator Name: LONGFELLOW ENERGY LP**Well Name:** OZZY FEDERAL COM 18D**Well Number:** 001H

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 1956**Anticipated Surface Pressure:** 955**Anticipated Bottom Hole Temperature(F):** 110**Anticipated abnormal pressures, temperatures, or potential geologic hazards?** NO**Describe:****Contingency Plans geohazards description:****Contingency Plans geohazards attachment:****Hydrogen Sulfide drilling operations plan required?** YES**Hydrogen sulfide drilling operations plan:**

Ozzy_18D_1H_H2S_Plan_20200918035258.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

Ozzy_18D_1H_Horizontal_Plan_20200918035318.pdf

Other proposed operations facets description:**Other proposed operations facets attachment:**

Ozzy_18D_1H_Drill_Plan_20200918035326.pdf

CoFlex_Certs_20200918035335.pdf

Ozzy_18D_1H_Speedhead_Specs_20200918035341.pdf

Other Variance attachment:



Longfellow Energy

Ozzy Fed Com 18D 001H
Eddy Co NM
Northing: 665504.38
Easting: 605783.96
Plan 1



Azimuths to Grid North
True North: -0.11°
Magnetic North: 7.04°

Magnetic Field
Strength: 47867.4nT
Dip Angle: 60.47°
Date: 8/26/2020
Model: HDGM FILE

WELL DETAILS					Ozzy Fed Com 18D 001H
3697.40					
+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
0.00	0.00	665504.38	605783.96	32.829322	-104.123523

SECTION DETAILS

MD	Inc	Az	TVD	+N/-S	+E/-W	Dleg	TFace	V/Sec	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	
670.12	7.40	24.83	669.13	21.67	124.83	24.83	24.83	1.84	
4082.87	7.40	24.83	4053.40	420.75	194.67	0.00	0.00	229.97	
4558.84	60.00	89.85	4441.03	451.69	433.78	12.00	69.20	470.85	
4648.84	60.00	89.85	4486.03	451.88	511.72	0.00	0.00	548.52	
9551.84	90.00	89.85	9550.00	452.49	750.45	12.00	0.00	786.43	FTP Oozy 18d 1H
9551.84	90.00	89.85	9550.00	454.28	654.28	12.00	0.00	843.31	FTP Oozy 18d 1H
9631.80	90.00	89.85	9550.00	464.48	583.40	0.00	0.00	5503.03	BH Oozy 18d 1H

DESIGN TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting
FTP Ozzy 18D 1H	4550.00	452.49	750.45	665956.87	606534.41
LTP Ozzy 18D 1H	4550.00	464.28	5403.40	665968.66	611187.36
BH Ozzy 18D 1H	4550.00	464.48	5483.40	665968.86	611267.36

PROJECT DETAILS: Eddy Co NM

Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Eastern Zone
System Datum: Mean Sea Level

SITE DETAILS: Sec 13/18-17S-29E

Site Centre Northing: 665375.40
Easting: 605413.55


Positional Uncertainty: 0.00
Convergence: 0.11
Local North: Grid

WELLBORE DETAILS: OH Wellbore

Section 13/18-17S-29E

SHL: 270 FSL 650 FEL (Sec13)
BH: 1185 FSL 20 FEL (Sec 18)

LEGEND

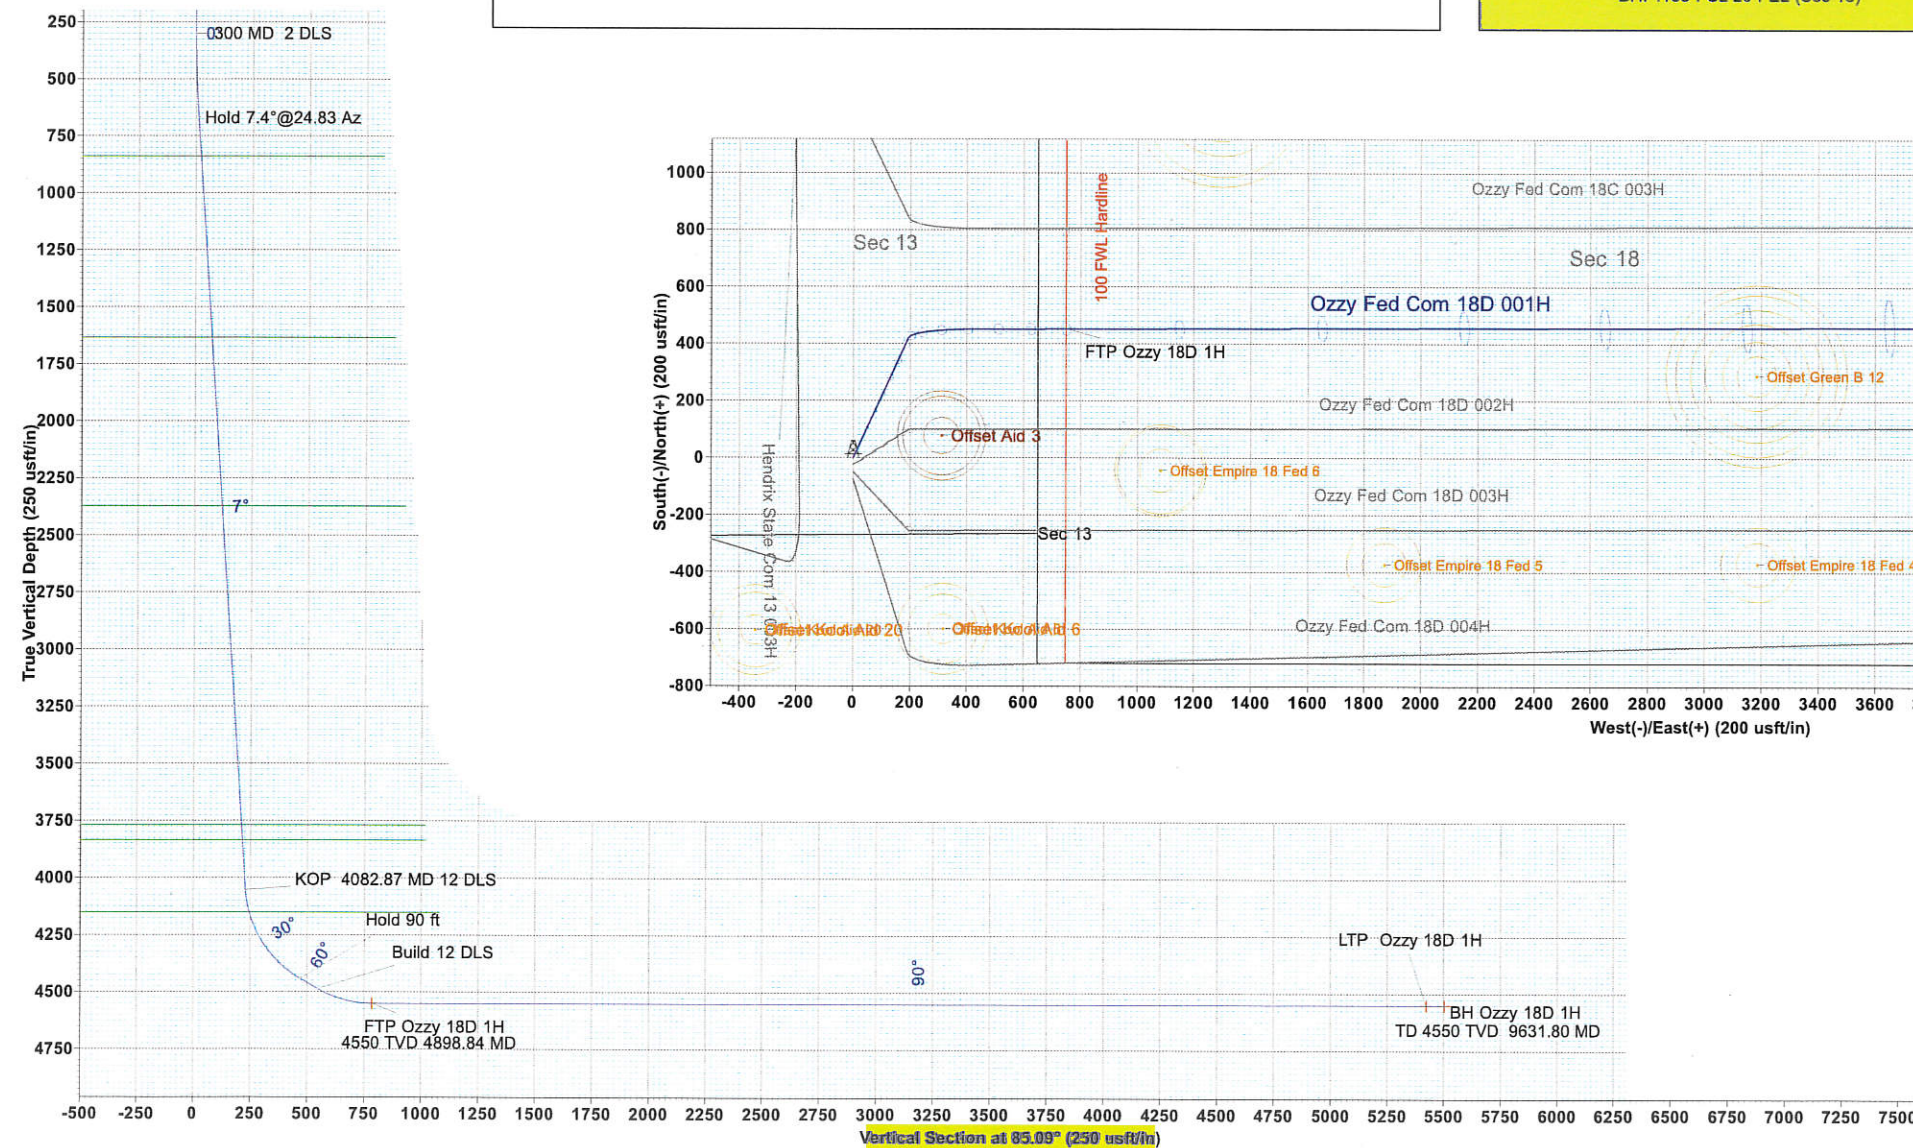[illegible]



Scientific Drilling, Intl

Planning Report

Database:	Midland	Local Co-ordinate Reference:	Well Ozzy Fed Com 18D 001H
Company:	Longfellow Energy	TVD Reference:	3697.4 GL + 12 KB @ 3709.40usft
Project:	Eddy Co NM	MD Reference:	3697.4 GL + 12 KB @ 3709.40usft
Site:	Sec 13/18-17S-29E	North Reference:	Grid
Well:	Ozzy Fed Com 18D 001H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH Wellbore		
Design:	Plan 1		

Project	Eddy Co NM, Eddy County, New Mexico		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Sec 13/18-17S-29E		
Site Position:		Northing:	665,375.41 usft
From:	Lat/Long	Easting:	605,413.56 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "
		Latitude:	32.828970
		Longitude:	-104.124730
		Grid Convergence:	0.11 °

Well	Ozzy Fed Com 18D 001H		
Well Position	+N/-S	128.98 usft	Northing:
	+E/-W	370.41 usft	Easting:
Position Uncertainty	0.00 usft	Wellhead Elevation:	3,709.40 usft
		Latitude:	32.829323
		Longitude:	-104.123524
		Ground Level:	3,697.40 usft

Wellbore	OH Wellbore		
Magnetics	Model Name	Sample Date	Declination (°)
	HDGM_FILE	8/26/2020	7.15
			Dip Angle (°)
			60.47
			Field Strength (nT)
			47,867.40000000

Design	Plan 1		
Audit Notes:			
Version:	Phase:	PLAN	Tie On Depth:
			0.00
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W
	(usft)	(usft)	(usft)
	0.00	0.00	0.00
			Direction (°)
			85.09

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00	
670.13	7.40	24.83	669.11	21.67	10.03	2.00	2.00	0.00	24.83	
4,082.87	7.40	24.83	4,053.40	420.73	194.67	0.00	0.00	0.00	0.00	
4,558.84	60.00	89.85	4,441.03	451.69	433.78	12.00	11.05	13.66	69.20	
4,648.84	60.00	89.85	4,486.03	451.88	511.72	0.00	0.00	0.00	0.00	
4,898.84	90.00	89.85	4,550.00	452.49	750.45	12.00	12.00	0.00	0.00	FTP Ozzy 18D 1H
9,551.80	90.00	89.85	4,550.00	464.28	5,403.40	0.00	0.00	0.00	0.00	LTP Ozzy 18D 1H
9,631.80	90.00	89.85	4,550.00	464.48	5,483.40	0.00	0.00	0.00	0.00	BH Ozzy 18D 1H



Scientific Drilling, Intl Planning Report

Database: Midland
Company: Longfellow Energy
Project: Eddy Co NM
Site: Sec 13/18-17S-29E
Well: Ozzy Fed Com 18D 001H
Wellbore: OH Wellbore
Design: Plan 1

Local Co-ordinate Reference: Well Ozzy Fed Com 18D 001H
TVD Reference: 3697.4 GL + 12 KB @ 3709.40usft
MD Reference: 3697.4 GL + 12 KB @ 3709.40usft
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
300 MD 2 DLS									
400.00	2.00	24.83	399.98	1.58	0.73	0.87	2.00	2.00	0.00
500.00	4.00	24.83	499.84	6.33	2.93	3.46	2.00	2.00	0.00
600.00	6.00	24.83	599.45	14.24	6.59	7.79	2.00	2.00	0.00
670.13	7.40	24.83	669.11	21.67	10.03	11.84	2.00	2.00	0.00
Hold 7.4°@24.83 Az									
700.00	7.40	24.83	698.72	25.16	11.64	13.75	0.00	0.00	0.00
800.00	7.40	24.83	797.89	36.86	17.05	20.15	0.00	0.00	0.00
840.45	7.40	24.83	838.00	41.59	19.24	22.73	0.00	0.00	0.00
Yates									
900.00	7.40	24.83	897.06	48.55	22.46	26.54	0.00	0.00	0.00
1,000.00	7.40	24.83	996.22	60.24	27.87	32.93	0.00	0.00	0.00
1,100.00	7.40	24.83	1,095.39	71.94	33.28	39.32	0.00	0.00	0.00
1,200.00	7.40	24.83	1,194.55	83.63	38.69	45.71	0.00	0.00	0.00
1,300.00	7.40	24.83	1,293.72	95.32	44.10	52.10	0.00	0.00	0.00
1,400.00	7.40	24.83	1,392.89	107.02	49.51	58.49	0.00	0.00	0.00
1,500.00	7.40	24.83	1,492.05	118.71	54.92	64.89	0.00	0.00	0.00
1,600.00	7.40	24.83	1,591.22	130.40	60.34	71.28	0.00	0.00	0.00
1,643.14	7.40	24.83	1,634.00	135.45	62.67	74.03	0.00	0.00	0.00
Queen									
1,700.00	7.40	24.83	1,690.39	142.10	65.75	77.67	0.00	0.00	0.00
1,800.00	7.40	24.83	1,789.55	153.79	71.16	84.06	0.00	0.00	0.00
1,900.00	7.40	24.83	1,888.72	165.48	76.57	90.45	0.00	0.00	0.00
2,000.00	7.40	24.83	1,987.89	177.17	81.98	96.84	0.00	0.00	0.00
2,100.00	7.40	24.83	2,087.05	188.87	87.39	103.23	0.00	0.00	0.00
2,200.00	7.40	24.83	2,186.22	200.56	92.80	109.63	0.00	0.00	0.00
2,300.00	7.40	24.83	2,285.39	212.25	98.21	116.02	0.00	0.00	0.00
2,386.33	7.40	24.83	2,371.00	222.35	102.88	121.54	0.00	0.00	0.00
San Andres									
2,400.00	7.40	24.83	2,384.55	223.95	103.62	122.41	0.00	0.00	0.00
2,500.00	7.40	24.83	2,483.72	235.64	109.03	128.80	0.00	0.00	0.00
2,600.00	7.40	24.83	2,582.89	247.33	114.44	135.19	0.00	0.00	0.00
2,700.00	7.40	24.83	2,682.05	259.03	119.85	141.58	0.00	0.00	0.00
2,800.00	7.40	24.83	2,781.22	270.72	125.26	147.97	0.00	0.00	0.00
2,900.00	7.40	24.83	2,880.39	282.41	130.67	154.37	0.00	0.00	0.00
3,000.00	7.40	24.83	2,979.55	294.11	136.08	160.76	0.00	0.00	0.00
3,100.00	7.40	24.83	3,078.72	305.80	141.49	167.15	0.00	0.00	0.00
3,200.00	7.40	24.83	3,177.89	317.49	146.90	173.54	0.00	0.00	0.00
3,300.00	7.40	24.83	3,277.05	329.19	152.31	179.93	0.00	0.00	0.00
3,400.00	7.40	24.83	3,376.22	340.88	157.72	186.32	0.00	0.00	0.00
3,500.00	7.40	24.83	3,475.38	352.57	163.13	192.71	0.00	0.00	0.00
3,600.00	7.40	24.83	3,574.55	364.27	168.54	199.11	0.00	0.00	0.00
3,700.00	7.40	24.83	3,673.72	375.96	173.95	205.50	0.00	0.00	0.00
3,796.08	7.40	24.83	3,769.00	387.20	179.15	211.64	0.00	0.00	0.00
Glorietta									
3,800.00	7.40	24.83	3,772.88	387.65	179.36	211.89	0.00	0.00	0.00
3,861.63	7.40	24.83	3,834.00	394.86	182.70	215.83	0.00	0.00	0.00
Paddock									
3,900.00	7.40	24.83	3,872.05	399.35	184.77	218.28	0.00	0.00	0.00
4,000.00	7.40	24.83	3,971.22	411.04	190.18	224.67	0.00	0.00	0.00
4,082.87	7.40	24.83	4,053.40	420.73	194.67	229.97	0.00	0.00	0.00



Scientific Drilling, Intl Planning Report

Database:	Midland	Local Co-ordinate Reference:	Well Ozzy Fed Com 18D 001H
Company:	Longfellow Energy	TVD Reference:	3697.4 GL + 12 KB @ 3709.40usft
Project:	Eddy Co NM	MD Reference:	3697.4 GL + 12 KB @ 3709.40usft
Site:	Sec 13/18-17S-29E	North Reference:	Grid
Well:	Ozzy Fed Com 18D 001H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH Wellbore		
Design:	Plan 1		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
KOP 4082.87 MD 12 DLS									
4,100.00	8.36	38.17	4,070.37	422.71	195.90	231.37	12.00	5.56	77.89
4,182.49	16.12	69.05	4,151.00	431.54	210.33	246.50	12.00	9.41	37.43
Blinberry									
4,200.00	18.04	71.99	4,167.73	433.25	215.18	251.48	12.00	10.94	16.82
4,300.00	29.45	81.46	4,259.15	441.71	254.36	291.24	12.00	11.41	9.47
4,400.00	41.18	85.90	4,340.62	447.74	311.71	348.90	12.00	11.73	4.44
4,500.00	53.01	88.63	4,408.58	451.06	384.75	421.95	12.00	11.83	2.73
4,558.84	60.00	89.85	4,441.03	451.69	433.78	470.85	12.00	11.87	2.08
Hold 90 ft									
4,600.00	60.00	89.85	4,461.61	451.78	469.43	506.38	0.00	0.00	0.00
4,648.84	60.00	89.85	4,486.03	451.88	511.72	548.52	0.00	0.00	0.00
Build 12 DLS									
4,700.00	66.14	89.85	4,509.19	452.00	557.31	593.96	12.00	12.00	0.00
4,800.00	78.14	89.85	4,539.81	452.24	652.32	688.64	12.00	12.00	0.00
4,898.84	90.00	89.85	4,550.00	452.49	750.45	786.43	12.00	12.00	0.00
4550 TVD 4898.84 MD - FTP Ozzy 18D 1H									
4,900.00	90.00	89.85	4,550.00	452.49	751.61	787.59	0.00	0.00	0.00
5,000.00	90.00	89.85	4,550.00	452.75	851.61	887.25	0.00	0.00	0.00
5,100.00	90.00	89.85	4,550.00	453.00	951.61	986.90	0.00	0.00	0.00
5,200.00	90.00	89.85	4,550.00	453.25	1,051.61	1,086.55	0.00	0.00	0.00
5,300.00	90.00	89.85	4,550.00	453.51	1,151.61	1,186.21	0.00	0.00	0.00
5,400.00	90.00	89.85	4,550.00	453.76	1,251.61	1,285.86	0.00	0.00	0.00
5,500.00	90.00	89.85	4,550.00	454.01	1,351.61	1,385.52	0.00	0.00	0.00
5,600.00	90.00	89.85	4,550.00	454.27	1,451.61	1,485.17	0.00	0.00	0.00
5,700.00	90.00	89.85	4,550.00	454.52	1,551.61	1,584.83	0.00	0.00	0.00
5,800.00	90.00	89.85	4,550.00	454.77	1,651.61	1,684.48	0.00	0.00	0.00
5,900.00	90.00	89.85	4,550.00	455.03	1,751.61	1,784.13	0.00	0.00	0.00
6,000.00	90.00	89.85	4,550.00	455.28	1,851.61	1,883.79	0.00	0.00	0.00
6,100.00	90.00	89.85	4,550.00	455.53	1,951.61	1,983.44	0.00	0.00	0.00
6,200.00	90.00	89.85	4,550.00	455.79	2,051.61	2,083.10	0.00	0.00	0.00
6,300.00	90.00	89.85	4,550.00	456.04	2,151.61	2,182.75	0.00	0.00	0.00
6,400.00	90.00	89.85	4,550.00	456.29	2,251.61	2,282.41	0.00	0.00	0.00
6,500.00	90.00	89.85	4,550.00	456.55	2,351.61	2,382.06	0.00	0.00	0.00
6,600.00	90.00	89.85	4,550.00	456.80	2,451.61	2,481.71	0.00	0.00	0.00
6,700.00	90.00	89.85	4,550.00	457.05	2,551.61	2,581.37	0.00	0.00	0.00
6,800.00	90.00	89.85	4,550.00	457.31	2,651.61	2,681.02	0.00	0.00	0.00
6,900.00	90.00	89.85	4,550.00	457.56	2,751.61	2,780.68	0.00	0.00	0.00
7,000.00	90.00	89.85	4,550.00	457.81	2,851.61	2,880.33	0.00	0.00	0.00
7,100.00	90.00	89.85	4,550.00	458.07	2,951.61	2,979.99	0.00	0.00	0.00
7,200.00	90.00	89.85	4,550.00	458.32	3,051.61	3,079.64	0.00	0.00	0.00
7,300.00	90.00	89.85	4,550.00	458.57	3,151.61	3,179.29	0.00	0.00	0.00
7,400.00	90.00	89.85	4,550.00	458.83	3,251.61	3,278.95	0.00	0.00	0.00
7,500.00	90.00	89.85	4,550.00	459.08	3,351.61	3,378.60	0.00	0.00	0.00
7,600.00	90.00	89.85	4,550.00	459.33	3,451.61	3,478.26	0.00	0.00	0.00
7,700.00	90.00	89.85	4,550.00	459.58	3,551.61	3,577.91	0.00	0.00	0.00
7,800.00	90.00	89.85	4,550.00	459.84	3,651.61	3,677.57	0.00	0.00	0.00
7,900.00	90.00	89.85	4,550.00	460.09	3,751.60	3,777.22	0.00	0.00	0.00
8,000.00	90.00	89.85	4,550.00	460.34	3,851.60	3,876.87	0.00	0.00	0.00
8,100.00	90.00	89.85	4,550.00	460.60	3,951.60	3,976.53	0.00	0.00	0.00
8,200.00	90.00	89.85	4,550.00	460.85	4,051.60	4,076.18	0.00	0.00	0.00
8,300.00	90.00	89.85	4,550.00	461.10	4,151.60	4,175.84	0.00	0.00	0.00
8,400.00	90.00	89.85	4,550.00	461.36	4,251.60	4,275.49	0.00	0.00	0.00
8,500.00	90.00	89.85	4,550.00	461.61	4,351.60	4,375.15	0.00	0.00	0.00



Scientific Drilling, Intl

Planning Report

Database:	Midland	Local Co-ordinate Reference:	Well Ozzy Fed Com 18D 001H
Company:	Longfellow Energy	TVD Reference:	3697.4 GL + 12 KB @ 3709.40usft
Project:	Eddy Co NM	MD Reference:	3697.4 GL + 12 KB @ 3709.40usft
Site:	Sec 13/18-17S-29E	North Reference:	Grid
Well:	Ozzy Fed Com 18D 001H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH Wellbore		
Design:	Plan 1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,600.00	90.00	89.85	4,550.00	461.86	4,451.60	4,474.80	0.00	0.00	0.00
8,700.00	90.00	89.85	4,550.00	462.12	4,551.60	4,574.45	0.00	0.00	0.00
8,800.00	90.00	89.85	4,550.00	462.37	4,651.60	4,674.11	0.00	0.00	0.00
8,900.00	90.00	89.85	4,550.00	462.62	4,751.60	4,773.76	0.00	0.00	0.00
9,000.00	90.00	89.85	4,550.00	462.88	4,851.60	4,873.42	0.00	0.00	0.00
9,100.00	90.00	89.85	4,550.00	463.13	4,951.60	4,973.07	0.00	0.00	0.00
9,200.00	90.00	89.85	4,550.00	463.38	5,051.60	5,072.73	0.00	0.00	0.00
9,300.00	90.00	89.85	4,550.00	463.64	5,151.60	5,172.38	0.00	0.00	0.00
9,400.00	90.00	89.85	4,550.00	463.89	5,251.60	5,272.03	0.00	0.00	0.00
9,500.00	90.00	89.85	4,550.00	464.14	5,351.60	5,371.69	0.00	0.00	0.00
9,551.80	90.00	89.85	4,550.00	464.28	5,403.40	5,423.31	0.00	0.00	0.00
LTP Ozzy 18D 1H									
9,600.00	90.00	89.85	4,550.00	464.40	5,451.60	5,471.34	0.00	0.00	0.00
9,631.80	90.00	89.85	4,550.00	464.48	5,483.40	5,503.03	0.00	0.00	0.00
TD 4550 TVD 9631.80 MD - BH Ozzy 18D 1H									

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- hit/miss target									
- Shape									
BH Ozzy 18D 1H	0.00	0.00	4,550.00	464.48	5,483.40	665,968.87	611,267.36	32.830568	-104.105669
- plan hits target center									
- Point									
LTP Ozzy 18D 1H	0.00	0.00	4,550.00	464.28	5,403.40	665,968.66	611,187.36	32.830568	-104.105929
- plan hits target center									
- Point									
FTP Ozzy 18D 1H	0.00	0.00	4,550.00	452.49	750.45	665,956.87	606,534.41	32.830562	-104.121077
- plan hits target center									
- Point									

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
840.45	838.00	Yates		0.00		
1,643.14	1,634.00	Queen		0.00		
2,386.33	2,371.00	San Andres		0.00		
3,796.08	3,769.00	Glorietta		0.00		
3,861.63	3,834.00	Paddock		0.00		
4,182.49	4,151.00	Blinberry		0.00		



Scientific Drilling, Intl

Planning Report

Database:	Midland	Local Co-ordinate Reference:	Well Ozzy Fed Com 18D 001H
Company:	Longfellow Energy	TVD Reference:	3697.4 GL + 12 KB @ 3709.40usft
Project:	Eddy Co NM	MD Reference:	3697.4 GL + 12 KB @ 3709.40usft
Site:	Sec 13/18-17S-29E	North Reference:	Grid
Well:	Ozzy Fed Com 18D 001H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH Wellbore		
Design:	Plan 1		

Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
300.00	300.00	0.00	0.00	300 MD 2 DLS
670.13	669.11	21.67	10.03	Hold 7.4°@24.83 Az
4,082.87	4,053.40	420.73	194.67	KOP 4082.87 MD 12 DLS
4,558.84	4,441.03	451.69	433.78	Hold 90 ft
4,648.84	4,486.03	451.88	511.72	Build 12 DLS
4,898.84	4,550.00	452.49	750.45	4550 TVD 4898.84 MD
9,631.80	4,550.00	464.48	5,483.40	TD 4550 TVD 9631.80 MD

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	LONGFELLOW ENERGY LP
LEASE NO.:	NMNM014847
LOCATION:	Section 13, T.17 S., R.28 E., NMPM
COUNTY:	Eddy County, New Mexico

WELL NAME & NO.:	OZZY FEDERAL COM 18D 001H
SURFACE HOLE FOOTAGE:	270'/S & 650'/E
BOTTOM HOLE FOOTAGE:	1185'/S & 20'/E

WELL NAME & NO.:	OZZY FEDERAL COM 18D 002H
SURFACE HOLE FOOTAGE:	245'/S & 650'/E
BOTTOM HOLE FOOTAGE:	830'/S & 20'/E

WELL NAME & NO.:	OZZY FEDERAL COM 18D 003H
SURFACE HOLE FOOTAGE:	220'/S & 650'/E
BOTTOM HOLE FOOTAGE:	475'/S & 20'/E

WELL NAME & NO.:	OZZY FEDERAL COM 18D 004H
SURFACE HOLE FOOTAGE:	195'/S & 650'/E
BOTTOM HOLE FOOTAGE:	120'/S & 20'/E

COA

H2S	<input checked="" type="radio"/> Yes	<input type="radio"/> No	
Potash	<input checked="" type="radio"/> None	<input type="radio"/> Secretary	<input type="radio"/> R-111-P
Cave/Karst Potential	<input type="radio"/> Low	<input checked="" type="radio"/> Medium	<input type="radio"/> High
Cave/Karst Potential	<input type="radio"/> Critical		
Variance	<input type="radio"/> None	<input checked="" type="radio"/> Flex Hose	<input type="radio"/> Other
Wellhead	<input type="radio"/> Conventional	<input type="radio"/> Multibowl	<input checked="" type="radio"/> Both
Other	<input type="checkbox"/> 4 String Area	<input type="checkbox"/> Capitan Reef	<input type="checkbox"/> WIPP
Other	<input type="checkbox"/> Fluid Filled	<input type="checkbox"/> Cement Squeeze	<input type="checkbox"/> Pilot Hole
Special Requirements	<input type="checkbox"/> Water Disposal	<input checked="" type="checkbox"/> COM	<input type="checkbox"/> Unit

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H2S) Drilling Plan shall be activated 500 feet prior to drilling into a **Unknown** formation. As a result, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING**Casing Design:**

1. The **9-5/8** inch surface casing shall be set at approximately **325** feet (a minimum of **70 feet (Eddy County)** into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The minimum required fill of cement behind the **7 X 5-1/2** inch production casing is:

Option 1 (Single Stage):

- Cement to surface. If cement does not circulate see B.1.a, c-d above. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.**

Option 2:

Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.

- a. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
- b. Second stage above DV tool:
 - Cement to surface. If cement does not circulate, contact the appropriate BLM office.

Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.

- ❖ In **Medium Cave/Karst Areas** if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
- 2.

Option 1:

- a. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **3000 (3M)** psi.
- b. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the intermediate casing shoe shall be **3000 (3M)** psi.

Option 2:

1. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **3000 (3M)** psi.
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)
393-3612

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including

lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

NMK03082021



H₂S Drilling Operations Plan

- a. All personnel will be trained in H₂S working conditions as required by Onshore Order 6 before drilling out of the surface casing.
- b. Two briefing areas will be established. Each will be $\geq 150'$ from the wellhead, perpendicular from one another, and easily entered and exited. See H₂S page 5 for more details.
- c. H₂S Safety Equipment/Systems:
 - i. Well Control Equipment
 - Flare line will be $\geq 150'$ from the wellhead and ignited by a pilot light.
 - Beware of SO₂ created by flaring.
 - Choke manifold will include a remotely operated choke.
 - Mud gas separator
 - ii. Protective Equipment for Essential Personnel
 - Every person on site will be required to wear a personal H₂S and SO₂ monitor at all times while on site. Monitors will not be worn on hard hats. Monitors will be worn on the front of the chest – not on the belt.
 - One self-contained breathing apparatus (SCBA) 30-minute rescue pack will be at each briefing area. Two 30-minute SCBA packs will be stored in the safety trailer.
 - Four work/escape packs will be on the rig floor. Each pack will have a long enough hose to allow unimpaired work activity.
 - Four emergency escape packs will be in the doghouse for emergency evacuation.
 - Hand signals will be used when wearing protective breathing apparatus.
 - Stokes litter or stretcher
 - Two full OSHA compliant body harnesses
 - A 100' long x 5/8" OSHA compliant rope
 - One 20-pound ABC fire extinguisher
 - iii. H₂S Detection & Monitoring Equipment
 - Every person on site will be required to wear a personal H₂S and SO₂ monitor at all times while on site. Monitors will not be worn on hard hats. Monitors will be worn on the front of the chest.



- A stationary detector with 3 sensors will be in the doghouse.
- Sensors will be installed on the rig floor, bell nipple, and at the end of the flow line or where drilling fluids are discharged.
- Visual alarm will be triggered at 10 ppm.
- Audible alarm will be triggered at 10 ppm.
- Calibration will occur at least every 30 days. Gas sample tubes will be kept in the safety trailer.

iv. Visual Warning System

- Color-coded H₂S condition sign will be set at the entrance to the pad.
- Color-coded condition flag will be installed to indicate current H₂S conditions.
- Two wind socks will be installed that will be visible from all sides.

v. Mud Program

- A water based mud with a pH of ≥ 10 will be maintained to control corrosion, H₂S gas returns to the surface, and minimize sulfide stress cracking and embrittlement.
- Drilling mud containing H₂S gas will be degassed at an optimum location for the rig configuration.
- This gas will be piped into the flare system.
- Enough mud additives will be on location to scavenge and/or neutralize H₂S where formation pressures are unknown.

vi. Metallurgy

- All equipment that has the potential to be exposed to H₂S will be suitable for H₂S service.
- Equipment that will meet the metallurgical standards include the drill string, casing, wellhead, BOP assembly, casing head & spool, rotating head, kill lines, choke, choke manifold & lines, valves, mud-gas separators, DST tools, test units, tubing, flanges, and other related equipment (elastomer packings and seals).

vii. Communication from well site

- Cell phones and/or two-way radios will be used to communicate from the well site.

d. A remote-controlled choke, mud-gas separator, and a rotating head will be installed before drilling or testing any formation expected to contain H₂S.



Office: (972) 590-9905

Local & County Agencies

911 or (575) 628-5450

911 or (575) 887-7551

911 or (575) 746-9888

(575) 887-9511

(575) 748-3333

(575) 746-9540

(575) 748-9718

(575) 748-1283

(505) 476-3440

(575) 637-7201

(575) 234-5972

(800) 424-8802

(800) 887-6063

(214) 665-6444

3



Air Evacuation

Med Flight Air Ambulance (Albuquerque) (800) 842-4431


Lifeguard (Albuquerque) (888) 866-7256

Veterinarian

Artesia Animal Clinic (575) 748-2042

SECTION 13, TOWNSHIP 17 SOUTH, RANGE 28 EAST, N.M.P.M.
EDDY COUNTY, STATE OF NEW MEXICO
SITE MAP

NOTE: LATITUDE AND LONGITUDE COORDINATES ARE SHOWN USING THE NORTH AMERICAN DATUM OF 1983 (NAD83) LISTED NEW MEXICO STATE PLANE EAST COORDINATES ARE GRID (NAD83). BASIS OF BEARING AND DISTANCES USED ARE NEW MEXICO STATE PLANE EAST COORDINATES MODIFIED TO THE SURFACE. VERTICAL DATUM NAVD88.

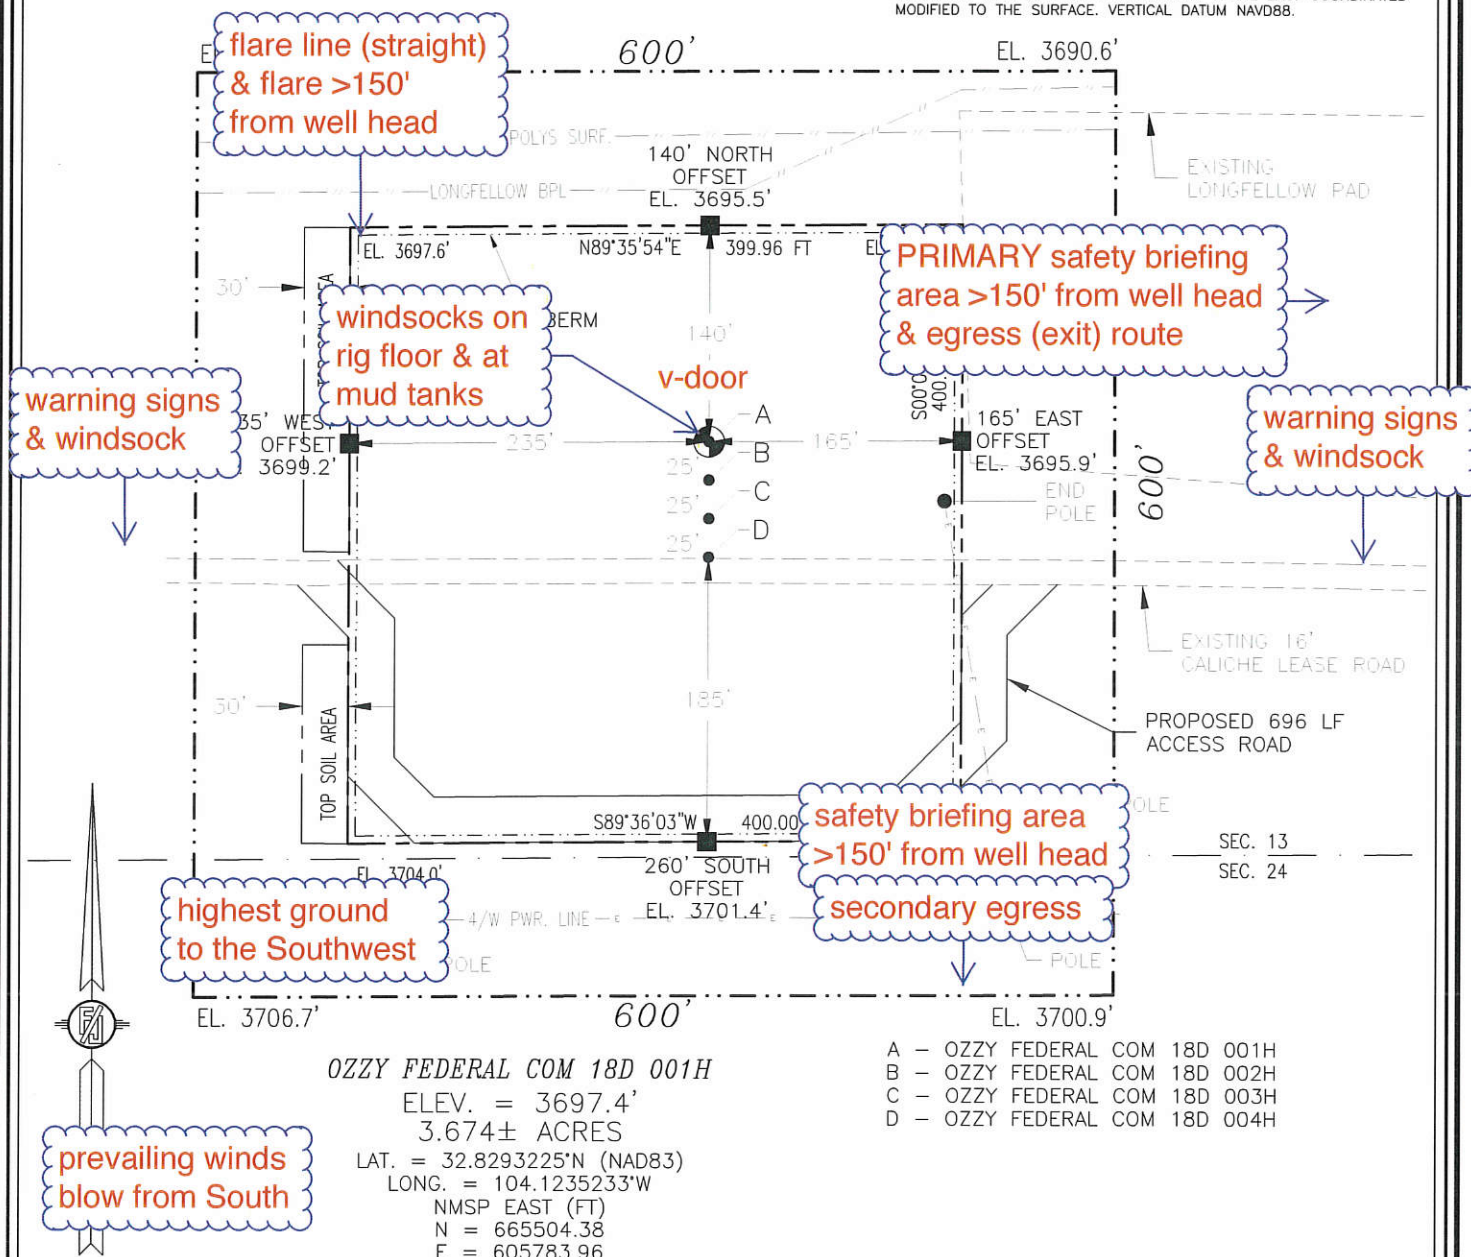

012 60 120 240

SCALE 1" = 120'
DIRECTIONS TO LOCATION

FROM THE INTERSECTION OF STATE HIGHWAY 82 AND CR. 211 (OLD LOCO ROAD) GO WEST ON STATE HIGHWAY 82 1.1 MILES, TURN RIGHT ON CALICHE ROAD GO NORTH 0.3 OF A MILE, TURN RIGHT GO NORTH-NORTHEAST 0.31 OF A MILE, TURN LEFT GO NORTHWEST 0.71 OF A MILE, TURN RIGHT GO NORTH 0.34 OF A MILE TO CALICHE ROAD ON THE LEFT, GO WEST 466' TO EAST SIDE OF PROPOSED PAD FOR THIS LOCATION.

I, FILIMON F. JARAMILLO, A NEW MEXICO REGISTERED PROFESSIONAL SURVEYOR CERTIFY THAT DIRECTLY AND INDIVIDUALLY FOR THIS SURVEY, THAT THIS SURVEY IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF AND THAT I HAVE COMPLIED WITH THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO.

FILIMON F. JARAMILLO

MADRON SURVEYING, INC.

LONGFELLOW ENERGY, LP
OZZY FEDERAL COM 18D 001H
LOCATED 270 FT. FROM THE SOUTH LINE
AND 650 FT. FROM THE EAST LINE OF
SECTION 13, TOWNSHIP 17 SOUTH,
RANGE 28 EAST, N.M.P.M.
EDDY COUNTY, STATE OF NEW MEXICO

AUGUST 11, 2020

SURVEY NO. 8393

CARLSBAD, NEW MEXICO


Longfellow Energy, L.P.

Ozzy Federal Com
Pad 18D
H₂S Contingency Plan:
Radius Map

Section 13, Township 17S, Range 28E
Eddy County, New Mexico





Well Pad Location




NAD 1983 New Mexico State Plane East
FIPS 3001 Feet



Prepared by Permits West, Inc., August 21, 2020
for Longfellow Energy, L.P.

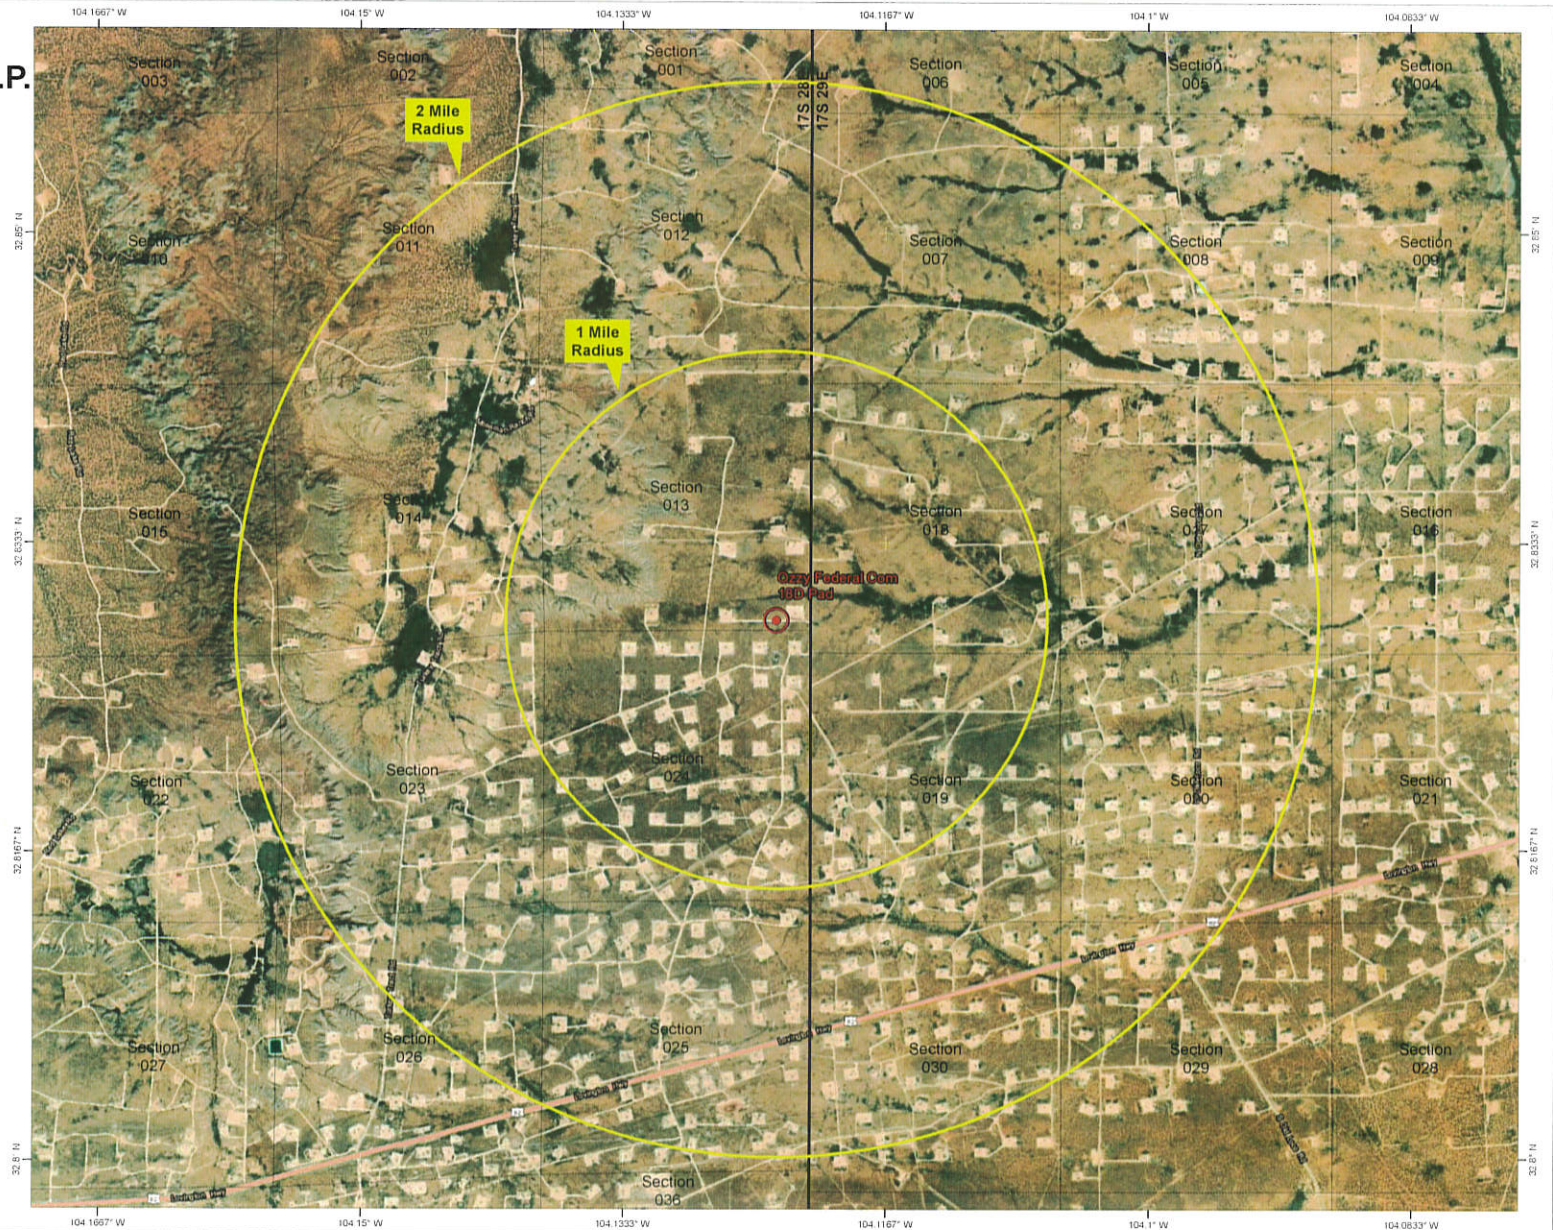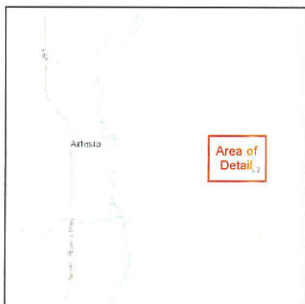

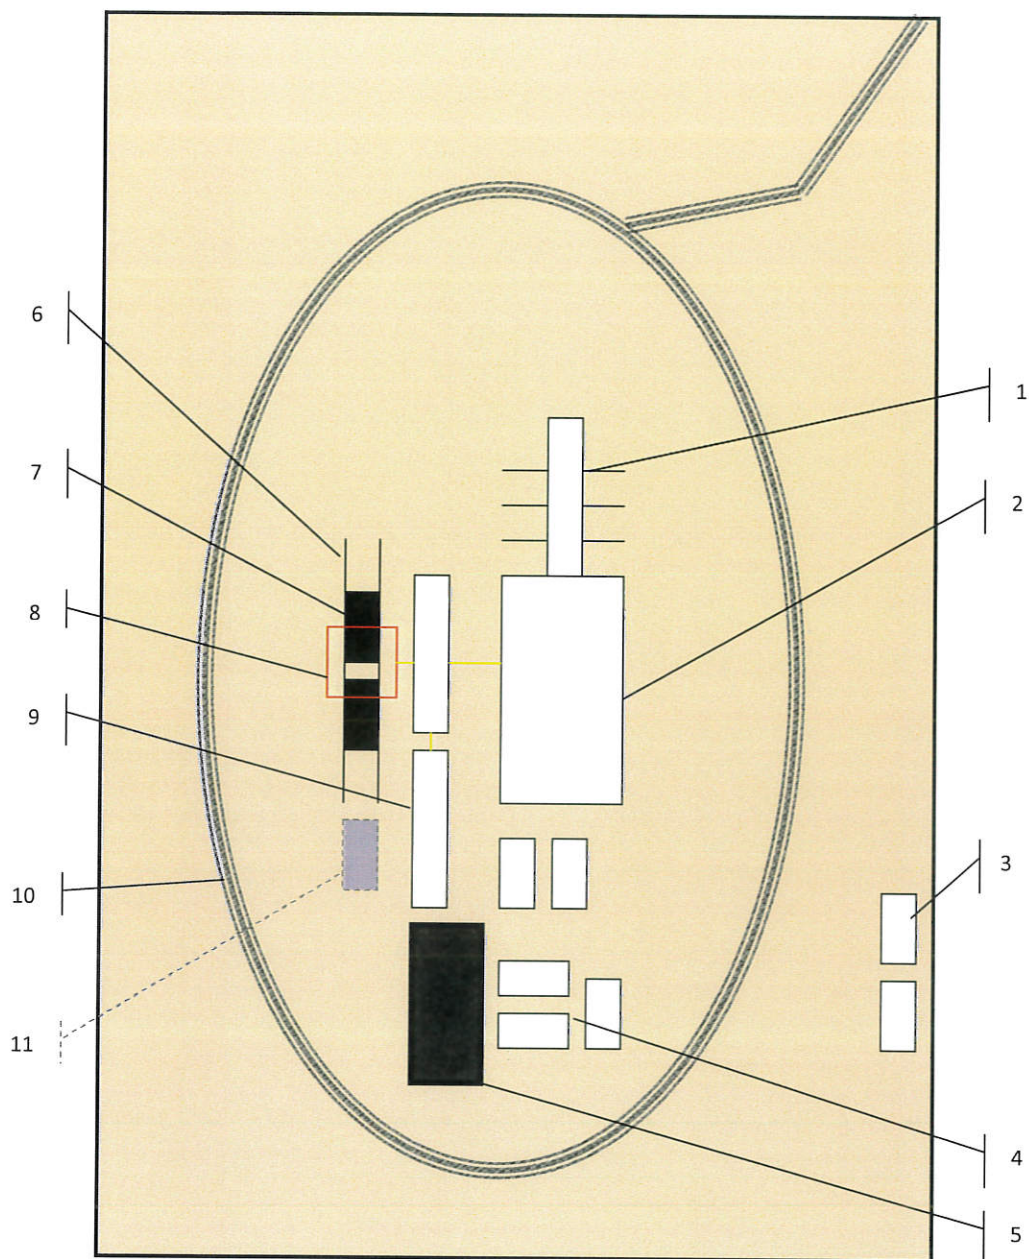

Schematic Closed Loop Drilling Rig*

1. Pipe Rack
2. Drill Rig
3. House Trailers/ Offices
4. Generator/Fuel/Storage
5. Overflow-Frac Tank
6. Skids
7. Roll Offs
8. Hopper or Centrifuge
9. Mud Tanks
10. Loop Drive
11. Generator (only for use with centrifuge)

*Not drawn to scale: Closed loop system requires at least 30 feet beyond mud tanks. Ideally 60 feet would be available

PERMITS WEST, INC.
 PROVIDING PERMITS for LAND USERS
 37Verano Loop, Santa Fe, New Mexico 87508 (505) 466-8120




Above: Centrifugal Closed Loop System



Closed Loop Drilling System: Mud tanks to right (1)
 Hopper in air to settle out solids (2)
 Water return pipe (3)
 Shaker between hopper and mud tanks (4)
 Roll offs on skids (5)

Flow Chart for Drilling Fluids and Solids

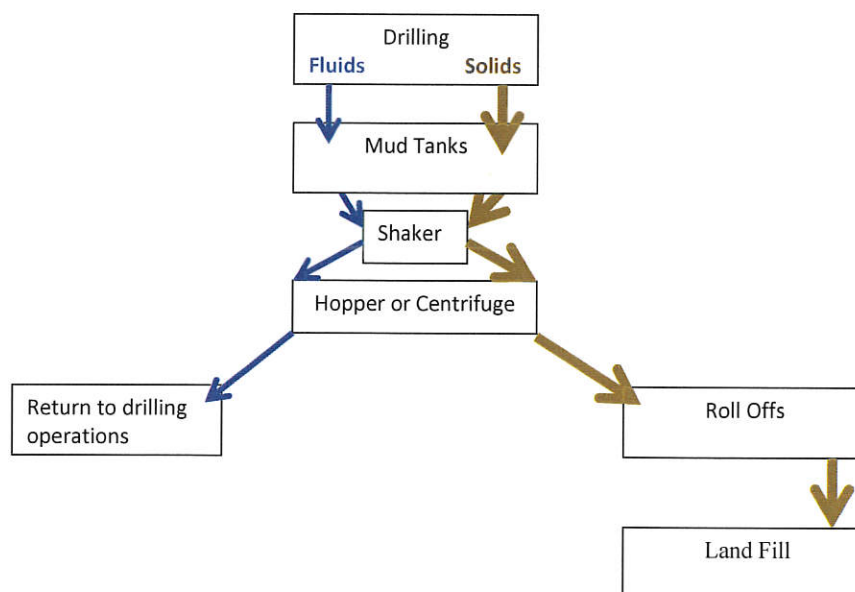

Photos Courtesy of Gandy Corporation Oil
 Field Service

PERMITS WEST, INC.
 PROVIDING PERMITS for LAND USERS
 37Verano Loop, Santa Fe, New Mexico 87508 (505) 466-8120

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

COMMENTS

Action 27280

COMMENTS

Operator:		OGRID:		Action Number:		Action Type:	
LONGFELLOW ENERGY, LP	8115 Preston Road	372210		27280		FORM 3160-3	
Suite 800	Dallas, TX75225						

Created By	Comment	Comment Date
kpickford	KP GEO Review 5/11/2021	05/11/2021

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 27280

CONDITIONS OF APPROVAL

Operator:		OGRID:	Action Number:	Action Type:
LONGFELLOW ENERGY, LP	8115 Preston Road	372210	27280	FORM 3160-3
Suite 800	Dallas, TX75225			

OCD Reviewer	Condition
kpickford	Notify OCD 24 hours prior to casing & cement
kpickford	Will require a File As Drilled C-102 and a Directional Survey with the C-104
kpickford	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
kpickford	Cement is required to circulate on both surface and intermediate1 strings of casing
kpickford	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system