Form C-144 Revised June 6, 2013

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources
Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office.

For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application	<u>1</u>
Type of action: Below grade tank registration Permit of a pit or proposed alternative method Closure of a pit, below-grade tank, or proposed alternative method Modification to an existing permit/or registration Closure plan only submitted for an existing permitted or non-permitted pit, be or proposed alternative method	elow-grade tank,
Instructions: Please submit one application (Form C-144) per individual pit, below-grade tank or alternative	ve request
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface wat environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's ru	
operator: Burlington Resources Oil & Gas Company, LP OGRID #: 14538	QIL CONS. DIV DIST.
Address: PO BOX 4289, Farmington, NM 87499	SHO. DIV DIST.
Facility or well name: EPNG COM C 5	OCT 05 2016
API Number:30-045-29768 OCD Permit Number:	
U/L or Qtr/Qtr K Section 16 Township 32N Range 10W County: San Juan	
Center of Proposed Design: Latitude <u>36.98307 °N</u> Longitude <u>-107.89167</u> °W NAD: □1927 ☑ 1983	
Surface Owner: ☐ Federal ☑ State ☐ Private ☐ Tribal Trust or Indian Allotment	
2. □ Pit: Subsection F, G or J of 19.15.17.11 NMAC Temporary: □ Drilling □ Workover	
☐ Permanent ☐ Emergency ☐ Cavitation ☐ P&A ☐ Multi-Well Fluid Management Low Chloride Drilling F	luid □ ves □ no
☐ Lined ☐ Unlined Liner type: Thickness mil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other	
String-Reinforced	
Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x	D
3. Subsection I of 19.15.17.11 NMAC	
Volume: 120 bbl Type of fluid: Produced Water	
Tank Construction material: Metal	
☐ Secondary containment with leak detection ☐ Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off	
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☐ Other	

1 of 6

Liner type: Thickness

☐ Alternative Method:

institution or church)

☐ Alternate. Please specify

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital,

UNSPECIFIED

mil HDPE PVC Other

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)

Four foot height, four strands of barbed wire evenly spaced between one and four feet

Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other Monthly inspections (If potting or screening is not physically feesible)	
Monthly inspections (If netting or screening is not physically feasible)	
Signs: Subsection C of 19.15.17.11 NMAC 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers Signed in compliance with 19.15.16.8 NMAC	
Variances and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Variance(s): Requests must be submitted to the appropriate division district for consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	
9. Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptance are provided below. Siting criteria does not apply to drying pads or above-grade tanks.	ptable source
General siting	
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No 図 NA
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within the area overlying a subsurface mine. (Does not apply to below grade tanks) - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
 Within an unstable area. (Does not apply to below grade tanks) Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	☐ Yes ☐ No
Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map	Yes No
Below Grade Tanks	
Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☑ No
Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☑ No
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)	6
Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Yes No
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No

Within 100 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pit Non-low chloride drilling fluid	
Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Permanent Pit or Multi-Well Fluid Management Pit	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application.	
- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	Yes No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 N Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the docattached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19. and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:	NMAC 15.17.9 NMAC
Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the docattached. Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC A List of wells with approved application for permit to drill associated with the pit. Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 and 19.15.17.13 NMAC Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:	.15.17.9 NMAC

Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the	doguments are
attached. ☐ Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC ☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC ☐ Climatological Factors Assessment ☐ Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Quality Control/Quality Assurance Construction and Installation Plan ☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC ☐ Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC ☐ Nuisance or Hazardous Odors, including H₂S, Prevention Plan ☐ Emergency Response Plan ☐ Oil Field Waste Stream Characterization ☐ Monitoring and Inspection Plan ☐ Erosion Control Plan ☐ Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC	
13. Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.	
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-well F Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method	luid Management Pit
14. Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be closure plan. Please indicate, by a check mark in the box, that the documents are attached. □ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC □ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC □ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) □ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	
15. Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. F 19.15.17.10 NMAC for guidance.	
Ground water is less than 25 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes No
 Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 	☐ Yes ☐ No
Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	

 adopted pursuant to NMSA 1978, Section 3-27-3, as amended. Written confirmation or verification from the municipality; Written approval obtained from the municipality 	
	☐ Yes ☐ No
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
 Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	☐ Yes ☐ No
Within a 100-year floodplain FEMA map	Yes No
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.17. Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cann Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	.11 NMAC .15.17.11 NMAC
17. Operator Application Certification:	
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and bel	lief.
Name (Print):	
Signature: Date:	
e-mail address: Telephone:	
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature: Approval Date: 10 5	19016
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature: Approval Date: 10 5	19016
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature: Approval Date: 10 5	g the closure report.
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature: Approval Date: OCD Permit Number: OCD Permit Number: Closure Report (required within 60 days of closure completion): 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not	g the closure report.
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment) OCD Representative Signature: Approval Date: OCD Permit Number: OCD Permit Number: Closure Report (required within 60 days of closure completion): 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not section of the form until an approved closure plan has been obtained and the closure activities have been completed.	g the closure report.

22.	200.50
Operator Closure Certification:	
I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.	
Name (Print) Crystal Walker Title: Regulatory Coordinator	
Signature: Date: 10-4-2016	e e
e-mail address: <u>crystal.walker@cop.com</u> Telephone: (505) 326-9837	

District I '1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Form C-141 Revised August 8, 2011

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 Submit 1 Copy to appropriate District Office to accordance with 19.15.29 NMAC.

			Rele	ease Notific	atio	n and Co	orrective A	ction				
						OPERA	ГOR		Initi	al Report	\boxtimes	Final Repor
				O&G Company,			ystal Walker					
Address 340			gton, NM			Telephone No.(505) 326-9837						
Facility Nar	ne: EPNG	COM C 5				Facility Type: Gas Well						
Surface Ow	ner STAT	Е		Mineral O	wner	STATE			API No	30-045-2	29768	
						N OF RE						
Unit Letter K	Section 16	Township 32N	Range 10W	Feet from the 1910		South Line	Feet from the 1380	East/We		County San Juan		
				36.98307		Longitud	e107.89167	1				
				NAT	URE	OF REL	EASE					
Type of Rele	ase					Volume of			Volume I	Recovered		
Source of Re	lease					Date and H	Iour of Occurrence	ce I	Date and	Hour of Dis	covery	
Was Immedia	ate Notice G	iven?				If YES, To	Whom?					
Was Immedi	ite i totice G		Yes	No 🛛 Not Re	quired	11 125, 10	Wildin.					
By Whom?	1					Date and H	Iour					
Was a Water	course Reach						olume Impacting t	the Waterc	ourse.			
			Yes 🛛 1	No								
If a Watercou	rse was Imp	acted, Descr	ibe Fully.*	:	-							
N/A												
Describe Cau	se of Proble	m and Reme	dial Action	Taken.*								
No release w	as encounte	red during	the BGT (Closure.								
Describe Are	a Affected a	nd Cleanup A	Action Tak	en.*					-			
N/A												
				is true and comple								
				d/or file certain re								
				e of a C-141 report investigate and re								
				tance of a C-141 r								
federal, state,	or local law	s and/or regu	ılations.									
Signature:				1			OIL CON	<u>SERVA</u>	TION	DIVISIO	<u>N</u>	
Jighature.		ful (Wal	See.								
	Y			-		Approved by	Environmental S	pecialist:				
Printed Name	: Crystal W	alker				Tr-0.500		1				
Title: Regula	tory Coordi	nator				Approval Dat	e:	Ex	piration	Date:		
E-mail Addre	ss: crv	stal.walker@	con.com			Conditions of	f Approval:					
	1		,-00.00111			- Situations Of	pp.0.u.			Attached		
Date: /0 /		Phone: (505		7		- 5 10 11			_			
Attach Addi	ional Sheet	ts If Necess	arv			or a						

Burlington Resources Oil & Gas Company, LP San Juan Basin Below Grade Tank Closure Report

Lease Name: EPNG COM C 5

API No.: 30-045-29768

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure of the below-grade tank referenced above. All proper documentation regarding closure activities is being included with the C-144.

General Plan:

1. BR shall close a below-grade tank within 60 days of cessation of operations per Subsection G.4 of 19.15.17.13 NMAC. This will include a) below-grade tanks that do not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC within five years, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC; b) an earlier date that the division requires because of imminent danger to fresh water, public health or the environment. For any closure, BR will file the C144 Closure Report as required.

The below-grade tank referenced above was permitted and closed within 60 days of cessation of the below-grade tanks operation.

2. BR shall remove liquids and sludge from a below-grade tank prior to implementing a closure method and shall dispose of the liquids and sludge in a division-approved facility. The facilities to be used will be Basin Disposal (Permit #NM-01-005), JFJ Landfarm % Industrial Ecosystem Inc. (Permit # NM-01-0010B) and Envirotech Land Farm (Permit #NM-01-011). The liner after being cleaned well (Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC) will be disposed of at the San Juan County Regional Landfill located on CR 3100.

All recovered liquids were disposed of at Basin Disposal (Permit #NM-01-005) and any sludge or soil required to be removed to facilitate closure was hauled to Envirotech Land Farm (Permit #NM-01-011) and JFJ Landfarm % IEI (Permit #NM-01-0010B). The liner was cleaned per Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC was disposed of at the San Juan County Regional Landfill located on CR 3100.

3. BR will receive prior approval to remove the below-grade tank and dispose of it in a division-approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.

The below-grade tank was disposed of in a division-approved manner.

4. If there is any on-site equipment associated with a below-grade tank, then BR shall remove the equipment, unless the equipment is required for some other purpose.

All on-site equipment associated with the below-grade tank was removed.

5. BR will test the soils beneath the below-grade tank to determine whether a release has occurred. BR shall collect, at a minimum, a five point, composite sample; collect individual grab samples from any area that is wet, discolored or showing other evidence of a release; and analyzed for the constituents listed in Table I of 19.15.17.13 NMAC. COPC shall notify the division of its results on form C-141.

A five point composite sample was taken of the below-grade tank using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached). Form C-141 is attached.

Components	mponents Tests Method				
Benzene	EPA SW-846 8021B or 8260B	0.2			
BTEX	EPA SW-846 8021B or 8260B	50			
TPH	EPA SW-846 418.1	100			
Chlorides	EPA 300.0	250			

6. If BR or the division determines that a release has occurred, then BR shall comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC, as appropriate.

A release was not determined for the above referenced well.

7. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Table I of 19.15.17.13 NMAC, then BR shall backfill the excavation with compacted, non-waste containing, earthen material; construct a division-prescribed soil cover; recontour and re-vegetate the site.

The below-grade tank area passed all requirements of Paragraph (4) of Subsection E of 19.15.17.13 NMAC and was backfilled with compacted, non-waste containing, earthen material.

- 8. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.

Notification is attached.

9. The surface owner shall be notified of BR's closing of the below-grade tank 72 hours, but not more than one week, prior to closure as per the approved closure plan via certified mail, return receipt requested.

The closure process notification to the landowner was sent via email. (See Attached) (Well located on Federal Land, certified mail is not required for Federal Land per BLM/OCD MOU.)

10. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The below-grade tank area was re-contoured to match fit, shape, line, form and texture of the surrounding area. Re-shaping including drainage control, to prevent ponding and erosion. Natural drainages were unimpeded and water bars and/or silt traps were placed in areas where needed to prevent erosion on a large scale. Final recontour has a uniform appearance with smooth surface, fitting the natural landscape.

11. BR shall seed the disturbed areas the first favorable growing season following closure of a below-grade tank. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM stipulated seed mixes will used on federally regulated lands and division-approved seed mixtures (administratively approved if required) will be utilized on all State or private lands. A uniform vegetative cover has been established that reflects a life-form ratio of plus or minus fifty percent (50%) of pre-disturbance levels and a total percent plant cover of at least seventy percent (70%) of pre-disturbance levels, excluding noxious weeds. If alternate seed mix is required by the state, private owner or tribe, it will be implemented with administrative approval if needed. COPC will repeat seeding or planting will be continued until successful vegetative growth occurs.

Provision 13 was accomplished through complying with BLM seeding requirements as allowed by the BLM/OCD MOU.

12. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material, with chloride concentrations less than 600 mg/kg as analyzed by EPA Method 300.0, to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.

The below-grade tank area was backfilled and more than four feet of cover was achieved and the cover included one foot of suitable material to establish vegetation at the site.

- 13. All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on C-144 and incorporate the following:
 - Soil Backfilling and Cover Installation (See Report)
 - Re-vegetation application rates and seeding techniques (See Report)
 - Photo documentation of the site reclamation (Included as an attachment)
 - Confirmation Sampling Results (Included as an attachment)
 - Proof of closure notice (Included as an attachment)

Walker, Crystal

From:

Roberts, Kelly G

Sent:

Monday, June 20, 2016 2:00 PM

To:

Cory Smith; Fields, Vanessa, EMNRD; Katherina Diemer (kdiemer@blm.gov); McKinney

John (jmckinne@blm.gov); Porter Mike (mgporter@blm.gov)

Cc:

Payne, Wendy F; Farrell, Juanita R; GRP:SJBU Regulatory; Jones, Lisa; SJBU E-Team

Subject:

72 Hour BGT Closure Notification: EPNG COM C5

Subject: 72 Hour BGT Closure Notification

Anticipated Start Date: Friday June 24, 2016

The subject well has a below-grade tank that will begin the closure process between 72 hours and one week from this notification. Please contact me at any time if you have any questions or concerns.

Well Name: EPNG COM C5

API#: 30-045-29768

Unit K (NE/SW), Section 16, T32N, R10W, San Juan County, New Mexico

Footages: 1910' FSL & 1380' FWL

Operator:

Location:

Burlington Resources Oil & Gas Co.

Surface Owner: State (B-1131)

Kelly G. Roberts

ConocoPhillips Co.

Rockies Business Unit San Juan Asset Regulatory Technician 505-326-9775

505-330-7921

Solutions to Regulations for Industry -

September 30, 2016

Mr. Robert Spearman ConocoPhillips San Juan Business Unit 5525 Highway 64 Farmington, New Mexico 87401

Re: EPNG Com C 5

Below Grade Tank Closure Sampling Report

Dear Mr. Spearman:

This report summarizes the below grade tank (BGT) closure sampling activities conducted by Rule Engineering, LLC (Rule) at the ConocoPhillips EPNG Com C 5 located in Unit Letter K, Section 16, Township 32N, Range 10W in San Juan County, New Mexico. Activities included collection and analysis of a 5-point composite soil confirmation sample from beneath the BGT on June 24, 2016. A topographic map of the location is included as Figure 1 and an aerial site map is included as Figure 2.

BGT Summary

Site Name – EPNG Com C 5
Location – Unit Letter K, Section 16, Township 32N, Range 10W
API Number – 30-045-29768
Wellhead Latitude/Longitude – N36.98313 and W107.89152
BGT Latitude/Longitude – N36.98307 and W107.89167
Land Jurisdiction – State of New Mexico
Size of BGT – 120 barrels
Date of BGT Closure Soil Sampling – June 24, 2016

BGT Closure Standards

As outlined in 19.15.17.13 New Mexico Administrative Code (NMAC), BGT closure standards for the EPNG Com C 5 are as follows: 0.2 milligrams per kilogram (mg/kg) benzene, 50 mg/kg total benzene, toluene, ethylbenzene, and total xylenes (BTEX), 100 mg/kg total petroleum hydrocarbons (TPH), and 250 mg/kg chlorides.

Field Activities

On June 24, 2016, following removal of the BGT tank and liner, Rule personnel conducted a visual inspection for surface/subsurface indications of a release. No evidence of a release was observed. Rule personnel then collected five soil samples (S-1 through S-5) from 0.5 feet beneath the floor of the BGT excavation. Figure 2 provides the location of the soil samples collected from below the BGT. The field work summary sheet is attached.

Mr. Robert Spearman EPNG Com C 5 September 30, 2016 Page 2 of 3

Soil Sampling

The five soil samples (S-1 through S-5) collected from below the floor of the BGT excavation were combined to create soil confirmation sample SC-1. A portion of SC-1 was field screened for volatile organic compounds (VOCs) and chlorides, and field analyzed for TPH.

Field screening for VOC vapors was conducted with a photo-ionization detector (PID). Prior to field screening, the PID was calibrated with 100 parts per million (ppm) isobutylene gas. Field analysis for TPH was conducted per U.S. Environmental Protection Agency (USEPA) Method 418.1, utilizing a total hydrocarbon analyzer. Prior to field analysis, the machine was calibrated following the manufacturer's procedure with includes calculation of a calibration curve using known concentration standards. Field screening for chloride was conducted using the Hach chloride low range test kit. Chloride concentrations were determined by drop count titration method using silver nitrate titrant.

The portion of SC-1 collected for laboratory analysis was placed into laboratory supplied glassware, labeled, and maintained on ice until delivery to Hall Environmental Analysis Laboratory in Albuquerque, New Mexico. The sample was analyzed for BTEX per USEPA Method 8021B, TPH per USEPA Method 418.1 and 8015D, and chlorides per USEPA Method 300.0.

Field and Analytical Results

Field sampling results for soil confirmation sample SC-1 indicated a VOC concentration of 3.0 ppm and a TPH concentration of 27.0 mg/kg. Field chloride concentrations were reported at 60 mg/kg.

Laboratory analytical results for sample SC-1 reported benzene and total BTEX concentrations below the laboratory reporting limits of 0.023 mg/kg and 0.211 mg/kg, respectively. Laboratory analytical results for SC-1 reported the TPH concentrations of 23 mg/kg per USEPA Method 418.1, below the laboratory reporting limits of 4.7 mg/kg as GRO per USEPA Method 8015D, and below the laboratory reporting limit of 10 mg/kg DRO by USEPA Method 8015D. The laboratory analytical result for SC-1 for chloride concentration was below the laboratory reporting limit of 1.5 mg/kg. Field and laboratory results for SC-1 are summarized in Table 1, and the analytical laboratory report is attached.

Conclusions

On June 24, 2016, BGT closure sampling activities were conducted at the ConocoPhillips EPNG Com C 5. Field and laboratory results for confirmation sample SC-1 were reported below the BGT closure standards for benzene, total BTEX, TPH, and chlorides as outlined in 19.15.17.13 NMAC. Based on field sampling and laboratory analytical results, no release occurred from the BGT and no further work is recommended.



Mr. Robert Spearman EPNG Com C 5 September 30, 2016 Page 3 of 3

Rule Engineering appreciates the opportunity to provide services to ConocoPhillips. If you have any questions, please contact me at (505) 325-1055.

Sincerely,

Rule Engineering, LLC

Heather M. Woods, P.G. Area Manager/Geologist

Attachments:

Table 1. BGT Soil Sampling Results

Figure 1. Topographic Map Figure 2. Aerial Site Map

Field Work Summary Sheet

Analytical Laboratory Report

Table 1. BGT Soil Sampling Results ConocoPhillips EPNG Com C 5 San Juan County, New Mexico

			Sample Depth	Field Sampling Results					Laboratory An	alytical Resul	ts	
		Sample	(ft below BGT	VOCs (PID)	TPH - 418.1	Chloride**	Benzene	Total BTEX	TPH - 418.1	TPH - GRO	TPH - DRO	Chloride***
Sample ID	Date	Type	liner)	(ppm)	(mg/kg)	(mg/kg)	(mg/kg)	(mg/kg)	(mg/kg)	(mg/kg)	(mg/kg)	(mg/kg)
BGT Closure Standards*			100	250	0.2	50	100	-	-	250		
SC-1	6/24/16	Composite	0.5	3.0	27.0	60	<0.023	<0.211	23	<4.7	<10	<1.5

Notes:

PID - photo-ionization detector

ppm - parts per million

mg/kg - milligrams/kilograms

VOCs - volatile organic compounds


TPH - total petroleum hydrocarbons per USEPA Method 418.1


BTEX - benzene, toluene, ethylbenzene, and total xylenes

*19.15.17.13 NMAC

**Per Hach chloride low-range test kit

***Per USEPA Method 300.0 chlorides

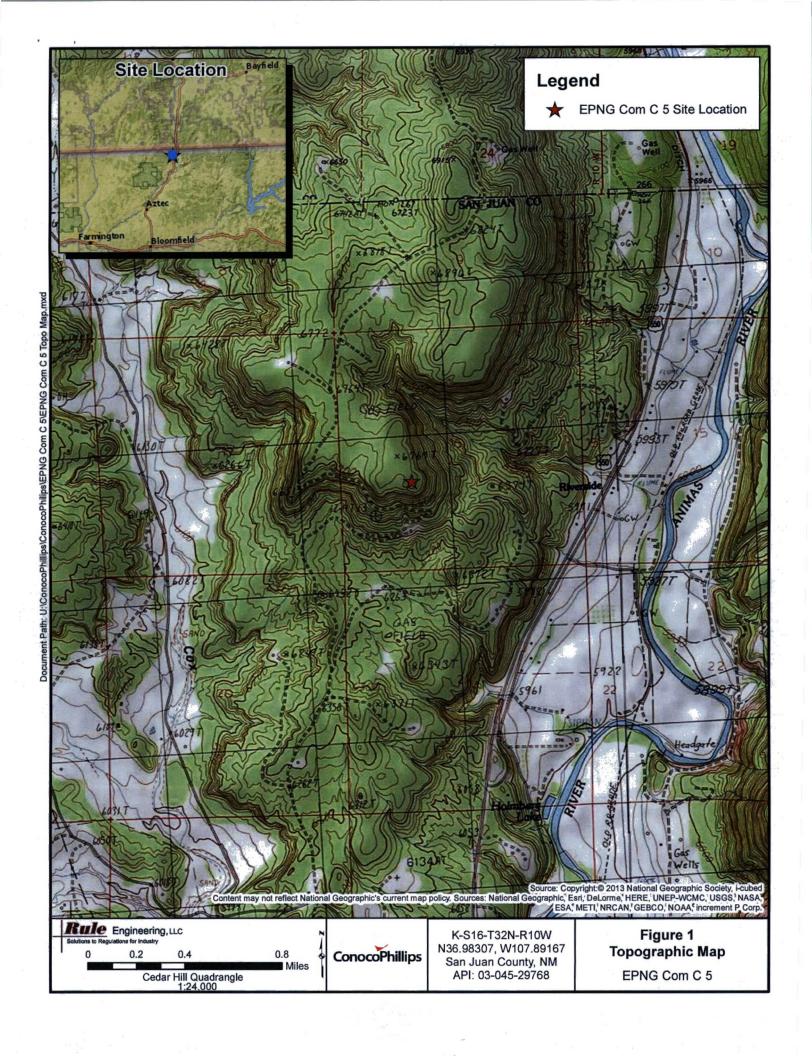

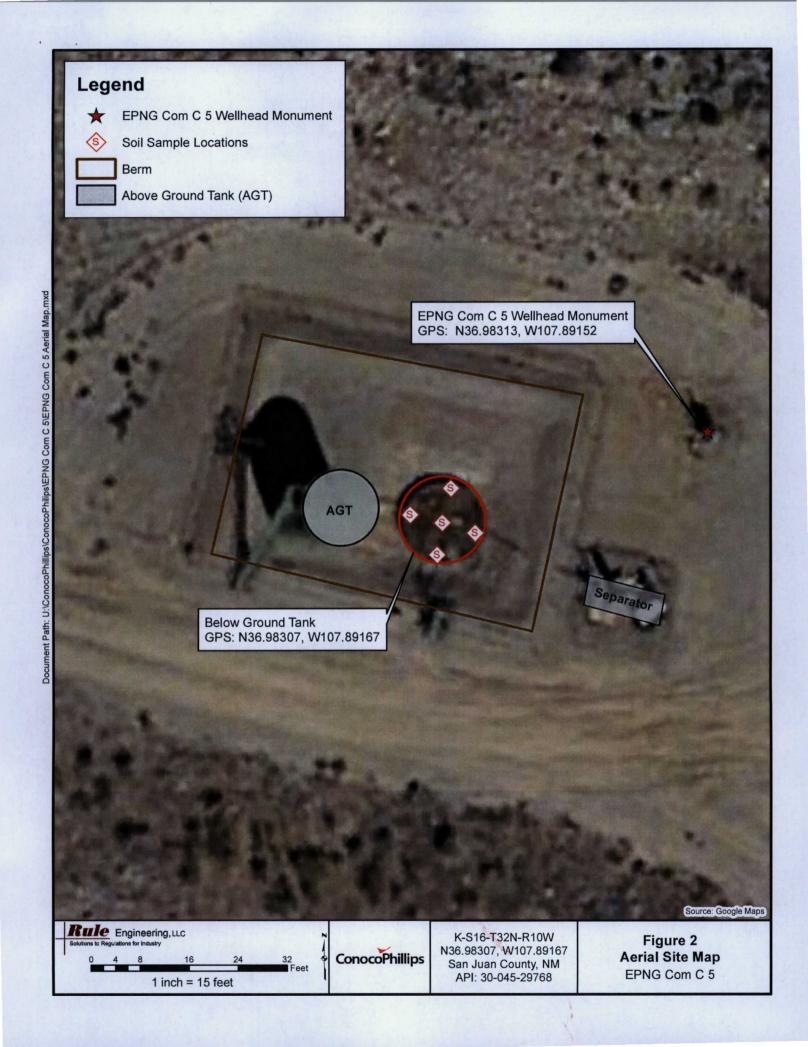

Rule Engineering Field Work Summary Sheet

Company:	ConocoPhillips
Location:	EPNG Com C 5
API:	30-045-29768
Legals:	K-S16-T32N-R10W
County:	San Juan
Land Jurisd	iction: State of New Mexico

Date:	6/24/16
Staff:	Justin Valdez

Wellhead GPS: 36.98313, -107.89152 BGT GPS: 36.98307 -107.89167

Siting Information based on BGT Location:

Site Rank 0

Groundwater: Estimated to be greater than 100 feet below grade surface, based on elevation differential and

the cathodic well report for the EPNG Com C 4.

Surface Water: Several unnamed, ephemeral washes traverse the area and located over 1,000 feet from the BGT

location.

Wellhead Protection: No water wells identified within 1,000 ft of location.

Objective: Closure sampling for BGT

Tank Size: 120 barrels, removed during closure activities

Liner: No liner was observed during closure activities

Observations: No staining or excess moisture was observed below the tank.

Notes: Ms. Vanessa Fields, NMOCD representative, was onsite during collection of the


confirmation sample.

Field Sampling Information

	Type of	Collection	Collection	VOCs ¹	VOCs	TPH ²	TPH	Chloride ³	Chloride
Name	Sample	Time	Location	(ppm)	time	mg/kg	Time	mg/kg	Time
SC-1	Composite	11:15	See below	3.0	11:25	27.0	11:54	60	11:45

SC-1 is a 5-point composite of S-1 through S-5, collected 0.5 ft below BGT.

Sample SC-1 was laboratory analyzed for TPH (8015 and 418.1), BTEX (8021) and chlorides (300.0).

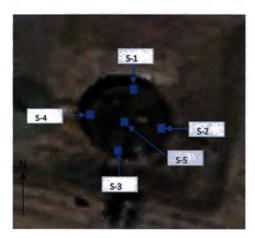

Field Sampling Notes:

³Field screening for chlorides was conducted using the Hach chloride low range test kit. Chloride concentrations are determined by drop count titration method using silver nitrate titrant.



¹ Field screening for volatile organic compounds (VOC) vapors was conducted with a photo-ionization detector (PID). Before beginning field screening, the PID was calibrated with 100 parts per million (ppm) isobutylene gas.

² Field analysis for TPH was conducted using a total hydrocarbon analyzer. Prior to field analysis, the machine was calibrated following the manufacturer's procedure which includes calculation of a calibration curve using known concentration standards.



Hall Environmental Analysis Laboratory 4901 Hawkins NE Albuquerque, NM 87109

TEL: 505-345-3975 FAX: 505-345-4107 Website: www.hallenvironmental.com

July 06, 2016

Heather Woods Rule Engineering LLC 501 Airport Dr., Ste 205 Farmington, NM 87401 TEL: (505) 325-1055

FAX

RE: EPNG COM C 5

OrderNo.: 1606E52

Dear Heather Woods:

Hall Environmental Analysis Laboratory received 1 sample(s) on 6/25/2016 for the analyses presented in the following report.

These were analyzed according to EPA procedures or equivalent. To access our accredited tests please go to www.hallenvironmental.com or the state specific web sites. In order to properly interpret your results it is imperative that you review this report in its entirety. See the sample checklist and/or the Chain of Custody for information regarding the sample receipt temperature and preservation. Data qualifiers or a narrative will be provided if the sample analysis or analytical quality control parameters require a flag. When necessary, data qualifiers are provided on both the sample analysis report and the QC summary report, both sections should be reviewed. All samples are reported, as received, unless otherwise indicated. Lab measurement of analytes considered field parameters that require analysis within 15 minutes of sampling such as pH and residual chlorine are qualified as being analyzed outside of the recommended holding time.

Please don't hesitate to contact HEAL for any additional information or clarifications.

ADHS Cert #AZ0682 -- NMED-DWB Cert #NM9425 -- NMED-Micro Cert #NM0190

Sincerely,

Andy Freeman

Laboratory Manager

4901 Hawkins NE

Albuquerque, NM 87109

Analytical Report

Lab Order 1606E52

Date Reported: 7/6/2016

Hall Environmental Analysis Laboratory, Inc.

CLIENT: Rule Engineering LLC

Client Sample ID: SC-1

Project: EPNG COM C 5

Collection Date: 6/24/2016 11:15:00 AM

Lab ID: 1606E52-001

Matrix: SOIL

Received Date: 6/25/2016 9:45:00 AM

Analyses	Result	PQL Qu	al Units	DF	Date Analyzed	Batch
EPA METHOD 418.1: TPH					Analyst	: KJH
Petroleum Hydrocarbons, TR	23	20	mg/Kg	1	6/29/2016 12:00:00 PM	26119
EPA METHOD 300.0: ANIONS					Analyst	: LGT
Chloride	ND	1.5	mg/Kg	1	6/30/2016 3:33:00 PM	26172
EPA METHOD 8015M/D: DIESEL RAN	GE ORGANICS				Analyst	: TOM
Diesel Range Organics (DRO)	ND	10	mg/Kg	1	6/29/2016 3:45:21 PM	26125
Surr: DNOP	88.0	70-130	%Rec	1	6/29/2016 3:45:21 PM	26125
EPA METHOD 8015D: GASOLINE RAM	IGE				Analyst	: NSB
Gasoline Range Organics (GRO)	ND	4.7	mg/Kg	1	6/28/2016 9:58:01 PM	26103
Surr: BFB	98.3	80-120	%Rec	1	6/28/2016 9:58:01 PM	26103
EPA METHOD 8021B: VOLATILES					Analyst	NSB
Benzene	ND	0.023	mg/Kg	1	6/28/2016 9:58:01 PM	26103
Toluene	ND	0.047	mg/Kg	1	6/28/2016 9:58:01 PM	26103
Ethylbenzene	ND	0.047	mg/Kg	1	6/28/2016 9:58:01 PM	26103
Xylenes, Total	ND	0.094	mg/Kg	1	6/28/2016 9:58:01 PM	26103
Surr: 4-Bromofluorobenzene	93.7	80-120	%Rec	1	6/28/2016 9:58:01 PM	26103

Refer to the QC Summary report and sample login checklist for flagged QC data and preservation information.

Qualifiers:

- * Value exceeds Maximum Contaminant Level.
- D Sample Diluted Due to Matrix
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- S % Recovery outside of range due to dilution or matrix
- B Analyte detected in the associated Method Blank
- E Value above quantitation range
- J Analyte detected below quantitation limits Page 1 of 6
- P Sample pH Not In Range
- RL Reporting Detection Limit
- W Sample container temperature is out of limit as specified

Hall Environmental Analysis Laboratory, Inc.

WO#:

1606E52 06-Jul-16

Client:

Rule Engineering LLC

Project:

EPNG COM C 5

Sample ID MB-26172

SampType: mblk

TestCode: EPA Method 300.0: Anions

Client ID:

PBS

Batch ID: 26172

PQL

SPK value SPK Ref Val

SPK value SPK Ref Val

RunNo: 35353

%REC LowLimit

Prep Date: 6/30/2016 Analysis Date: 6/30/2016

Result

SeqNo: 1093623

Units: mg/Kg HighLimit

%RPD

RPDLimit

Qual

Analyte Chloride

ND

Sample ID LCS-26172

SampType: Ics

TestCode: EPA Method 300.0: Anions

Client ID: LCSS Batch ID: 26172

RunNo: 35353

%REC

Units: mg/Kg

Prep Date: 6/30/2016 Analysis Date: 6/30/2016

PQL

SeqNo: 1093624

HighLimit

%RPD **RPDLimit**

Qual

Analyte

90

15.00 Chloride 14 1.5 96.6

110

Qualifiers:

Value exceeds Maximum Contaminant Level.

D Sample Diluted Due to Matrix

H Holding times for preparation or analysis exceeded

ND Not Detected at the Reporting Limit

RPD outside accepted recovery limits R

S % Recovery outside of range due to dilution or matrix B Analyte detected in the associated Method Blank

Value above quantitation range E

Analyte detected below quantitation limits

Page 2 of 6

Sample pH Not In Range

Reporting Detection Limit

Sample container temperature is out of limit as specified

Hall Environmental Analysis Laboratory, Inc.

WO#: 1606E52

06-Jul-16

Client:

Rule Engineering LLC

Project:

EPNG COM C 5

Sample ID MB-26119

SampType: MBLK

TestCode: EPA Method 418.1: TPH

Client ID:

PBS

Batch ID: 26119

RunNo: 35304

Prep Date:

6/28/2016

Analysis Date: 6/29/2016

Units: mg/Kg

Analyte

Result **PQL**

ND

SeqNo: 1091911

Qual

SPK value SPK Ref Val %REC LowLimit HighLimit

RPDLimit %RPD

Petroleum Hydrocarbons, TR Sample ID LCS-26119

SampType: LCS

TestCode: EPA Method 418.1: TPH

Client ID: LCSS

Batch ID: 26119

100

RunNo: 35304

0

Prep Date: 6/28/2016

Analysis Date: 6/29/2016

SeqNo: 1091912

Units: mg/Kg

Analyte

PQL

20

20

20

SPK value SPK Ref Val %REC

83.4

HighLimit %RPD

127

RPDLimit Qual

Petroleum Hydrocarbons, TR Sample ID LCSD-26119

Client ID: LCSS02

SampType: LCSD Batch ID: 26119 TestCode: EPA Method 418.1: TPH

103

RunNo: 35304

SeqNo: 1091913

Units: mg/Kg

Prep Date:

6/28/2016

Analysis Date: 6/29/2016

100.0

%REC

HighLimit LowLimit

%RPD

RPDLimit

Qual

Analyte Petroleum Hydrocarbons, TR Result 98

SPK value SPK Ref Val PQL

100.0

0 98.1 83.4

127

5.24

20

Qualifiers:

R

- Value exceeds Maximum Contaminant Level.
- D Sample Diluted Due to Matrix H Holding times for preparation or analysis exceeded
- Not Detected at the Reporting Limit ND RPD outside accepted recovery limits
- S % Recovery outside of range due to dilution or matrix
- Analyte detected in the associated Method Blank В
- E Value above quantitation range
- Analyte detected below quantitation limits

Page 3 of 6

- Sample pH Not In Range
- RL Reporting Detection Limit
- Sample container temperature is out of limit as specified

Hall Environmental Analysis Laboratory, Inc.

Result

ND

8.2

PQL

10

10.00

WO#:

1606E52

06-Jul-16

Client:

Rule Engineering LLC

Project:

Analyte

Surr: DNOP

Diesel Range Organics (DRO)

EPNG COM C 5

Sample ID LCS-26125	SampType: LCS	TestCode: EPA Method	8015M/D: Diesel Range Organics							
Client ID: LCSS	Batch ID: 26125	RunNo: 35299								
Prep Date: 6/28/2016	Analysis Date: 6/29/2016 SeqNo: 1092068 Units: mg/Kg									
Analyte	Result PQL SPK value	SPK Ref Val %REC LowLimit	HighLimit %RPD RPDLimit Qual							
Diesel Range Organics (DRO)	53 10 50.00	0 106 62.6	124							
Surr: DNOP	4.7 5.000	93.3 70	130							
Sample ID MB-26125 SampType: MBLK TestCode: EPA Method 8015M/D: Diesel Range Organics										
Client ID: PBS	Batch ID: 26125 RunNo: 35299									
Prep Date: 6/28/2016	Analysis Date: 6/29/2016	Units: mg/Kg								

SPK value SPK Ref Val %REC LowLimit

82.5

HighLimit

130

70

%RPD

RPDLimit

Qual

Qualifiers:

- * Value exceeds Maximum Contaminant Level.
- D Sample Diluted Due to Matrix
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- S % Recovery outside of range due to dilution or matrix
- B Analyte detected in the associated Method Blank
- E Value above quantitation range
- J Analyte detected below quantitation limits

Page 4 of 6

- P Sample pH Not In Range
- RL Reporting Detection Limit
 - W Sample container temperature is out of limit as specified

Hall Environmental Analysis Laboratory, Inc.

WO#:

1606E52

06-Jul-16

Client:

Rule Engineering LLC

Project:

EPNG COM C 5

Sample ID MB-26103

SampType: MBLK

TestCode: EPA Method 8015D: Gasoline Range

Client ID:

Batch ID: 26103

RunNo: 35271

Prep Date: 6/27/2016

Analysis Date: 6/28/2016

SeqNo: 1091323

Units: mg/Kg

Analyte

Result

970

SPK value SPK Ref Val %REC

80

LowLimit

LowLimit

Qual

Gasoline Range Organics (GRO)

PQL ND 5.0

1000

97.4

120

HighLimit

%RPD **RPDLimit**

Surr: BFB

SampType: LCS

0

TestCode: EPA Method 8015D: Gasoline Range

Sample ID LCS-26103

Client ID: LCSS

Batch ID: 26103

PQL

RunNo: 35271

Prep Date: 6/27/2016

Analysis Date: 6/28/2016

SeqNo: 1091324

%REC

Units: mg/Kg

%RPD

Gasoline Range Organics (GRO)

Result

SPK value SPK Ref Val 25.00

106 108

80 80

HighLimit

RPDLimit Qual

Page 5 of 6

Surr: BFB

27 5.0 1100 1000

120 120

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- D Sample Diluted Due to Matrix
- Н Holding times for preparation or analysis exceeded
- Not Detected at the Reporting Limit ND
- R RPD outside accepted recovery limits
- % Recovery outside of range due to dilution or matrix S
- Analyte detected in the associated Method Blank B
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH Not In Range
- RL Reporting Detection Limit
- Sample container temperature is out of limit as specified

Hall Environmental Analysis Laboratory, Inc.

WO#:

1606E52

06-Jul-16

Client:

Rule Engineering LLC

Project:

EPNG COM C 5

Sample ID MB-26103 SampType: MBLK TestCode: EPA Method 8021B: Volatiles Client ID: Batch ID: 26103 RunNo: 35271 Prep Date: 6/27/2016 Analysis Date: 6/28/2016 SeqNo: 1091345 Units: mg/Kg Analyte Result PQL SPK value SPK Ref Val %REC LowLimit HighLimit %RPD **RPDLimit** Qual Benzene ND 0.025 Toluene ND 0.050 0.050 Ethylbenzene ND Xylenes, Total ND 0.10 Surr: 4-Bromofluorobenzene 0.94 1.000 93.5 80 120

Sample ID LCS-26103	SampType: LCS TestCode: EPA Method 8021B: Volatiles									
Client ID: LCSS	Batch	n ID: 26	103	F	RunNo: 3					
Prep Date: 6/27/2016	Analysis D)ate: 6/	28/2016	S	SeqNo: 1	091346	Units: mg/K	(g		
Analyte	Result	PQL	SPK value	SPK Ref Val	SPK Ref Val %REC LowLimit		HighLimit	%RPD	RPDLimit	Qual
Benzene	0.99	0.025	1.000	0	99.1	75.3	123			
Toluene	0.99	9 0.050 1.000 0 99.1 80		124						
Ethylbenzene	1.0	0.050	0 1.000 0 101 82.8		121					
Xylenes, Total	3.0	0.10	3.000	0	99.5	83.9	122			
Surr: 4-Bromofluorobenzene 1.0 1.000					101	80	120			

Qualifiers:

- * Value exceeds Maximum Contaminant Level.
- D Sample Diluted Due to Matrix
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- S % Recovery outside of range due to dilution or matrix
- B Analyte detected in the associated Method Blank
- E Value above quantitation range
- J Analyte detected below quantitation limits

Page 6 of 6

- P Sample pH Not In Range
- RL Reporting Detection Limit
- W Sample container temperature is out of limit as specified



Hall Environmental Analysis Laboratory 4901 Hawkins NE Albuquerque, NAI 87105

TEL: 505-345-3975 FAX: 505-345-4107 Website: www.hallenvironmental.com

Sample Log-In Check List

Client Name:	RULE ENGINEERING	G LL Work Order Numbe	r: 1606	E52		Rcpti	No: 1
Received by/date	M	06/25/16			Annaly Alle	മ	
Logged By:	Lindsay Mangin	6/25/2016 9:45:00 AN	л		0.00	-	
Completed By:	Lindsay Mangin	6/25/2016 10:41:36 A	M		Junely Hard	50	
Reviewed By:	AT U6/28	1116					
<u>Chain of Cus</u>	<u>tody</u>				,		-1
	Is intact on sample bot	tles?	Yes		No !		
2. Is Chain of C	Custody complete?		Yes		No [Not Present	
3. How was the	sample delivered?		Cou	<u>ier</u>			
Log In							
4. Was an atte	mpt made to cool the s	amples?	Yes		No [] NA	1
5. Were all san	nples received at a tem	perature of >0° C to 6.0°C	Yes		No [.]	NA É	-1
6. Sample(s) in	n proper container(s)?		Yes		No [.	1	
7. Sufficient sa	mple volume for indica	ted test(s)?	Yes		No 1.	I	
8. Are samples	(except VOA and ONG	properly preserved?	Yes		No [
9. Was preserv	rative added to bottles?	()	Yes	[.]	No 🖈	NA l	.1
10.VOA vials ha	ave zero headspace?		Yes		No [No VOA Vials	
11. Were any sa	ample containers receiv	ved broken?	Yes		No 🐱	# of preserved	
40 -		_		, *1		bottles checked	
	vork match bottle labels pancies on chain of cus		Yes		No		<2 or >12 unless noted)
	correctly identified on		Yes		No i		
14, Is it clear wh	at analyses were reque	ested?	Yes		No 🗔	1	
	ding times able to be m customer for authorizat		Yes		No []	Checked b	y:
Special Hand	ling (if applicable)					
	otified of all discrepand		Yes		No []	NA S	•
Persor	Notified:	Date:	***************************************	tion of the		_	
By Wh		Via:	i [] eMa	ail [Phone Fa	x [] In Person	
Regard	ding:	A CONTRACTOR OF THE PARTY OF TH					•
Client I	Instructions:			-		all a manuscrib like q deministrate a maliferentabel	•
17. Additional re	emarks:						
18. Cooler Info Cooler No		ion Seal Intact Seal No Yes	Seal D	ate	Signed By	4	

Chain-of-Custody Record			Turn-Around	Turn-Around Time:				HALL ENVIRONMENTAL													
lient:	Zule	Engin	eering, LLC	Standard			ANALYSIS LABORATOR												(
		•			Project Name:				www.hallenvironmental.com												
ailing Address: 501 Airport Drive Suite			EPNG	EPNG COM C 5 Project #:				4901 Hawkins NE - Albuquerque, NM 87109													
15	Farmi	O OFNIA	NM 87401	Project #:				Te	1. 50	5-34	5-39	75	F	ax	505-	345-	4107	7			
15 Farminyton, WM 87401											Ar	naly	sis	Req	uest						
		valleza	Intergeneering co	Project Mana	ager:		_	(yl	쥹					(F)					T		\Box
A/QC	Package:	}	J				021	SOF	雅			6		J.	PCB's						
Standard			n) Heatner	Woods		## (8021)	ල)	8	İ		SIMS)		18	PC						1	
	itation				stin Vald	ez.	雅	H.	0	=	=	20		萬	308						9
NEL	AP	□ Othe	r	On Ice:	On Ice: Z Yes No			+	8	18	8	82	S	3	8/8		(F)				6
EDD	(Type)	Ť		Sample Tem	perature: 3	39	養	BE	9	8	g	0	etal	馬	side	8) -				2
Date	Time	Matrix	Sample Request II	Container Type and #	Preservative Type	HEAL NO.	BTEX + MAKE	BTEX + MTBE + TPH (Gas only)	TPH 8015B (GRO / DRO / 1465)	TPH (Method 418.1)	EDB (Method 504.1)	PAH's (8310 or 8270	RCRA 8 Metals	Anions (FC) AND 3, AND, (FD), SED)	8081 Pesticides / 8082	8260B (VOA)	8270 (Semi-VOA)				Air Bubbles (Y or N)
مالو	11:15	soil	SC-1	(1) 402 (dass	Cold	-001	X		X	Х				X							
_																					
											\neg								\neg	\top	\forall
																				工	
			H									_							_	_	4-1
			J.				_			-		-	_						+	+	+
_	ļ			\rightarrow			-				-	-	_						+	+	+
-		 									-	\dashv	-		-				+	+	+
	-											\dashv							\top	+	\forall
																				\top	\top
ate:	Time:	Relinquish	1 4 # /	Received by:	L 11	Date Time	Rer	nark	s: D	rect	Bi	11 +0	C	DADO	o F	hill	ips		Boi	oby 5	pearm
Lyllb ate:	4:23	/Wad	u Valle		tuche		AM	~ S	MPN	י מכנו	Rin	50	la a	10-	N/	DU	dene	i ph	· 1640	•	,
will	Time:	Relinquish	itatu ()	Received by	A	Ocal Time			7			894		,	'n	U	skr	D:	KL	7ARC	14
		, samples sub	mitted to Hall Environmental may be	subcontracted to other	accredited laboratori					b-cont	tracted	data v	vill be	clear	ly not	ated or	the a	nalytica	l repor	i.	



BURLINGTON

ConocoPhillips EPNG COM C 5

ATITUDE N 360 58.9

1910' FSL & 1380' FWL **SEC.16 TO32N R010W**

LEASE NO. B-11318-41-NM ELEV. 6760

API NO. 30-045-29768

SAN JUAN COUNTY, NEW MEXICO

EMERGENCY NUMBER (505) 324-5170