District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr.

Santa Fe, NM 87505

Form C-144 Revised June 6, 2013

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office.

For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

-1-0	Pit, Below-Grade Tank, or	
5638	Proposed Alternative Method Permit or Closure Plan App	olication
	Type of action: Below grade tank registration Permit of a pit or proposed alternative method Closure of a pit, below-grade tank, or proposed alternative method Modification to an existing permit/or registration Closure plan only submitted for an existing permitted or non-permit	
1	or proposed alternative method	
1	Instructions: Please submit one application (Form C-144) per individual pit, below-grade tank	or alternative request
	at approval of this request does not relieve the operator of liability should operations result in pollution of oes approval relieve the operator of its responsibility to comply with any other applicable governmental a	
1. Operator: Burlin	ington Resources Oil & Gas Company, LP_OGRID #:14538	
1	BOX 4289, Farmington, NM 87499	THE PROPERTY OF
Contract Security	name: <u>SAN JUAN 29-7 UNIT 69A</u>	OIL CONS. DIV DIST. 3
	30-039-21632 OCD Permit Number:	OCT 1 9 2016
	I Section 25 Township 29N Range 7W County: Rio A	
	section 25 Township 25N Range 7W County, Rio A	
	A rederal State Frivate Frivate Frivate Fried Fried of Indian Anothers 36, 643614 107	7.51 7493 OLD NAD 83
2.	ction F, G or J of 19.15.17.11 NMAC	
	Drilling Workover	
	☐ Emergency ☐ Cavitation ☐ P&A ☐ Multi-Well Fluid Management Low Chlorid	de Drilling Fluid 🗆 ves 🗍 no
	Inlined Liner type: Thicknessmil LLDPE HDPE PVC Other	
String-Reinfo		
	Welded ☐ Factory ☐ Other Volume:bbl Dimensions: L_	x W x D
Little Committee	Trouble Literary Library Libra	
3.	- to-lar Calabration Lactions 17 11 NDMAC	
	e tank: Subsection I of 19.15.17.11 NMAC	
	bbl Type of fluid:Produced Water on material:Metal	
	containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shu	nt off
	ewalls and liner Visible sidewalls only Other	
	cknessmil HDPE PVC Other UNSPECIFIED	
Liner type: Time	:knessniii	
4. Alternative N	Method:	-
Submittal of an e	exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau	u office for consideration of approval.
5.		
Fencing: Subsec	ection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)	
institution or chu		nent residence, school, hospital,
	ight, four strands of barbed wire evenly spaced between one and four feet	
Alternate. Ple	lease specify	

5	
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other	
☐ Monthly inspections (If netting or screening is not physically feasible)	
Signs: Subsection C of 19.15.17.11 NMAC 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers Signed in compliance with 19.15.16.8 NMAC	
Variances and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Variance(s): Requests must be submitted to the appropriate division district for consideration of approval. Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	
9. Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptance are provided below. Siting criteria does not apply to drying pads or above-grade tanks.	ptable source
General siting	
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) - Written confirmation or verification from the municipality; Written approval obtained from the municipality	Yes No
Within the area overlying a subsurface mine. (Does not apply to below grade tanks) - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
 Within an unstable area. (Does not apply to below grade tanks) Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	☐ Yes ☐ No
Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map	Yes No
Below Grade Tanks	
Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☑ No
Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☑ No
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)	
Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial application.	☐ Yes ☐ No
 Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 	
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	Yes No

Within 100 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pit Non-low chloride drilling fluid	
Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Permanent Pit or Multi-Well Fluid Management Pit	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 Natructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the do attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19. and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:	NMAC 15.17.9 NMAC
Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the docattached. Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC A List of wells with approved application for permit to drill associated with the pit. Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 and 19.15.17.13 NMAC Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC	
Previously Approved Design (attach copy of design) API Number: or Permit Number:	

Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the	documents are
Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Proposed Closure: 19.15.17.13 NMAC	
Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.	
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-well Find Alternative Proposed Closure Method: Waste Excavation and Removal Waste Removal (Closed-loop systems only) On-site Closure Method (Only for temporary pits and closed-loop systems) In-place Burial On-site Trench Burial Alternative Closure Method	luid Management Pit
14. Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be	attack adds the
closure plan. Please indicate, by a check mark in the box, that the documents are attached. ☐ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC ☐ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC ☐ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) ☐ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC ☐ Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC ☐ Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. F 19.15.17.10 NMAC for guidance.	
Ground water is less than 25 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes No
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	Yes No
Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	

adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality					
	☐ Yes ☐ No				
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No				
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological					
Society; Topographic map	☐ Yes ☐ No				
Within a 100-year floodplain FEMA map	☐ Yes ☐ No				
16					
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.17.11 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved) Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC					
17. Operator Application Certification:					
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and beli	ief.				
Name (Print): Title:					
Signature: Date:					
e-mail address: Date: Telephone:					
e-mail address:Telephone:					
e-mail address:					
e-mail address:	7-/6 the closure report.				
e-mail address: Telephone:	7-/6 the closure report.				
e-mail address: Telephone:	7-/6 the closure report. complete this				

22.
Operator Closure Certification:
I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and
belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.
Name (Print) Crystal Walker Title: Regulatory Coordinator
Signature: Jola Walker Date: 10/12/2016
e-mail address: crystal.walker@cop.com Telephone: (505) 326-9837

Form C-144

Oil Conservation Division

Page 6 of 6

Burlington Resources Oil & Gas Company, LP San Juan Basin Below Grade Tank Closure Report

Lease Name: San Juan 29-7 Unit 69A

API No.:30-039-21632

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure of the below-grade tank referenced above. All proper documentation regarding closure activities is being included with the C-144.

General Plan:

BR shall close a below-grade tank within 60 days of cessation of operations per Subsection G.4 of 19.15.17.13 NMAC.
 This will include a) below-grade tanks that do not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC within five years, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC; b) an earlier date that the division requires because of imminent danger to fresh water, public health or the environment. For any closure, BR will file the C144 Closure Report as required.

The below-grade tank referenced above was permitted and closed within 60 days of cessation of the below-grade tanks operation.

2. BR shall remove liquids and sludge from a below-grade tank prior to implementing a closure method and shall dispose of the liquids and sludge in a division-approved facility. The facilities to be used will be Basin Disposal (Permit #NM-01-005), JFJ Landfarm % Industrial Ecosystem Inc. (Permit # NM-01-0010B) and Envirotech Land Farm (Permit #NM-01-011). The liner after being cleaned well (Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC) will be disposed of at the San Juan County Regional Landfill located on CR 3100.

All recovered liquids were disposed of at Basin Disposal (Permit #NM-01-005) and any sludge or soil required to be removed to facilitate closure was hauled to Envirotech Land Farm (Permit #NM-01-011) and JFJ Landfarm % IEI (Permit #NM-01-0010B). The liner was cleaned per Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC was disposed of at the San Juan County Regional Landfill located on CR 3100.

BR will receive prior approval to remove the below-grade tank and dispose of it in a division-approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.

The below-grade tank was disposed of in a division-approved manner.

4. If there is any on-site equipment associated with a below-grade tank, then BR shall remove the equipment, unless the equipment is required for some other purpose.

All on-site equipment associated with the below-grade tank was moved to the twinned well San Juan 29-7 Unit 139N to share a BGT.

5. BR will test the soils beneath the below-grade tank to determine whether a release has occurred. BR shall collect, at a minimum, a five point, composite sample; collect individual grab samples from any area that is wet, discolored or showing other evidence of a release; and analyzed for the constituents listed in Table I of 19.15.17.13 NMAC. COPC shall notify the division of its results on form C-141.

A five point composite sample was taken of the below-grade tank using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached). Form C-141 is attached.

Components	Tests Method	Limit (mg/kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	100
Chlorides	EPA 300.0	250

If BR or the division determines that a release has occurred, then BR shall comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC, as appropriate.

A release was not determined for the above referenced well.

If the sampling program demonstrates that a release has not occurred or that any release does not exceed the
concentrations specified in Table I of 19.15.17.13 NMAC, then BR shall backfill the excavation with compacted,
non-waste containing, earthen material; construct a division-prescribed soil cover; recontour and re-vegetate the
site.

The below-grade tank area passed all requirements of Paragraph (4) of Subsection E of 19.15.17.13 NMAC and was backfilled with compacted, non-waste containing, earthen material.

- 8. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.

Notification was not found.

The surface owner shall be notified of BR's closing of the below-grade tank 72 hours, but not more than one week, prior to closure as per the approved closure plan via certified mail, return receipt requested.

The closure process notification to the landowner was not found.

10. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The below-grade tank area was re-contoured to match fit, shape, line, form and texture of the surrounding area. Re-shaping including drainage control, to prevent ponding and erosion. Natural drainages were unimpeded and water bars and/or silt traps were placed in areas where needed to prevent erosion on a large scale. Final recontour has a uniform appearance with smooth surface, fitting the natural landscape.

11. BR shall seed the disturbed areas the first favorable growing season following closure of a below-grade tank. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM stipulated seed mixes will be used on federally regulated lands and division-approved seed mixtures (administratively approved if required) will be utilized on all State or private lands. A uniform vegetative cover has been established that reflects a life-form ratio of plus or minus fifty percent (50%) of pre- disturbance levels and a total percent plant cover of at least seventy percent (70%) of pre-disturbance levels, excluding noxious weeds. If alternate seed mix is required by the state, private owner or tribe, it will be implemented with administrative approval if needed. COPC will repeat seeding or planting will be continued until successful vegetative growth occurs.

BR seeded the disturbed areas as needed. The location is still active with the SJ 29-7 Unit 69A and the SJ 29-7 Unit 139N sharing a BGT.

12. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material, with chloride concentrations less than 600 mg/kg as analyzed by EPA Method 300.0, to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.

The below-grade tank area was backfilled and more than four feet of cover was achieved and the cover included one foot of suitable material to establish vegetation at the site.

- 13. All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on C-144 and incorporate the following:
 - Soil Backfilling and Cover Installation (See Report)
 - Re-vegetation application rates and seeding techniques (See Report)
 - Photo documentation of the site reclamation (Included as an attachment)
 - Confirmation Sampling Results (Included as an attachment)
 - Proof of closure notice (Missing)

in the restored to

I dealer gen

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Form C-141
Revised August 8, 2011
Submit 1 Copy to appropriate District Office to

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505 Submit 1 Copy to appropriate District Office to accordance with 19.15.29 NMAC.

			Rele	ease Notific	atioi	n and Co	orrective A	ction				
						OPERA	TOR		☐ Initi	al Report	\boxtimes	Final Repor
Name of Co	mpany Bu	ırlington Re	sources C	&G Company,	LP	Contact Crystal Walker						
Address 3401 East 30 th St, Farmington, NM Facility Name: San Juan 29-7 Unit 69A						Telephone No.(505) 326-9837						
Facility Na	ne: San Jua	an 29-7 Unit	69A			Facility Typ	e: Gas Well					
Surface Ow	ner Federa	al		Mineral O	wner	Federal	10-1-x		API No	o. 30-039-2	21632	
				LOCA	TIO	N OF RE						
Unit Letter Section Township Range Feet from the North					South Line	Feet from the 1180	CONTRACTOR STATE	est Line Cast	County Rio Arrib	a		
			Lati	tude <u>36.6937</u>	54	Longitud	e <u>-107.51731</u>	5				
				NAT	URE	OF REL	EASE					
Type of Rele						Volume of			300000000000000000000000000000000000000	Recovered		
Source of Re	lease					Date and I	Hour of Occurrence	ce	Date and	Hour of Dis	covery	
Was Immedi	ate Notice G		Yes 🗆	No 🛛 Not Re	quired	If YES, To	Whom?					
By Whom?						Date and I	lour					
Was a Water	course Reac		Yes 🛛 N	1 0		If YES, Vo	olume Impacting t	the Wate	rcourse.			
	as encounte	ered during t	the BGT (Closure.								
Describe Are N/A I hereby certi				en.*	ete to ti	ne best of my	knowledge and u	ınderstan	d that pur	suant to NM	OCD r	ules and
regulations a public health should their	Il operators a or the envir operations ha nment. In ac	are required to onment. The ave failed to a ddition, NMO	o report an acceptance acceptance of accepta	d/or file certain re e of a C-141 report investigate and re tance of a C-141 re	lease n t by the mediat	otifications a e NMOCD m e contaminati	nd perform correct arked as "Final R on that pose a three the operator of	etive action deport" do reat to gro responsib	ons for rel oes not rel ound wate oility for c	eases which ieve the oper r, surface wa compliance w	may er rator of iter, hu vith any	ndanger Fliability man health
Signature:	Crystal W	and the second second	Val	Eku		Approved by	OIL CON			DIVISIO	<u>N</u>	
Title: Regula	YAN A SE	50 (ASS)	<u> </u>			Approval Da	te:	F	Expiration	Date:		
	- 	terro seesa soo					554°			gyperSDE POW		
E-mail Addre		ystal.walker@		7		Conditions of	f Approval:			Attached		
Date: (O) Attach Addi		Phone: (505		I								_



April 18, 2011

Project No. 92115-1636

Ms. Shelly Cook-Cowden ConocoPhillips 3401 East 30th Street Farmington, New Mexico 87401

Phone: (505) 324-5140

policy of the later

RE: BELOW-GRADE TANK CLOSURE DOCUMENTATION FOR THE SAN JUAN 29-7 UNIT #69A (HBR) WELL SITE, RIO ARRIBA COUNTY, NEW MEXICO

Dear Ms. Cook-Cowden,

Enclosed please find the field notes and analytical results for below-grade tank (BGT) closure activities conducted at the San Juan 29-7 Unit #69A (hBr) well site located in Section 25, Township 29 North, Range 7 West, Rio Arriba County, New Mexico. Upon Envirotech personnel's arrival on March 22, 2011, one (1) five (5)-point composite sample was collected from directly beneath the BGT; see attached *Field Notes*. The sample was analyzed in the field for total petroleum hydrocarbons (TPH) using USEPA Method 418.1, for organic vapors using a photoionization detector (PID) and for chlorides. Additionally, the sample was placed into a four (4)-ounce glass jar, capped headspace free, and transported on ice, under chain of custody, to Envirotech's Analytical Laboratory to be analyzed for benzene and BTEX using USEPA Method 8021 and for total chlorides using USEPA Method 4500. The sample returned results below the regulatory limits for all constituents analyzed, confirming a release did not occur; see attached *Analytical Results*. Envirotech, Inc. recommends no further action in regards to this incident.

We appreciate the opportunity to be of service. If you have any questions or require additional information, please contact our office at (505) 632-0615.

Respectfully submitted,

ENVIROTECH, INC.

Crystal Delgai

Environmental Field Technician cdelgai@envirotech-inc.com

Enclosures:

Field Notes

Analytical Results

Cc:

Client File 92115

PAGE NO: 1 OF 1	ENVIRO			CH INC	NEERS	ENVIRON	MENTAL ST.
		5796 U.S	S. HIGHWA	Y 64 - 3014		DI ECIALI	C Delgai
DATE STARTED: 3 22 11	F/			MEXICO 8740)1		.6934674877
DATE FINISHED: 3/22/11			NE: (505) 6	The state of the s			107.517356594
	EPORT: I				1 10		200
LOCATION: NAME: San duan	SEC: 25	WELL #:	TWP: 20	TEMP PIT:	RNG: 7	NENT PIT:	BGT: PM: NM
QTR/FOOTAGE: 1180'E 1460			10 Arm		ST: Ne		
EXCAVATION APPROX:	FT. X		FT. X	-	FT. DEEP		
DISPOSAL FACILITY:				TION METH			
LAND OWNER: Feder CONSTRUCTION MATERIAL:			039075	WITH LEAK	BGT/PIT		
						N:	
LOCATION APPROXIMATELY: DEPTH TO GROUNDWATER:	70'	FT. 25	550	FROM WELI	LHEAD		
TEMPORARY PIT - GROUNDWA'	and the second second	EET DEEP	-	-			
BENZENE ≤ 0.2 mg/kg, BTEX ≤ 50 mg/k				00 mg/kg, TPH	(418.1) ≤ 250	0 mg/kg, CH	LORIDES ≤ 500 mg/kg
TEMPORARY PIT - GROUNDWAY	TER ≥100 FEE	ET DEEP					
BENZENE ≤ 0,2 mg/kg, BTEX ≤ 50 mg/kg	g, GRO & DRO	FRACTION	N (8015) ≤ 50	0 mg/kg, TPH (418.1) ≤ 2500	mg/kg, CHL	ORIDES ≤ 1000 mg/kg
PERMANENT PIT OR BGT							
BENZENE ≤ 0.2 mg/kg, BTEX ≤ 50 mg	/kg, TPH (418.1	(1) ≤ 100 mg/	-		-		
TIME	CALMIEID	LABNO		D 418.1 ANAL		Incapace	CATO (=-A-)
13:00		LAB NO.	WEIGHT (g	mL FREON	DILUTION	2D8	CALC. (mg/kg)
13:04		1	5	20	4	9	36
		3					
7		4					
		5					
		6 -					
PERIMETER		FIELD C	HLORIDE	S RESULTS	,	PRO	FILE
A musty-	*	SAMPLE	READING	CALC. (mg/kg)	1N		
Permanent		STD	_	_ 28		,	
			2.4	82	_	3	20 -
	1.					1/	X
	MH				'		')
	10	I	PID RESU	TS	20'	(×	r 1)
8	0		PLEID	RESULTS	00		v dal
	- 1	BGT .		(mg/kg)			01
	t	<i>PGI</i> .		0.0			-
	į				21015	N	36.41.6153'
	- 1				3'.865		1070 31.048215
	h						
LAB SAMPLES	NOTES:		. 1 0	1.00	week a	hour O	10.2
SAMPLE ID ANALYSIS RESULTS BENZENE VD	Left m	45503	e for s	neces on	WELKE	nine @	13:50
BTEX							
GRO & DRO							
CHLORIDES CO	ł						
	WORKORDE	R#		WHO ORDER	ED		



EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:

ConocoPhillips

Project #:

92115-1636

Sample No .:

1

Date Reported:

4/4/2011

Sample ID:

BGT

Date Sampled: 3/

3/22/2011

Sample Matrix:

Soil Cool Date Analyzed: Analysis Needed: 3/22/2011 TPH-418.1

Preservative: Condition:

Cool and Intact

		Det.
	Concentration	Limit
Parameter	(mg/kg)	(mg/kg)

Total Petroleum Hydrocarbons

36

5.0

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis

of Water and Waste, USEPA Storet No. 4551, 1978.

Comments:

San Juan 29-7 Unit #69A (hBr)

Instrument calibrated to 200 ppm standard. Zeroed before each sample

Analyst

Hevie

Crystal Delgai

Printed

Robyn Jones, EIT

Printed



CONTINUOUS CALIBRATION EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Cal	-	٠.
	 121	_

22-Mar-11

Parameter	Standard Concentration mg/L	Concentration Reading mg/L	
TPH	100		
	200	208	
	500		
	1000		

The accepted percent relative deviation (%RSD) of the calibration factor is less than 20% over the working range.

Curstal Degin	4/4/2011
Analyst	Date
Crystal Delgai	
Print-Name	
TOWN SOM	4/4/2011
Review	Date

Robyn Jones, EIT



Field Chloride

Client:

ConocoPhillips

Project #:

92115-1636

Sample No.:

1

Date Reported:

4/4/2011

Sample ID:

BGT

Date Sampled:

3/22/2011

Sample Matrix:

Soil

Date Analyzed: Analysis Needed: 3/22/2011 Chloride

Preservative: Condition:

Cool and Intact

Concentration Limit
Parameter (mg/kg) (mg/kg)

Field Chloride

82

28.0

ND = Parameter not detected at the stated detection limit.

References:

"Standard Methods for the Examination of Water and Wastewater", 18th ed., 1992

Hach Company Quantab Titrators for Chloride

Comments:

San Juan Unit #69A (hBr)

Analyst

Review

Crystal Delgai

Printed

Robyn Jones, EIT

Printed



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	ConocoPhillips	Project #:	92115-1636
Sample ID:	BGT	Date Reported:	03-23-11
Laboratory Number:	57675	Date Sampled:	03-22-11
Chain of Custody:	11407	Date Received:	03-22-11
Sample Matrix:	Soil	Date Analyzed:	03-23-11
Preservative:	Cool	Date Extracted:	03-22-11
Condition:	Intact	Analysis Requested:	BTEX
		Dilution:	10

	Diddon. 10						
Toluene Ethylbenzene p,m-Xylene o-Xylene	Concentration (ug/Kg)	Det. Limit (ug/Kg)					
Benzene	ND	0.9					
Toluene	ND	1.0					
Ethylbenzene	ND	1.0					
p,m-Xylene	ND	1.2					
o-Xylene	ND	0.9					
Total BTEX	ND						

ND - Parameter not detected at the stated detection limit.

Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	91.0 %
	1,4-difluorobenzene	98.3 %
	Bromochlorobenzene	90.4 %

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996,

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846,

USEPA, December 1996.

Comments:

BGT Closure/San Juan 29-7 #69A (hBr)

Analyst

Review



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	N/A	Project #:	N/A
Sample ID:	0323BBLK QA/QC	Date Reported:	03-23-11
Laboratory Number:	57675	Date Sampled:	N/A
Sample Matrix:	Soil	Date Received:	N/A
Preservative:	N/A	Date Analyzed:	03-23-11
Condition:	N/A	Analysis:	BTEX
		Dilution:	10

The state of the s						
Calibration and	I-Cal RF:	C-Cal RF:	%Diff.	Blank	Detect.	13
Detection Limits (ug/L)		Accept. Rang	je 0 - 15%	Conc	Limit	3
Benzene	1,2824E+005	1,2849E+005	0.2%	ND	0.1	
Toluene	1.4620E+005	1.4649E+005	0.2%	ND	0.1	
Ethylbenzene	1,2525E+005	1,2550E+005	0.2%	ND	0.1	
p,m-Xylene	2.8959E+005	2.9017E+005	0.2%	ND	0.1	
o-Xylene	1.2028E+005	1.2052E+005	0.2%	ND	0.1	

Duplicate Conc. (ug/Kg) Benzene	Sample	Duplicate	%Diff.	Accept Range	Detect Limit
	ND	ND	0.0%	0 - 30%	0.9
Toluene	ND	ND	0.0%	0 - 30%	1.0
Ethylbenzene	ND	ND	0.0%	0 - 30%	1.0
p,m-Xylene	ND	ND	0.0%	0 - 30%	1.2
o-Xylene	ND	ND	0.0%	0 - 30%	0.9

Spike Conc. (ug/Kg)	Sample	Amount Spiked	Spiked Sample	% Recovery	Accept Range
Benzene	ND	500	475	94.9%	39 - 150
Toluene	ND	500	478	95.6%	46 - 148
Ethylbenzene	ND	500	490	98.0%	32 - 160
p,m-Xylene	ND	1000	979	97.9%	46 - 148
o-Xylene	ND	500	501	100%	46 - 148

ND - Parameter not detected at the stated detection limit.

Dilution: Spike and spiked sample concentration represent a dilution proportional to sample dilution.

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic and Halogenated Volatiles by Gas Chromatography Using Photoionization and/or Electrolytic Conductivity Detectors, SW-846, USEPA December 1996.

Comments:

QA/QC for Samples 57675, 57666-57668, 57637

Analyst

Review



Chloride

Client:

ConocoPhillips

Project #:

92115-1636

Sample ID:

BGT

Date Reported:

03/23/11

Lab ID#:

57675

Date Sampled:

03/22/11

Sample Matrix:

Soil

Date Received:

03/22/11

Preservative: Condition:

Cool Intact Date Analyzed: Chain of Custody: 03/23/11 11407

Concentration (mg/Kg)

Total Chloride

Parameter

80

Reference:

U.S.E.P.A., 4500B, "Methods for Chemical Analysis of Water and Wastes", 1983.

Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

. M

Comments:

BGT Closure/San Juan 29-7 #69A (hBr)

5796 US Highway 64, Farmington, NM 87401

Ph (505) 632-0615 Fr (800) 362-1879 Fx (505) 632-1865 lab@envirotech-inc.com envirotech-inc.com

CHAIN OF CUSTODY RECORD

11407


Client Address:	hillip	s	Project Name / I	SUCC	/San	Juan	29	-7	12)#	9A	-(V	Bi)	ANAL	YSIS	/ PAF	AME	TERS	T			Γ			
Client Phone No.:		-	Client Nb.: 92115	or Closure/SanJuan 29 Her Name: Market Delgai No.: 2115-1636					TPH (Method 8015)		VOC (Method 8260)	3 Metals	3 Metals	RCRA 8 Metals	3 Metals Anion	Cation / Anion		TCLP with H/P		(1.81)	SIDE			e Cool	Sample Intact
Sample No./	Sample	Sample		8	Sample Matrix	No./Volume of Containers	Presen	vative	TH	BTEX (Method 8021)	VOC	RCRA	Cation	5	TOLP	PAH	TPH (418.1)	CHLORIDE			Sample	Sampl			
BGT	72411	12:4	57675	Solid	Sludge Aqueous	1-402		1		/								/			Y	Y			
		,		Soil Solid	Studge Aqueous																				
				Soil Solid	Sludge Aqueous		T																		
				Soil Solid	Sludge Aqueous			T																	
				Soil Solid	Sludge			T																	
				Soil Solid	Sludge Aqueous			T																	
				Soil Solid	Sludge Aqueous																				
				Soil Solid	Sludge Aqueous		T	T																	
				Soil Solid	Sludge Aqueous		1																		
				Soil Solid	Sludge Aqueous		\top	T	Г																
Relinquished by: (Sign	ature)	Ban	,		Date	Time 15:64	4	کے	ک	(Sign	Vac	מנק	ча	_	_				3	Date 22/11	1	ime 5:0			
Reliceuished by: (Sign	nature) (Rec	eive	d by:	(Sign	ature	0								/					
Relinquished by: (Sign	nature)						Rec	eive	d by:	(Sign	ature))			_				+		+				
				_		env	•																		





Analytical Laboratory

5796 US Highway 64 • Farmington, NM 87401 • 505-632-0615 • lab@envirotech-inc.com

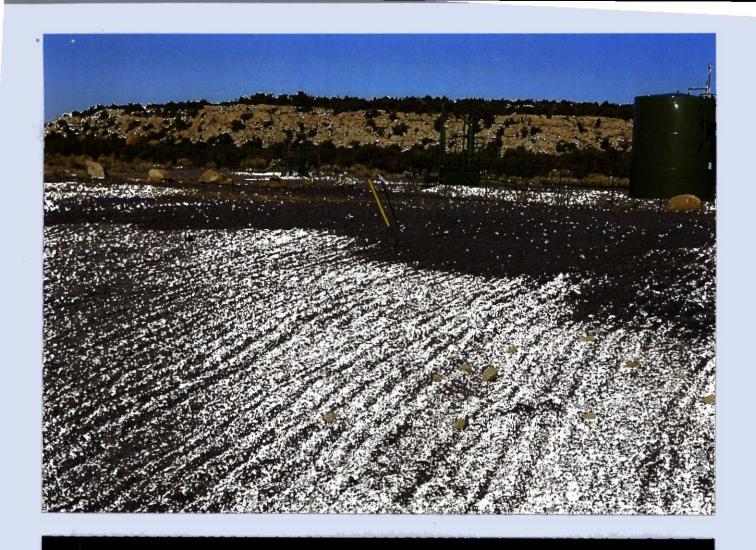

BURLINGTON

SAN JUAN 29-7 UNIT #139N
1490' FSL 1210' FEL
UNIT I SEC 25 T29N R07W / LEASE# SF-078425
BH: SWSE SEC 25 T29N R07W
API #30-039-30969 ELEV. 6728'
UNIT # NMNM-78417B
LATITUDE 36° 41 MIN. 37 SEC. N (NAD 83)
LONGITUDE 107° 31 MIN. 03 SEC. W (NAD 83)
RIO ARRIBA COUNTY, NEW MEXICO
EMERGENCY CONTACT: 1-505-324-5170