State of New Mexico es

Form C-144 Revised June 6, 2013

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office.

For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

District I	State of New Mexico
625 N. French Dr., Hobbs, NM 88240 District II	Energy Minerals and Natural Resource
District II 511 S. First St., Artesia, NM 88210	Department
District III	Oil Conservation Division
000 Rio Brazos Road, Aztec, NM 87410 District IV	1220 South St. Francis Dr.
220 S. St. Francis Dr., Santa Fe, NM 87505	Santa Fe, NM 87505

Pit, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application	
Type of action: Below grade tank registration Permit of a pit or proposed alternative method Closure of a pit, below-grade tank, or proposed alternative method Modification to an existing permit/or registration Closure plan only submitted for an existing permitted or non-permitted pit, below-grade tank, or proposed alternative method	
Instructions: Please submit one application (Form C-144) per individual pit, below-grade tank or alternative request	
ease be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the vironment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinance.	s.
Operator: Burlington Resources Oil & Gas Company, LP OGRID #: 14538	
Facility or well name: WILLIAMS 1	
API Number:30-045-05941 OCD Permit Number:	
Address:PO BOX 4289, Farmington, NM 87499 Facility or well name:WILLIAMS 1 API Number:30-045-05941 OCD Permit Number:	
Center of Proposed Design: Latitude <u>36.50522 ∘N</u> Longitude <u>-107.72698 ∘W</u> NAD: □1927 ⊠ 1983	
Surface Owner: Federal State Private Tribal Trust or Indian Allotment	
Pit: Subsection F, G or J of 19.15.17.11 NMAC Pit: Subsection F, G or J of 19.15.17.11 NMAC Permanent Drilling Workover Permanent Emergency Cavitation P&A Multi-Well Fluid Management Low Chloride Drilling Fluid yes no Lined Unlined Liner type: Thicknessmil LLDPE HDPE PVC Other String-Reinforced Volume:bbl Dimensions: L _ x W _ x D 3. Below-grade tank: Subsection I of 19.15.17.11 NMAC	
Volume:bbl Type of fluid:Produced Water	
Tank Construction material: Metal Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off Visible sidewalls and liner Visible sidewalls only Other Liner type: Thicknessmil HDPE PVC Other UNSPECIFIED	
4.	
Alternative Method: Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	
Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet Alternate. Please specify	

6. Netting; Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)	
Screen Netting Other	
Monthly inspections (If netting or screening is not physically feasible)	
7. Signs: Subsection C of 19.15.17.11 NMAC	
☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers	
☐ Signed in compliance with 19.15.16.8 NMAC	
8. Variances and Exceptions:	
Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.	
Please check a box if one or more of the following is requested, if not leave blank: Variance(s): Requests must be submitted to the appropriate division district for consideration of approval.	
Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	
9. Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accematerial are provided below. Siting criteria does not apply to drying pads or above-grade tanks.	ptable source
General siting	
Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank. - □ NM Office of the State Engineer - iWATERS database search; □ USGS; □ Data obtained from nearby wells	☐ Yes ☐ No ☑ NA
Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☑ NA
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. (Does not apply to below grade tanks) - Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within the area overlying a subsurface mine. (Does not apply to below grade tanks) - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
 Within an unstable area. (Does not apply to below grade tanks) Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	☐ Yes ☐ No
Within a 100-year floodplain. (Does not apply to below grade tanks) - FEMA map	☐ Yes ☐ No
Below Grade Tanks	
Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured	☐ Yes ☑ No
from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☑ No
Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☑ No
Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)	
Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.) - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial application.	☐ Yes ☐ No
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	
Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application. NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No

Within 100 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pit Non-low chloride drilling fluid	
Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application; - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Permanent Pit or Multi-Well Fluid Management Pit	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 N Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the doc attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.1 and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:	NMAC 15.17.9 NMAC
Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the doc attached. Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC A List of wells with approved application for permit to drill associated with the pit. Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19. and 19.15.17.13 NMAC Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Previously Approved Design (attach copy of design) API Number: or Permit Number:	15.17.9 NMAC

Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the	documents are
attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.19 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H ₂ S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.	
Type: Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Multi-well F	luid Management Pit
☐ Alternative Proposed Closure Method: ☐ Waste Excavation and Removal ☐ Waste Removal (Closed-loop systems only) ☐ On-site Closure Method (Only for temporary pits and closed-loop systems) ☐ In-place Burial ☐ On-site Trench Burial ☐ Alternative Closure Method	
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be closure plan. Please indicate, by a check mark in the box, that the documents are attached. □ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC □ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC □ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) □ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC □ Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	attached to the
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sour provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. In 19.15.17.10 NMAC for guidance.	
Ground water is less than 25 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	☐ Yes ☐ No ☐ NA
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	☐ Yes ☐ No
Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	☐ Yes ☐ No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	

adopted pursuant to NMSA 1978, Section 3-27-3, as amended. Written confirmation or verification from the municipality; Written approval obtained from the municipality	☐ Yes ☐ No
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	☐ Yes ☐ No
 Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	Yes No
Within a 100-year floodplain FEMA map	Yes No
16.	
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.17. Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cann Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC	11 NMAC 15.17.11 NMAC
Operator Application Certification:	
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and believed to the best of the b	ief.
Name (Print): Title:	
Signature: Date:	
e-mail address:Telephone:	
18. OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment)	/
OCD Representative Signature: Approval Date: 2//	//7
Title: Environmental Spec O OCD Permit Number:	
19. Closure Report (required within 60 days of closure completion): 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not section of the form until an approved closure plan has been obtained and the closure activities have been completed.	the closure report. complete this
☐ Closure Completion Date: 3/22/2013	
20. Closure Method: Waste Excavation and Removal ☐ On-Site Closure Method ☐ Alternative Closure Method ☐ Waste Removal (Closed-logon of the control of th	oop systems only)
Closure Report Attachment Checklist: _Instructions: Each of the following items must be attached to the closure report. Please in mark in the box, that the documents are attached. □ Proof of Closure Notice (surface owner and division) □ Proof of Deed Notice (required for on-site closure for private land only) □ Plot Plan (for on-site closures and temporary pits) □ Confirmation Sampling Analytical Results (if applicable) □ Waste Material Sampling Analytical Results (required for on-site closure) □ Disposal Facility Name and Permit Number	dicate, by a check
Soil Backfilling and Cover Installation ☐ Re-vegetation Application Rates and Seeding Technique ☐ Site Reclamation (Photo Documentation) ☐ On-site Closure Location: Latitude □N Longitude □W NAD: ☐ 1927 ☐ 1983	

22.
Operator Closure Certification:
I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and
belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.
Name (Print) Crystal Walker Title: Regulatory Coordinator
Signature: Date: 1/10/2017
e-mail address: crystal walker@con.com Telephone: (505) 326-9837

Burlington Resources Oil & Gas Company, LP San Juan Basin Below Grade Tank Closure Report

Lease Name: Williams 1 API No.: 30-045-05941

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure of the below-grade tank referenced above. All proper documentation regarding closure activities is being included with the C-144.

General Plan:

1. BR shall close a below-grade tank within 60 days of cessation of operations per Subsection G.4 of 19.15.17.13 NMAC. This will include a) below-grade tanks that do not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC within five years, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC; b) an earlier date that the division requires because of imminent danger to fresh water, public health or the environment. For any closure, BR will file the C144 Closure Report as required.

The below-grade tank referenced above was permitted and closed within 60 days of cessation of the below-grade tanks operation.

2. BR shall remove liquids and sludge from a below-grade tank prior to implementing a closure method and shall dispose of the liquids and sludge in a division-approved facility. The facilities to be used will be Basin Disposal (Permit #NM-01-005), JFJ Landfarm % Industrial Ecosystem Inc. (Permit # NM-01-0010B) and Envirotech Land Farm (Permit #NM-01-011). The liner after being cleaned well (Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC) will be disposed of at the San Juan County Regional Landfill located on CR 3100.

All recovered liquids were disposed of at Basin Disposal (Permit #NM-01-005) and any sludge or soil required to be removed to facilitate closure was hauled to Envirotech Land Farm (Permit #NM-01-011) and JFJ Landfarm % IEI (Permit #NM-01-0010B). The liner was cleaned per Subsection D, Paragraph 1, Subparagraph (m) of 19.15.9.712 NMAC was disposed of at the San Juan County Regional Landfill located on CR 3100.

3. BR will receive prior approval to remove the below-grade tank and dispose of it in a division-approved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.

The below-grade tank was disposed of in a division-approved manner.

4. If there is any on-site equipment associated with a below-grade tank, then BR shall remove the equipment, unless the equipment is required for some other purpose.

All on-site equipment associated with the below-grade tank was removed.

5. BR will test the soils beneath the below-grade tank to determine whether a release has occurred. BR shall collect, at a minimum, a five point, composite sample; collect individual grab samples from any area that is wet, discolored or showing other evidence of a release; and analyzed for the constituents listed in Table I of 19.15.17.13 NMAC. COPC shall notify the division of its results on form C-141.

A five point composite sample was taken of the below-grade tank using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached). Form C-141 is attached.

Components	Tests Method	Limit (mg/kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	100
Chlorides	EPA 300.0	250

6. If BR or the division determines that a release has occurred, then BR shall comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC, as appropriate.

A release was not determined for the above referenced well.

7. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Table I of 19.15.17.13 NMAC, then BR shall backfill the excavation with compacted, non-waste containing, earthen material; construct a division-prescribed soil cover; recontour and re-vegetate the site.

The below-grade tank area passed all requirements of Paragraph (4) of Subsection E of 19.15.17.13 NMAC and was backfilled with compacted, non-waste containing, earthen material.

- 8. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.

Notification was not found.

The surface owner shall be notified of BR's closing of the below-grade tank 72 hours, but not more than one week, prior to closure as per the approved closure plan via certified mail, return receipt requested.

The closure process notification to the landowner was not found.

10. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The below-grade tank area was re-contoured to match fit, shape, line, form and texture of the surrounding area. Re-shaping including drainage control, to prevent ponding and erosion. Natural drainages were unimpeded and water bars and/or silt traps were placed in areas where needed to prevent erosion on a large scale. Final recontour has a uniform appearance with smooth surface, fitting the natural landscape.

11. BR shall seed the disturbed areas the first favorable growing season following closure of a below-grade tank. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM stipulated seed mixes will be used on federally regulated lands and division-approved seed mixtures (administratively approved if required) will be utilized on all State or private lands. A uniform vegetative cover has been established that reflects a life-form ratio of plus or minus fifty percent (50%) of pre- disturbance levels and a total percent plant cover of at least seventy percent (70%) of pre-disturbance levels, excluding noxious weeds. If alternate seed mix is required by the state, private owner or tribe, it will be implemented with administrative approval if needed. COPC will repeat seeding or planting will be continued until successful vegetative growth occurs.

Provision 13 was accomplished through complying with BLM seeding requirements as allowed by the BLM/OCD MOU.

12. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material, with chloride concentrations less than 600 mg/kg as analyzed by EPA Method 300.0, to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.

The below-grade tank area was backfilled and more than four feet of cover was achieved and the cover included one foot of suitable material to establish vegetation at the site.

- 13. All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on C-144 and incorporate the following:
 - Soil Backfilling and Cover Installation (See Report)
 - Re-vegetation application rates and seeding techniques (See Report)
 - Photo documentation of the site reclamation (Included as an attachment)
 - Confirmation Sampling Results (Included as an attachment)
 - Proof of closure notice (Missing)

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Form C-141 Revised August 8, 2011 Submit 1 Copy to appropriate District Office to accordance with 19.15.29 NMAC.

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

		I	Rele	ase Notif	icatio	on	and Co	orrec	tive A	ction	1				
						(OPERA	ГOR			☐ Init	ial Report	\boxtimes	Fina	al Report
Name of Company Burlington Resources O&G Company, LP Address 3401 East 30 th St, Farmington, NM							Contact Crystal Walker								
		armington	ı, NM				elephone N			337					
Facility Nat	ne: Williams 1					Fa	acility Typ	e: Gas	Well						
Surface Ow	ner TRIBAL			Minera	l Owner	· TI	RIBAL				API N	o. 30-045	-05941		
	LOCATION OF RELEASE														
Unit Letter F	Section Town		nge W	Feet from the 1550	Nort		outh Line	I may make the	om the		West Line West	County San Jua	n		
	Latitude 36.50522 Longitude -107.72698														
					TURI	_	F RELI				_				
Type of Rele	ase			142	T UIG		Volume of				Volume	Recovered			
Source of Re							Date and H			ce		Hour of D	iscovery	/	
Was Immedia	ate Notice Given?					+	If YES, To	Whom)						
Was minear	ate riotice Griefi.	☐ Yes	s 🔲	No 🛛 Not	Require		11 120, 10	Willom.							
By Whom?							Date and H	Iour							
Was a Water	course Reached?						If YES, Vo	olume In	npacting t	the Wat	ercourse.				
	☐ Yes ☒ No														
	irse was Impacted,	Describe F	Fully.*												
N/A															
	se of Problem and														
No release w	as encountered d	uring the B	3G1 C	losure.											
Describe And	a Affactad and Cla	anum Antin	n Tales	*											
N/A	a Affected and Cle	anup Actio	n Take	n. T											
I hereby certi	fy that the informa	tion given a	above i	s true and cor	nplete to	the	best of my	knowled	dge and u	ındersta	nd that pur	suant to NN	AOCD 1	ules a	ınd
regulations a	ll operators are req	uired to rep	ort and	l/or file certain	n release	not	ifications ar	nd perfo	rm correc	ctive act	ions for re	leases whic	h may e	ndang	ger
	or the environmen														
	nment. In addition														
	or local laws and/														
Signature:				1				OII	CON	SERV	ATION	DIVISI	on		
Signature.	=	la	1_0	ter											
	0					A	pproved by	Environ	mental S	pecialis	t:				
Printed Name	e: Crystal Walker					-	,								
Title: Regula	atory Coordinator					Aı	pproval Dat	te:			Expiration	Date:			
E-mail Addre	ess: crystal w	alker@con	com			Co	onditions of	Annros	al·						
E-mail Address: crystal.walker@cop.com Conditions of Approval: Attached					d 🔲										
Date: 1 10	2017 Phon	e: (505) 326	6-9837												
Attach Addi	ional Sheets If N	lecessary													



May 3, 2013

Lisa Hunter ConocoPhillips San Juan Business Unit Office 214-04 5525 Hwy 64 Farmington, New Mexico 87401 www.animasenvironmental.com

624 E. Comanche Farmington, NM 87401 505-564-2281

> Durango, Colorado 970-403-3084

RE: Below Grade Tank Closure Report

Williams #1

San Juan County, New Mexico

Dear Ms. Hunter:

Animas Environmental Services, LLC (AES) is pleased to provide the final report associated with the below grade tank (BGT) closure at ConocoPhillips (CoP) Williams #1, located in San Juan County, New Mexico. Tank removal had been completed by CoP contractors prior to AES' arrival at the location.

1.0 Site Information

1.1 Location

Site Name - Williams #1

Legal Description – SE¼ NW¼, Section 7, T26N, R8W, San Juan County, New Mexico Well Latitude/Longitude – N36.50547 and W107.72706, respectively BGT Latitude/Longitude – N36.50522 and W107.72698, respectively Land Jurisdiction – Navajo Indian Reservation

Figure 1. Topographic Site Location Map

Figure 2. Aerial Site Map, March 2013

1.2 Site Ranking

The BGT is located within the boundaries of the Navajo Nation. Navajo Nation Environmental Protection Agency (NNEPA) adheres to action levels for releases and spills as established by the New Mexico Oil Conservation Division (NMOCD). Prior to site work, the New Mexico Oil Conservation Division (NMOCD) database was reviewed, and a C-144 form dated August 2007 for the Huerfanito Unit #91E located 2,000 feet west of the location reported the depth to groundwater as less than 50 feet below ground surface (bgs). The New Mexico Office of the State Engineer (NMOSE) database was

reviewed for nearby water wells, and no registered water wells were reported to be located within 1,000 feet of the location. Additionally, Google Earth and the New Mexico Tech Petroleum Recovery Research Center online mapping tool (http://ford.nmt.edu/react/project.html) were accessed to aid in the identification of downgradient surface water.

Once on site, AES personnel further assessed the ranking using topographical interpretation, Global Positioning System (GPS) elevation readings, and visual reconnaissance. AES personnel concluded that depth to groundwater at the site was less than 50 feet bgs. Blanco Canyon is located approximately 350 feet west of the location. Based on this information, the location was assessed a ranking score of 30.

1.3 BGT Closure Assessment

AES was initially contacted by Danny Rudder, CoP representative, on March 22, 2013, and on the same day, Kelsey Christiansen and Heather Woods of AES mobilized to the location. AES personnel collected six soil samples from below the BGT liner. Four samples were collected from the perimeter of the BGT footprint, one sample was collected from the center of the BGT footprint, and one sample was composited from the four perimeter samples and one center sample.

2.0 Soil Sampling

On March 22, 2013, AES personnel conducted field screening and collected five soil samples (S-1 through S-5) and one 5-point composite (SC-1) from below the BGT. Soil samples were collected from approximately 0.5 feet below the former BGT for field screening of volatile organic compounds (VOCs) and total petroleum hydrocarbon (TPH). Soil sample SC-1 was field screened for VOCs and chloride and was submitted for confirmation laboratory analysis. Soil sample locations are included on Figure 2.

2.1 Field Screening

2.1.1 Volatile Organic Compounds

A portion of each sample was utilized for field screening of VOC vapors with a photo-ionization detector (PID) organic vapor meter (OVM). Before beginning field screening, the PID-OVM was first calibrated with 100 parts per million (ppm) isobutylene gas.

2.1.2 Total Petroleum Hydrocarbons

Soil samples were also analyzed in the field for TPH per USEPA Method 418.1 using a Buck Scientific Model HC-404 Total Hydrocarbon Analyzer Infrared Spectrometer (Buck). A 3-point calibration was completed prior to conducting soil analyses. Field analytical

protocol followed AES's Standard Operating Procedure: Field Analysis Total Petroleum Hydrocarbons per EPA Method 418.1.

2.1.3 Chlorides

Soil sample SC-1 was field screened for chlorides using Chloride Drop Count Titration with silver nitrate. Sampling and analysis methods followed procedures provided by Hach Company.

2.2 Laboratory Analyses

The composite soil sample SC-1 collected for laboratory analysis was placed into a new, clean, laboratory-supplied container, which was then labeled, placed on ice, and logged onto a sample chain of custody record. The sample was maintained on ice until delivery to the analytical laboratory, Hall Environmental Analysis Laboratory (Hall), in Albuquerque, New Mexico. Soil sample SC-1 was laboratory analyzed for:

- Benzene, toluene, ethylbenzene, and xylene (BTEX) per U.S. Environmental Protection Agency (USEPA) Method 8260B; and
- Chloride per USEPA Method 300.0.

2.3 Field and Laboratory Analytical Results

Field screening readings for VOCs via OVM ranged from 0.3 ppm in S-2 up to 1.6 ppm in SC-1. Field TPH concentrations were less than 20.0 mg/kg in all samples (S-1 through S-5). The field chloride concentration in SC-1 was 80 mg/kg. Field screening results are summarized in Table 1 and presented on Figure 2. The AES Field Screening Report is attached.

Table 1. Soil Field Screening VOCs, TPH, and Chloride Results
Williams #1 BGT Closure. March 2013

Sample ID	Date Sampled	Depth below BGT (ft)	VOCs OVM Reading (ppm)	Field TPH (mg/kg)	Field Chlorides (mg/kg)
NMOCD Action	Level (NMAC 19.	15.17.13E)		100	250
S-1	03/22/13	0.5	1.1	<20.0	NA
S-2	03/22/13	0.5	0.3	<20.0	NA
S-3	03/22/13	0.5	1.2	<20.0	NA
S-4	03/22/13	0.5	0.5	<20.0	NA
S-5	03/22/13	0.5	0.8	<20.0	NA
SC-1	03/22/13	0.5	1.6	NA	80

NA - not analyzed

Laboratory analytical results reported benzene and total BTEX concentrations in SC-1 as less than 0.050 mg/kg and 0.25 mg/kg, respectively. The laboratory chloride concentration was reported as 33 mg/kg. Laboratory analytical results are summarized in Table 2 and included on Figure 2. Laboratory analytical reports are attached.

Table 2. Soil Laboratory Analytical Results Williams #1 BGT Closure, March 2013

Sample ID	Date Sampled	Depth (ft)	Benzene (mg/kg)	Total BTEX (mg/kg)	TPH- GRO (mg/kg)	TPH- DRO (mg/kg)	Chlorides (mg/kg)
NMOCD Action	Level (NMAC 19.15	C 19.15.17.13E) 0.2		50	1	00	250
SC-1	03/22/13	0.5	<0.050	<0.25	NA	NA	33

NA - not analyzed

3.0 Conclusions and Recommendations

NNEPA utilizes NMOCD action levels for BGT closures specified in New Mexico Administrative Code (NMAC) 19.15.17.13E. Field TPH concentrations were below the NMOCD action level of 100 mg/kg, with concentrations reported at less than 20 mg/kg in all samples. Benzene and total BTEX concentrations in SC-1 were below the NMOCD action levels of 0.2 mg/kg and 50 mg/kg, respectively. Chloride concentrations in SC-1 were below the NMOCD action level of 250 mg/kg. Based on field screening and laboratory analytical results for benzene, total BTEX, TPH, and chlorides, no further work is recommended at the Williams #1.

If you have any questions about this report or site conditions, please do not hesitate to contact Deborah Watson at (505) 564-2281.

Sincerely,

Kelsey Christiansen Environmental Scientist

Lelay Christian

Elizabeth McNally, P.E.


Elizabeth V MiNdly

Lisa Hunter Williams #1 BGT Closure Report May 3, 2013 Page 5 of 5

Attachments:

Figure 1. Topographic Site Location Map Figure 2. Aerial Site Map, March 2013 AES Field Screening Report 032213 Hall Analytical Report 1303944

R:\Animas 2000\Dropbox\2013 Projects\ConocoPhillips\Williams #1\Williams #1 BGT Closure Report050313.docx

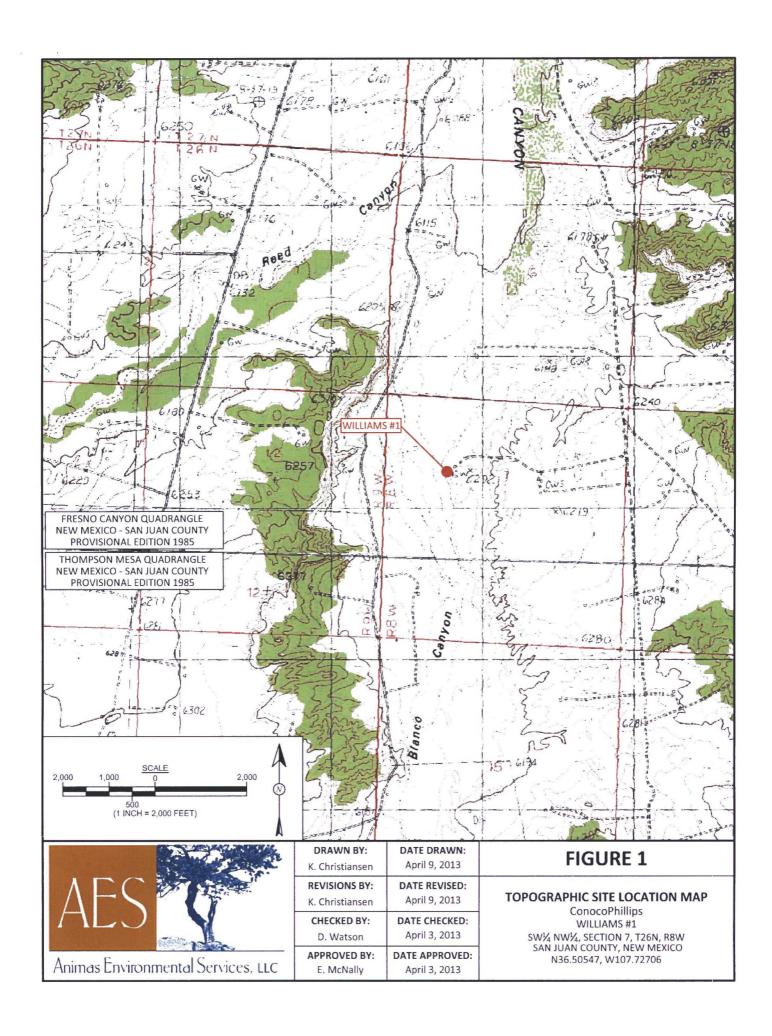

LEGEND

SAMPLE LOCATIONS


	Field Scr	eening A	lesults	
Sample ID	Diste	OVM- PID (ppm)	TPH (mg/kg)	Chlorides (mg/kg)
MMOCD AC	DOM TEAET	**	100	250
S-1	3/22/13	1.1	<20.0	NA
S-2	3/22/13	0.3	<20.0	NA
S-3	3/22/13	1.2	<20.0	NA
S-4	3/22/13	0.5	<20.0	NA
S-5	3/22/13	0.8	<20.0	NA
SC-1	3/22/13	1.6	NA	80

SC-1 IS	A 5-PO	INTCO	MAPO	SITE S	AMPLE	OF S-1
	A 0. M. A					WI W 1
THROU	GH S-5	. NA -	NOTA	MALY	ZED	

		Laborato	ry Analytico	ul Results		
Sample 10	Date	Benzene (mg/kg)	Total BTEX (mg/kg)	TPH - GRO (mg/kg)	YPH - DRO (mg/kg)	Chiorides (mg/kg)
NMOCD ACT	YON LEVEL	0.2	50	10	10	250
SC-1	3/22/13	< 0.050	< 0.25	MA	NA	33







AERIAL SOURCE: © 2012 MICROSOFT CORPORATION - AVAILABLE EXCLUSIVELY BY DIGITALGLOBE

AES	
A I*	TO SHOW THE PARTY OF THE PARTY

Δ	F. T.	60	
01	rest in		4 9 900
Animac	Environmental	MATTACIAC	116
CANTINIES 1	Part Attended to the service	WILL TIPPOL	LLW.

DRAWN BY:	DATE DRAWN:
K. Christiansen	April 9, 2013
REVISIONS BY:	DATE REVISED:
K. Christiansen	April 9, 2013
CHECKED BY:	DATE CHECKED:
D. Watson	April 13, 2013
APPROVED BY:	DATE APPROVED:
E. McNally	April 13, 2013

FIGURE 2

AERIAL SITE MAP
BELOW GRADE TANK CLOSURE
MARCH 2013
ConocoPhillips
WILLIAMS #1
SE¼ NW¼, SECTION 7, T26N, R8W
SAN JUAN COUNTY, NEW MEXICO
N36.50547, W107.72706

AES Field Screening Report

Animas Environmental Services, LLC

www.animasenvironmental.com

624 E. Comanche Farmington, NM 87401 505-564-2281

> Durango, Colorado 970-403-3084

Client: ConocoPhillips

Project Location: Williams #1

Date: 3/22/2013

Matrix: Soil

Sample ID	Collection Date	Time of Sample Collection	Sample Location	OVM (ppm)	Field Chloride (mg/kg)	Field TPH Analysis Time	Field TPH* (mg/kg)	TPH PQL (mg/kg)	DF	TPH Analysts Initials				
S-1	3/22/2013	12:35	North	1.1	NA	13:18	<20.0	20.0	1	КС				
S-2	3/22/2013	12:38	South	0.3	NA	13:21	<20.0	20.0	1	КС				
S-3	3/22/2013	12:41	East	1.2	NA	13:24	<20.0	20.0	1	КС				
S-4	3/22/2013	12:42	West	0.5	NA	13:27	<20.0	20.0	1	КС				
S-5	3/22/2013	12:45	Center	0.8	NA	13:30	<20.0	20.0	1	КС				
SC-1	3/22/2013	12:50	Composite	1.6	80	Not Analyzed for TPH.								

Field Chloride - Quantab Chloride Titrators or Drop Count Titration with

Silver Nitrate

Total Petroleum Hydrocarbons - USEPA 418.1

Analyst:

.

PQL Practical Quantitation Limit

ND Not Detected at the Reporting Limit

NA Not Analyzed
DF Dilution Factor

*Field TPH concentrations recorded may be below PQL.



Hall Environmental Analysis Laboratory 4901 Hawkins NE Albuquerque, NM 87109 TEL: 505-345-3975 FAX: 505-345-4107 Website: www.hallenvironmental.com

March 26, 2013

Debbie Watson Animas Environmental Services 624 East Comanche Farmington, NM 87401 TEL: (505) 486-4071

FAX:

RE: CoP Williams #1

OrderNo.: 1303944

Dear Debbie Watson:

Hall Environmental Analysis Laboratory received 1 sample(s) on 3/23/2013 for the analyses presented in the following report.

These were analyzed according to EPA procedures or equivalent. To access our accredited tests please go to www.hallenvironmental.com or the state specific web sites. See the sample checklist and/or the Chain of Custody for information regarding the sample receipt temperature and preservation. Data qualifiers or a narrative will be provided if the sample analysis or analytical quality control parameters require a flag. All samples are reported as received unless otherwise indicated. Lab measurement of analytes considered field parameters that require analysis within 15 minutes of sampling such as pH and residual chlorine are qualified as being analyzed outside of the recommended holding time.

Please don't hesitate to contact HEAL for any additional information or clarifications.

Sincerely,

Andy Freeman

Laboratory Manager

4901 Hawkins NE

Albuquerque, NM 87109

Analytical Report

Lab Order 1303944

Date Reported: 3/26/2013

Hall Environmental Analysis Laboratory, Inc.

CLIENT: Animas Environmental Services

Project: CoP Williams #1

Lab ID: 1303944-001

Matrix: SOIL

Client Sample ID: SC-1 Collection Date: 3/22/2013 12:50:00 PM

Received Date: 3/23/2013 10:26:00 AM

Analyses	Result	RL Qu	al Units	DF	Date Analyzed
EPA METHOD 300.0: ANIONS					Analyst: JRR
Chloride	33	30	mg/Kg	20	3/25/2013 11:50:01 AM
EPA METHOD 8260B: VOLATILES	SHORT LIST				Analyst: RAA
Benzene	ND	0.050	mg/Kg	1	3/25/2013 2:47:59 PM
Toluene	ND	0.050	mg/Kg	1	3/25/2013 2:47:59 PM
Ethylbenzene	ND	0.050	mg/Kg	1	3/25/2013 2:47:59 PM
Xylenes, Total	ND	0.10	mg/Kg	1	3/25/2013 2:47:59 PM
Surr: 1,2-Dichloroethane-d4	85.9	70-130	%REC	1	3/25/2013 2:47:59 PM
Surr: 4-Bromofluorobenzene	97.0	70-130	%REC	1	3/25/2013 2:47:59 PM
Surr: Dibromofluoromethane	92.2	70-130	%REC	1	3/25/2013 2:47:59 PM
Surr: Toluene-d8	99.3	70-130	%REC	1	3/25/2013 2:47:59 PM

Qualifiers:

- Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH greater than 2
- RL Reporting Detection Limit

- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- Spike Recovery outside accepted recovery limits 1 of 4

QC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#: 1303944

26-Mar-13

Client:

Animas Environmental Services

Project:

CoP Williams #1

Sample ID: MB-6631

SampType: MBLK

TestCode: EPA Method 300.0: Anions

Client ID:

PBS

Batch ID: 6631

RunNo: 9397

HighLimit

Prep Date:

SeqNo: 268226

Units: mg/Kg

Analyte

3/25/2013

Analysis Date: 3/25/2013

PQL

RPDLimit Qual

Chloride

ND 1.5

Sample ID: LCS-6631

SampType: LCS

TestCode: EPA Method 300.0: Anions

Client ID: LCSS

Batch ID: 6631

RunNo: 9397

LowLimit

Prep Date: 3/25/2013

Analysis Date: 3/25/2013

PQL

1.5

SeqNo: 268227

Units: mg/Kg

Analyte

%REC

HighLimit 110 Qual

14

Result

SPK value SPK Ref Val 15.00

0 95.8

SPK value SPK Ref Val %REC LowLimit

90

%RPD **RPDLimit**

Chloride

Sample ID: 1303705-001AMS

SampType: MS

16

Result

15

TestCode: EPA Method 300.0: Anions

%RPD

Prep Date:

Client ID:

BatchQC 3/25/2013

Batch ID: 6631 Analysis Date: 3/25/2013

SeqNo: 268232

RunNo: 9397

Units: mg/Kg

Analyte

Result PQL

7.5

SPK value SPK Ref Val %REC

3.210

LowLimit 83.7 64.4

HighLimit 117 %RPD **RPDLimit** Qual

Chloride

Sample ID: 1303705-001AMSD

SampType: MSD

TestCode: EPA Method 300.0: Anions

SeqNo: 268233

Client ID: Prep Date:

BatchQC

Batch ID: 6631

RunNo: 9397

Units: mg/Kg

Analyte Chloride

3/25/2013

Analysis Date: 3/25/2013 PQL

7.5

15.00

15.00

SPK value SPK Ref Val

3.210

%REC 81.1

LowLimit 64.4 HighLimit 117

%RPD 2.46

RPDLimit

Qual 20

Value exceeds Maximum Contaminant Level.

E Value above quantitation range

Analyte detected below quantitation limits

P Sample pH greater than 2 Reporting Detection Limit В Analyte detected in the associated Method Blank

Holding times for preparation or analysis exceeded H ND Not Detected at the Reporting Limit

R

Spike Recovery outside accepted recovery limits

Qualifiers:

RPD outside accepted recovery limits

Page 2 of 4

QC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#: **1303944**

26-Mar-13

Client:

Animas Environmental Services

Project:

CoP Williams #1

Sample ID: 5ml-rb	SampType: MBLK TestCode: EPA Meth						8260B: Volat	tiles Short	List	
Client ID: PBS	Batch	ID: R9	399	F	RunNo: 9	399				
Prep Date:	Analysis D	ate: 3/	25/2013	8	SeqNo: 2	68552	Units: mg/K	(g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	ND	0.050								
Toluene	ND	0.050								
Ethylbenzene	ND	0.050								
Xylenes, Total	ND	0.10								
Surr: 1,2-Dichloroethane-d4	0.45		0.5000		89.5	70	130			
Surr: 4-Bromofluorobenzene	0.53		0.5000		106	70	130			
Surr: Dibromofluoromethane	0.50		0.5000		99.1	70	130			
Surr: Toluene-d8	0.48		0.5000		95.0	70	130			
Sample ID: 100ng Ics	SampType: LCS TestCode: EPA Method						8260B: Volat	iles Short	List	
Client ID: LCSS	Batch	n ID: R9	399	F	RunNo: 9	399				
Prep Date:	Analysis D	ate: 3/	25/2013	8	SeqNo: 2	68558	Units: mg/K	(g		
Analyte	Result	PQL		SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	1.0	0.050	1.000	0	105	70	130			
Toluene	1.0	0.050	1.000	0	104	80	120			
Surr: 1,2-Dichloroethane-d4	0.44		0.5000		88.6	70	130			
Surr: 4-Bromofluorobenzene	0.54		0.5000		108	70	130			
Surr: Dibromofluoromethane	0.46		0.5000		92.3	70	130			
Surr: Toluene-d8	0.47		0.5000		94.5	70	130			
Sample ID: 1303944-001a ms	SampT	уре: М	3	Tes	tCode: El	PA Method	8260B: Volat	iles Short	List	
Client ID: SC-1	Batch	ID: R9	399	F	RunNo: 9	399				
Prep Date:	Analysis D	ate: 3/	25/2013	, 8	SeqNo: 2	68589	Units: mg/K	g		
Analyte	Result	PQL		SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	0.76	0.050	0.7628	0	99.9	67.5	124			
Toluene	0.84	0.050	0.7628	0	110	55.8	142			
Surr: 1,2-Dichloroethane-d4	0.33		0.3814		86.8	70	130			

Sample ID: 1303944-001a ms	d SampT	ype: MS	D	Test	tCode: El	PA Method	8260B: Volat			
Client ID: SC-1	Batch	ID: R9	399	R	RunNo: 9	399				
Prep Date:	Analysis D	ate: 3/	25/2013	S	SeqNo: 268590 Units: mg/Kg					
Analyte	Result	Result PQL SPK value SF			%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Benzene	0.74	0.050	0.7628	0	97.5	67.5	124	2.43	20	
Toluene	0.81	0.050	0.7628	0	107	55.8	142	3.43	20	
Surr: 1,2-Dichloroethane-d4	0.33		0.3814		87.3	70	130	0	0	

0.3814

0.3814

0.3814

Qualifiers:

* Value exceeds Maximum Contaminant Level.

0.36

0.35

0.39

- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH greater than 2

Surr: 4-Bromofluorobenzene

Surr: Dibromofluoromethane

Surr: Toluene-d8

RL Reporting Detection Limit

B Analyte detected in the associated Method Blank

70

70

70

130

130

130

- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit

94.6

91.0

103

- R RPD outside accepted recovery limits
- S Spike Recovery outside accepted recovery limits

Page 3 of 4

QC SUMMARY REPORT

Hall Environmental Analysis Laboratory, Inc.

WO#: 1303944

26-Mar-13

Client:

Animas Environmental Services

Project:

CoP Williams #1

Sample ID: 1303944-001a ms	d SampT	ype: MS	SD	Tes	tCode: EF	PA Method	8260B: Volat	iles Short	List	
Client ID: SC-1	Batch	ID: R9	399	R						
Prep Date:	Analysis D	ate: 3/	25/2013	S	SeqNo: 20	68590	Units: mg/K	g		
Analyte	Result	PQL	SPK value	SPK Ref Val	%REC	LowLimit	HighLimit	%RPD	RPDLimit	Qual
Surr: 4-Bromofluorobenzene	0.35		0.3814		91.7	70	130	0	0	
Surr: Dibromofluoromethane	0.35		0.3814		91.1	70	130	0	0	
Surr: Toluene-d8	0.39		0.3814		102	70	130	0	0	

Qualifiers:

- * Value exceeds Maximum Contaminant Level.
- E Value above quantitation range
- J Analyte detected below quantitation limits
- P Sample pH greater than 2
- RL Reporting Detection Limit

- B Analyte detected in the associated Method Blank
- H Holding times for preparation or analysis exceeded
- ND Not Detected at the Reporting Limit
- R RPD outside accepted recovery limits
- S Spike Recovery outside accepted recovery limits

Page 4 of 4



Hall Environmental Analysis Laboratory 4901 Hawkins NE Albuquerque, NM 87105

TEL: 505-345-3975 FAX: 505-345-410; Website: www.hallenvironmental.com

Sample Log-In Check List

Clie	ent Name:	Animas Env	ironmental	Work C	order Numb	er: 13039	944			RcptNo:	1
Rec	eived by/da	te: A	-13/23	//3			_				
Logg	ged By:	Anne Thor	ne	3/23/2013	3 10:26:00	AM					
Con	npleted By:	Anne Thor	ne	3/23/2013	3						
Revi	iewed By:	As	13/23/	/13							
Cha	in of Cus	stody								-	
1. (Custody sea	als intact on sa	mple bottles?	•		Yes		No		Not Present	
2. 1	ls Chain of	Custody comp	ete?			Yes	V	No		Not Present	
3. 1	How was the	e sample deliv	ered?								
Log	ı In										
		empt made to	cool the samp	les?		Yes	V	No		NA 🗆	
5 1	More ell co	mples received	l et a tempera	turn of NO C	- 6 0°C	Yes		No	П	NA 🗆	
J. 1	vvere all sai	inples received	at a tempera	itule of >0 C	10 0.0 C	res	•	NO	_	NA L	
6.	Sample(s) i	n proper conta	iner(s)?			Yes	V	No			
7. 8	Sufficient sa	ample volume f	or indicated to	est(s)?		Yes		No			
8. 4	Are samples	s (except VOA	and ONG) pro	operly preserve	ed?	Yes	✓	No			
9. \	Was presen	vative added to	bottles?			Yes		No	V	NA 🗆	
10.	VOA vials h	ave zero head:	space?			Yes		No		No VOA Vials	
11.	Were any s	ample contain	ers received b	roken?		Yes		No	\checkmark	# of preserved	
										bottles checked	
		work match bo pancies on ch)		Yes	\checkmark	No		for pH: (<2 c	r >12 unless noted)
		s correctly iden				Yes	V	No		Adjusted?	
14.1	s it clear wh	nat analyses w	ere requested	?		Yes	✓	No			
		ding times able				Yes	\checkmark	No		Checked by:_	
(if no, notify	customer for a	iutnorization.)								
Spec	cial Hand	lling (if app	licable)								
		otified of all di		vith this order?		Yes		No		NA ☑	
	Person	n Notified:		:	Date				-		1
	By Wh	nom:		!	Via:	☐ eMa	ail [Phone	Fax	☐ In Person	
	Regan	ding:									
	Client	Instructions:	South a Makhan at make make a facility		. A 50 'm add 5 1's to 1.	of the second second		- me'-mak mellahi atamanan P		End management of the Artistics (1971) above 1971 (1971)	
17.	Additional r	emarks:									_
18.	Cooler Info	ormation									
	Cooler N	o Temp °C	Condition		Seal No	Seal D	ate	Signed	Ву		
	1	1.6	Good	Yes							

C	hain-	of-Cu	stody Record	Turn-Around	Time:					н	AI		E	uv	TE	20	NI	ИF	NT	AL	
Client:	himas	s Envi	ronnental	☐ Standard	Rush	Same Day] -													OR	
So	rice			Project Name	: Q	0					ww										
Mailing	Address	1004	E. Comanche	COP WI	Mans # 1			490)1 Ha									109			
Tour	,	QZ N	M 87401	Project #:	HOLUM # 1				1. 50						•		410				
OVY	V-1940		2281					16	1. 50	0-04	J-35				Req						1 1 1 1
email or	_	5-969	-2281	Project Mana	- COP			2	<u> </u>						104						
				Project Mana	ger.		21)	on	MR	.				SO,	S						
Stan	Package:		☐ Level 4 (Full Validation)	D wale			TEES (8021)	TPH (Gas only)	TPH 8015B (GRO / DRO / MRO)	-		SIMS)		Anions (F,CI,NO3,NO2,PO4,SO4)	PCB's						
Accredi			Level 4 (I dii Validation)	D. Wats		/11 : 1 · 1 ·	Sal	ij	DR.				- 1	D2,F				B			
□ NEL		□ Othe	r	On Ice	Christians	n/H. Woods		린	0	TPH (Method 418.1)	EDB (Method 504.1)	8270		Ž,	8081 Pesticides / 8082		7	Churdes			Air Bubbles (Y or N)
□ EDD	(Type)			Sample Tem	ing the least of		+	BTEX + MTBE +	GR	441	9 20		als	8	des	~	8270 (Semi-VOA)	٤			څا
	, ,, ,-					and the second	150	MT	2B	<u>پ</u>	읉	3310	Me	D, T	stici	VOV	i i	U		1	<u>8</u>
Date	Time	Matrix	Sample Request ID	Container	Preservative	E BALL	X	+ ×	8	Ž	Š	8 (8	A 8) SU	Pe	B ((S)	0			qqn
				Type and #	Туре	- esemble	BTEX	E E	퓝	됩		PAH's (8310 or	RCRA 8 Metals	Anio	3081	8260B (VOA)	1270	3000			i B
120/10	1250	Soil	Sc-1	MOH Kit.	Neox		X			-	-	-	-	1	ω.	ω.	ω.	χ	+	+	+
14113	1200	30(1	JUST	HOZYCH	100	700	10		-	\dashv	_	\dashv	-		-		_	\vdash	\dashv	+	+
							-		\dashv	\dashv	-	\dashv						\vdash	\dashv	+	+
									_	_	_	_							\rightarrow	\rightarrow	
																				\perp	
																				}	
																		П			
																				\top	\top
								\vdash			1	\neg							1	+	+
							+			\dashv	\dashv	-				-		$\vdash \vdash$	\dashv	+	+
				-			\vdash			\dashv	\dashv	-			_		-	\vdash	\dashv	+	+
							\vdash	-			-	-			_			\vdash	-	+	+
					-		\vdash			-	\dashv	\dashv					-		\vdash	+	+
Deter	Times	Delinguish	ad bus	Received by:		Doto Time	Day													\perp	
Jale:	Date: Time: Relinquished by:		LA L	01)	Date Time	Kei	пагк	8. B.	11,	to	Car	100	2 8	hill	lips	i			on onto		
1417	1654	Polinguish	as follow	Received by:	HUDELB	To 122/13/654	N	04	101	590	66	3			Su	per	150	C: 7	held	2	
Date:	Time:	Relinquish	eu by.	The Colvectory.	1 (h	Date Time	Ar	ea: a	15						USE	rI	0:6	EN	W/	040	ya
12/13	1725	1/2hr	withhaller	Cla.	1 Mi	02/01/2 /1059	AC	hut	4-0	de	: C2	200	7		ord	erec	h	1:0	an	1 Rud	de
1	If necessary, samples submitted to Hall Environmental may be s			contracted to other a	ccredited laboratorie	es. This serves as notice of thi	is poss	ibility.	Ẩny su	b-cont	racted	data	will be	clear	ly note	ated or	n the a	inalytic	al repo	rt.	



ConocoPhilips RESCURCES

WILLIAMS 1
LATITUDE 36⁰ 30' 19"
LONGITUDE 107⁰ 43' 37"
SE/NW, 1550' FNL & 1500' FWL
SEC.07 T026N R008W NMPM
14-20-603-769
API NO 30-045-05941
SAN JUAN COUNTY, NM ELEV 6155
EMERGENCY NUMBER (505) 324-5170
NO SMOKING NO TRESPASSING