

Form 3160-3
(June 2015)FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER 1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other 1c. Type of Completion: <input type="checkbox"/> Hydraulic Fracturing <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		5. Lease Serial No. NMNM114998 6. If Indian, Allottee or Tribe Name 7. If Unit or CA Agreement, Name and No. 8. Lease Name and Well No. SIOUX 25-36 STATE FED COM [326483] 16H 9. API Well No. 30-025-49472
2. Name of Operator CAZA OPERATING LLC [249099] 3a. Address 200 N. Loraine Street, Suite 1550, Midland, TX 79701 3b. Phone No. (include area code) (432) 682-7424		10. Field and Pool, or Exploratory [98228] WC-025 G-09 S253536D/WC-025 G-09 S 11. Sec., T. R. M. or Blk. and Survey or Area SEC 25/T25S/R35E/NMP
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NENW / 260 FNL / 1760 FWL / LAT 32.1079028 / LONG -103.324097 At proposed prod. zone SESE / 20 FSL / 1960 FWL / LAT 32.0796257 / LONG -103.3234585		12. County or Parish LEA 13. State NM
14. Distance in miles and direction from nearest town or post office* 7 miles		15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 260 feet 16. No of acres in lease 17. Spacing Unit dedicated to this well 320.0
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 90 feet 19. Proposed Depth 12566 feet / 22720 feet 20. BLM/BIA Bond No. in file FED: NMB000471		21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3081 feet 22. Approximate date work will start* 07/31/2021 23. Estimated duration 35 days
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|---|---|
| 1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification.
6. Such other site specific information and/or plans as may be requested by the BLM. |
|---|---|

25. Signature (Electronic Submission) Title Engineer	Name (Printed/Typed) STEVE MORRIS / Ph: (432) 682-7424	Date 01/20/2021
Approved by (Signature) (Electronic Submission) Title Assistant Field Manager Lands & Minerals	Name (Printed/Typed) Cody Layton / Ph: (575) 234-5959 Office Carlsbad Field Office	Date 09/30/2021

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
 Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

NGMP Rec 10/13/2021**SL**

(Continued on page 2)

APPROVED WITH CONDITIONS

KZ
10/22/2021

*(Instructions on page 2)

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-025-49472	² Pool Code 98228	³ Pool Name WC-025 G-09 S253536D; UPR WOLFCAMP
⁴ Property Code 326483	⁵ Property Name SIOUX 25-36 STATE FED COM	
⁷ OGRID No. 249099	⁸ Operator Name CAZA OPERATING LLC	⁶ Well Number 16H
		⁹ Elevation 3081'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
C	25	25S	35E		260	NORTH	1760	WEST	LEA

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
N	36	25S	35E		20	SOUTH	1960	WEST	LEA

¹² Dedicated Acres 320.0	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
---	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

	<p>CORNER COORDINATES NAD 83, SPCS NM EAST A - X: 853484.39' / Y: 394143.43' B - X: 853444.12' / Y: 399427.25' C - X: 853414.11' / Y: 402063.06' D - X: 853387.56' / Y: 404709.54' E - X: 854708.75' / Y: 404723.98' F - X: 854762.22' / Y: 399439.66' G - X: 854805.65' / Y: 394155.13'</p>	<p>17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</p> <p>Signature _____ Date 8/8/2020</p> <p>Steve Morris Printed Name steve.morris@morcoreengineering.com E-mail Address</p>
	<p>CORNER COORDINATES NAD 27, SPCS NM EAST A - X: 812296.71' / Y: 394085.49' B - X: 812256.66' / Y: 399369.17' C - X: 812226.75' / Y: 402004.91' D - X: 812200.31' / Y: 404651.32' E - X: 813521.47' / Y: 404665.74' F - X: 813574.74' / Y: 399381.57' G - X: 813617.96' / Y: 394097.18'</p>	
	<p>SURFACE HOLE LOCATION 260' FNL 1760' FWL, SECTION 25 NAD 83, SPCS NM EAST X: 853828.84' / Y: 404454.41' LAT: 32.10790286N / LON: 103.32409706W NAD 27, SPCS NM EAST X: 812641.57' / Y: 404396.19' LAT: 32.10777598N / LON: 103.32363490W</p>	
	<p>KICK OFF POINT / FIRST TAKE POINT 100' FNL 1960' FWL, SECTION 25 NAD 83, SPCS NM EAST X: 854027.39' / Y: 404616.53' LAT: 32.10834334N / LON: 103.32345102W NAD 27, SPCS NM EAST X: 812840.12' / Y: 404558.30' LAT: 32.10821646N / LON: 103.32298886W</p>	
	<p>LAST TAKE POINT 100' FSL 1960' FWL, SECTION 36 NAD 83, SPCS NM EAST X: 854122.34' / Y: 394249.08' LAT: 32.07984562N / LON: 103.32345795W NAD 27, SPCS NM EAST X: 812934.67' / Y: 394191.14' LAT: 32.07971860N / LON: 103.32299723W</p>	
<p>BOTTOM HOLE LOCATION 20' FSL 1960' FWL, SECTION 36 NAD 83, SPCS NM EAST X: 854122.90' / Y: 394169.08' LAT: 32.07982572N / LON: 103.32345855W NAD 27, SPCS NM EAST X: 812935.22' / Y: 394111.14' LAT: 32.07949870N / LON: 103.32299785W</p>		<p>18 SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</p> <p>JANUARY 17, 2020 Date of Survey</p> <p>Signature and Seal of Professional Surveyor: </p> <p>Certificate Number LLOYD P. SHORT 21653</p>

Distances/areas relative to NAD 83 Combined Scale Factor: 0.99987673 Convergence: 00°32'19.77000"

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	CAZA OPERATING LLC
WELL NAME & NO.:	Sioux 25-36 State Fed Com 16H
LOCATION:	SECTION 25, T25S, R35E, NMPM
COUNTY:	LEA

COA

H2S	<input type="radio"/> Yes	<input checked="" type="radio"/> No	
Potash	<input checked="" type="radio"/> None	<input type="radio"/> Secretary	<input type="radio"/> R-111-P
Cave/Karst Potential	<input checked="" type="radio"/> Low	<input type="radio"/> Medium	<input type="radio"/> High
Cave/Karst Potential	<input type="radio"/> Critical		
Variance	<input type="radio"/> None	<input checked="" type="radio"/> Flex Hose	<input type="radio"/> Other
Wellhead	<input type="radio"/> Conventional	<input type="radio"/> Multibowl	<input checked="" type="radio"/> Both
Other	<input type="checkbox"/> 4 String Area	<input checked="" type="checkbox"/> Capitan Reef	<input type="checkbox"/> WIPP
Other	<input type="checkbox"/> Fluid Filled	<input type="checkbox"/> Cement Squeeze	<input type="checkbox"/> Pilot Hole
Special Requirements	<input type="checkbox"/> Water Disposal	<input checked="" type="checkbox"/> COM	<input type="checkbox"/> Unit

A. HYDROGEN SULFIDE

Hydrogen Sulfide (H2S) monitors shall be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

1. The **20** inch conductor casing shall be set at approximately 120 feet and cemented to the surface.
2. The **13-3/8** inch surface casing shall be set at approximately 1100 feet (a minimum of 25 feet (Lea County) into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8**

- hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
3. The minimum required fill of cement behind the **9-5/8** inch intermediate casing is:
- Cement to surface. If cement does not circulate see B.1.a, c-d above.
 - ❖ In Capitan Reef Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.
 - ❖ **Special Capitan Reef requirements.** If lost circulation (50% or greater) occurs below the Base of the Salt, the operator shall do the following:
 - Switch to fresh water mud to protect the Capitan Reef and use fresh water mud until setting the intermediate casing. The appropriate BLM office is to be notified for a PET to witness the switch to fresh water.
 - Daily drilling reports from the Base of the Salt to the setting of the intermediate casing are to be submitted to the BLM CFO engineering staff via e-mail by 0800 hours each morning. Any lost circulation encountered is to be recorded on these drilling reports. The daily drilling report should show mud volume per shift/tour. Failure to submit these reports will result in an Incidence of Non-Compliance being issued for failure to comply with the Conditions of Approval. If not already planned, the operator shall run a caliper survey for the intermediate well bore and submit to the appropriate BLM office.
4. The minimum required fill of cement behind the **5-1/2** inch production casing is:
- Cement should tie-back at least **50 feet** on top of Capitan Reef top. If cement does not circulate see B.1.a, c-d above.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface

casing shoe shall be **10,000 (10M) psi. Variance is approved to use a 5000 (5M) Annular which shall be tested to 5000 (5M) psi.**

- a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
- b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
- c. Manufacturer representative shall install the test plug for the initial BOP test.
- d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Carlsbad Field Office, 620 E Greene St. Carlsbad, New Mexico 88220, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,

(575) 361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)
393-3612

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.

2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's

requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.

3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).

- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Operator Certification Data Report

10/04/2021

Operator Certification

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

NAME: STEVE MORRIS

Signed on: 12/09/2020

Title: Engineer

Street Address: 14102 WCR 173

City: ODESSA

State: TX

Zip: 79766

Phone: (985)415-9729

Email address: steve.morris@morcorengineering.com

Field Representative

Representative Name: STEVE MORRIS

Street Address: 200 N. LORRAINE ST 1550

City: MIDLAND

State: TX

Zip: 79701

Phone: (985)415-9729

Email address: steve.morris@morcorengineering.com



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Application Data Report

10/04/2021

APD ID: 10400066298

Submission Date: 01/20/2021

Highlighted data
reflects the most
recent changes

Operator Name: CAZA OPERATING LLC

Well Name: SIOUX 25-36 STATE FED COM

Well Number: 16H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - General

APD ID: 10400066298

Tie to previous NOS? Y

Submission Date: 01/20/2021

BLM Office: Carlsbad

User: STEVE MORRIS

Title: Engineer

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM114998

Lease Acres:

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? Y

Permitting Agent? YES

APD Operator: CAZA OPERATING LLC

Operator letter of designation:

Operator Info

Operator Organization Name: CAZA OPERATING LLC

Operator Address: 200 N. Loraine Street, Suite 1550

Zip: 79701

Operator PO Box:

Operator City: Midland

State: TX

Operator Phone: (432)682-7424

Operator Internet Address:

Section 2 - Well Information

Well in Master Development Plan? NO

Master Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: SIOUX 25-36 STATE FED COM

Well Number: 16H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: WC-025 G-09
S253536DPool Name: WC-025 G-09
S253536D;UPR WOLFCAMP

Is the proposed well in an area containing other mineral resources? USEABLE WATER,NATURAL GAS,OIL

Operator Name: CAZA OPERATING LLC**Well Name:** SIOUX 25-36 STATE FED COM**Well Number:** 16H**Is the proposed well in an area containing other mineral resources?** USEABLE WATER,NATURAL GAS,OIL**Is the proposed well in a Helium production area?** N**Use Existing Well Pad?** Y**New surface disturbance?** N**Type of Well Pad:** MULTIPLE WELL**Multiple Well Pad Name:** Sioux**Number:** 2H

25-36 State Fed Com

Well Class: HORIZONTAL**Number of Legs:** 1**Well Work Type:** Drill**Well Type:** OIL WELL**Describe Well Type:****Well sub-Type:** DELINEATION**Describe sub-type:****Distance to town:** 7 Miles**Distance to nearest well:** 90 FT**Distance to lease line:** 260 FT**Reservoir well spacing assigned acres Measurement:** 320 Acres**Well plat:** Sioux_25_36_State_Fed_Com_16H___C_102_signed_20201214080521.pdf**Well work start Date:** 07/31/2021**Duration:** 35 DAYS**Section 3 - Well Location Table****Survey Type:** RECTANGULAR**Describe Survey Type:****Datum:** NAD83**Vertical Datum:** NAVD88**Survey number:** R4012-004_H**Reference Datum:** GROUND LEVEL

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this lease?
SHL Leg #1	260	FNL	1760	FWL	25S	35E	25	Aliquot NENW	32.1079028	-103.324097	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 114998	3081	0	0	Y
KOP Leg #1	100	FNL	1960	FWL	25S	35E	36	Aliquot NENW	32.1083433	-103.323451	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 114998	-8772	11864	11853	Y
PPP Leg #1-1	100	FNL	1960	FWL	25S	35E	36	Aliquot NENW	32.1083433	-103.323451	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 114998	-9345	12756	12426	Y

Operator Name: CAZA OPERATING LLC**Well Name:** SIOUX 25-36 STATE FED COM**Well Number:** 16H

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this lease?
PPP Leg #1-2	0	FNL	1960	FWL	25S	35E	25	Aliquot NENW 4	32.094084	- 103.323454	LEA	NEW MEXICO	NEW MEXICO	S	STATE	- 9411	17459	12492	Y
EXIT Leg #1	100	FSL	1960	FWL	25S	35E	25	Aliquot SESE	32.0798456	- 103.3234579	LEA	NEW MEXICO	NEW MEXICO	S	STATE	- 9485	22640	12566	Y
BHL Leg #1	20	FSL	1960	FWL	25S	35E	25	Aliquot SESE	32.0796257	- 103.3234585	LEA	NEW MEXICO	NEW MEXICO	S	STATE	- 9485	22720	12566	Y



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

10/04/2021

APD ID: 10400066298

Submission Date: 01/20/2021

Highlighted data
reflects the most
recent changes

Operator Name: CAZA OPERATING LLC

Well Name: SIOUX 25-36 STATE FED COM

Well Number: 16H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
1233864	---	3081	0	0	ALLUVIUM	NONE	N
1233865	RUSTLER	2346	735	735	DOLOMITE, LIMESTONE, SILTSTONE	USEABLE WATER	N
1233866	TOP SALT	1956	1125	1125	SALT	NONE	N
1233867	BASE OF SALT	658	2423	2423	SALT	NONE	N
1233868	TANSILL	33	3048	3049	ANHYDRITE, DOLOMITE	NONE	N
1233869	YATES	-109	3190	3191	ANHYDRITE, DOLOMITE	NONE	N
1233870	SEVEN RIVERS	-383	3464	3467	ANHYDRITE, DOLOMITE	NONE	N
1233871	QUEEN	-602	3683	3688	ANHYDRITE, DOLOMITE	NONE	N
1233872	GRAYBURG	-935	4016	4021	ANHYDRITE, DOLOMITE	NONE	N
1233873	SAN ANDRES	-1445	4526	4532	ANHYDRITE, DOLOMITE	NONE	N
1233874	DELAWARE	-1844	4925	4932	CONGLOMERATE, LIMESTONE, SANDSTONE	NONE	N
1233875	CHERRY CANYON	-2564	5645	5654	CONGLOMERATE, LIMESTONE, SANDSTONE	NONE	N
1233876	BRUSHY CANYON	-4224	7305	7316	CONGLOMERATE, LIMESTONE, SANDSTONE	NATURAL GAS, OIL	N
1233877	BONE SPRING	-5479	8560	8571	CONGLOMERATE, LIMESTONE, SANDSTONE	NONE	N
1233878	BONE SPRING 1ST	-6624	9705	9716	CONGLOMERATE, LIMESTONE, SANDSTONE	NATURAL GAS, OIL	N
1233879	BONE SPRING 2ND	-7124	10205	10216	CONGLOMERATE, LIMESTONE, SANDSTONE	NATURAL GAS, OIL	N
1233880	BONE SPRING 3RD	-8511	11592	11603	CONGLOMERATE, LIMESTONE, SANDSTONE	NATURAL GAS, OIL	N
1233881	WOLFCAMP	-8806	11887	11898	SANDSTONE, SHALE	NATURAL GAS, OIL	Y

Operator Name: CAZA OPERATING LLC**Well Name:** SIOUX 25-36 STATE FED COM**Well Number:** 16H

Section 2 - Blowout Prevention

Pressure Rating (PSI): 10M**Rating Depth:** 15000**Equipment:** Rotating head with a rating of 500psi will be used. A remote kill line and gas buster will be used.**Requesting Variance?** YES

Variance request: Variance is requested for the use of a coflex hose for the choke line to from the BOP to the choke manifold. A variance is requested to use 1502(15,000psi working pressure) hammer unions downstream of the Choke Manifold used to connect the mud/gas separator and panic line. See choke manifold diagram. Variance is requested to use a 5M Annular. Well Control Plan is attached.

Testing Procedure: Minimum Working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the 13-3/8 inch casing shoe shall be 5000 (5M) psi. 5M system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips the minimum wait time before cut-off is eight hours after bumping the pug. BOP/BOPE testing can begin after cut-off or once cement reaches 500PSI compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified). The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (18 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater prior to initiating the test (see casing segment as lead cement may be critical item). a. The results of the test shall be reported to the appropriate BLM office. b. All Tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office. c. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug.

Choke Diagram Attachment:

Sioux_25_36_State_Fed_Com_16H___10M_Choke_Schematic_20201209091256.pdf

Sioux_25_36_State_Fed_Com_16H___Coflex_Hyd_Test_Cert_20201209091256.pdf

Sioux_25_36_State_Fed_Com_16H___Coflex_Hose_Test_Chart_20201209091257.pdf

BOP Diagram Attachment:

Sioux_25_36_State_Fed_Com_16H___10M_BOP_Schematic_20201209091308.pdf

Sioux_25_36_State_Fed_Com_16H___Multi_Bowl_Wellhead_20201209091308.pdf

Sioux_25_36_State_Fed_Com_16H___Well_Control_20201209091310.pdf

Operator Name: CAZA OPERATING LLC**Well Name:** SIOUX 25-36 STATE FED COM**Well Number:** 16H**Section 3 - Casing**

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	CONDUCTOR	26	20.0	NEW	API	N	0	120	0	120	3081	2961	120	H-40	94	ST&C						
2	SURFACE	17.5	13.375	NEW	API	N	0	1100	0	1100	3081	1981	1100	J-55	61	ST&C	3.03	1	DRY	8.87	DRY	8.87
3	INTERMEDIATE	12.25	9.625	NEW	API	N	0	7200	0	7211	3081	-4130	7200	HCL-80	40	BUTT	1.13	1.07	DRY	2.11	DRY	2.11
4	INTERMEDIATE	12.25	9.625	NEW	API	N	7200	10300	7211	10311	-4130	-7230	3100	HCL-80	47	BUTT	1.33	1.27	DRY	7.43	DRY	7.43
5	PRODUCTION	8.5	6.0	NEW	API	N	0	22721	0	12566	3081	-9485	22721	P-110	24.5	BUTT	1.4	1.58	DRY	2.61	DRY	2.61

Casing Attachments**Casing ID:** 1 **String Type:** CONDUCTOR**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**

Operator Name: CAZA OPERATING LLC**Well Name:** SIOUX 25-36 STATE FED COM**Well Number:** 16H**Casing Attachments**

Casing ID: 2 **String Type:** SURFACE**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**SIOUX_25_36_STATE_FED_COM_16H___Casing_and_Cement_Design_20201214071113.pdf

Casing ID: 3 **String Type:** INTERMEDIATE**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**SIOUX_25_36_STATE_FED_COM_16H___Casing_and_Cement_Design_20201214071230.pdf

Casing ID: 4 **String Type:** INTERMEDIATE**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**SIOUX_25_36_STATE_FED_COM_16H___Casing_and_Cement_Design_20201214071332.pdf

Operator Name: CAZA OPERATING LLC

Well Name: SIOUX 25-36 STATE FED COM

Well Number: 16H

Casing Attachments

Casing ID: 5 String Type: PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

SIOUX_25_36_STATE_FED_COM_16H___Casing_and_Cement_Design_20201214071429.pdf

Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
CONDUCTOR	Lead		0	120	105	1.33	14.8	135	5	Class C	CaCl2

SURFACE	Lead		0	800	576	1.93	13.5	1111	100	Class C	4% bwoc Bentonite II + 2% bwoc Calcium Chloride + 0.25 lbs/sack Cello Flake + 0.005% bwoc Static Free + 0.005 gps FP- 6L
SURFACE	Tail		800	1100	309	1.35	14.8	417	100	Class C	CaCl2
INTERMEDIATE	Lead	4900	0	4800	1380	2.13	12.6	2939	100	Class C	(35:65) + Poz (Fly Ash) + 4% bwoc Bentonite II + 5% bwoc MPA-5 + 0.25% bwoc FL-52 + 5 lbs/sack LCM- 1 + 0.125 lbs/sack Cello Flake + 0.005 lbs/sack Static Free + 0.005 gps FP-6L + 1.2% bwoc Sodium Metasilicate + 5% bwow Sodium Chloride
INTERMEDIATE	Tail		4800	4900	150	1.35	14.8	202	100	Class C	CaCl2

Operator Name: CAZA OPERATING LLC

Well Name: SIOUX 25-36 STATE FED COM

Well Number: 16H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
INTERMEDIATE	Lead	4900	4900	7200	700	2.13	12.6	1491	100	Class C	(35:65) + Poz (Fly Ash) + 4% bwoc Bentonite II + 5% bwoc MPA-5 + 0.25% bwoc FL-52 + 5 lbs/sack LCM- 1 + 0.125 lbs/sack Cello Flake + 0.005 lbs/sack Static Free + 0.005 gps FP-6L + 1.2% bwoc Sodium Metasilicate + 5% bwow Sodium Chloride

INTERMEDIATE	Lead		7200	9800	770	2.13	12.6	1506	100	Class C	(35:65) + Poz (Fly Ash) + 4% bwoc Bentonite II + 5% bwoc MPA-5 + 0.25% bwoc FL-52 + 5 lbs/sack LCM- 1 + 0.125 lbs/sack Cello Flake + 0.005 lbs/sack Static Free + 0.005 gps FP-6L + 1.2% bwoc Sodium Metasilicate + 5% bwow Sodium Chloride
INTERMEDIATE	Tail		9800	10311	260	1.18	15.6	306	100	Class H	CaCl2
PRODUCTION	Lead		0	12000	2100	2.38	11.5	4998	100	Class H	CaCl2
PRODUCTION	Tail		12000	22721	2860	1.62	13.5	4633	100	Class H	(50:50) + Poz (Fly Ash) + 10% bwoc Bentonite II + 5% bwow Sodium Chloride + 5 lbs/sack LCM-1 + 0.005 lbs/sack Static Free + 0.005 gps FP-6L

Operator Name: CAZA OPERATING LLC**Well Name:** SIOUX 25-36 STATE FED COM**Well Number:** 16H**Section 5 - Circulating Medium****Mud System Type:** Closed**Will an air or gas system be Used?** NO**Description of the equipment for the circulating system in accordance with Onshore Order #2:****Diagram of the equipment for the circulating system in accordance with Onshore Order #2:**

Describe what will be on location to control well or mitigate other conditions: Sufficient mud will be on location to control any abnormal conditions encountered. Such as but not limited to a kick, lost circulation and hole sloughing.

Describe the mud monitoring system utilized: A Pason PVT system will be rigged up prior to spudding the well. A volume monitoring system that measures, calculates, and displays readings from the mud system on the rig to alert the rig crew of impending gas kicks and lost circulation issues. Components a) PVT Pit Bull monitor: Acts as the heart of the system, containing all the controls, switches, and alarms. Typically, it is mounted near the driller's console. b) Junction box: Provides a safe, convenient place for making the wiring connections. c) Mud probes: Measure the volume of drilling fluid in each individual tank. d) Flow sensor: Measures the relative amount of mud flowing in the return line.

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	1100	SPUD MUD	8.4	8.9	62	0.1	9.5	2	0	0	
1100	1031 1	SALT SATURATED	9.2	10	75	0.1	9.5	2	150000	0	
1031 1	2272 1	OIL-BASED MUD	10.5	12.5	82	0.4	9.5	6	135000	18	

Operator Name: CAZA OPERATING LLC**Well Name:** SIOUX 25-36 STATE FED COM**Well Number:** 16H

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

none

List of open and cased hole logs run in the well:

GAMMA RAY LOG,DIRECTIONAL SURVEY,MEASUREMENT WHILE DRILLING,MUD LOG/GEOLOGICAL LITHOLOGY LOG,

Coring operation description for the well:

none

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 8160**Anticipated Surface Pressure:** 5395**Anticipated Bottom Hole Temperature(F):** 171**Anticipated abnormal pressures, temperatures, or potential geologic hazards?** NO**Describe:****Contingency Plans geohazards description:****Contingency Plans geohazards attachment:****Hydrogen Sulfide drilling operations plan required?** YES**Hydrogen sulfide drilling operations plan:**

Sioux_25_36_State_Fed_Com_16H___H2S_Plan_20201209091641.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

201214_Sioux_25_36_State_Fed_Com_16H___Plot_20201214071456.pdf

201214_Sioux_25_36_State_Fed_Com_16H___Plan_20201214071456.pdf

Other proposed operations facets description:**Other proposed operations facets attachment:**


Sioux_25_36_State_Fed_Com_16H___Closed_Loop_Diagram_Design_Plan_20201209091720.pdf


Sioux_25_36_State_Fed_Com_16H___Closed_Loop_Design_Operating_and_Closure_Plan_20201209091720.pdf


Sioux_25_36_State_Fed_Com_16H___Gas_Capture_Plan_20201209091721.pdf

Other Variance attachment:

Sioux_25_36_State_Fed_Com_16H___Multi_Bowl_Wellhead_20201209091708.pdf

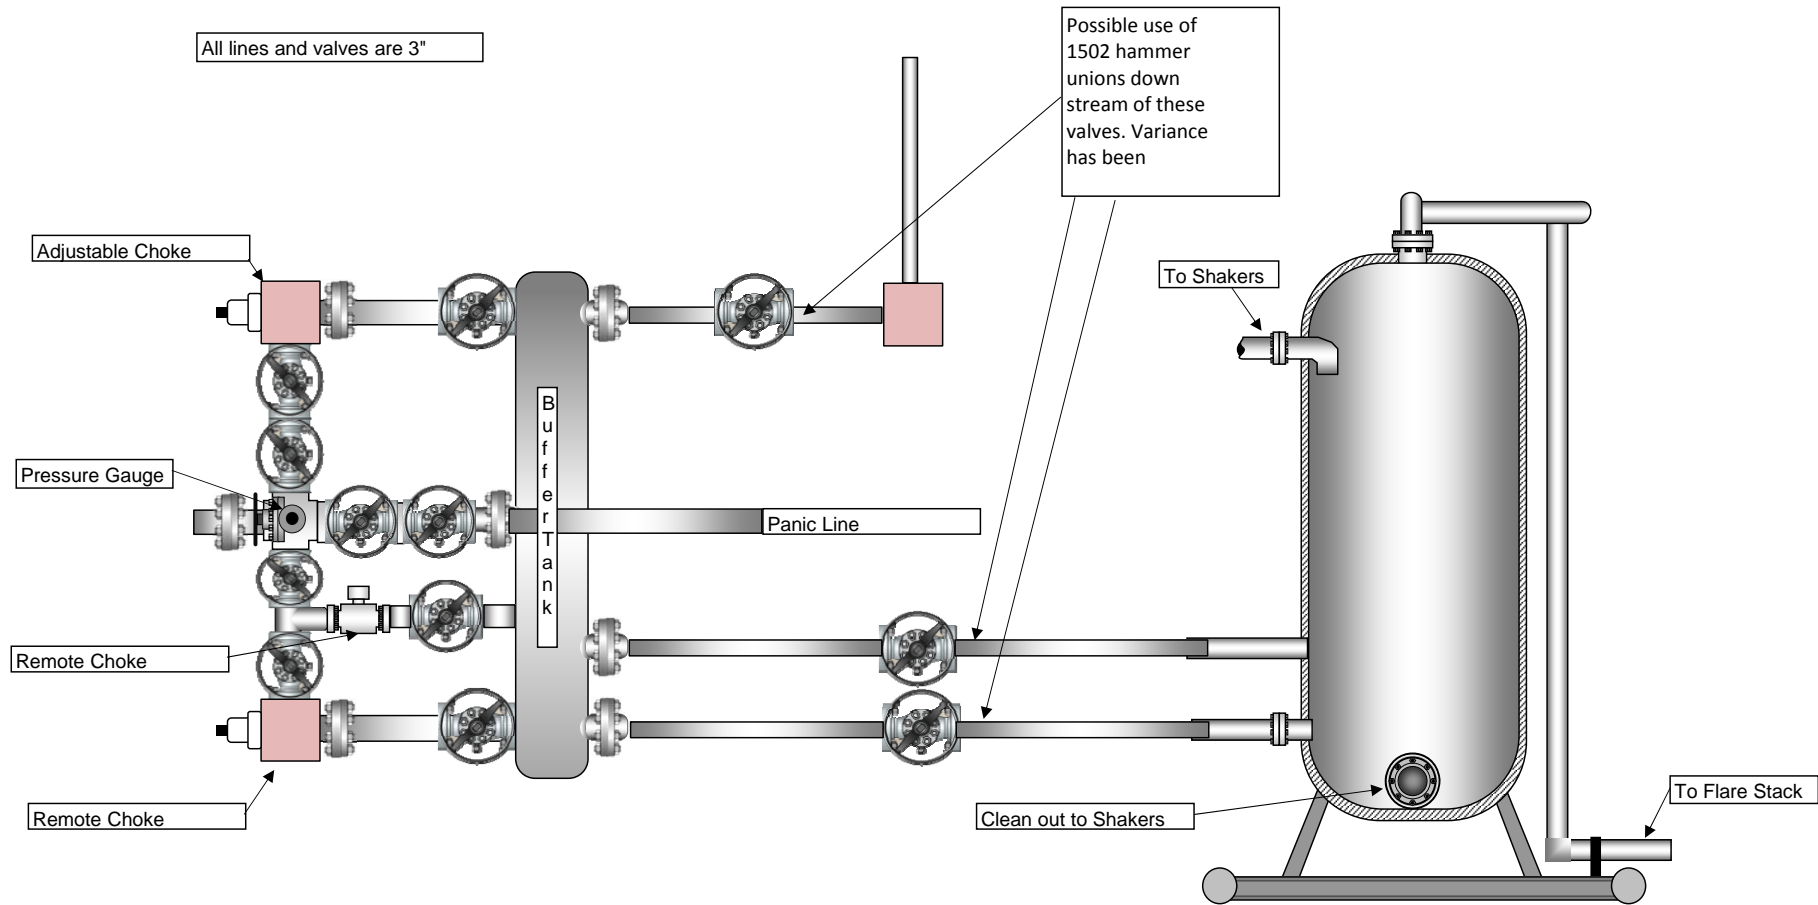

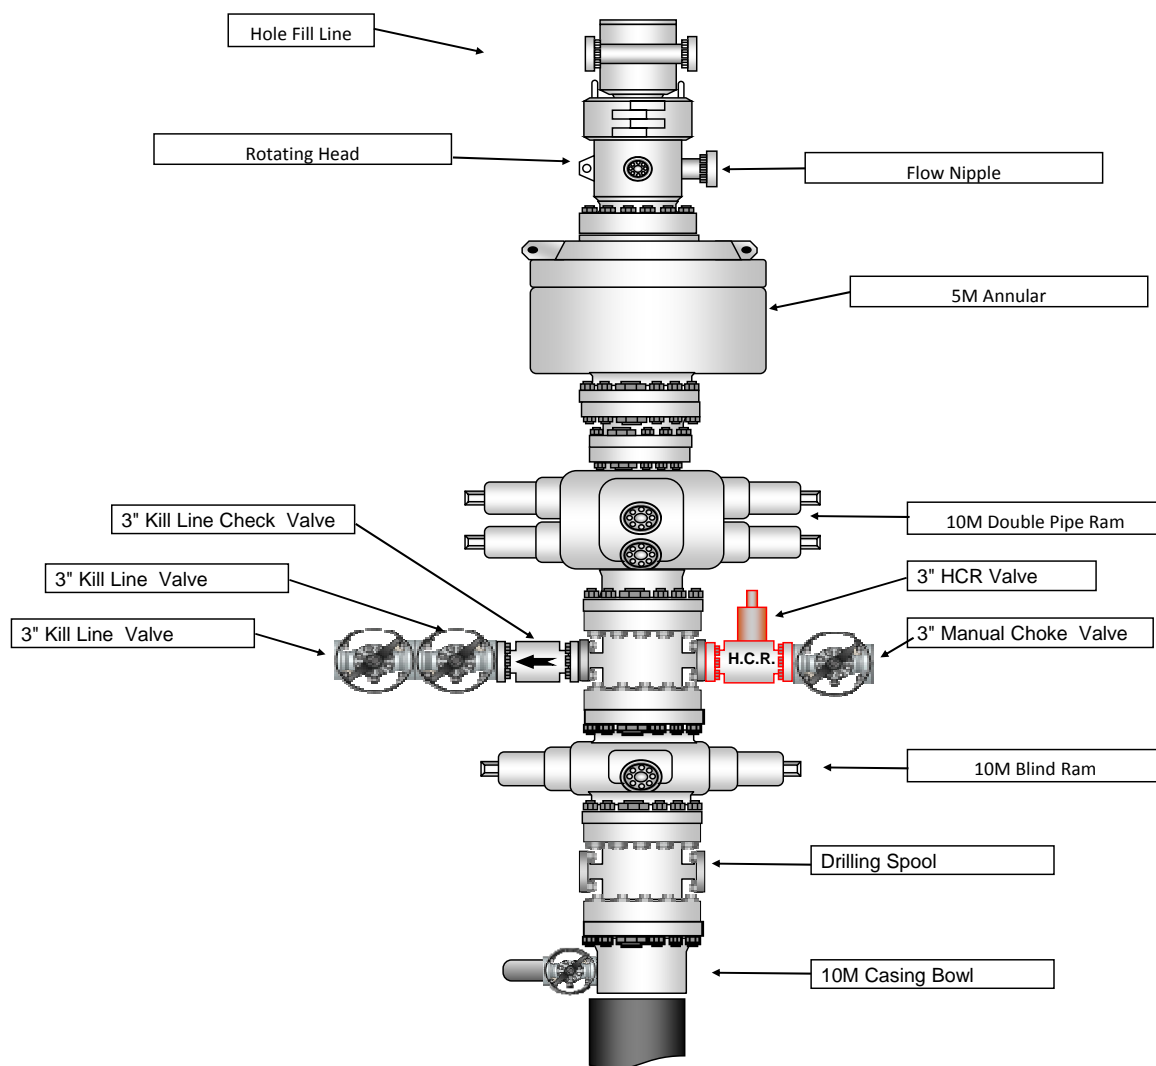

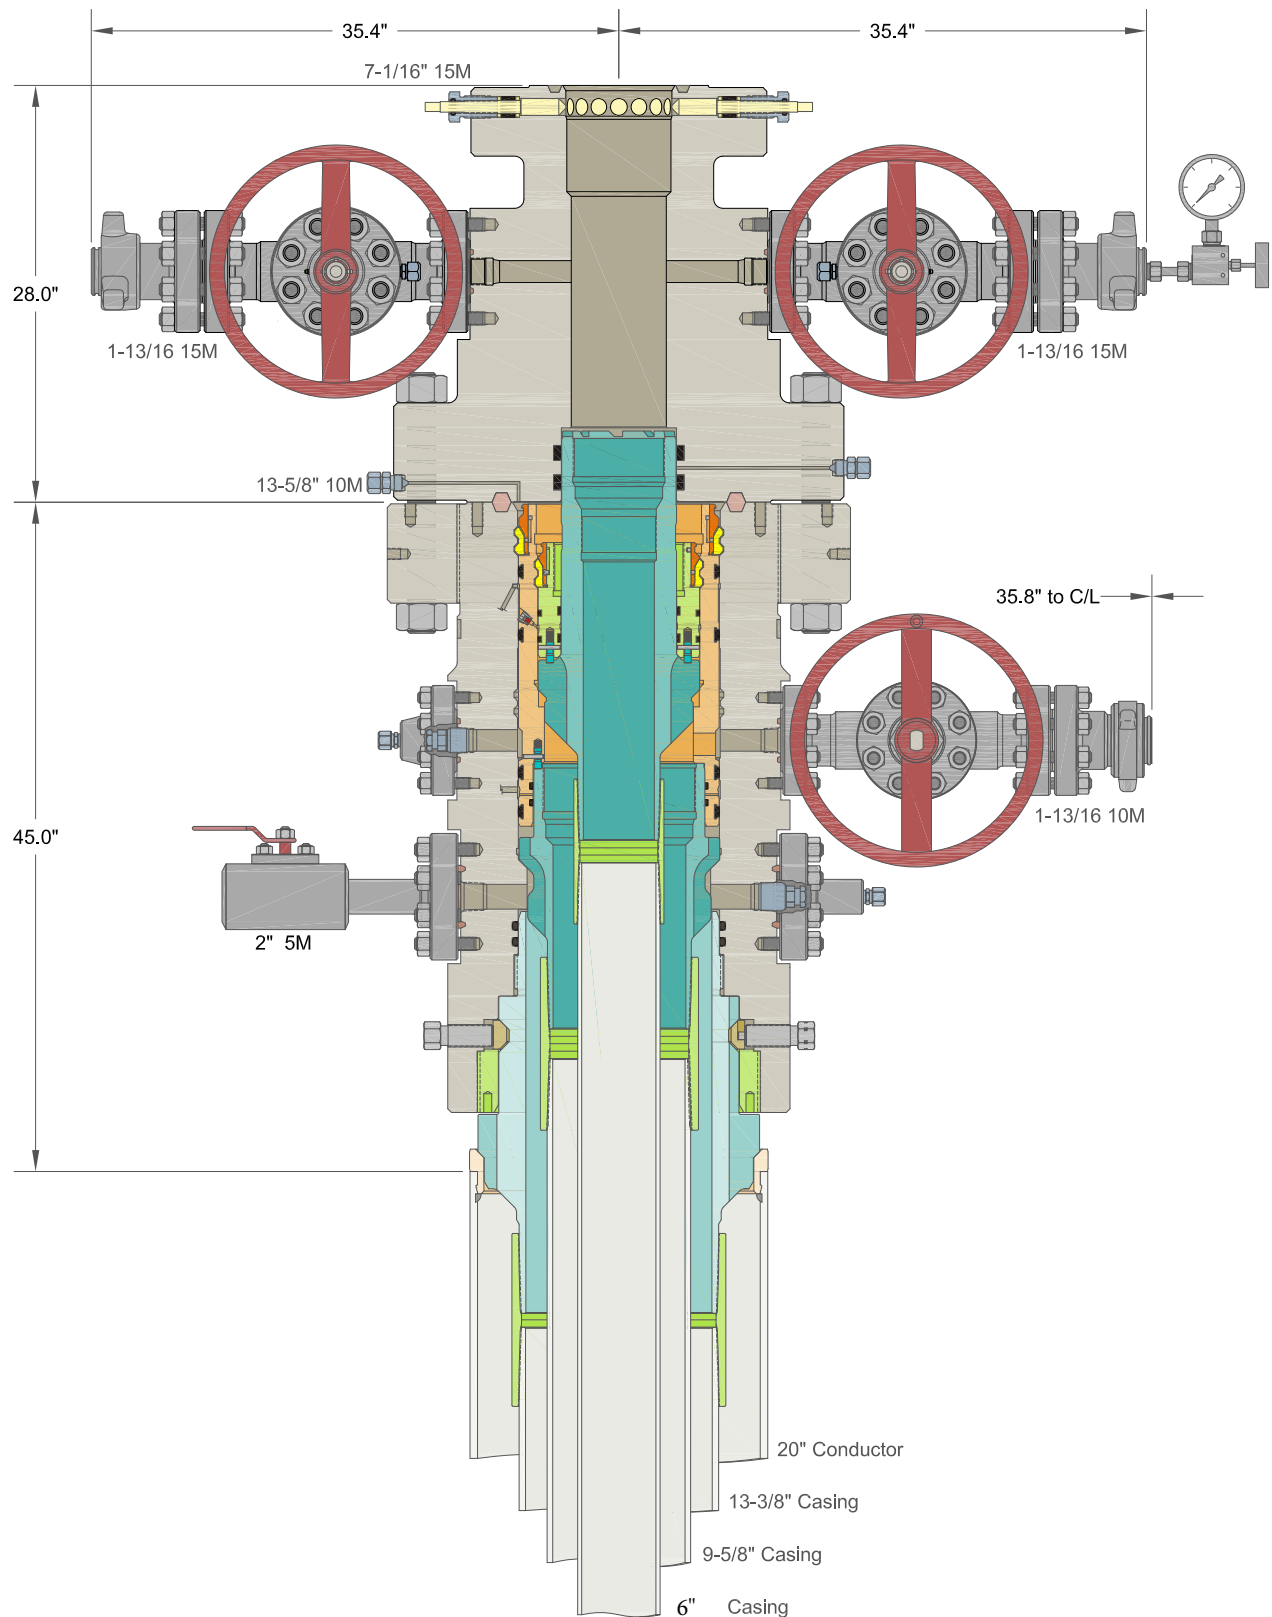

INFORMATION CONTAINED HEREIN IS THE PROPERTY OF CACTUS WELLHEAD, LLC. REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PERMISSIBLE ONLY AS PROVIDED BY CONTRACT OR AS EXPRESSLY AUTHORIZED BY CACTUS WELLHEAD, LLC.

ALL DIMENSIONS APPROXIMATE

CACTUS WELLHEAD LLC

CAZA PETROLEUM
PERMIAN BASIN

13-3/8" x 9-5/8" x 6" MBU-3T-CFL-R-DBLO Wellhead System
With 13-5/8" 10M x 7-1/16" 15M CTH-DBLHPS Tubing Head
And 13-3/8", 9-5/8" & 5-1/2" Mandrel Casing Hangers

DRAWN

DLE

25SEP19

APPRV

DRAWING NO.

ODE0003135

Well Control Plan For 10M MASP Section of Wellbore**1. Component and Preventer Compatibility Table**

The table below covers drilling and casing of the 10M MASP portion of the well and outlines the tubulars and the compatible preventers in use. Combined with the mud program, the below documents that two barriers to flow can be maintained at all times, independent of the rating of the annular preventer.

Component	OD	Preventer	RWP
Drill Pipe	5"	Upper 5"-7" VBR Lower 5"-7" VBR	10M
HWDP	5"		
Drill Collars and MWD	6"-6.75"		
Mud Motor	6.75"-7.25"		
Production Casing	6"		
ALL		Annular	5M
Open-hole	0-13.625"	Blind Rams	10M

VBR = Variable Bore Ram with compatible range listed in chart.

2. Well Control and Shut-In Procedures

Well control procedures are specific to the rig equipment and the operation at the time the kick occurs. Below are minimum tasks prescribed to assure a proper shut-in while drilling, tripping, running casing, pipe out of the hole (open hole), and moving the BHA through the BOPs. The maximum pressure at which well control is transferred from the annular to another compatible ram is 2500 psi.

Drilling:

1. Sound the alarm (alert rig crew)
2. Space out the drill string
3. Shut down pumps and stop the rotary
4. Shut-in the well with the annular with HCR and choke in closed position
5. Confirm the well is shut-in
6. Notify contractor and company representatives
7. Read and record the following data
 - Time of shut-in
 - SIDPP and SICP
 - Pit gain
8. If pressure has increased to or is anticipated to increase to 2500 psi, confirm spacing and close the upper pipe rams.
9. Prepare for well kill operation.

Tripping:

1. Sound alarm (alert rig crew)
2. Stab full opening safety valve and close the valve
3. Space out the drill string
4. Shut-in the well with the annular with HCR and choke in closed position
5. Confirm shut-in
6. Notify contractor and company representatives
7. Read and record the following data:

Well Control Plan For 10M MASP Section of Wellbore

- Time of shut-in
 - SIDPP and SICP
 - Pit gain
8. If pressure has increased to or is anticipated to increase to 2500 psi, confirm spacing and close the upper pipe rams.
 9. Prepare for well kill operation.

Running Casing

1. Sound alarm (alert rig crew)
2. Stab crossover and valve and close the valve
3. Shut-in the well with annular with HCR and choke in closed position
4. Confirm shut-in
5. Notify contractor and company representatives
6. Read and record the following data
 - Time of shut-in
 - SIDPP and SICP
 - Pit gain
7. If pressure has increased to or is anticipated to increase to 2500 psi, confirm spacing and close the upper pipe rams.
8. Prepare for well kill operation

No Pipe in Hole (Open Hole)

1. At any point when pipe or BHA are not in BOP stack, well will be shut in with blind rams, HCR will be open and choke will be closed. If pressure increase is observed:
2. Sound alarm (alert crew)
3. Confirm shut-in
4. Notify contractor and company representatives
5. Read and record the following data
 - Time of shut-in
 - Time of pressure increase
 - SICP
6. Prepare for well kill operation

Pulling BHA through BOP Stack

1. Prior to pulling last joint/stand of drillpipe through the stack, perform a flow check. If well is flowing:
 - a. Sound alarm (alert crew)
 - b. Stab full opening safety valve and close the valve
 - c. Space out drill string with tooljoint just beneath the upper pipe ram.
 - d. Shut-in the well with upper pipe ram with HCR and choke in closed position
 - e. Confirm shut-in
 - f. Notify contractor and company representatives
 - g. Read and record the following data
 - Time of shut-in
 - SIDPP and SICP
 - Pit gain
 - h. Prepare for well kill operation.

Well Control Plan For 10M MASP Section of Wellbore

2. With BHA in the stack:
 - a. If possible to pick up high enough, pull BHA clear of the stack
 - i. Follow "Open Hole" procedure above
 - b. If impossible to pick up high enough to pull BHA clear of the stack:
 - i. Stab crossover, make up one joint/stand of drillpipe, and full opening safety valve and close
 - ii. Space out drill string with tooljoint just beneath the upper pipe ram.
 - iii. Shut-in the well with upper pipe ram with HCR and choke in closed position
 - iv. Confirm shut-in
 - v. Notify contractor and company representatives
 - vi. Read and record the following:
 - Time of shut-in
 - SIDPP and SICP
 - Pit gain
 - vii. Prepare for well kill operation.

3. Well Control Drills

Well control drills are specific to the rig equipment, personnel and operation at the time a kick occurs. Each crew will execute one drill weekly relevant to ongoing operations, but will make a reasonable attempt to vary the type of drills. The drills will be recorded in the daily drilling log. Below are minimum tasks for respective well control drills.

Drilling/Pit:

Action	Responsible Party
Initiate Drill <ul style="list-style-type: none"> • Lift Flow Sensor or Pit Float to indicate a kick • Immediately record start time 	Company Representative / Rig Manager
Recognition <ul style="list-style-type: none"> • Driller and/or Crew recognizes indicator • Driller stop drilling, pick up off bottom and spaces out drill string, stop pumps and rotary • Conduct flow check 	Driller
Initiate Action <ul style="list-style-type: none"> • Sound alarm, notify rig crew that the well is flowing 	Company Representative / Rig Manager
Reaction <ul style="list-style-type: none"> • Driller moves BOP remote and stands by • Crew is at their assigned stations • Time is stopped • Record time and drill type in the Drilling Report 	Driller / Crew

Well Control Plan For 10M MASP Section of WellboreTripping Pit Drills (either in the hole or out of the hole)

Action	Responsible Party
Initiate Drill <ul style="list-style-type: none"> • Lift Flow Sensor or Pit Float to indicate a kick • Immediately record start time 	Company Representative / Rig Manager
Recognition <ul style="list-style-type: none"> • Driller recognizes indicator • Suspends tripping operations • Conduct Flow Check 	Driller
Initiate Action <ul style="list-style-type: none"> • Sound alarm, notify rig crew that the well is flowing 	Company Representative / Rig Manager
Reaction <ul style="list-style-type: none"> • Position tool joint above rotary and set slips • Stab FOSV and close valve • Driller moves to BOP remote and stands by • Crew is at their assigned stations • Time is stopped • Record time and drill type in the Drilling Report 	Driller / Crew

Choke

Action	Responsible Party
<ul style="list-style-type: none"> • Have designated choke operator on station at the choke panel • Close annular preventer • Pressure annulus up 200-300 psi • Pump slowly to bump the float and obtain SIDPP • At choke operator instruction, slowly bring pumps online to slow pump rate while holding casing pressure constant at the SICP. • Allow time for the well to stabilize. Mark and record circulating drillpipe pressure. • Measure time lag on drillpipe gauge after choke adjustments. • Hold casing pressure constant as pumps are slowed down while choke is closed. • Record time and drill type in the Drilling Report 	Company Man / Rig Manager & Rig Crew

Operator	Caza Operating LLC
Well Name & No.	Sioux 25-36 State Fed Com 16H
County	Lea
Location (S/T/R/Alt)	
Lease Number	
ATS or EC #	

APD### or EC###

ral 6H Lea NM114998 Caza Operating LLC 13-22 10052019 LV

Colors:
Choose casings
Fill in, if applicable

Name	
Date	
Version	

Remarks	
---------	--

Type of Casing	Size of Hole (in)	Size of Casing (in)	Weight per Foot (lbs/ft)	Grade	Yield	Coupling #:	Top (ft)	Bottom (MD) (ft)	Setting Depth (TVD) (TVD of entire string) (ft)	Min Mud Weight (ppg)	Max Mud Weight (ppg)	ID	Drift ID	Cplg OD
Surface	17.500	13.375	61.00	j	55	stc	0	1100	1100	8.40	8.90	12.5150	12.3900	14.3750
Int 1	12.250	9.625	40.00	hcl	80	btc	0	7200	10300	9.20	10.00	8.8350	8.7500	10.6250
Int 1 Taper 1	12.250	9.625	47.00	hcl	80	btc	7200	10311	10300	9.20	10.00	8.6810	8.6250	10.6250
<Choose Casing>														
Prod 1	8.500	6.000	24.50	p	110	btc	0	22721	12566	10.50	12.50	5.2000	5.0750	6.8750
<Choose Casing>														
<Choose Casing>														

Cement														
Surface			Int 1			Prod 1			<Choose Casing>			<Choose Casing>		
TOC	0		TOC	0		TOC	0		TOC			TOC		
DV Depth			DV Depth	4900		DV Depth			DV Depth			DV Depth		
Sacks		Yield (ft3/sx)			Yield (ft3/sx)	Sacks		Yield (ft3/sx)	Sacks		Yield (ft3/sx)	Sacks		Yield (ft3/sx)
Lead	576	1.93	Lead	1470	2.13	Lead 1	2100	2.38	Lead 1			Lead 1		
Tail	309	1.35	Tail	260	1.18	Tail 1	2860	1.62	Tail 1			Tail 1		
DV Lead			DV Lead	1380	2.13	DV Lead			DV Lead			DV Lead		
DV Tail			DV Tail	150	1.35	DV Tail			DV Tail			DV Tail		
Cmt Added	1528.83	cuft	Cement Added	3437.9 / 3141.9	cuft	Cement Added	9631.20	cuft	Cement Added	#N/A	cuft	Cement Added	#N/A	cuft
Cmt Req.	764	cuft	Cement Req.	1694.7 / 1574	cuft	Cement Req.	4773	cuft	Cement Req.	0	cuft	Cement Req.	0	cuft
Excess	100.08%		Excess	102.9% / 99.6%		Excess	101.79%		Excess	#N/A		Excess	#N/A	

Clearances	in Hole	In Surface	In Int 1	In Int 1 Taper 1	In Prod 1		
Surface	Pass = 1.5625						
Int 1	Pass = 0.8125	Pass = 0.945					
Int 1 Taper 1	Pass = 0.8125	No Overlap	No Overlap				
Prod 1	Pass = 0.8125	Pass = 2.82	Pass = 0.98	Pass = 0.903	No Overlap		

Safety Factors	Joint/Body	Collapse	Burst	Alt Burst
Surface	8.87	3.03	0.58	1.00
Int 1	2.11	1.13	0.70	1.07
Int 1 Taper 1	7.43	1.33	0.84	1.27
Prod 1	2.61	1.40	1.58	2.38

BOP Requirements After the Shoe					
Surface		Int 1		Prod 1	
Max. Surf. Pressure	3085 psi	Max. Surf. Pressure	5395 psi	Max. Surf. Pressure	psi
BOP Required	5M System	BOP Required	10M System	BOP Required	System
<Choose Casing>					
Max. Surf. Pressure	psi				
BOP Required	System				

Operator	Caza Operating LLC	Colors: Choose casings Fill in, if applicable	Name		Remarks
Well Name & No.	Sioux 25-36 State Fed Com 16H		Date		
County	Lea		Version		
Location (S/T/R/Alt)					
Lease Number					
ATS or EC #		APD### or EC###			

Type of Casing	Size of Hole (in)	Size of Casing (in)	Weight per Foot (lbs/ft)	Grade	Yield	Coupling #:	Top (ft)	Bottom (MD) (ft)	Setting Depth (TVD) (TVD of entire string) (ft)	Min Mud Weight (ppg)	Max Mud Weight (ppg)	ID	Drift ID	Cplg OD
Surface	17.500	13.375	61.00	j	55	stc	0	1100	1100	8.40	8.90	12.5150	12.3900	14.3750
Int 1	12.250	9.625	40.00	hcl	80	btc	0	7200	10300	9.20	10.00	8.8350	8.7500	10.6250
Int 1 Taper 1	12.250	9.625	47.00	hcl	80	btc	7200	10311	10300	9.20	10.00	8.6810	8.6250	10.6250
<Choose Casing>														
Prod 1	8.500	6.000	24.50	p	110	btc	0	22721	12566	10.50	12.50	5.2000	5.0750	6.8750
<Choose Casing>														
<Choose Casing>														

Cement														
Surface			Int 1			Prod 1			<Choose Casing>			<Choose Casing>		
TOC	0		TOC	0		TOC	0		TOC			TOC		
DV Depth			DV Depth	4900		DV Depth			DV Depth			DV Depth		
Sacks		Yield (ft3/sx)			Yield (ft3/sx)	Sacks		Yield (ft3/sx)	Sacks		Yield (ft3/sx)	Sacks		Yield (ft3/sx)
Lead	576	1.93	Lead	1470	2.13	Lead 1	2100	2.38	Lead 1			Lead 1		
Tail	309	1.35	Tail	260	1.18	Tail 1	2860	1.62	Tail 1			Tail 1		
DV Lead			DV Lead	1380	2.13	DV Lead			DV Lead			DV Lead		
DV Tail			DV Tail	150	1.35	DV Tail			DV Tail			DV Tail		
Cmt Added	1528.83	cuft	Cement Added	3437.9 / 3141.9	cuft	Cement Added	9631.20	cuft	Cement Added	#N/A	cuft	Cement Added	#N/A	cuft
Cmt Req.	764	cuft	Cement Req.	1694.7 / 1574	cuft	Cement Req.	4773	cuft	Cement Req.	0	cuft	Cement Req.	0	cuft
Excess	100.08%		Excess	102.9% / 99.6%		Excess	101.79%		Excess	#N/A		Excess	#N/A	

Clearances	in Hole	In Surface	In Int 1	In Int 1 Taper 1	In Prod 1		
Surface	Pass = 1.5625						
Int 1	Pass = 0.8125	Pass = 0.945					
Int 1 Taper 1	Pass = 0.8125	No Overlap	No Overlap				
Prod 1	Pass = 0.8125	Pass = 2.82	Pass = 0.98	Pass = 0.903	No Overlap		

Safety Factors	Joint/Body	Collapse	Burst	Alt Burst
Surface	8.87	3.03	0.58	1.00
Int 1	2.11	1.13	0.70	1.07
Int 1 Taper 1	7.43	1.33	0.84	1.27
Prod 1	2.61	1.40	1.58	2.38

BOP Requirements After the Shoe				
Surface		Int 1		Prod 1
Max. Surf. Pressure	3085 psi	Max. Surf. Pressure	5395 psi	Max. Surf. Pressure psi
BOP Required	5M System	BOP Required	10M System	BOP Required System
<Choose Casing>				
Max. Surf. Pressure	psi			
BOP Required	System			

Operator	Caza Operating LLC	Colors: Choose casings Fill in, if applicable	Name		Remarks	
Well Name & No.	Sioux 25-36 State Fed Com 16H		Date			
County	Lea		Version			
Location (S/T/R/Alt)						
Lease Number						
ATS or EC #		APD### or EC###				

Type of Casing	Size of Hole (in)	Size of Casing (in)	Weight per Foot (lbs/ft)	Grade	Yield	Coupling #:	Top (ft)	Bottom (MD) (ft)	Setting Depth (TVD) (TVD of entire string) (ft)	Min Mud Weight (ppg)	Max Mud Weight (ppg)	ID	Drift ID	Cplg OD
Surface	17.500	13.375	61.00	j	55	stc	0	1100	1100	8.40	8.90	12.5150	12.3900	14.3750
Int 1	12.250	9.625	40.00	hcl	80	btc	0	7200	10300	9.20	10.00	8.8350	8.7500	10.6250
Int 1 Taper 1	12.250	9.625	47.00	hcl	80	btc	7200	10311	10300	9.20	10.00	8.6810	8.6250	10.6250
<Choose Casing>														
Prod 1	8.500	6.000	24.50	p	110	btc	0	22721	12566	10.50	12.50	5.2000	5.0750	6.8750
<Choose Casing>														
<Choose Casing>														

Cement														
Surface			Int 1			Prod 1			<Choose Casing>			<Choose Casing>		
TOC	0		TOC	0		TOC	0		TOC			TOC		
DV Depth			DV Depth	4900		DV Depth			DV Depth			DV Depth		
Sacks		Yield (ft3/sx)			Yield (ft3/sx)	Sacks		Yield (ft3/sx)	Sacks		Yield (ft3/sx)	Sacks		Yield (ft3/sx)
Lead	576	1.93	Lead	1470	2.13	Lead 1	2100	2.38	Lead 1			Lead 1		
Tail	309	1.35	Tail	260	1.18	Tail 1	2860	1.62	Tail 1			Tail 1		
DV Lead			DV Lead	1380	2.13	DV Lead			DV Lead			DV Lead		
DV Tail			DV Tail	150	1.35	DV Tail			DV Tail			DV Tail		
Cmt Added	1528.83	cuft	Cement Added	3437.9 / 3141.9	cuft	Cement Added	9631.20	cuft	Cement Added	#N/A	cuft	Cement Added	#N/A	cuft
Cmt Req.	764	cuft	Cement Req.	1694.7 / 1574	cuft	Cement Req.	4773	cuft	Cement Req.	0	cuft	Cement Req.	0	cuft
Excess	100.08%		Excess	102.9% / 99.6%		Excess	101.79%		Excess	#N/A		Excess	#N/A	

Clearances	in Hole	In Surface	In Int 1	In Int 1 Taper 1	In Prod 1		
Surface	Pass = 1.5625						
Int 1	Pass = 0.8125	Pass = 0.945					
Int 1 Taper 1	Pass = 0.8125	No Overlap	No Overlap				
Prod 1	Pass = 0.8125	Pass = 2.82	Pass = 0.98	Pass = 0.903	No Overlap		

Safety Factors	Joint/Body	Collapse	Burst	Alt Burst
Surface	8.87	3.03	0.58	1.00
Int 1	2.11	1.13	0.70	1.07
Int 1 Taper 1	7.43	1.33	0.84	1.27
Prod 1	2.61	1.40	1.58	2.38

BOP Requirements After the Shoe				
Surface		Int 1		Prod 1
Max. Surf. Pressure	3085 psi	Max. Surf. Pressure	5395 psi	Max. Surf. Pressure psi
BOP Required	5M System	BOP Required	10M System	BOP Required System
<Choose Casing>				
Max. Surf. Pressure	psi			
BOP Required	System			

Operator	Caza Operating LLC	Colors: Choose casings Fill in, if applicable	Name		Remarks
Well Name & No.	Sioux 25-36 State Fed Com 16H		Date		
County	Lea		Version		
Location (S/T/R/Alt)					
Lease Number					
ATS or EC #		APD### or EC###			

Type of Casing	Size of Hole (in)	Size of Casing (in)	Weight per Foot (lbs/ft)	Grade	Yield	Coupling #:	Top (ft)	Bottom (MD) (ft)	Setting Depth (TVD) (TVD of entire string) (ft)	Min Mud Weight (ppg)	Max Mud Weight (ppg)	ID	Drift ID	Cplg OD
Surface	17.500	13.375	61.00	j	55	stc	0	1100	1100	8.40	8.90	12.5150	12.3900	14.3750
Int 1	12.250	9.625	40.00	hcl	80	btc	0	7200	10300	9.20	10.00	8.8350	8.7500	10.6250
Int 1 Taper 1	12.250	9.625	47.00	hcl	80	btc	7200	10311	10300	9.20	10.00	8.6810	8.6250	10.6250
<Choose Casing>														
Prod 1	8.500	6.000	24.50	p	110	btc	0	22721	12566	10.50	12.50	5.2000	5.0750	6.8750
<Choose Casing>														
<Choose Casing>														

Cement														
Surface			Int 1			Prod 1			<Choose Casing>			<Choose Casing>		
TOC	0		TOC	0		TOC	0		TOC			TOC		
DV Depth			DV Depth	4900		DV Depth			DV Depth			DV Depth		
Sacks		Yield (ft3/sx)			Yield (ft3/sx)	Sacks		Yield (ft3/sx)	Sacks		Yield (ft3/sx)	Sacks		Yield (ft3/sx)
Lead	576	1.93	Lead	1470	2.13	Lead 1	2100	2.38	Lead 1			Lead 1		
Tail	309	1.35	Tail	260	1.18	Tail 1	2860	1.62	Tail 1			Tail 1		
DV Lead			DV Lead	1380	2.13	DV Lead			DV Lead			DV Lead		
DV Tail			DV Tail	150	1.35	DV Tail			DV Tail			DV Tail		
Cmt Added	1528.83	cuft	Cement Added	3437.9 / 3141.9	cuft	Cement Added	9631.20	cuft	Cement Added	#N/A	cuft	Cement Added	#N/A	cuft
Cmt Req.	764	cuft	Cement Req.	1694.7 / 1574	cuft	Cement Req.	4773	cuft	Cement Req.	0	cuft	Cement Req.	0	cuft
Excess	100.08%		Excess	102.9% / 99.6%		Excess	101.79%		Excess	#N/A		Excess	#N/A	

Clearances	in Hole	In Surface	In Int 1	In Int 1 Taper 1	In Prod 1		
Surface	Pass = 1.5625						
Int 1	Pass = 0.8125	Pass = 0.945					
Int 1 Taper 1	Pass = 0.8125	No Overlap	No Overlap				
Prod 1	Pass = 0.8125	Pass = 2.82	Pass = 0.98	Pass = 0.903	No Overlap		

Safety Factors	Joint/Body	Collapse	Burst	Alt Burst
Surface	8.87	3.03	0.58	1.00
Int 1	2.11	1.13	0.70	1.07
Int 1 Taper 1	7.43	1.33	0.84	1.27
Prod 1	2.61	1.40	1.58	2.38

BOP Requirements After the Shoe					
Surface		Int 1		Prod 1	
Max. Surf. Pressure	3085 psi	Max. Surf. Pressure	5395 psi	Max. Surf. Pressure	psi
BOP Required	5M System	BOP Required	10M System	BOP Required	System
<Choose Casing>					
Max. Surf. Pressure	psi				
BOP Required	System				

Caza Oil and Gas, Inc

H2S Drilling Operations Plan

Sioux 25-36 State Fed Com 9H

Lea County, New Mexico

Prepared by: Steve Morris

Date: 06/27/2018

Table of Contents

H2S Contingency Plan Section	3
Scope:.....	3
Objective:	3
Emergency Procedures Section	4
Emergency Procedures	4
Emergency Procedure Implementation.....	4
Simulated Blowout Control Drills.....	5
Ignition Procedures	8
Responsibility:	8
Instructions for Igniting the Well:	8
Training Program.....	9
Emergency Equipment Requirements	9
CHECK LISTS	12
Status Check List	12
Procedural Check List.....	13
Briefing Procedures	14
Pre-Spud Meeting	14
Evacuation Plan.....	15
General Plan.....	15
Emergency Assistance Telephone List	15
MAPS AND PLATS.....	16

H2S Contingency Plan Section

Scope:

This contingency plan provides an organized plan of action for alerting and protecting the public within an area of exposure prior to an intentional release, of following the accidental release of a potentially hazardous volume of hydrogen sulfide. The plan establishes guidelines for all personnel whose work activity may involve exposure to Hydrogen Sulfide Gas (H₂S).

Objective:

Prevent any and all accidents, and prevent the uncontrolled release of H₂S into the atmosphere.

Provide proper evacuation procedures to cope with emergencies.

Provide immediate and adequate medical attention should an injury occur.

Implementation: This plan, with all details, is to be fully implemented 1000' before drilling into the first sour zone.

Emergency Response Procedure: This section outlines the conditions and denotes steps to be taken in the event of an emergency.

Emergency Equipment and Procedure: This section outlines the safety and emergency equipment that will be required for the drilling of this well.

Training Provisions: This section outlines the training provisions that must be adhered to 1000' before drilling into the first sour zone.

Emergency Call Lists: Included are the telephone numbers of all persons that would need to be contacted, should an H₂S emergency occur.

Briefing: This section deals with the briefing of all persons involved with the drilling of this well.

Public Safety: Public safety personnel will be made aware of the drilling of this well.

Check Lists: Status check lists and procedural check lists have been included to ensure adherence to the plan.

General Information: A general information section has been included to supply support information.

Emergency Procedures Section

Emergency Procedures

- I. In the event of any evidence of H₂S level above 10 ppm, take the following steps immediately:**
 - A. Secure breathing apparatus.
 - B. Order non-essential personnel out of the danger zone.
 - C. Take steps to determine if the H₂S level can be corrected or suppressed, and if so, proceed with normal operations.
- II. If uncontrollable conditions occur, proceed with the following:**
 - A. Take steps to protect and/or remove any public downwind of the rig, including partial evacuation or isolation. Notify necessary public safety personnel and the New Mexico Oil & Gas of the situation.
 - B. Remove all personnel to the safe briefing area.
 - C. Notify public safety personnel for help with maintaining roadblocks and implementing evacuation.
 - D. Determine and proceed with the best possible plan to regain control of the well. Maintain tight security and safety measures.
- III. Responsibility:**
 - A. The company approved supervisor shall be responsible for the total implementation of the plan.
 - B. The company approved supervisor shall be in complete command during any emergency.
 - C. The company approved supervisor shall designate a backup supervisor in the event that he/she is not available.

Emergency Procedure Implementation

- I. Drilling or Tripping:**
 - A. All Personnel
 1. When alarm sounds, don escape unit and report to upwind safe briefing area.
 2. Check status of other personnel (buddy system).
 3. Secure breathing apparatus.
 4. Wait for orders from supervisor.
 - B. Drilling Foreman
 1. Report to the upwind safe briefing area.
 2. Don breathing apparatus and return to the point of release with the Tool pusher of Driller (buddy system).
 3. Determine the concentration of H₂S.
 4. Address the situation and take appropriate control measures.
 - C. Tool Pusher
 1. Report to the upwind safe briefing area.
 2. Don breathing apparatus and return to the point of release with the Drilling Foreman or the Driller (buddy system).

3. Determine the concentration.
4. Address the situation and take appropriate control measures.
- D. Driller
 1. Check the status of other personnel (in a rescue attempt, always use the buddy system).
 2. Assign the least essential person to notify the Drilling Foreman and Tool Pusher, in the event of their absence.
 3. Assume the responsibility of the Drilling Foreman and the Tool Pusher until they arrive, in the event of their absence.
- E. Derrick Man and Floor Hands
 1. Remain in the upwind safe briefing area until otherwise instructed by a supervisor.
- F. Mud Engineer
 1. Report to the upwind safe briefing area.
 2. When instructed, begin check of mud for PH level and H2S level.
- G. Safety Personnel
 1. Don breathing apparatus.
 2. Check the status of all personnel.
 3. Wait for instructions from Drilling Foreman or Tool Pusher.
- II. **Taking a Kick:**
 - A. All personnel report to the upwind safe briefing area.
 - B. Follow standard BOP procedures.
- III. **Open Hole Logging:**
 - A. All unnecessary personnel should leave the rig floor.
 - B. Drilling Foreman and Safety personnel should monitor the conditions and make necessary safety equipment recommendations.
- IV. **Running Casing or Plugging:**
 - A. Follow "Drilling or Tripping" procedures.
 - B. Assure that all personnel have access to protective equipment.

Simulated Blowout Control Drills

All drills will be initiated by activating alarm devices (air horn). One long blast on the air horn for ACTUAL and SIMULATED blowout control drills. This operation will be performed by the Drilling Foreman or Tool Pusher at least one time per week for each of the following conditions, with each crew:

- | | |
|----------|---------------------|
| Drill #1 | On-bottom Drilling |
| Drill #2 | Tripping Drill Pipe |

In each of these drills, the initial reaction time to shutting in the well shall be timed as well as the total time for the crew to complete its entire put drill assignment. The times must be recorded on the IADC Driller's log as "Blowout Control Drill".

Drill No.:		
Reaction Time to Shut-in:	minutes,	seconds.
Total Time to Complete Assignment:	minutes,	seconds.

I. Drill Overviews:

A. Drill No. 1 – On-bottom Drilling

1. Sound the alarm immediately.
2. Stop the rotary and hoist the Kelly joint above the rotary table.
3. Stop the circulatory pump.
4. Close the drill pipe rams.
5. Record casing and drill pipe shut-in pressures and pit volume increases.

B. Drill No. 2 – Tripping Drill Pipe:

1. Sound the alarm immediately.
2. Position the upper tool joint just above the rotary table and set the slips.
3. Install a full opening valve inside blowout preventer tool in order to close the drill pipe.
4. Close the drill pipe rams.
5. Record the shut-in annular pressure.

II. Crew Assignments

A. Drill No. 1 – On-bottom Drilling:

1. Driller
 - a) Stop the rotary and hoist the Kelly joint above the rotary table.
 - b) Stop the circulatory pump.
 - c) Check flow.
 - d) If flowing, sound the alarm immediately.
 - e) Record the shut-in drill pipe pressure.
 - f) Determine the mud weight increase needed or other courses of action.
2. Derrick Man
 - a) Open choke line valve at BOP.
 - b) Signal Floor Man #1 at accumulator that choke line is open.
 - c) Close choke upstream valve after pipe rams have been closed.
 - d) Read the shut-in annular pressure and report readings to Driller.
3. Floor Man #1
 - a) Close the pipe rams after receiving the signal from the Derrick Man.
 - b) Report to Driller for further instructions.
4. Floor Man #2
 - a) Notify the Tool Pusher and Operator Representative of the H2S alarms.
 - b) Check for open fires and, if safe to do so, extinguish them.
 - c) Stop all welding operations.
 - d) Turn-off all non-explosive proof lights and instruments.

- e) Report to Driller for further instructions.
- 5. Tool Pusher
 - a) Report to the rig floor.
 - b) Have a meeting with all crews.
 - c) Compile and summarize all information.
 - d) Calculate the proper kill weight.
 - e) Ensure that proper well procedures are put into action.
- 6. Operator Representative
 - a) Notify the Drilling Superintendent.
 - b) Determine if an emergency exists and if so, activate the contingency plan.
- B. Drill No. 2 – Tripping Pipe:
 - 1. Driller
 - a) Sound the alarm immediately when mud volume increase has been detected.
 - b) Position the upper tool joint just above the rotary table and set slips.
 - c) Install a full opening valve or inside blowout preventer tool to close the drill pipe.
 - d) Check flow.
 - e) Record all data reported by the crew.
 - f) Determine the course of action.
 - 2. Derrick Man
 - a) Come down out of derrick.
 - b) Notify Tool Pusher and Operator Representative.
 - c) Check for open fires and, if safe to do so, extinguish them.
 - d) Stop all welding operations.
 - e) Report to Driller for further instructions.
 - 3. Floor Man #1
 - a) Pick up full opening valve or inside blowout preventer tool and slab into tool joint above rotary table (with Floor Man #2)
 - b) Tighten valve with back-up tongs.
 - c) Close pipe rams after signal from Floor Man #2.
 - d) Read accumulator pressure and check for possible high pressure fluid leaks in valves or piping.
 - e) Report to Driller for further instructions.
 - 4. Floor Man #2
 - a) Pick-up full opening valve or inside blowout preventer tool and tab into tool joint above rotary table (with Floor Man #1)
 - b) Position back-up tongs on drill pipe.
 - c) Open choke line valve at BOP.
 - d) Signal Floor Man #1 at accumulator that choke line is open.
 - e) Close choke and upstream valve after pipe rams have been closed.
 - f) Check for leaks on BOP stack and choke manifold.

- g) Read annular pressure.
- h) Report readings to the Driller.
- 5. Tool Pusher
 - a) Report to the rig floor.
 - b) Have a meeting with all of the crews.
 - c) Compile and summarize all information.
 - d) See that proper well kill procedures are put into action.
- 6. Operator Representative
 - a) Notify Drilling Superintendent.
 - b) Determine if an emergency exists, and if so, activate the contingency plan

Ignition Procedures

Responsibility:

The decision to ignite the well is responsibility of the DRILLING FOREMAN in concurrence with the STATE POLICE. In the event of the Drilling Foreman is incapacitated, it becomes the responsibility of the RIG TOOL PUSHER. This decision should be made only as a last resort and in a situation where it is clear that:

1. Human life and property are endangered.
2. There is no hope of controlling the blowout under the prevailing conditions.

If time permits, notify the main office, but do not delay if human life is in danger. Initiate the first phase of the evacuation plan.

Instructions for Igniting the Well:

1. Two people are required for the actual igniting operation. Both men must wear self-contained breathing apparatus and must use a full body harness and attach a retrievable safety line to the D-Ring in the back. One man must monitor the atmosphere for explosive gases with the LEL monitor, while the Drilling Foreman is responsible for igniting the well.
2. The primary method to ignite is a 25mm flare gun with a range of approximately 500 feet.
3. Ignite from upwind and do not approach any closer than is warranted.
4. Select the ignition site best suited for protection and which offers an easy escape route.
5. Before igniting, check for the presence of combustible gases.
6. After igniting, continue emergency actions and procedures as before.
7. All unassigned personnel will limit their actions to those directed by the Drilling Foreman.

NOTE: After the well is ignited, burning Hydrogen Sulfide will convert to Sulfur Dioxide, which is also highly toxic. Do not assume the area is safe after the well is ignited.

Training Program

When working in an area where Hydrogen Sulfide (H₂S) might be encountered, definite training requirements for all personnel must be carried out. The Company Supervisor will ensure that all personnel at the well site have had adequate training in the following:

1. Hazards and Characteristics of Hydrogen Sulfide.
2. Physicals effects of Hydrogen Sulfide on the human body.
3. Toxicity of Hydrogen Sulfide and Sulfur Dioxide.
4. H₂S detection, emergency alarm and sensor location.
5. Emergency rescue.
6. Resuscitators.
7. First aid and artificial resuscitation.
8. The effects of Hydrogen Sulfide on metals.
9. Location safety.

Service company personnel and visiting personnel must be notified if the zone contains H₂S, and each service company must provide adequate training and equipment for their employees before they arrive at the well site.

Emergency Equipment Requirements

Lease Entrance Sign:

Should be located at the lease entrance with the following information:

CAUTION- POTENTIAL POISON GAS HYDROGEN SULFIDE

Well Control Equipment:

- A flare line will be located a minimum of 150' from the wellhead to be ignited by a flare gun.
- The choke manifold will include a remotely operated choke.
- A mud/gas separator will be installed to separate gas from the drilling mud.

Mud Program:

The drilling mud program has been designed to minimize the volume of hydrogen sulfide (H₂S) circulated to surface. The operator will have the necessary mud products on location to minimize the hazards while drilling in H₂S-bearing zones.

Metallurgy:

- All drill strings , casings, tubing, wellhead equipment , the blowout preventer , the drilling spool, kill lines, choke manifold and lines, and all valves shall be suitable for H2S service.
- All elastomers used for packing and seals shall be H2S trim.

Respiratory Equipment:

- Fresh air breathing equipment should be placed at the safe briefing areas and should include the following: Two SCBA's will be placed at each briefing area. A moveable breathing air trailer with 2 SCBA's, 5 work/escape units, ample breathing air hose and manifolds will be on location. The breathing air hose will be installed on the rig floor and derrick along with breathing air manifolds so that it will not restrict work activity. All employees that may wear respiratory will complete a MEQ and be quantitative fit tested 1000' prior to the 1st zone that may contain H2S.

Windsocks or Wind Streamers:

- A minimum of two 10" windsocks located at strategic locations so that they may be seen from any point on location. More will be used if necessary for wind consciousness.
- Wind streamers (if preferred) should be placed at various locations on the well site to ensure wind consciousness at all times. (Corners of location).

Hydrogen Sulfide Detector and Alarms:

- 1 - Four channel H2S monitor with audible and visual alarms, strategically located to be seen and heard by all employees working on the well site. All sensors will be bump tested or calibrated if necessary on a weekly basis. The alarms will be set to visually alarm at 10 PPM and audible at 14 PPM.
- Four (4) sensors located as follows: #1 -Rig Floor, #2 & #3- Bell Nipple, #4- End of flow line where wellbore fluid is discharged.
- Portable color metric tube detector with tubes will be stored in the Tool Pusher trailer.

Well Condition Sign and Flags:

The Well Condition Sign with flags should be placed a minimum of 150' before entry to the location. It should have three (3) color coded flags (green, yellow and red) that will be used to denote the following location conditions:

GREEN - Normal Operating Conditions

YELLOW - Potential Danger

RED - Danger, H2S Gas Present

Auxiliary Rescue Equipment:

- Stretcher (drilling contractor)
- 2- 100' OSHA approved Rescue lines (drilling contractor)
- First Aid Kit properly stocked (drilling contractor)

Mud Inspection Equipment:

Garret Gas Train or Hach Tester for inspection of Hydrogen Sulfide in the drilling mud system.

Fire Extinguishers:

Adequate fire extinguishers shall be located at strategic locations (provided by drilling contractor)

Blowout Preventer:

- The well shall have hydraulic BOP equipment for the anticipated BHP.
- The BOP should be tested upon installation.
- BOP, Choke Line and Kill Line will be tested as specified by Operator.

Confined Space Monitor:

There should be a portable multi-gas monitor with at least 3 sensors (O2, LEL & H2S). This instrument should be used to test the atmosphere of any confined space before entering. It should also be used for atmospheric testing for LEL gas before beginning any type of Hot Work. Proper calibration documentation will need to be provided. (Supplied by Drilling Contractor)

Communication Equipment:

- Proper communication equipment such as cell phones or 2 -way radios should be available at the rig.
- Radio communication shall be available for communication between the company man's trailer, rig floor and the tool pusher's trailer.
- Communication equipment shall be available on the vehicles.

Special Control Equipment:

- Hydraulic BOP equipment with remote control on the ground.
- Rotating head at the surface casing point.
- BOP, Choke Manifold and Process Flow Diagrams (see the attached - previously submitted)
- Patriot Rig #5 SM Choke Manifold Equipment (see the attached - previously submitted)

Evacuation Plan:

- Evacuation routes should be established prior to spudding the well.
- Should be discussed with all rig personnel.

Designated Areas:

Parking and Visitor area:

- All vehicles are to be parked at a pre-determined safe distance from the wellhead.
- Designated smoking area.

Safe Briefing Areas:

- Two safe briefing Areas shall be designated on either side of the location at the maximum allowable distance from the well bore so they offset prevailing winds or they are at a 180 degree angle if wind directions tend to shift in the area.
- Personal protective equipment should be stored at both briefing areas or if a moveable cascade trailer is used, it should be kept upwind of existing winds. When wind is from the prevailing direction, both briefing areas should be accessible.

NOTES:

- Additional personal H2S monitors are available for all employees on location.
- Automatic Flare Igniters are recommended for installation on the rig.

CHECK LISTS

Status Check List

Note: Date each item as they are implemented.

1. Sign at location entrance.
2. Two (2) wind socks (in required locations).
3. Wind Streamers (if required).
4. SCBA's on location for all rig personnel and mud loggers.
5. Air packs, inspected and ready for use.
6. Spare bottles for each air pack (if required).
7. Cascade system for refilling air bottles.
8. Cascade system and hose line hook up.
9. Choke manifold hooked-up and tested. (Before drilling out surface casing.)
10. Remote Hydraulic BOP control (hooked-up and tested before drilling out surface casing).
11. BOP tested (before drilling out surface casing).
12. Mud engineer on location with equipment to test mud for H2S.
13. Safe Briefing Areas set-up.
14. Well Condition sign and flags on location and ready.
15. Hydrogen Sulfide detection system hooked-up & tested.
16. Hydrogen Sulfide alarm system hooked-up & tested.
17. Stretcher on location at Safe Briefing Area.
18. 2-100' OSHA Approved Life Lines on location.
19. 1-20# Fire Extinguisher in safety trailer.
20. Confined Space Monitor on location and tested.
21. All rig crews and supervisor trained (as required).
22. Access restricted for unauthorized personnel.
23. Drills on H2S and well control procedures.
24. All outside service contractors advised of potential H2S on the well.
25. NO SMOKING sign posted.
26. H2S Detector Pump w/tubes on location.
27. 25mm Flare Gun on location w/flares.
28. Automatic Flare Igniter installed on rig.

Procedural Check List

Perform the following on each tour:

1. Check fire extinguishers to see that they have the proper charge.
2. Check breathing equipment to insure that they have not been tampered with.
3. Check pressure on the supply air bottles to make sure they are capable of recharging.
4. Make sure all of the Hydrogen Sulfide detection systems are operative.

Perform the following each week:

1. Check each piece of breathing equipment to make sure that they are fully charged and operational. This requires that the air cylinder be opened and the mask assembly be put on and tested to make sure that the regulators and

masks are properly working. Negative and positive pressure should be conducted on all masks.

2. BOP skills.
3. Check supply pressure on BOP accumulator stand-by source.
4. Check all breathing air mask assemblies to see that straps are loosened and turned back, ready to use.
5. Check pressure on cascade air cylinders to make sure they are fully charged and ready to use for refill purposes if necessary.
6. Check all cascade system regulators to make sure they work properly.
7. Perform breathing drills with on-site personnel.
8. Check the following supplies for availability:
 - Stretcher
 - Safety Belts and ropes.
 - Spare air bottles.
 - Spare oxygen bottles (if resuscitator required).
 - Gas Detector Pump and tubes.
 - Emergency telephone lists.
9. Test the Confined Space Monitor to verify the batteries are good and that the unit is in good working condition and has been properly calibrated according to manufacturer's recommendations.

Briefing Procedures

The following scheduled briefings will be held to ensure the effective drilling and operation of this project:

Pre-Spud Meeting

Date: Prior to spudding the well.

Attendance: Drilling Supervisor
Drilling Engineer
Drilling Foreman
Rig Tool Pushers
Mud Engineer
All Safety Personnel
Key Service Company Personnel

Purpose: Review and discuss the well program, step-by-step, to ensure complete understanding of assignments and responsibilities.

Evacuation Plan

General Plan

The direct lines of action prepared by Caza SAFETY, to protect the public from hazardous gas situations are as follows:

1. When the company approved supervisor (Drilling Foremen, Tool Pusher or Driller) determine that Hydrogen Sulfide gas cannot be limited to the well location, and the public will be involved, he will activate the evacuation plan. Escape routes are noted on the Area Map.
2. Company safety personnel or designee will notify the appropriate local government agency that a hazardous condition exists and evacuation needs to be implemented.
3. Company approved safety personnel that have been trained in the use of the proper emergency equipment will be utilized.
4. Law enforcement personnel (State Police, Local Police Department, Fire Department, and the Sheriff's Department) will be called to aid in setting up and maintaining road blocks. Also, they will aid in evacuation of the public if necessary.

NOTE: Law enforcement personnel will not be asked to come into a contaminated area. Their assistance will be limited to uncontaminated areas. Constant radio contact will be maintained with them.

5. After the discharge of gas has been controlled, "Company" safety personnel will determine when the area is safe for re-entry.

Emergency Assistance Telephone List

PUBLIC SAFETY: 911 or

Lea County Sheriff or Police..... (575) 396-3611

Fire Department(575) 397-9308

Hospital (575) 492-5000

Ambulance 911

Department of Public Safety..... (392) 392-5588

Oil Conservation Division(575) 748-1823

New Mexico Energy, Minerals & Natural Resources Department(575) 748-1283

Caza Oil and Gas, Inc:

Office(423) 682-7424

VP Operations: Tony Sam

Office(423) 682-7424

Cell(432) 556-6708

Project Manager: Steve Morris

Cell(972) 835-3315

Project Manager: Joel Stockford

Cell(972) 835-3349

The geologic zones that will be encountered during drilling may contain hazardous quantities of H₂S. The accompanying map illustrates the affected areas of the community. The residents within this radius will be notified via a hand delivered written notice describing the activities, potential hazards, and conditions of evacuation, evacuation drill siren alarms and other precautionary measures.

Evacuee Description:

Residents: THERE ARE NO RESIDENTS WITHIN 3000' ROE.

Notification Process:

A continuous siren audible to all residence will be activated, signaling evacuation of previously notified and informed residents.

Evacuation Plan:


All evacuees will migrate laterally toward the wind direction.

Caza Oil and Gas, Inc. will identify all home bound or highly susceptible individuals and make special evacuation preparations, interfacing with the local and emergency medical service as necessary.



MAPS AND PLATS

See the attached map showing the 3000' ROE clarification.

Project: Sioux 25-36 State Fed Com 16H
 Site: Sioux 25-36 State Fed Com 16H
 Well: Sioux 25-36 State Fed Com 16H
 Design: 201214 Sioux 25-36 State Fed Com 16H

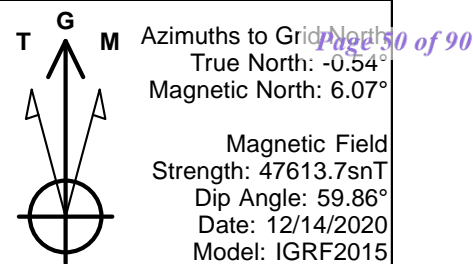

CASING DETAILS				FORMATION TOP DETAILS			
TVD	MD	Name	Size	TVDPath	MDPath	Formation	DipAngle
120.0	120.0	20" Conductor	20	754.0	754.0	Rustler	0.00
1100.0	1100.0	13 3/8" Surface Casing	13-3/8	1144.0	1144.0	Top of Salt	0.00
10300.0	10311.5	9 5/8" Intermediate Casing	9-5/8	2442.0	2442.4	Base of Salt	0.00
12566.0	22720.5	6" Production Casing	6	3067.0	3069.2	Tansil	0.00
				3209.0	3211.6	Yates	0.00
				3483.0	3486.4	Seven Rivers	0.00
				3702.0	3706.0	Queen	0.00
				4035.0	4040.0	Grayburg	0.00
				4535.0	4541.4	San Andres	0.00
				4944.0	4951.6	Delaware	0.00
				5664.0	5673.6	Cherry Canyon	0.00
				7324.0	7335.5	Brushy Canyon	0.00
				8579.0	8590.5	Bone Spring	0.00
				9724.0	9735.5	1st Bone Spring	0.00
				10224.0	10235.5	2nd Bone Spring	0.00
				11611.0	11622.5	3rd Bone Spring	0.00
				11906.0	11917.5	Wolfcamp	0.00

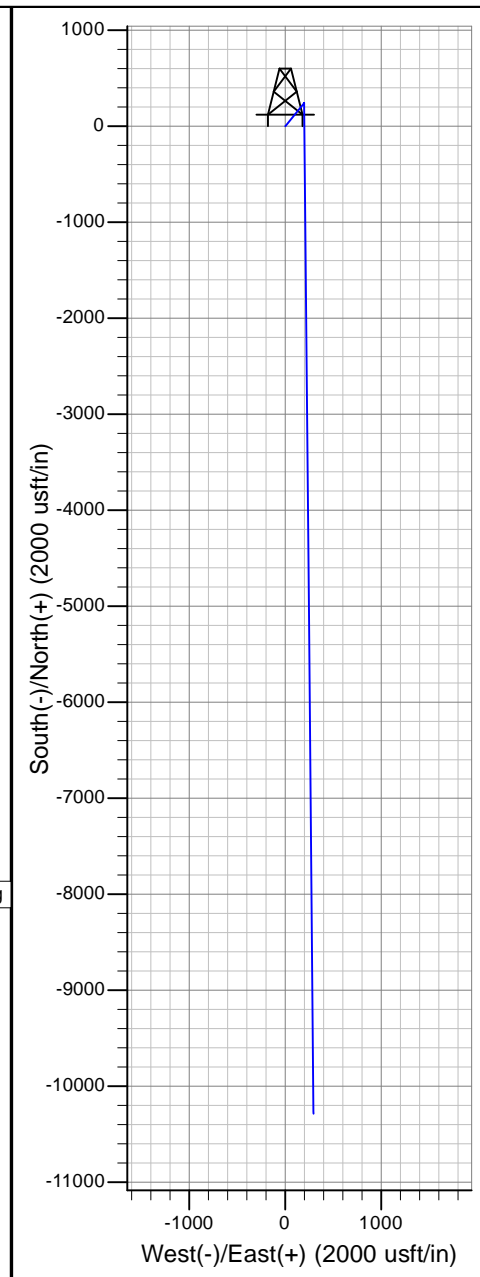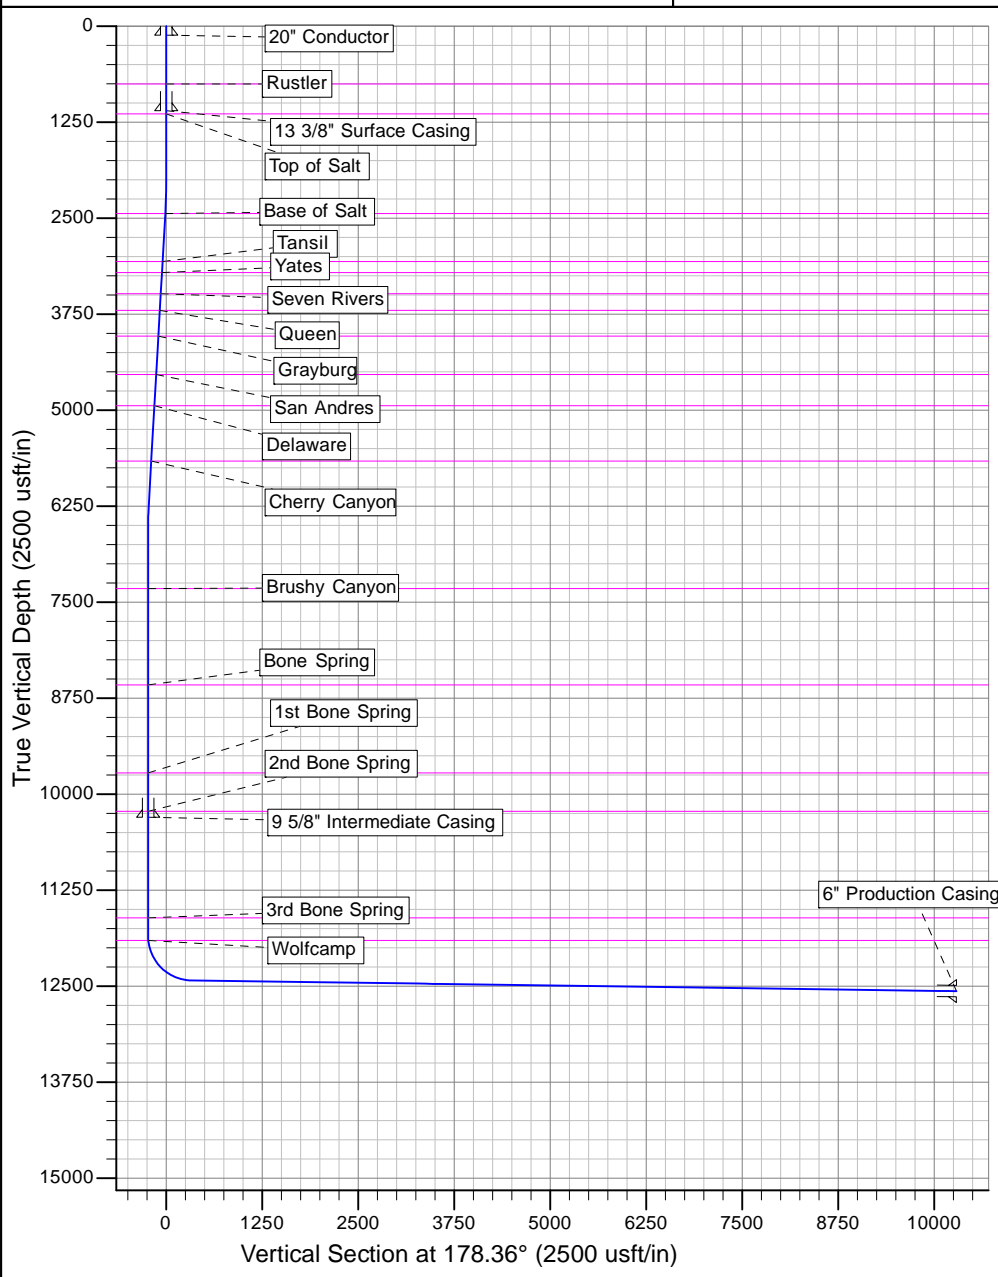



Caza Operating LLC

Sioux 25-36 State Fed Com 16H

Sioux 25-36 State Fed Com 16H

Sioux 25-36 State Fed Com 16H

Sioux 25-36 State Fed Com 16H

Plan: 201214 Sioux 25-36 State Fed Com 16H - Plan

Morcor Standard Plan

14 December, 2020



Morcor Engineering

Morcor Standard Plan

Company:	Caza Operating LLC	Local Co-ordinate Reference:	Well Sioux 25-36 State Fed Com 16H
Project:	Sioux 25-36 State Fed Com 16H	TVD Reference:	WELL @ 3102.0usft (Original Well Elev)
Site:	Sioux 25-36 State Fed Com 16H	MD Reference:	WELL @ 3102.0usft (Original Well Elev)
Well:	Sioux 25-36 State Fed Com 16H	North Reference:	Grid
Wellbore:	Sioux 25-36 State Fed Com 16H	Survey Calculation Method:	Minimum Curvature
Design:	201214 Sioux 25-36 State Fed Com 16H - Plan	Database:	EDM 5000.1 Single User Db

Project	Sioux 25-36 State Fed Com 16H		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Sioux 25-36 State Fed Com 16H		
Site Position:		Northing:	404,454.41 usft
From:	Map	Easting:	853,828.84 usft
Position Uncertainty:	1.0 usft	Slot Radius:	17-1/2 "
		Latitude:	32° 6' 28.450 N
		Longitude:	103° 19' 26.749 W
		Grid Convergence:	0.54 °

Well	Sioux 25-36 State Fed Com 16H		
Well Position	+N/-S	0.0 usft	Northing:
	+E/-W	0.0 usft	Easting:
Position Uncertainty	1.0 usft	Wellhead Elevation:	usft
		Latitude:	32° 6' 28.450 N
		Longitude:	103° 19' 26.749 W
		Ground Level:	3,081.0 usft

Wellbore	Sioux 25-36 State Fed Com 16H		
Magnetics	Model Name	Sample Date	Declination (°)
	IGRF2015	12/14/2020	6.60
			Dip Angle (°)
			59.86
			Field Strength (nT)
			47,614

Design	201214 Sioux 25-36 State Fed Com 16H - Plan		
Audit Notes:			
Version:	Phase:	PLAN	Tie On Depth:
			0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)
	0.0	0.0	0.0
			Direction (°)
			178.36

Survey Tool Program	Date	12/14/2020		
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description
0.0	22,720.5	201214 Sioux 25-36 State Fed Com 16H -	MWD	MWD - Standard



Morcor Engineering

Morcor Standard Plan

Company: Caza Operating LLC
Project: Sioux 25-36 State Fed Com 16H
Site: Sioux 25-36 State Fed Com 16H
Well: Sioux 25-36 State Fed Com 16H
Wellbore: Sioux 25-36 State Fed Com 16H
Design: 201214 Sioux 25-36 State Fed Com 16H - Plan

Local Co-ordinate Reference: Well Sioux 25-36 State Fed Com 16H
TVD Reference: WELL @ 3102.0usft (Original Well Elev)
MD Reference: WELL @ 3102.0usft (Original Well Elev)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: EDM 5000.1 Single User Db

Planned Survey

MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)
0.0	0.00	0.00	0.0	-3,102.0	0.0	0.0	853,828.84	404,454.41	0.00	0.00
100.0	0.00	0.00	100.0	-3,002.0	0.0	0.0	853,828.84	404,454.41	0.00	0.00
120.0	0.00	0.00	120.0	-2,982.0	0.0	0.0	853,828.84	404,454.41	0.00	0.00
20" Conductor										
200.0	0.00	0.00	200.0	-2,902.0	0.0	0.0	853,828.84	404,454.41	0.00	0.00
300.0	0.00	0.00	300.0	-2,802.0	0.0	0.0	853,828.84	404,454.41	0.00	0.00
400.0	0.00	0.00	400.0	-2,702.0	0.0	0.0	853,828.84	404,454.41	0.00	0.00
500.0	0.00	0.00	500.0	-2,602.0	0.0	0.0	853,828.84	404,454.41	0.00	0.00
600.0	0.00	0.00	600.0	-2,502.0	0.0	0.0	853,828.84	404,454.41	0.00	0.00
700.0	0.00	0.00	700.0	-2,402.0	0.0	0.0	853,828.84	404,454.41	0.00	0.00
754.0	0.00	0.00	754.0	-2,348.0	0.0	0.0	853,828.84	404,454.41	0.00	0.00
Rustler										
800.0	0.00	0.00	800.0	-2,302.0	0.0	0.0	853,828.84	404,454.41	0.00	0.00
900.0	0.00	0.00	900.0	-2,202.0	0.0	0.0	853,828.84	404,454.41	0.00	0.00
1,000.0	0.00	0.00	1,000.0	-2,102.0	0.0	0.0	853,828.84	404,454.41	0.00	0.00
1,100.0	0.00	0.00	1,100.0	-2,002.0	0.0	0.0	853,828.84	404,454.41	0.00	0.00
13 3/8" Surface Casing										
1,144.0	0.00	0.00	1,144.0	-1,958.0	0.0	0.0	853,828.84	404,454.41	0.00	0.00
Top of Salt										
1,200.0	0.00	0.00	1,200.0	-1,902.0	0.0	0.0	853,828.84	404,454.41	0.00	0.00
1,300.0	0.00	0.00	1,300.0	-1,802.0	0.0	0.0	853,828.84	404,454.41	0.00	0.00
1,400.0	0.00	0.00	1,400.0	-1,702.0	0.0	0.0	853,828.84	404,454.41	0.00	0.00
1,500.0	0.00	0.00	1,500.0	-1,602.0	0.0	0.0	853,828.84	404,454.41	0.00	0.00
1,600.0	0.00	0.00	1,600.0	-1,502.0	0.0	0.0	853,828.84	404,454.41	0.00	0.00
1,700.0	0.00	0.00	1,700.0	-1,402.0	0.0	0.0	853,828.84	404,454.41	0.00	0.00
1,800.0	0.00	0.00	1,800.0	-1,302.0	0.0	0.0	853,828.84	404,454.41	0.00	0.00
1,900.0	0.00	0.00	1,900.0	-1,202.0	0.0	0.0	853,828.84	404,454.41	0.00	0.00
2,000.0	0.00	0.00	2,000.0	-1,102.0	0.0	0.0	853,828.84	404,454.41	0.00	0.00



Morcor Engineering

Morcor Standard Plan

Company: Caza Operating LLC
Project: Sioux 25-36 State Fed Com 16H
Site: Sioux 25-36 State Fed Com 16H
Well: Sioux 25-36 State Fed Com 16H
Wellbore: Sioux 25-36 State Fed Com 16H
Design: 201214 Sioux 25-36 State Fed Com 16H - Plan

Local Co-ordinate Reference: Well Sioux 25-36 State Fed Com 16H
TVD Reference: WELL @ 3102.0usft (Original Well Elev)
MD Reference: WELL @ 3102.0usft (Original Well Elev)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: EDM 5000.1 Single User Db

Planned Survey

MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)
2,100.0	1.00	39.25	2,100.0	-1,002.0	0.7	0.6	853,829.39	404,455.09	-0.66	1.00
2,200.0	2.00	39.25	2,200.0	-902.0	2.7	2.2	853,831.05	404,457.11	-2.64	1.00
2,300.0	3.00	39.25	2,299.9	-802.1	6.1	5.0	853,833.81	404,460.49	-5.94	1.00
2,400.0	4.00	39.25	2,399.7	-702.3	10.8	8.8	853,837.67	404,465.22	-10.55	1.00
2,431.9	4.32	39.25	2,431.5	-670.5	12.6	10.3	853,839.14	404,467.01	-12.30	1.00
2,442.4	4.32	39.25	2,442.0	-660.0	13.2	10.8	853,839.64	404,467.63	-12.90	0.00
Base of Salt										
2,500.0	4.32	39.25	2,499.4	-602.6	16.6	13.5	853,842.38	404,470.98	-16.18	0.00
2,600.0	4.32	39.25	2,599.1	-502.9	22.4	18.3	853,847.14	404,476.82	-21.87	0.00
2,700.0	4.32	39.25	2,698.8	-403.2	28.2	23.1	853,851.91	404,482.65	-27.57	0.00
2,800.0	4.32	39.25	2,798.5	-303.5	34.1	27.8	853,856.67	404,488.48	-33.26	0.00
2,900.0	4.32	39.25	2,898.3	-203.7	39.9	32.6	853,861.44	404,494.31	-38.96	0.00
3,000.0	4.32	39.25	2,998.0	-104.0	45.7	37.4	853,866.20	404,500.15	-44.65	0.00
3,069.2	4.32	39.25	3,067.0	-35.0	49.8	40.7	853,869.50	404,504.18	-48.59	0.00
Tansil										
3,100.0	4.32	39.25	3,097.7	-4.3	51.6	42.1	853,870.97	404,505.98	-50.34	0.00
3,200.0	4.32	39.25	3,197.4	95.4	57.4	46.9	853,875.73	404,511.81	-56.04	0.00
3,211.6	4.32	39.25	3,209.0	107.0	58.1	47.4	853,876.29	404,512.49	-56.70	0.00
Yates										
3,300.0	4.32	39.25	3,297.1	195.1	63.2	51.7	853,880.50	404,517.64	-61.73	0.00
3,400.0	4.32	39.25	3,396.8	294.8	69.1	56.4	853,885.26	404,523.48	-67.43	0.00
3,486.4	4.32	39.25	3,483.0	381.0	74.1	60.5	853,889.38	404,528.52	-72.35	0.00
Seven Rivers										
3,500.0	4.32	39.25	3,496.6	394.6	74.9	61.2	853,890.03	404,529.31	-73.12	0.00
3,600.0	4.32	39.25	3,596.3	494.3	80.7	66.0	853,894.79	404,535.14	-78.81	0.00
3,700.0	4.32	39.25	3,696.0	594.0	86.6	70.7	853,899.56	404,540.97	-84.51	0.00
3,706.0	4.32	39.25	3,702.0	600.0	86.9	71.0	853,899.84	404,541.33	-84.85	0.00
Queen										



Morcor Engineering Morcor Standard Plan

Company: Caza Operating LLC
Project: Sioux 25-36 State Fed Com 16H
Site: Sioux 25-36 State Fed Com 16H
Well: Sioux 25-36 State Fed Com 16H
Wellbore: Sioux 25-36 State Fed Com 16H
Design: 201214 Sioux 25-36 State Fed Com 16H - Plan

Local Co-ordinate Reference: Well Sioux 25-36 State Fed Com 16H
TVD Reference: WELL @ 3102.0usft (Original Well Elev)
MD Reference: WELL @ 3102.0usft (Original Well Elev)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: EDM 5000.1 Single User Db

Planned Survey

MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)
3,800.0	4.32	39.25	3,795.7	693.7	92.4	75.5	853,904.32	404,546.81	-90.20	0.00
3,900.0	4.32	39.25	3,895.4	793.4	98.2	80.2	853,909.09	404,552.64	-95.90	0.00
4,000.0	4.32	39.25	3,995.1	893.1	104.1	85.0	853,913.85	404,558.47	-101.59	0.00
4,040.0	4.32	39.25	4,035.0	933.0	106.4	86.9	853,915.75	404,560.80	-103.87	0.00
Grayburg										
4,100.0	4.32	39.25	4,094.9	992.9	109.9	89.8	853,918.61	404,564.31	-107.28	0.00
4,200.0	4.32	39.25	4,194.6	1,092.6	115.7	94.5	853,923.38	404,570.14	-112.98	0.00
4,300.0	4.32	39.25	4,294.3	1,192.3	121.6	99.3	853,928.14	404,575.97	-118.67	0.00
4,400.0	4.32	39.25	4,394.0	1,292.0	127.4	104.1	853,932.91	404,581.80	-124.37	0.00
4,500.0	4.32	39.25	4,493.7	1,391.7	133.2	108.8	853,937.67	404,587.64	-130.06	0.00
4,541.4	4.32	39.25	4,535.0	1,433.0	135.6	110.8	853,939.65	404,590.05	-132.42	0.00
San Andres										
4,600.0	4.32	39.25	4,593.4	1,491.4	139.1	113.6	853,942.44	404,593.47	-135.76	0.00
4,700.0	4.32	39.25	4,693.1	1,591.1	144.9	118.4	853,947.20	404,599.30	-141.45	0.00
4,800.0	4.32	39.25	4,792.9	1,690.9	150.7	123.1	853,951.97	404,605.13	-147.14	0.00
4,900.0	4.32	39.25	4,892.6	1,790.6	156.6	127.9	853,956.73	404,610.97	-152.84	0.00
4,951.6	4.32	39.25	4,944.0	1,842.0	159.6	130.3	853,959.19	404,613.97	-155.77	0.00
Delaware										
5,000.0	4.32	39.25	4,992.3	1,890.3	162.4	132.7	853,961.50	404,616.80	-158.53	0.00
5,100.0	4.32	39.25	5,092.0	1,990.0	168.2	137.4	853,966.26	404,622.63	-164.23	0.00
5,200.0	4.32	39.25	5,191.7	2,089.7	174.1	142.2	853,971.03	404,628.46	-169.92	0.00
5,300.0	4.32	39.25	5,291.4	2,189.4	179.9	147.0	853,975.79	404,634.30	-175.61	0.00
5,400.0	4.32	39.25	5,391.2	2,289.2	185.7	151.7	853,980.56	404,640.13	-181.31	0.00
5,500.0	4.32	39.25	5,490.9	2,388.9	191.6	156.5	853,985.32	404,645.96	-187.00	0.00
5,600.0	4.32	39.25	5,590.6	2,488.6	197.4	161.2	853,990.09	404,651.80	-192.70	0.00
5,673.6	4.32	39.25	5,664.0	2,562.0	201.7	164.8	853,993.59	404,656.09	-196.89	0.00
Cherry Canyon										



Morcor Engineering

Morcor Standard Plan

Company:	Caza Operating LLC	Local Co-ordinate Reference:	Well Sioux 25-36 State Fed Com 16H
Project:	Sioux 25-36 State Fed Com 16H	TVD Reference:	WELL @ 3102.0usft (Original Well Elev)
Site:	Sioux 25-36 State Fed Com 16H	MD Reference:	WELL @ 3102.0usft (Original Well Elev)
Well:	Sioux 25-36 State Fed Com 16H	North Reference:	Grid
Wellbore:	Sioux 25-36 State Fed Com 16H	Survey Calculation Method:	Minimum Curvature
Design:	201214 Sioux 25-36 State Fed Com 16H - Plan	Database:	EDM 5000.1 Single User Db

Planned Survey

MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)
5,700.0	4.32	39.25	5,690.3	2,588.3	203.2	166.0	853,994.85	404,657.63	-198.39	0.00
5,800.0	4.32	39.25	5,790.0	2,688.0	209.1	170.8	853,999.62	404,663.46	-204.08	0.00
5,900.0	4.32	39.25	5,889.7	2,787.7	214.9	175.5	854,004.38	404,669.29	-209.78	0.00
6,000.0	4.32	39.25	5,989.5	2,887.5	220.7	180.3	854,009.15	404,675.13	-215.47	0.00
6,100.0	4.32	39.25	6,089.2	2,987.2	226.5	185.1	854,013.91	404,680.96	-221.17	0.00
6,200.0	4.32	39.25	6,188.9	3,086.9	232.4	189.8	854,018.67	404,686.79	-226.86	0.00
6,223.5	4.32	39.25	6,212.3	3,110.3	233.8	191.0	854,019.79	404,688.16	-228.20	0.00
6,300.0	3.17	39.25	6,288.7	3,186.7	237.6	194.1	854,022.96	404,692.03	-231.98	1.50
6,400.0	1.67	39.25	6,388.6	3,286.6	240.9	196.8	854,025.63	404,695.30	-235.17	1.50
6,500.0	0.17	39.25	6,488.5	3,386.5	242.1	197.8	854,026.65	404,696.55	-236.39	1.50
6,511.5	0.00	0.00	6,500.0	3,398.0	242.2	197.8	854,026.66	404,696.56	-236.40	1.50
6,600.0	0.00	0.00	6,588.5	3,486.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
6,700.0	0.00	0.00	6,688.5	3,586.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
6,800.0	0.00	0.00	6,788.5	3,686.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
6,900.0	0.00	0.00	6,888.5	3,786.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
7,000.0	0.00	0.00	6,988.5	3,886.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
7,100.0	0.00	0.00	7,088.5	3,986.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
7,200.0	0.00	0.00	7,188.5	4,086.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
7,300.0	0.00	0.00	7,288.5	4,186.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
7,335.5	0.00	0.00	7,324.0	4,222.0	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
Brushy Canyon										
7,400.0	0.00	0.00	7,388.5	4,286.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
7,500.0	0.00	0.00	7,488.5	4,386.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
7,600.0	0.00	0.00	7,588.5	4,486.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
7,700.0	0.00	0.00	7,688.5	4,586.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
7,800.0	0.00	0.00	7,788.5	4,686.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
7,900.0	0.00	0.00	7,888.5	4,786.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00



Morcor Engineering

Morcor Standard Plan

Company: Caza Operating LLC
Project: Sioux 25-36 State Fed Com 16H
Site: Sioux 25-36 State Fed Com 16H
Well: Sioux 25-36 State Fed Com 16H
Wellbore: Sioux 25-36 State Fed Com 16H
Design: 201214 Sioux 25-36 State Fed Com 16H - Plan

Local Co-ordinate Reference: Well Sioux 25-36 State Fed Com 16H
TVD Reference: WELL @ 3102.0usft (Original Well Elev)
MD Reference: WELL @ 3102.0usft (Original Well Elev)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: EDM 5000.1 Single User Db

Planned Survey

MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)
8,000.0	0.00	0.00	7,988.5	4,886.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
8,100.0	0.00	0.00	8,088.5	4,986.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
8,200.0	0.00	0.00	8,188.5	5,086.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
8,300.0	0.00	0.00	8,288.5	5,186.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
8,400.0	0.00	0.00	8,388.5	5,286.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
8,500.0	0.00	0.00	8,488.5	5,386.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
8,590.5	0.00	0.00	8,579.0	5,477.0	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
Bone Spring										
8,600.0	0.00	0.00	8,588.5	5,486.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
8,700.0	0.00	0.00	8,688.5	5,586.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
8,800.0	0.00	0.00	8,788.5	5,686.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
8,900.0	0.00	0.00	8,888.5	5,786.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
9,000.0	0.00	0.00	8,988.5	5,886.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
9,100.0	0.00	0.00	9,088.5	5,986.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
9,200.0	0.00	0.00	9,188.5	6,086.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
9,300.0	0.00	0.00	9,288.5	6,186.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
9,400.0	0.00	0.00	9,388.5	6,286.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
9,500.0	0.00	0.00	9,488.5	6,386.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
9,600.0	0.00	0.00	9,588.5	6,486.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
9,700.0	0.00	0.00	9,688.5	6,586.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
9,735.5	0.00	0.00	9,724.0	6,622.0	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
1st Bone Spring										
9,800.0	0.00	0.00	9,788.5	6,686.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
9,900.0	0.00	0.00	9,888.5	6,786.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
10,000.0	0.00	0.00	9,988.5	6,886.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
10,100.0	0.00	0.00	10,088.5	6,986.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
10,200.0	0.00	0.00	10,188.5	7,086.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00



Morcor Engineering Morcor Standard Plan

Company: Caza Operating LLC
Project: Sioux 25-36 State Fed Com 16H
Site: Sioux 25-36 State Fed Com 16H
Well: Sioux 25-36 State Fed Com 16H
Wellbore: Sioux 25-36 State Fed Com 16H
Design: 201214 Sioux 25-36 State Fed Com 16H - Plan

Local Co-ordinate Reference: Well Sioux 25-36 State Fed Com 16H
TVD Reference: WELL @ 3102.0usft (Original Well Elev)
MD Reference: WELL @ 3102.0usft (Original Well Elev)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: EDM 5000.1 Single User Db

Planned Survey

MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)
10,235.5	0.00	0.00	10,224.0	7,122.0	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
2nd Bone Spring										
10,300.0	0.00	0.00	10,288.5	7,186.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
10,311.5	0.00	0.00	10,300.0	7,198.0	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
9 5/8" Intermediate Casing										
10,400.0	0.00	0.00	10,388.5	7,286.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
10,500.0	0.00	0.00	10,488.5	7,386.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
10,600.0	0.00	0.00	10,588.5	7,486.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
10,700.0	0.00	0.00	10,688.5	7,586.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
10,800.0	0.00	0.00	10,788.5	7,686.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
10,900.0	0.00	0.00	10,888.5	7,786.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
11,000.0	0.00	0.00	10,988.5	7,886.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
11,100.0	0.00	0.00	11,088.5	7,986.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
11,200.0	0.00	0.00	11,188.5	8,086.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
11,300.0	0.00	0.00	11,288.5	8,186.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
11,400.0	0.00	0.00	11,388.5	8,286.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
11,500.0	0.00	0.00	11,488.5	8,386.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
11,600.0	0.00	0.00	11,588.5	8,486.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
11,622.5	0.00	0.00	11,611.0	8,509.0	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
3rd Bone Spring										
11,700.0	0.00	0.00	11,688.5	8,586.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
11,800.0	0.00	0.00	11,788.5	8,686.5	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
11,864.6	0.00	0.00	11,853.1	8,751.1	242.2	197.8	854,026.66	404,696.56	-236.40	0.00
11,900.0	3.54	179.48	11,888.5	8,786.5	241.1	197.8	854,026.67	404,695.47	-235.31	10.00
11,917.5	5.30	179.48	11,906.0	8,804.0	239.7	197.8	854,026.68	404,694.12	-233.95	10.00
Wolfcamp										
12,000.0	13.54	179.48	11,987.3	8,885.3	226.2	198.0	854,026.80	404,680.63	-220.47	10.00
12,100.0	23.54	179.48	12,082.0	8,980.0	194.5	198.3	854,027.09	404,648.87	-188.71	10.00



Morcor Engineering

Morcor Standard Plan

Company:	Caza Operating LLC	Local Co-ordinate Reference:	Well Sioux 25-36 State Fed Com 16H
Project:	Sioux 25-36 State Fed Com 16H	TVD Reference:	WELL @ 3102.0usft (Original Well Elev)
Site:	Sioux 25-36 State Fed Com 16H	MD Reference:	WELL @ 3102.0usft (Original Well Elev)
Well:	Sioux 25-36 State Fed Com 16H	North Reference:	Grid
Wellbore:	Sioux 25-36 State Fed Com 16H	Survey Calculation Method:	Minimum Curvature
Design:	201214 Sioux 25-36 State Fed Com 16H - Plan	Database:	EDM 5000.1 Single User Db

Planned Survey

MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)
12,200.0	33.54	179.48	12,169.7	9,067.7	146.7	198.7	854,027.53	404,601.14	-141.00	10.00
12,300.0	43.54	179.48	12,247.8	9,145.8	84.5	199.3	854,028.10	404,538.91	-78.77	10.00
12,400.0	53.54	179.48	12,313.9	9,211.9	9.7	199.9	854,028.78	404,464.06	-3.94	10.00
12,500.0	63.54	179.48	12,366.1	9,264.1	-75.5	200.7	854,029.56	404,378.87	81.25	10.00
12,600.0	73.54	179.48	12,402.6	9,300.6	-168.5	201.6	854,030.41	404,285.92	174.18	10.00
12,700.0	83.54	179.48	12,422.4	9,320.4	-266.4	202.5	854,031.31	404,188.04	272.05	10.00
12,750.0	88.54	179.48	12,425.9	9,323.9	-316.2	202.9	854,031.76	404,138.18	321.90	10.00
12,756.5	89.19	179.48	12,426.0	9,324.0	-322.7	203.0	854,031.82	404,131.68	328.40	10.00
12,800.0	89.19	179.48	12,426.6	9,324.6	-366.2	203.4	854,032.22	404,088.19	371.89	0.00
12,900.0	89.19	179.48	12,428.0	9,326.0	-466.2	204.3	854,033.13	403,988.20	471.86	0.00
13,000.0	89.19	179.48	12,429.4	9,327.4	-566.2	205.2	854,034.05	403,888.22	571.83	0.00
13,100.0	89.19	179.48	12,430.8	9,328.8	-666.2	206.1	854,034.96	403,788.23	671.80	0.00
13,200.0	89.19	179.48	12,432.2	9,330.2	-766.2	207.0	854,035.88	403,688.24	771.77	0.00
13,300.0	89.19	179.48	12,433.6	9,331.6	-866.2	208.0	854,036.79	403,588.26	871.74	0.00
13,400.0	89.19	179.48	12,435.0	9,333.0	-966.1	208.9	854,037.70	403,488.27	971.71	0.00
13,500.0	89.19	179.48	12,436.4	9,334.4	-1,066.1	209.8	854,038.62	403,388.29	1,071.68	0.00
13,600.0	89.19	179.48	12,437.9	9,335.9	-1,166.1	210.7	854,039.53	403,288.30	1,171.66	0.00
13,700.0	89.19	179.48	12,439.3	9,337.3	-1,266.1	211.6	854,040.45	403,188.31	1,271.63	0.00
13,800.0	89.19	179.48	12,440.7	9,338.7	-1,366.1	212.5	854,041.36	403,088.33	1,371.60	0.00
13,900.0	89.19	179.48	12,442.1	9,340.1	-1,466.1	213.4	854,042.28	402,988.34	1,471.57	0.00
14,000.0	89.19	179.48	12,443.5	9,341.5	-1,566.1	214.3	854,043.19	402,888.36	1,571.54	0.00
14,100.0	89.19	179.48	12,444.9	9,342.9	-1,666.0	215.3	854,044.10	402,788.37	1,671.51	0.00
14,200.0	89.19	179.48	12,446.3	9,344.3	-1,766.0	216.2	854,045.02	402,688.38	1,771.48	0.00
14,300.0	89.19	179.48	12,447.7	9,345.7	-1,866.0	217.1	854,045.93	402,588.40	1,871.45	0.00
14,400.0	89.19	179.48	12,449.1	9,347.1	-1,966.0	218.0	854,046.85	402,488.41	1,971.43	0.00
14,500.0	89.19	179.48	12,450.5	9,348.5	-2,066.0	218.9	854,047.76	402,388.43	2,071.40	0.00
14,600.0	89.19	179.48	12,451.9	9,349.9	-2,166.0	219.8	854,048.67	402,288.44	2,171.37	0.00



Morcor Engineering Morcor Standard Plan

Company: Caza Operating LLC
Project: Sioux 25-36 State Fed Com 16H
Site: Sioux 25-36 State Fed Com 16H
Well: Sioux 25-36 State Fed Com 16H
Wellbore: Sioux 25-36 State Fed Com 16H
Design: 201214 Sioux 25-36 State Fed Com 16H - Plan

Local Co-ordinate Reference: Well Sioux 25-36 State Fed Com 16H
TVD Reference: WELL @ 3102.0usft (Original Well Elev)
MD Reference: WELL @ 3102.0usft (Original Well Elev)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: EDM 5000.1 Single User Db

Planned Survey

MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)
14,700.0	89.19	179.48	12,453.3	9,351.3	-2,266.0	220.7	854,049.59	402,188.45	2,271.34	0.00
14,800.0	89.19	179.48	12,454.7	9,352.7	-2,365.9	221.7	854,050.50	402,088.47	2,371.31	0.00
14,900.0	89.19	179.48	12,456.1	9,354.1	-2,465.9	222.6	854,051.42	401,988.48	2,471.28	0.00
15,000.0	89.19	179.48	12,457.5	9,355.5	-2,565.9	223.5	854,052.33	401,888.50	2,571.25	0.00
15,100.0	89.19	179.48	12,458.9	9,356.9	-2,665.9	224.4	854,053.24	401,788.51	2,671.22	0.00
15,200.0	89.19	179.48	12,460.3	9,358.3	-2,765.9	225.3	854,054.16	401,688.52	2,771.20	0.00
15,300.0	89.19	179.48	12,461.7	9,359.7	-2,865.9	226.2	854,055.07	401,588.54	2,871.17	0.00
15,400.0	89.19	179.48	12,463.1	9,361.1	-2,965.9	227.1	854,055.99	401,488.55	2,971.14	0.00
15,500.0	89.19	179.48	12,464.5	9,362.5	-3,065.8	228.1	854,056.90	401,388.57	3,071.11	0.00
15,600.0	89.19	179.48	12,466.0	9,364.0	-3,165.8	229.0	854,057.81	401,288.58	3,171.08	0.00
15,700.0	89.19	179.48	12,467.4	9,365.4	-3,265.8	229.9	854,058.73	401,188.59	3,271.05	0.00
15,800.0	89.19	179.48	12,468.8	9,366.8	-3,365.8	230.8	854,059.64	401,088.61	3,371.02	0.00
15,900.0	89.19	179.48	12,470.2	9,368.2	-3,465.8	231.7	854,060.56	400,988.62	3,470.99	0.00
16,000.0	89.19	179.48	12,471.6	9,369.6	-3,565.8	232.6	854,061.47	400,888.64	3,570.97	0.00
16,100.0	89.19	179.48	12,473.0	9,371.0	-3,665.8	233.5	854,062.39	400,788.65	3,670.94	0.00
16,200.0	89.19	179.48	12,474.4	9,372.4	-3,765.7	234.5	854,063.30	400,688.66	3,770.91	0.00
16,300.0	89.19	179.48	12,475.8	9,373.8	-3,865.7	235.4	854,064.21	400,588.68	3,870.88	0.00
16,400.0	89.19	179.48	12,477.2	9,375.2	-3,965.7	236.3	854,065.13	400,488.69	3,970.85	0.00
16,500.0	89.19	179.48	12,478.6	9,376.6	-4,065.7	237.2	854,066.04	400,388.71	4,070.82	0.00
16,600.0	89.19	179.48	12,480.0	9,378.0	-4,165.7	238.1	854,066.96	400,288.72	4,170.79	0.00
16,700.0	89.19	179.48	12,481.4	9,379.4	-4,265.7	239.0	854,067.87	400,188.73	4,270.76	0.00
16,800.0	89.19	179.48	12,482.8	9,380.8	-4,365.7	239.9	854,068.78	400,088.75	4,370.74	0.00
16,900.0	89.19	179.48	12,484.2	9,382.2	-4,465.6	240.9	854,069.70	399,988.76	4,470.71	0.00
17,000.0	89.19	179.48	12,485.6	9,383.6	-4,565.6	241.8	854,070.61	399,888.78	4,570.68	0.00
17,100.0	89.19	179.48	12,487.0	9,385.0	-4,665.6	242.7	854,071.53	399,788.79	4,670.65	0.00
17,200.0	89.19	179.48	12,488.4	9,386.4	-4,765.6	243.6	854,072.44	399,688.81	4,770.62	0.00
17,300.0	89.19	179.48	12,489.8	9,387.8	-4,865.6	244.5	854,073.35	399,588.82	4,870.59	0.00



Morcor Engineering Morcor Standard Plan

Company:	Caza Operating LLC	Local Co-ordinate Reference:	Well Sioux 25-36 State Fed Com 16H
Project:	Sioux 25-36 State Fed Com 16H	TVD Reference:	WELL @ 3102.0usft (Original Well Elev)
Site:	Sioux 25-36 State Fed Com 16H	MD Reference:	WELL @ 3102.0usft (Original Well Elev)
Well:	Sioux 25-36 State Fed Com 16H	North Reference:	Grid
Wellbore:	Sioux 25-36 State Fed Com 16H	Survey Calculation Method:	Minimum Curvature
Design:	201214 Sioux 25-36 State Fed Com 16H - Plan	Database:	EDM 5000.1 Single User Db

Planned Survey

MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)
17,400.0	89.19	179.48	12,491.2	9,389.2	-4,965.6	245.4	854,074.27	399,488.83	4,970.56	0.00
17,500.0	89.19	179.48	12,492.6	9,390.6	-5,065.6	246.3	854,075.18	399,388.85	5,070.53	0.00
17,600.0	89.19	179.48	12,494.1	9,392.1	-5,165.5	247.3	854,076.10	399,288.86	5,170.51	0.00
17,700.0	89.19	179.48	12,495.5	9,393.5	-5,265.5	248.2	854,077.01	399,188.88	5,270.48	0.00
17,800.0	89.19	179.48	12,496.9	9,394.9	-5,365.5	249.1	854,077.93	399,088.89	5,370.45	0.00
17,900.0	89.19	179.48	12,498.3	9,396.3	-5,465.5	250.0	854,078.84	398,988.90	5,470.42	0.00
18,000.0	89.19	179.48	12,499.7	9,397.7	-5,565.5	250.9	854,079.75	398,888.92	5,570.39	0.00
18,100.0	89.19	179.48	12,501.1	9,399.1	-5,665.5	251.8	854,080.67	398,788.93	5,670.36	0.00
18,200.0	89.19	179.48	12,502.5	9,400.5	-5,765.5	252.7	854,081.58	398,688.95	5,770.33	0.00
18,300.0	89.19	179.48	12,503.9	9,401.9	-5,865.5	253.7	854,082.50	398,588.96	5,870.30	0.00
18,400.0	89.19	179.48	12,505.3	9,403.3	-5,965.4	254.6	854,083.41	398,488.97	5,970.27	0.00
18,500.0	89.19	179.48	12,506.7	9,404.7	-6,065.4	255.5	854,084.32	398,388.99	6,070.25	0.00
18,600.0	89.19	179.48	12,508.1	9,406.1	-6,165.4	256.4	854,085.24	398,289.00	6,170.22	0.00
18,700.0	89.19	179.48	12,509.5	9,407.5	-6,265.4	257.3	854,086.15	398,189.02	6,270.19	0.00
18,800.0	89.19	179.48	12,510.9	9,408.9	-6,365.4	258.2	854,087.07	398,089.03	6,370.16	0.00
18,900.0	89.19	179.48	12,512.3	9,410.3	-6,465.4	259.1	854,087.98	397,989.04	6,470.13	0.00
19,000.0	89.19	179.48	12,513.7	9,411.7	-6,565.4	260.1	854,088.89	397,889.06	6,570.10	0.00
19,100.0	89.19	179.48	12,515.1	9,413.1	-6,665.3	261.0	854,089.81	397,789.07	6,670.07	0.00
19,200.0	89.19	179.48	12,516.5	9,414.5	-6,765.3	261.9	854,090.72	397,689.09	6,770.04	0.00
19,300.0	89.19	179.48	12,517.9	9,415.9	-6,865.3	262.8	854,091.64	397,589.10	6,870.02	0.00
19,400.0	89.19	179.48	12,519.3	9,417.3	-6,965.3	263.7	854,092.55	397,489.11	6,969.99	0.00
19,500.0	89.19	179.48	12,520.7	9,418.7	-7,065.3	264.6	854,093.46	397,389.13	7,069.96	0.00
19,600.0	89.19	179.48	12,522.2	9,420.2	-7,165.3	265.5	854,094.38	397,289.14	7,169.93	0.00
19,700.0	89.19	179.48	12,523.6	9,421.6	-7,265.3	266.5	854,095.29	397,189.16	7,269.90	0.00
19,800.0	89.19	179.48	12,525.0	9,423.0	-7,365.2	267.4	854,096.21	397,089.17	7,369.87	0.00
19,900.0	89.19	179.48	12,526.4	9,424.4	-7,465.2	268.3	854,097.12	396,989.18	7,469.84	0.00
20,000.0	89.19	179.48	12,527.8	9,425.8	-7,565.2	269.2	854,098.04	396,889.20	7,569.81	0.00



Morcor Engineering Morcor Standard Plan

Company:	Caza Operating LLC	Local Co-ordinate Reference:	Well Sioux 25-36 State Fed Com 16H
Project:	Sioux 25-36 State Fed Com 16H	TVD Reference:	WELL @ 3102.0usft (Original Well Elev)
Site:	Sioux 25-36 State Fed Com 16H	MD Reference:	WELL @ 3102.0usft (Original Well Elev)
Well:	Sioux 25-36 State Fed Com 16H	North Reference:	Grid
Wellbore:	Sioux 25-36 State Fed Com 16H	Survey Calculation Method:	Minimum Curvature
Design:	201214 Sioux 25-36 State Fed Com 16H - Plan	Database:	EDM 5000.1 Single User Db

Planned Survey										
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)
20,100.0	89.19	179.48	12,529.2	9,427.2	-7,665.2	270.1	854,098.95	396,789.21	7,669.79	0.00
20,200.0	89.19	179.48	12,530.6	9,428.6	-7,765.2	271.0	854,099.86	396,689.23	7,769.76	0.00
20,300.0	89.19	179.48	12,532.0	9,430.0	-7,865.2	271.9	854,100.78	396,589.24	7,869.73	0.00
20,400.0	89.19	179.48	12,533.4	9,431.4	-7,965.2	272.9	854,101.69	396,489.25	7,969.70	0.00
20,500.0	89.19	179.48	12,534.8	9,432.8	-8,065.1	273.8	854,102.61	396,389.27	8,069.67	0.00
20,600.0	89.19	179.48	12,536.2	9,434.2	-8,165.1	274.7	854,103.52	396,289.28	8,169.64	0.00
20,700.0	89.19	179.48	12,537.6	9,435.6	-8,265.1	275.6	854,104.43	396,189.30	8,269.61	0.00
20,800.0	89.19	179.48	12,539.0	9,437.0	-8,365.1	276.5	854,105.35	396,089.31	8,369.58	0.00
20,900.0	89.19	179.48	12,540.4	9,438.4	-8,465.1	277.4	854,106.26	395,989.32	8,469.56	0.00
21,000.0	89.19	179.48	12,541.8	9,439.8	-8,565.1	278.3	854,107.18	395,889.34	8,569.53	0.00
21,100.0	89.19	179.48	12,543.2	9,441.2	-8,665.1	279.3	854,108.09	395,789.35	8,669.50	0.00
21,200.0	89.19	179.48	12,544.6	9,442.6	-8,765.0	280.2	854,109.00	395,689.37	8,769.47	0.00
21,300.0	89.19	179.48	12,546.0	9,444.0	-8,865.0	281.1	854,109.92	395,589.38	8,869.44	0.00
21,400.0	89.19	179.48	12,547.4	9,445.4	-8,965.0	282.0	854,110.83	395,489.40	8,969.41	0.00
21,500.0	89.19	179.48	12,548.8	9,446.8	-9,065.0	282.9	854,111.75	395,389.41	9,069.38	0.00
21,600.0	89.19	179.48	12,550.2	9,448.2	-9,165.0	283.8	854,112.66	395,289.42	9,169.35	0.00
21,700.0	89.19	179.48	12,551.7	9,449.7	-9,265.0	284.7	854,113.57	395,189.44	9,269.33	0.00
21,800.0	89.19	179.48	12,553.1	9,451.1	-9,365.0	285.6	854,114.49	395,089.45	9,369.30	0.00
21,900.0	89.19	179.48	12,554.5	9,452.5	-9,464.9	286.6	854,115.40	394,989.47	9,469.27	0.00
22,000.0	89.19	179.48	12,555.9	9,453.9	-9,564.9	287.5	854,116.32	394,889.48	9,569.24	0.00
22,100.0	89.19	179.48	12,557.3	9,455.3	-9,664.9	288.4	854,117.23	394,789.49	9,669.21	0.00
22,200.0	89.19	179.48	12,558.7	9,456.7	-9,764.9	289.3	854,118.15	394,689.51	9,769.18	0.00
22,300.0	89.19	179.48	12,560.1	9,458.1	-9,864.9	290.2	854,119.06	394,589.52	9,869.15	0.00
22,400.0	89.19	179.48	12,561.5	9,459.5	-9,964.9	291.1	854,119.97	394,489.54	9,969.12	0.00
22,500.0	89.19	179.48	12,562.9	9,460.9	-10,064.9	292.0	854,120.89	394,389.55	10,069.10	0.00
22,600.0	89.19	179.48	12,564.3	9,462.3	-10,164.8	293.0	854,121.80	394,289.56	10,169.07	0.00
22,700.0	89.19	179.48	12,565.7	9,463.7	-10,264.8	293.9	854,122.72	394,189.58	10,269.04	0.00



Morcor Engineering

Morcor Standard Plan

Company: Caza Operating LLC
Project: Sioux 25-36 State Fed Com 16H
Site: Sioux 25-36 State Fed Com 16H
Well: Sioux 25-36 State Fed Com 16H
Wellbore: Sioux 25-36 State Fed Com 16H
Design: 201214 Sioux 25-36 State Fed Com 16H - Plan

Local Co-ordinate Reference: Well Sioux 25-36 State Fed Com 16H
TVD Reference: WELL @ 3102.0usft (Original Well Elev)
MD Reference: WELL @ 3102.0usft (Original Well Elev)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: EDM 5000.1 Single User Db

Planned Survey

MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	TVDSS (usft)	N/S (usft)	E/W (usft)	Easting (usft)	Northing (usft)	V. Sec (usft)	DLeg (°/100usft)
22,720.5	89.19	179.48	12,566.0	9,464.0	-10,285.3	294.1	854,122.90	394,169.08	10,289.53	0.00
6" Production Casing										

Casing Points

Measured Depth (usft)	Vertical Depth (usft)	Name	Casing Diameter (")	Hole Diameter (")
120.0	120.0	20" Conductor	20	26
1,100.0	1,100.0	13 3/8" Surface Casing	13-3/8	17-1/2
10,311.5	10,300.0	9 5/8" Intermediate Casing	9-5/8	12-1/4
22,720.5	12,566.0	6" Production Casing	6	8-1/2



Morcor Engineering

Morcor Standard Plan

Company: Caza Operating LLC
Project: Sioux 25-36 State Fed Com 16H
Site: Sioux 25-36 State Fed Com 16H
Well: Sioux 25-36 State Fed Com 16H
Wellbore: Sioux 25-36 State Fed Com 16H
Design: 201214 Sioux 25-36 State Fed Com 16H - Plan


Local Co-ordinate Reference: Well Sioux 25-36 State Fed Com 16H
TVD Reference: WELL @ 3102.0usft (Original Well Elev)
MD Reference: WELL @ 3102.0usft (Original Well Elev)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: EDM 5000.1 Single User Db

Formations

Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
10,235.5	10,224.0	2nd Bone Spring		0.00	
3,211.6	3,209.0	Yates		0.00	
5,673.6	5,664.0	Cherry Canyon		0.00	
4,951.6	4,944.0	Delaware		0.00	
3,706.0	3,702.0	Queen		0.00	
3,486.4	3,483.0	Seven Rivers		0.00	
4,040.0	4,035.0	Grayburg		0.00	
11,622.5	11,611.0	3rd Bone Spring		0.00	
9,735.5	9,724.0	1st Bone Spring		0.00	
4,541.4	4,535.0	San Andres		0.00	
2,442.4	2,442.0	Base of Salt		0.00	
8,590.5	8,579.0	Bone Spring		0.00	
754.0	754.0	Rustler		0.00	
11,917.5	11,906.0	Wolfcamp		0.00	
1,144.0	1,144.0	Top of Salt		0.00	
3,069.2	3,067.0	Tansil		0.00	
7,335.5	7,324.0	Brushy Canyon		0.00	

Checked By: _____ Approved By: _____ Date: _____

Closed Loop Diagram Design Plan

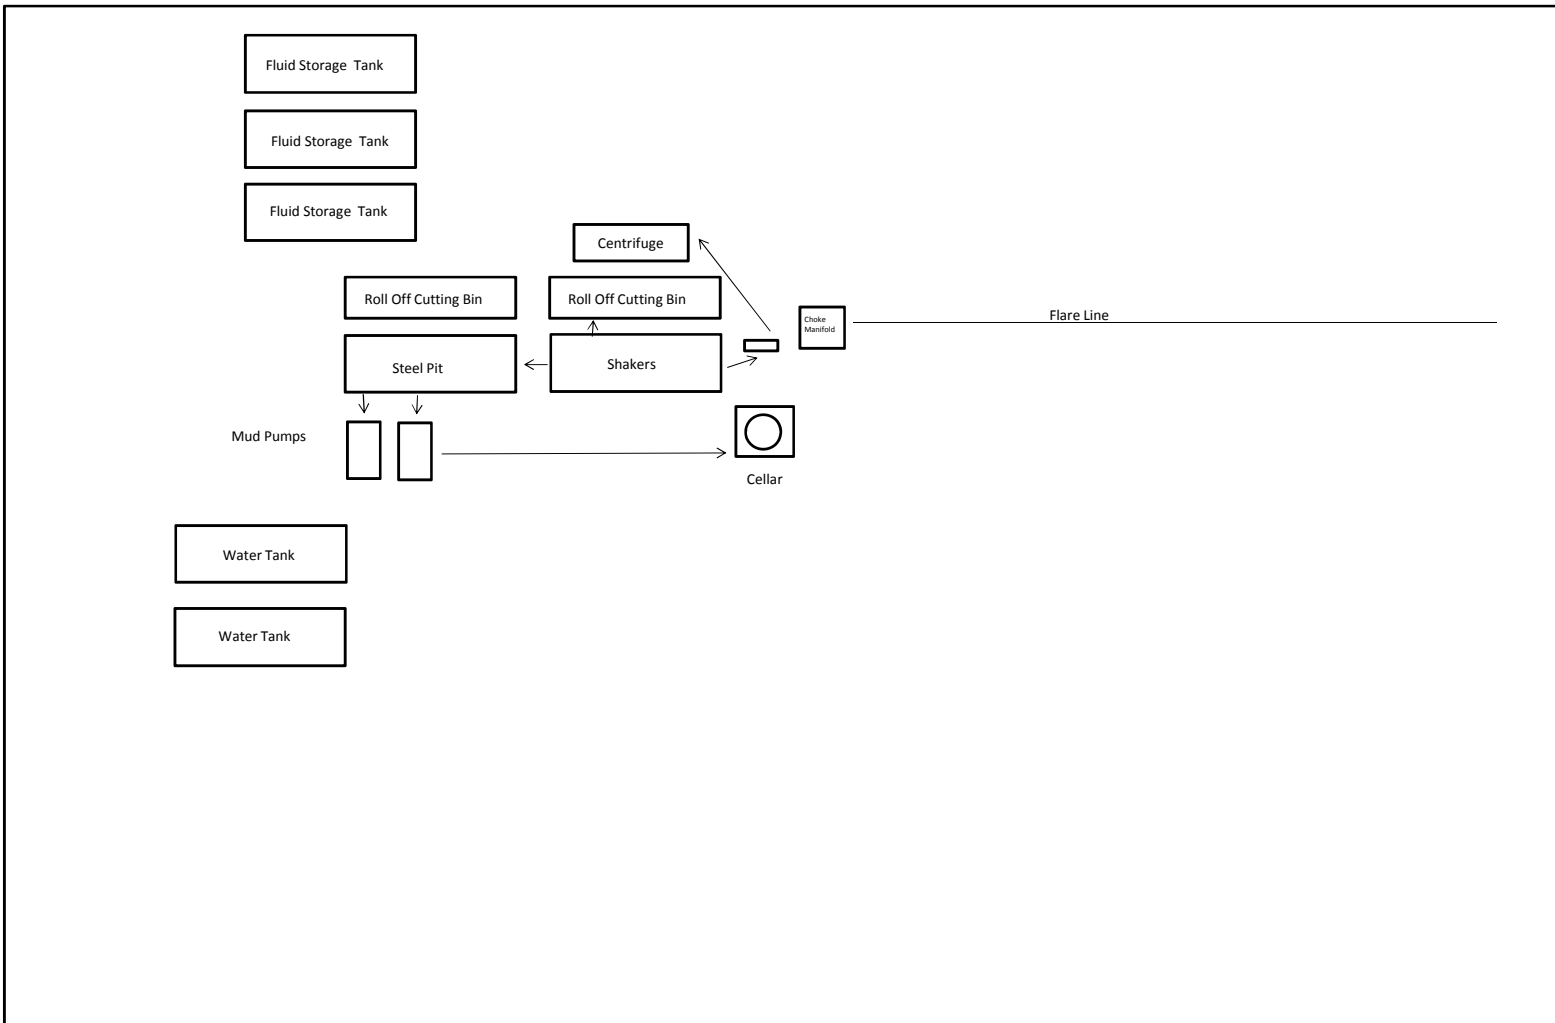

Design Plan, Operating Plan and Maintenance Plan, and Closure Plan for the OCD form C-144

Design Plan:

Fluid and cuttings coming from drilling operations will pass over the shale shaker with the cuttings going to the haul off bin and the cleaned fluid returning to the working steel pits.

Equipment Includes:


- 1-670bbl steel working pit
- 2-100bbl steel working suction pits
- 2-500bbl steel tanks
- 2-20yd³ steel haul off bins
- 2-pumps (HHF-1600)
- 2-Shale shakers
- 1-Centrifuge
- 1-Desilter/Desander

Operating and Maintenance Plan:

Inspection to occur every tour for proper operation of system and individual components. If any problems are found they will be repaired and/or corrected immediately.

Closure Plan:

All haul off bins containing cuttings will be removed from location and hauled to R-360 (NM-01-0006) disposal site located 30 miles east of Carlsbad.

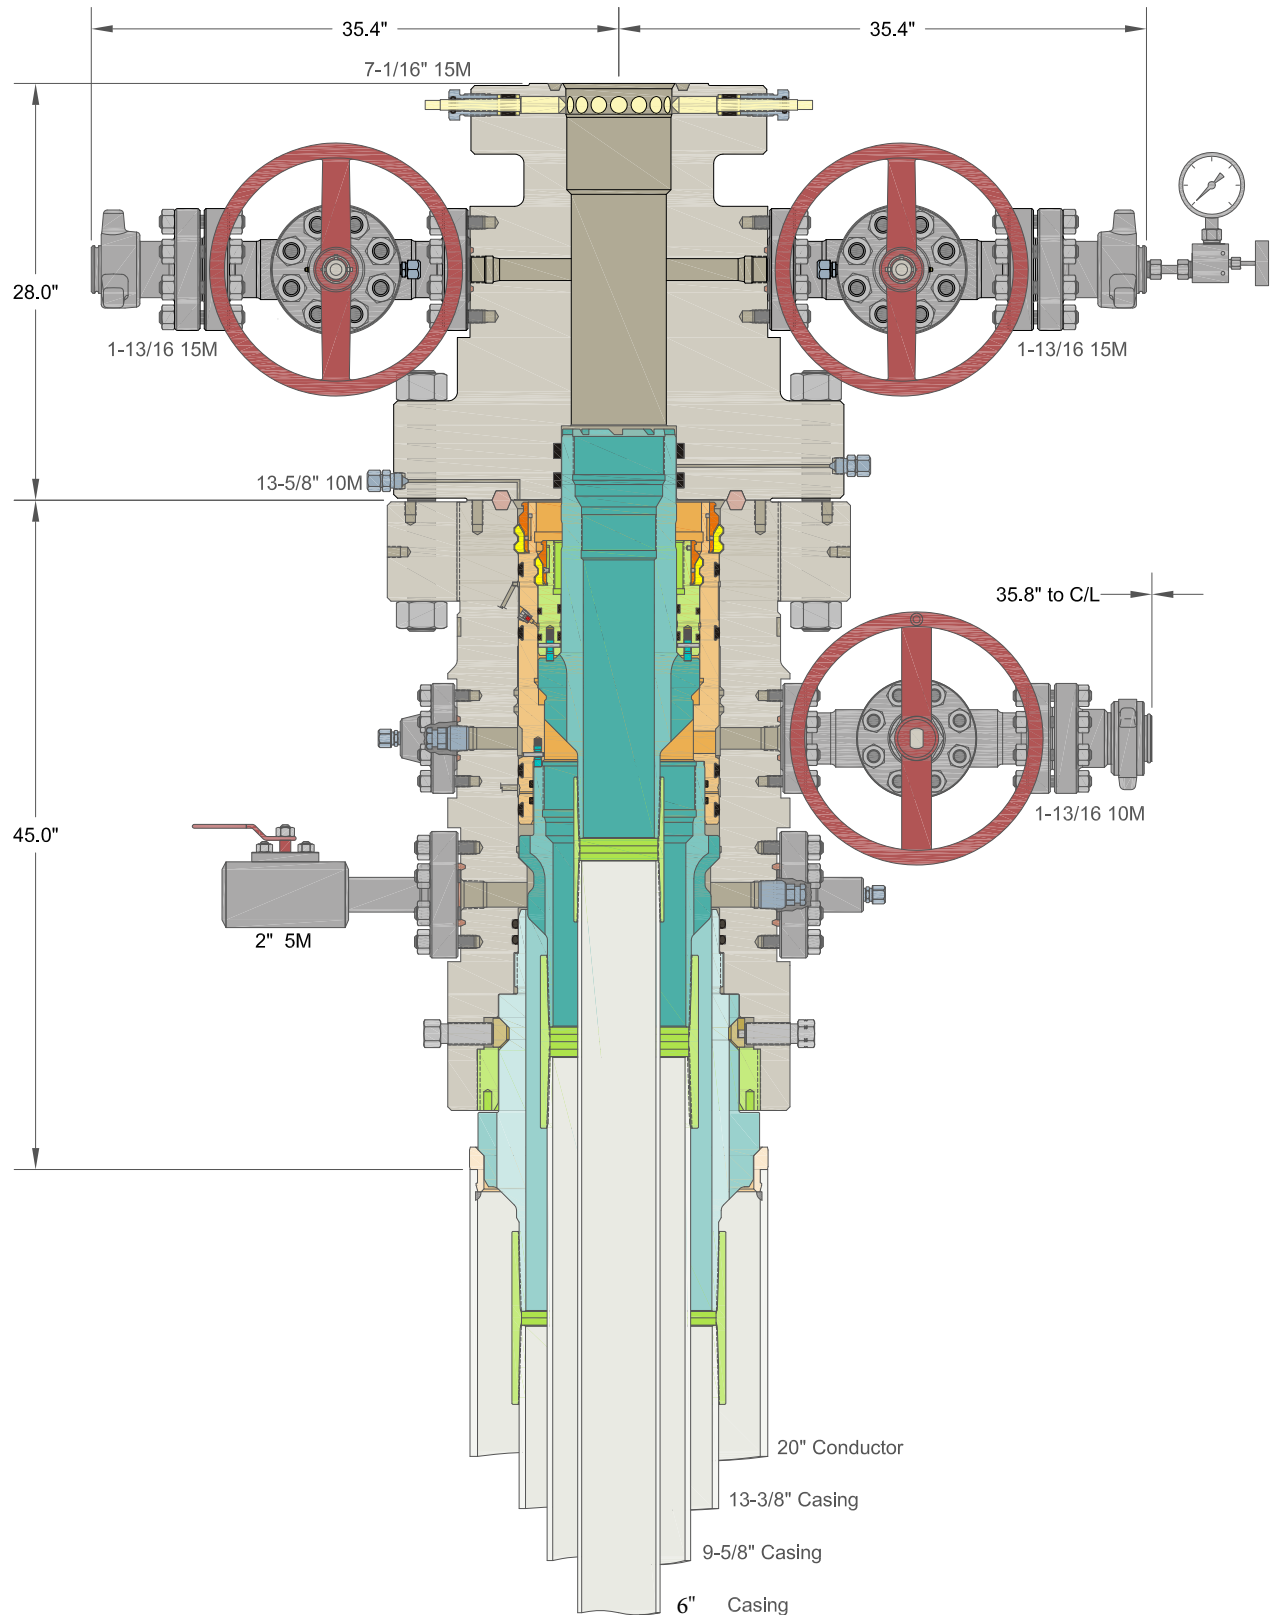

INFORMATION CONTAINED HEREIN IS THE PROPERTY OF CACTUS WELLHEAD, LLC. REPRODUCTION, DISCLOSURE, OR USE THEREOF IS PERMISSIBLE ONLY AS PROVIDED BY CONTRACT OR AS EXPRESSLY AUTHORIZED BY CACTUS WELLHEAD, LLC.

ALL DIMENSIONS APPROXIMATE

CACTUS WELLHEAD LLC

CAZA PETROLEUM
PERMIAN BASIN

13-3/8" x 9-5/8" x 6" MBU-3T-CFL-R-DBLO Wellhead System
With 13-5/8" 10M x 7-1/16" 15M CTH-DBLHPS Tubing Head
And 13-3/8", 9-5/8" & 5-1/2" Mandrel Casing Hangers

DRAWN	DLE	25SEP19
APPRV		
DRAWING NO.		ODE0003135



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

SUPO Data Report

10/04/2021

APD ID: 10400066298

Submission Date: 01/20/2021

Highlighted data
reflects the most
recent changes

Operator Name: CAZA OPERATING LLC

Well Name: SIOUX 25-36 STATE FED COM

Well Number: 16H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Existing Roads

Will existing roads be used? YES

Existing Road Map:

Sioux_25_36_State_Fed_Com_16H___Vicinity_and_Existing_Road_Plat_20201209091736.pdf

Existing Road Purpose: ACCESS,FLUID TRANSPORT

Row(s) Exist? NO

ROW ID(s)

ID:

Do the existing roads need to be improved? NO

Existing Road Improvement Description:

Existing Road Improvement Attachment:

Section 2 - New or Reconstructed Access Roads

Will new roads be needed? NO

Section 3 - Location of Existing Wells

Existing Wells Map? YES

Attach Well map:

Sioux_25_36_State_Fed_Com_16H___1_Mile_Radius_20201209091753.pdf

Operator Name: CAZA OPERATING LLC**Well Name:** SIOUX 25-36 STATE FED COM**Well Number:** 16H

Section 4 - Location of Existing and/or Proposed Production Facilities

Submit or defer a Proposed Production Facilities plan? SUBMIT

Production Facilities description: Central tank battery previously approved. Tankage will be added as needed. Each well will have a 3 phase metered separator and FWKO.

Production Facilities map:

Sioux_25_36_State_Fed_Com_16H___SIOUX_CENTRAL_TANK_BATTERY_20201209091808.pdf

20191018_R4012_001_SIOUX_CENTRAL_TANK_BATTERY_NM_LE_0001.00000_REV._1___CERTIFIED_BECKHAM_R
ANCH_20210120042258.pdf

20191018_R4012_001_SIOUX_CENTRAL_TANK_BATTERY_NM_LE_0003.00012_REV._1___CERTIFIED_BECKHAM_R
ANCH_20210120042305.pdf

20191018_R4012_001_SIOUX_CENTRAL_TANK_BATTERY_NM_LE_0003.00011_REV._1___CERTIFIED_DINWIDDIE_C
ATTLE_20210120042309.pdf

20191018_R4012_001_SIOUX_CENTRAL_TANK_BATTERY_NM_LE_0002.00011_REV._1___CERTIFIED_BECKHAM_R
ANCH_20210120042310.pdf

Section 5 - Location and Types of Water Supply

Water Source Table

Water source type: GW WELL

Water source use type: SURFACE CASING
STIMULATION
INTERMEDIATE/PRODUCTION
CASING

Source latitude: 32.107143

Source longitude: -103.30588

Source datum: NAD83

Water source permit type: PRIVATE CONTRACT

Water source transport method: TRUCKING

Source land ownership: PRIVATE

Source transportation land ownership: PRIVATE

Water source volume (barrels): 400000

Source volume (acre-feet): 51.55723853

Source volume (gal): 16800000

Operator Name: CAZA OPERATING LLC**Well Name:** SIOUX 25-36 STATE FED COM**Well Number:** 16H**Water source and transportation map:**

Sioux_25_36_State_Fed_Com_16H___Water_Supply_and_Caliche_Map_20201209092010.pdf

Water source comments: S30 T25S R36E NENW**New water well?** N**New Water Well Info****Well latitude:****Well Longitude:****Well datum:****Well target aquifer:****Est. depth to top of aquifer(ft):****Est thickness of aquifer:****Aquifer comments:****Aquifer documentation:****Well depth (ft):****Well casing type:****Well casing outside diameter (in.):****Well casing inside diameter (in.):****New water well casing?****Used casing source:****Drilling method:****Drill material:****Grout material:****Grout depth:****Casing length (ft.):****Casing top depth (ft.):****Well Production type:****Completion Method:****Water well additional information:****State appropriation permit:****Additional information attachment:****Section 6 - Construction Materials****Using any construction materials:** NO**Construction Materials description:****Construction Materials source location attachment:****Section 7 - Methods for Handling Waste****Waste type:** SEWAGE**Waste content description:** onsite housing sewage**Amount of waste:** 300 gallons**Waste disposal frequency :** Daily**Safe containment description:** closed septic system**Safe containmant attachment:**

Operator Name: CAZA OPERATING LLC**Well Name:** SIOUX 25-36 STATE FED COM**Well Number:** 16H**Waste disposal type:** HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** STATE**Disposal type description:****Disposal location description:** Hobbs Waste Water Management**Waste type:** DRILLING**Waste content description:** drill cuttings**Amount of waste:** 1163460 pounds**Waste disposal frequency :** Daily**Safe containment description:** roll off bins**Safe containmant attachment:****Waste disposal type:** HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** PRIVATE**Disposal type description:****Disposal location description:** R360 Commercial facility**Waste type:** GARBAGE**Waste content description:** onsite housing trash**Amount of waste:** 100 pounds**Waste disposal frequency :** Daily**Safe containment description:** steel trash trailer**Safe containmant attachment:****Waste disposal type:** HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** OTHER**Disposal type description:****Disposal location description:** Eunice landfill

Reserve Pit

Reserve Pit being used? NO**Temporary disposal of produced water into reserve pit?** NO**Reserve pit length (ft.)** **Reserve pit width (ft.)****Reserve pit depth (ft.)** **Reserve pit volume (cu. yd.)****Is at least 50% of the reserve pit in cut?****Reserve pit liner****Reserve pit liner specifications and installation description**

Operator Name: CAZA OPERATING LLC**Well Name:** SIOUX 25-36 STATE FED COM**Well Number:** 16H

Cuttings Area

Cuttings Area being used? NO**Are you storing cuttings on location?** N**Description of cuttings location****Cuttings area length (ft.)****Cuttings area width (ft.)****Cuttings area depth (ft.)****Cuttings area volume (cu. yd.)****Is at least 50% of the cuttings area in cut?****WCuttings area liner****Cuttings area liner specifications and installation description**

Section 8 - Ancillary Facilities

Are you requesting any Ancillary Facilities?: N**Ancillary Facilities attachment:****Comments:**

Section 9 - Well Site Layout

Well Site Layout Diagram:

Sioux_25_36_State_Fed_Com_16H___Location_Layout_20201209092256.pdf

Sioux_25_36_State_Fed_Com_16H___Well_Pad_Plat_20201209092259.pdf

Sioux_25_36_State_Fed_Com_16H___Well_Location_Plat_20201209092300.pdf

Comments:

Section 10 - Plans for Surface Reclamation

Type of disturbance: No New Surface Disturbance **Multiple Well Pad Name:** Sioux 25-36 State Fed Com**Multiple Well Pad Number:** 2H**Recontouring attachment:****Drainage/Erosion control construction:** Per BLM instructions as identified during onsite**Drainage/Erosion control reclamation:** Per BLM instructions as identified during onsite

Operator Name: CAZA OPERATING LLC

Well Name: SIOUX 25-36 STATE FED COM

Well Number: 16H

Well pad proposed disturbance (acres):	Well pad interim reclamation (acres): 0	Well pad long term disturbance (acres): 0
Road proposed disturbance (acres):	Road interim reclamation (acres): 0	Road long term disturbance (acres): 0
Powerline proposed disturbance (acres):	Powerline interim reclamation (acres): 0	Powerline long term disturbance (acres): 0
Pipeline proposed disturbance (acres):	Pipeline interim reclamation (acres): 0	Pipeline long term disturbance (acres): 0
Other proposed disturbance (acres):	Other interim reclamation (acres): 0	Other long term disturbance (acres): 0
Total proposed disturbance: 0	Total interim reclamation: 0	Total long term disturbance: 0

Disturbance Comments:

Reconstruction method: Interim reclamation as identified during onsite

Topsoil redistribution: Interim reclamation as identified during onsite

Soil treatment: Interim reclamation as identified during onsite

Existing Vegetation at the well pad: Sage brush and native grasses

Existing Vegetation at the well pad attachment:

Existing Vegetation Community at the road: Sage brush and native grasses

Existing Vegetation Community at the road attachment:

Existing Vegetation Community at the pipeline: Sage brush and native grasses

Existing Vegetation Community at the pipeline attachment:

Existing Vegetation Community at other disturbances: Sage brush and native grasses

Existing Vegetation Community at other disturbances attachment:

Non native seed used? N

Non native seed description:

Seedling transplant description:

Will seedlings be transplanted for this project? N

Seedling transplant description attachment:

Will seed be harvested for use in site reclamation? N

Seed harvest description:

Seed harvest description attachment:

Operator Name: CAZA OPERATING LLC**Well Name:** SIOUX 25-36 STATE FED COM**Well Number:** 16H**Seed Management****Seed Table****Seed Summary****Total pounds/Acre:****Seed Type****Pounds/Acre****Seed reclamation attachment:****Operator Contact/Responsible Official Contact Info****First Name:** STEVE**Last Name:** MORRIS**Phone:** (985)415-9729**Email:** steve.morris@morcorengineering.com**Seedbed prep:** Harrow**Seed BMP:** As identified during onsite**Seed method:** Broadcast followed by a drag chain**Existing invasive species?** N**Existing invasive species treatment description:****Existing invasive species treatment attachment:****Weed treatment plan description:** Spray for cheat grass**Weed treatment plan attachment:****Monitoring plan description:** Visual inspection in spring and late fall**Monitoring plan attachment:****Success standards:** 80% coverage by 2nd growing season of native species with less than 5% invasive species**Pit closure description:** no pits**Pit closure attachment:****Section 11 - Surface Ownership****Disturbance type:** WELL PAD**Describe:****Surface Owner:** PRIVATE OWNERSHIP**Other surface owner description:****BIA Local Office:****BOR Local Office:**

Operator Name: CAZA OPERATING LLC**Well Name:** SIOUX 25-36 STATE FED COM**Well Number:** 16H**COE Local Office:****DOD Local Office:****NPS Local Office:****State Local Office:****Military Local Office:****USFWS Local Office:****Other Local Office:****USFS Region:****USFS Forest/Grassland:****USFS Ranger District:****Fee Owner:** NGL Energy Partners LP**Fee Owner Address:** 10 Desta Dr**Phone:** (918)236-4717**Email:** alan.barker@nglep.com**Surface use plan certification:** YES**Surface use plan certification document:**

Sioux_25_36_State_Fed_Com_16H___Surface_use_plan_of_operations_certification_signed_20201209093029.po

Surface access agreement or bond: AGREEMENT**Surface Access Agreement Need description:** Fee per well drilled**Surface Access Bond BLM or Forest Service:****BLM Surface Access Bond number:****USFS Surface access bond number:**

Section 12 - Other Information

Right of Way needed? N**Use APD as ROW?****ROW Type(s):**

ROW Applications

SUPO Additional Information:

Operator Name: CAZA OPERATING LLC

Well Name: SIOUX 25-36 STATE FED COM

Well Number: 16H

Use a previously conducted onsite? Y

Previous Onsite information: Sioux 25-36 State Fed Com 2H

Other SUPO Attachment

Sioux_25_36_State_Fed_Com_16H___Closed_Loop_Diagram_Design_Plan_20201209092735.pdf

Sioux_25_36_State_Fed_Com_16H___Closed_Loop_Design_Operating_and_Closure_Plan_20201209092735.pdf

Sioux_25_36_State_Fed_Com_16H___Gas_Capture_Plan_20201209092735.pdf

Sioux_25_36_State_Fed_Com_16H___Vicinity_Plat_20201209092737.pdf

Sioux_25_36_State_Fed_Com_16H___Location_Verification_Plat_20201209092738.pdf

Sioux_25_36_State_Fed_Com_16H___IR_Plat_20201209092740.pdf

Sioux_14_15_16_17_20_21_22_23___Reciept_20210120042331.pdf

United States Department of the Interior
Bureau of Land Management
CARLSBAD FIELD OFFICE
620 E. GREENE
CARLSBAD, NM 88220 -6292
Phone: (575) 234-5972

Receipt

No: 4849809

Transaction #: 4978154	
Date of Transaction: 12/10/2020	
CUSTOMER:	
	CAZA OPERATING LLC 200 N LORAIN ST STE 1550 MIDLAND, TX 79701-4765 US

LINE #	QTY	DESCRIPTION	REMARKS	UNIT PRICE	TOTAL
1	1.00	OIL & GAS / APPLICATION FOR PERMIT TO DRILL (APD) / APD FEE	SIoux 25-36 STATE FED COM 14H	- n/a -	7770.00
2	1.00	OIL & GAS / APPLICATION FOR PERMIT TO DRILL (APD) / APD FEE - BW ALLOCATION	SIoux 25-36 STATE FED COM 14H	- n/a -	2590.00
3	1.00	OIL & GAS / APPLICATION FOR PERMIT TO DRILL (APD) / APD FEE	SIoux 25-36 STATE FED COM 15H	- n/a -	7770.00
4	1.00	OIL & GAS / APPLICATION FOR PERMIT TO DRILL (APD) / APD FEE - BW ALLOCATION	SIoux 25-36 STATE FED COM 15H	- n/a -	2590.00
5	1.00	OIL & GAS / APPLICATION FOR PERMIT TO DRILL (APD) / APD FEE	SIoux 25-36 STATE FED COM 16H	- n/a -	7770.00
6	1.00	OIL & GAS / APPLICATION FOR PERMIT TO DRILL (APD) / APD FEE - BW ALLOCATION	SIoux 25-36 STATE FED COM 16H	- n/a -	2590.00
7	1.00	OIL & GAS / APPLICATION FOR PERMIT TO DRILL (APD) / APD FEE	SIoux 25-36 STATE FED COM 17H	- n/a -	7770.00
8	1.00	OIL & GAS / APPLICATION FOR PERMIT TO DRILL (APD) / APD FEE - BW ALLOCATION	SIoux 25-36 STATE FED COM 17H	- n/a -	2590.00
9	1.00	OIL & GAS / APPLICATION FOR PERMIT TO DRILL (APD) / APD FEE	SIoux 25-36 STATE FED COM 20H	- n/a -	7770.00
		OIL & GAS / APPLICATION FOR	SIoux 25-36		

10	1.00	PERMIT TO DRILL (APD) / APD FEE - BW ALLOCATION	STATE FED COM 20H	- n/a -	2590.00
11	1.00	OIL & GAS / APPLICATION FOR PERMIT TO DRILL (APD) / APD FEE	SIOUX 25-36 STATE FED COM 21H	- n/a -	7770.00
12	1.00	OIL & GAS / APPLICATION FOR PERMIT TO DRILL (APD) / APD FEE - BW ALLOCATION	SIOUX 25-36 STATE FED COM 21H	- n/a -	2590.00
13	1.00	OIL & GAS / APPLICATION FOR PERMIT TO DRILL (APD) / APD FEE	SIOUX 25-36 STATE FED COM 22H	- n/a -	7770.00
14	1.00	OIL & GAS / APPLICATION FOR PERMIT TO DRILL (APD) / APD FEE - BW ALLOCATION	SIOUX 25-36 STATE FED COM 22H	- n/a -	2590.00
15	1.00	OIL & GAS / APPLICATION FOR PERMIT TO DRILL (APD) / APD FEE	SIOUX 25-36 STATE FED COM 23H	- n/a -	7770.00
16	1.00	OIL & GAS / APPLICATION FOR PERMIT TO DRILL (APD) / APD FEE - BW ALLOCATION	SIOUX 25-36 STATE FED COM 23H	- n/a -	2590.00
TOTAL:					\$82,880.00

PAYMENT INFORMATION				
1	AMOUNT:	82880.00	POSTMARKED:	12/10/2020
	TYPE:	CHECK	RECEIVED:	12/10/2020
	CHECK NO:	55193		
	NAME:	CAZA OPERATING LLC 200 N LORAIN ST STE 1550 MIDLAND TX 79701-4765 US		

REMARKS

This receipt was generated by the automated BLM Collections and Billing System and is a paper representation of a portion of the official electronic record contained therein.



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

PWD Data Report

10/04/2021

APD ID: 10400066298

Submission Date: 01/20/2021

Operator Name: CAZA OPERATING LLC

Well Name: SIOUX 25-36 STATE FED COM

Well Number: 16H

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit specifications:

Pit liner description:

Pit liner manufacturers information:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule attachment:

Lined pit reclamation description:

Lined pit reclamation attachment:

Leak detection system description:

Leak detection system attachment:

Operator Name: CAZA OPERATING LLC

Well Name: SIOUX 25-36 STATE FED COM

Well Number: 16H

Lined pit Monitor description:

Lined pit Monitor attachment:

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information attachment:

Section 3 - Unlined Pits

Would you like to utilize Unlined Pit PWD options? N

Produced Water Disposal (PWD) Location:

PWD disturbance (acres):

PWD surface owner:

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit specifications:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule attachment:

Unlined pit reclamation description:

Unlined pit reclamation attachment:

Unlined pit Monitor description:

Unlined pit Monitor attachment:

Do you propose to put the produced water to beneficial use?

Beneficial use user confirmation:

Estimated depth of the shallowest aquifer (feet):

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic evidence:

State authorization:

Unlined Produced Water Pit Estimated percolation:

Unlined pit: do you have a reclamation bond for the pit?

Operator Name: CAZA OPERATING LLC**Well Name:** SIOUX 25-36 STATE FED COM**Well Number:** 16H**Is the reclamation bond a rider under the BLM bond?****Unlined pit bond number:****Unlined pit bond amount:****Additional bond information attachment:**

Section 4 - Injection

Would you like to utilize Injection PWD options? N**Produced Water Disposal (PWD) Location:****PWD surface owner:****PWD disturbance (acres):****Injection PWD discharge volume (bbl/day):****Injection well mineral owner:****Injection well type:****Injection well number:****Injection well name:****Assigned injection well API number?****Injection well API number:****Injection well new surface disturbance (acres):****Minerals protection information:****Mineral protection attachment:****Underground Injection Control (UIC) Permit?****UIC Permit attachment:**

Section 5 - Surface Discharge

Would you like to utilize Surface Discharge PWD options? N**Produced Water Disposal (PWD) Location:****PWD surface owner:****PWD disturbance (acres):****Surface discharge PWD discharge volume (bbl/day):****Surface Discharge NPDES Permit?****Surface Discharge NPDES Permit attachment:****Surface Discharge site facilities information:****Surface discharge site facilities map:**

Section 6 - Other

Would you like to utilize Other PWD options? N**Produced Water Disposal (PWD) Location:****PWD surface owner:****PWD disturbance (acres):****Other PWD discharge volume (bbl/day):**

Operator Name: CAZA OPERATING LLC

Well Name: SIOUX 25-36 STATE FED COM

Well Number: 16H

Other PWD type description:

Other PWD type attachment:

Have other regulatory requirements been met?

Other regulatory requirements attachment:



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Bond Info Data Report

10/04/2021

APD ID: 10400066298

Submission Date: 01/20/2021

Highlighted data
reflects the most
recent changes

Operator Name: CAZA OPERATING LLC

Well Name: SIOUX 25-36 STATE FED COM

Well Number: 16H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Bond Information

Federal/Indian APD: FED

BLM Bond number: NMB000471

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment:

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: _____ **OGRID:** _____ **Date:** ____/____/____

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
	30-025-49472					

IV. Central Delivery Point Name: _____ [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
	30-025-49472					

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.



VI. Separation Equipment: Attach a complete description of how Operator will size separation equipment to optimize gas capture.

- Separation equipment is sized to allow for retention time and velocity to adequately separate oil, gas, and water at anticipated peak rates.
- All central tank battery equipment is designed to efficiently capture the remaining gas from the liquid phase.
- Valves and meters are designed to service without flow interruption or venting of gas.

VII. Operational Practices: Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F 19.15.27.8 NMAC.

19.15.27.8 (A)

Caza's field operations are designed with the goal of minimizing flaring and preventing venting of natural gas. If capturing the gas is not possible then the gas is combusted/flared using properly sized flares or combustors in accordance with state air permit rules.

19.15.27.8 (B) Venting and Flaring during drilling operations.

- A properly-sized flare stack will be located at a minimum 100' from the nearest surface hole location on the pad.
- All natural gas produced during drilling operations will be flared. Venting will only occur if there is an equipment malfunction and/or to avoid risk of an immediate and substantial adverse impact on safety, public health, or the environment.

19.15.27.8 (C) Venting and Flaring during completions or recompletions operations.

- During all phases of flowback, wells will flow through a sand separator, or other appropriate flowback separation equipment, and the well stream will be directed to a central tank battery (CTB) through properly sized flowlines.
- The CTB will have properly sized separation equipment for maximum anticipated flow rates
- Multiple stages of separation will be used to separate gas from liquids. All gas will be routed to a sales outlet. Fluids will be routed to tanks equipped with a closed loop system that will recover any residual gas from the tanks and route such gas to a sales outlet.

19.15.27.8 (D) Venting and Flaring during production operations.

- During production, the well stream will be routed to the CTB where multiple stages of separation will separate gas from liquids. All gas will be routed to a sales outlet. Fluids will be routed to tanks equipped with a closed loop system that will recover any residual gas from the tanks and route such gas to a sales outlet, minimizing tank emissions.
- Flares are equipped with auto-ignition systems and continuous pilot operations.
- Automatic gauging equipment is installed on all tanks.



19.15.27.8 (E) Performance Standards.

- Production equipment will be designed to handle maximum anticipated rates and pressure.
- Automatic gauging equipment is installed on all tanks to minimize venting.
- All flared gas will be combusted in a flare stack that is properly sized and designed to ensure proper combustion.
- Flares are equipped with continuous pilots and auto-ignitors along with remote monitoring of the pilot status.
- Weekly AVOs and monthly LDAR inspections will be performed on all wells and facilities that produce more than 60 Mcfd.
- Gas/H₂S detectors will be installed throughout the facilities and wellheads to detect leaks and enable timely repairs.

19.15.27.8 (F) Measurement or estimation of vented and flared natural gas.

- All high pressure flared gas is measured by equipment conforming to API 14.10.
- No meter bypasses are installed.
- When metering is not practical due to low pressure/low rate, the vented or flared volume will be estimated through flare flow curves with the assistance of air emissions consultants, as necessary.

VIII. Best Management Practices: Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

- Caza will use best management practices to vent as minimally as possible during well intervention operations and downhole well maintenance.
- All natural gas is routed into the gas gathering system and directed to one of Caza's multiple gas sales outlets.
- All venting events will be recorded and all start-up, shutdown, maintenance logs will be kept for control equipment.
- All control equipment will be maintained to provide highest run-time possible.
- All procedures are drafted to keep venting and flaring to the absolute minimum.

Section 2 – Enhanced Plan**EFFECTIVE APRIL 1, 2022**

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☐ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature:
Printed Name:
Title:
E-mail Address:
Date:
Phone:
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)
Approved By:
Title:
Approval Date:
Conditions of Approval:

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 55847

CONDITIONS

Operator: CAZA OPERATING, LLC 200 N Loraine St Midland, TX 79701	OGRID:
	249099
	Action Number:
	55847
Action Type:	
[C-101] BLM - Federal/Indian Land Lease (Form 3160-3)	

CONDITIONS

Created By	Condition	Condition Date
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104	10/22/2021
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string	10/22/2021
pkautz	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system	10/22/2021
pkautz	Cement is required to circulate on both surface and intermediate1 strings of casing	10/22/2021