

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources
Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-144
Revised April 3, 2017

For temporary pits, below-grade tanks, and multi-well fluid management pits, submit to the appropriate NMOCD District Office.
For permanent pits submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

15940
Pit, Below-Grade Tank, or
Proposed Alternative Method Permit or Closure Plan Application

Type of action: ☒ Below grade tank registration
☐ Permit of a pit or proposed alternative method
☐ Closure of a pit, below-grade tank, or proposed alternative method
☐ Modification to an existing permit/or registration
☐ Closure plan only submitted for an existing permitted or non-permitted pit, below-grade tank, or proposed alternative method

Instructions: Please submit one application (Form C-144) per individual pit, below-grade tank or alternative request

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.

1.
Operator: LOGOS Operating, LLC OGRID #: 289408
Address: 2010 Afton Place, Farmington, NM 87401
Facility or well name: LOGOS 2406 29H Com 13
API Number: 30-039-31359 OCD Permit Number: _____
U/L or Qtr/Qtr H Section 29 Township 24N Range 6W County: Rio Arriba
Center of Proposed Design: Latitude 36.284046°N Longitude 107.483703°W NAD83
Surface Owner: ☒ Federal ☐ State ☐ Private ☐ Tribal Trust or Indian Allotment

2.
☐ **Pit:** Subsection F, G or J of 19.15.17.11 NMAC
Temporary: ☐ Drilling ☐ Workover
☐ Permanent ☐ Emergency ☐ Cavitation ☐ P&A ☐ Multi-Well Fluid Management Low Chloride Drilling Fluid ☐ yes ☐ no
☐ Lined ☐ Unlined Liner type: Thickness _____ mil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other _____
☐ String-Reinforced
Liner Seams: ☐ Welded ☐ Factory ☐ Other _____ Volume: _____ bbl Dimensions: L _____ x W _____ x D _____

3.
☒ **Below-grade tank:** Subsection I of 19.15.17.11 NMAC
Volume: 95 bbl Type of fluid: Produced Water
Tank Construction material: Metal
☐ Secondary containment with leak detection ☒ Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☐ Other _____
Liner type: Thickness 45 mil ☐ HDPE ☐ PVC ☒ Other LLDPE

OIL CONS. DIV DIST. 3

MAY 31 2017

4.
☐ **Alternative Method:**
Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

5.
Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)
☐ Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church)
☐ Four foot height, four strands of barbed wire evenly spaced between one and four feet
☒ Alternate. Please specify 4' hog wire with one strand of barbed wire on top

25

6.

Netting: Subsection E of 19.15.17.11 NMAC (*Applies to permanent pits and permanent open top tanks*)

- ☒ Screen ☐ Netting ☐ Other _____
- ☐ Monthly inspections (If netting or screening is not physically feasible)

7.

Signs: Subsection C of 19.15.17.11 NMAC

- ☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers
- ☒ Signed in compliance with 19.15.16.8 NMAC

8.

Variances and Exceptions:

Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.

Please check a box if one or more of the following is requested, if not leave blank:

- ☒ Variance(s): Requests must be submitted to the appropriate division district for consideration of approval.
- ☐ Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

9.

Siting Criteria (regarding permitting): 19.15.17.10 NMAC

Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Siting criteria does not apply to drying pads or above-grade tanks.

General siting

Ground water is less than 25 feet below the bottom of a low chloride temporary pit or below-grade tank.

- ☒ NM Office of the State Engineer - iWATERS database search; ☐ USGS; ☒ Data obtained from nearby wells

☐ Yes ☒ No
☐ NA

Ground water is less than 50 feet below the bottom of a Temporary pit, permanent pit, or Multi-Well Fluid Management pit.

NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells

☐ Yes ☐ No
☐ NA

Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. **(Does not apply to below grade tanks)**

- Written confirmation or verification from the municipality; Written approval obtained from the municipality

☐ Yes ☐ No

Within the area overlying a subsurface mine. **(Does not apply to below grade tanks)**

- Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division

☐ Yes ☐ No

Within an unstable area. **(Does not apply to below grade tanks)**

- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map

☐ Yes ☐ No

Within a 100-year floodplain. **(Does not apply to below grade tanks)**

- FEMA map

☐ Yes ☐ No

Below Grade Tanks

Within 100 feet of a continuously flowing watercourse, significant watercourse, lake bed, sinkhole, wetland or playa lake (measured from the ordinary high-water mark).

- Topographic map; Visual inspection (certification) of the proposed site

☐ Yes ☒ No

Within 200 horizontal feet of a spring or a fresh water well used for public or livestock consumption;

- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site

☐ Yes ☒ No

Temporary Pit using Low Chloride Drilling Fluid (maximum chloride content 15,000 mg/liter)

Within 100 feet of a continuously flowing watercourse, or any other significant watercourse or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). (Applies to low chloride temporary pits.)

- Topographic map; Visual inspection (certification) of the proposed site

☐ Yes ☐ No

Within 300 feet from a occupied permanent residence, school, hospital, institution, or church in existence at the time of initial application.

- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image

☐ Yes ☐ No

Within 200 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 300feet of any other fresh water well or spring, in existence at the time of the initial application.

NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site

☐ Yes ☐ No

Within 100 feet of a wetland.

- US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site

☐ Yes ☐ No

Temporary Pit Non-low chloride drilling fluid

Within 300 feet of a continuously flowing watercourse, or any other significant watercourse, or within 200 feet of any lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).

- Topographic map; Visual inspection (certification) of the proposed site

☐ Yes ☐ No

Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.

- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image

☐ Yes ☐ No

Within 500 horizontal feet of a spring or a private, domestic fresh water well used by less than five households for domestic or stock watering purposes, or 1000 feet of any other fresh water well or spring, in the existence at the time of the initial application;

- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site

☐ Yes ☐ No

Within 300 feet of a wetland.

- US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site

☐ Yes ☐ No

Permanent Pit or Multi-Well Fluid Management Pit

Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).

- Topographic map; Visual inspection (certification) of the proposed site

☐ Yes ☐ No

Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.

- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image

☐ Yes ☐ No

Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application.

- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site

☐ Yes ☐ No

Within 500 feet of a wetland.

- US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site

☐ Yes ☐ No

10.

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC

Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

- ☒ Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC
- ☐ Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC
- ☒ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
- ☒ Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☒ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
- ☒ Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC

☐ Previously Approved Design (attach copy of design) API Number: _____ or Permit Number: _____

11.

Multi-Well Fluid Management Pit Checklist: Subsection B of 19.15.17.9 NMAC

Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

- ☐ Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
- ☐ A List of wells with approved application for permit to drill associated with the pit.
- ☐ Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
- ☐ Hydrogeologic Data - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC
- ☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC

☐ Previously Approved Design (attach copy of design) API Number: _____ or Permit Number: _____

12. **Permanent Pits Permit Application Checklist:** Subsection B of 19.15.17.9 NMAC

Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

- ☐ Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC
- ☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
- ☐ Climatological Factors Assessment
- ☐ Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☐ Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☐ Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☐ Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☐ Quality Control/Quality Assurance Construction and Installation Plan
- ☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
- ☐ Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☐ Nuisance or Hazardous Odors, including H₂S, Prevention Plan
- ☐ Emergency Response Plan
- ☐ Oil Field Waste Stream Characterization
- ☐ Monitoring and Inspection Plan
- ☐ Erosion Control Plan
- ☐ Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC

13. **Proposed Closure:** 19.15.17.13 NMAC

Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.

- Type: ☐ Drilling ☐ Workover ☐ Emergency ☐ Cavitation ☐ P&A ☐ Permanent Pit ☒ Below-grade Tank ☐ Multi-well Fluid Management Pit
☐ Alternative
- Proposed Closure Method: ☒ Waste Excavation and Removal
☐ Waste Removal (Closed-loop systems only)
☐ On-site Closure Method (Only for temporary pits and closed-loop systems)
☐ In-place Burial ☐ On-site Trench Burial
☐ Alternative Closure Method

14. **Waste Excavation and Removal Closure Plan Checklist:** (19.15.17.13 NMAC) **Instructions:** Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.

- ☒ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
- ☒ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.13 NMAC
- ☒ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)
- ☒ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
- ☒ Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
- ☒ Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC

15. **Siting Criteria (regarding on-site closure methods only):** 19.15.17.10 NMAC

Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria require justifications and/or demonstrations of equivalency. Please refer to 19.15.17.10 NMAC for guidance.

Ground water is less than 25 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> NA
Ground water is between 25-50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	<input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> NA
Within 100 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	<input type="checkbox"/> Yes <input type="checkbox"/> No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	<input type="checkbox"/> Yes <input type="checkbox"/> No
Within 300 horizontal feet of a private, domestic fresh water well or spring used for domestic or stock watering purposes, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	<input type="checkbox"/> Yes <input type="checkbox"/> No
Written confirmation or verification from the municipality; Written approval obtained from the municipality	<input type="checkbox"/> Yes <input type="checkbox"/> No
Within 300 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	<input type="checkbox"/> Yes <input type="checkbox"/> No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	

adopted pursuant to NMSA 1978, Section 3-27-3, as amended.

- Written confirmation or verification from the municipality; Written approval obtained from the municipality

☐ Yes ☐ No

Within the area overlying a subsurface mine.

- Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division

☐ Yes ☐ No

Within an unstable area.

- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map

☐ Yes ☐ No

Within a 100-year floodplain.

- FEMA map

☐ Yes ☐ No

16.

On-Site Closure Plan Checklist: (19.15.17.13 NMAC) *Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.*

- ☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
- ☐ Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection E of 19.15.17.13 NMAC
- ☐ Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of Subsection K of 19.15.17.11 NMAC
- ☐ Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☐ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
- ☐ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15.17.13 NMAC
- ☐ Waste Material Sampling Plan - based upon the appropriate requirements of 19.15.17.13 NMAC
- ☐ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved)
- ☐ Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
- ☐ Re-vegetation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
- ☐ Site Reclamation Plan - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC

17.

Operator Application Certification:

I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.

Name (Print): Tamra Sessions

Title: Regulatory Specialist

Signature: 

Date: 5-30-17

e-mail address: tsessions@logosresourcesllc.com

Telephone: 505-324-4145

18.

OCD Approval: ☒ Permit Application (including closure plan) ☐ Closure Plan (only) ☐ OCD Conditions (see attachment)

OCD Representative Signature: 

Approval Date: 8/31/17

Title: Environmental Spec.

OCD Permit Number: _____

19.

Closure Report (required within 60 days of closure completion): 19.15.17.13 NMAC

Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.

☐ Closure Completion Date: _____

20.

Closure Method:

- ☐ Waste Excavation and Removal ☐ On-Site Closure Method ☐ Alternative Closure Method ☐ Waste Removal (Closed-loop systems only)
- ☐ If different from approved plan, please explain.

21.

Closure Report Attachment Checklist: *Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the box, that the documents are attached.*

- ☐ Proof of Closure Notice (surface owner and division)
- ☐ Proof of Deed Notice (required for on-site closure for private land only)
- ☐ Plot Plan (for on-site closures and temporary pits)
- ☐ Confirmation Sampling Analytical Results (if applicable)
- ☐ Waste Material Sampling Analytical Results (required for on-site closure)
- ☐ Disposal Facility Name and Permit Number
- ☐ Soil Backfilling and Cover Installation
- ☐ Re-vegetation Application Rates and Seeding Technique
- ☐ Site Reclamation (Photo Documentation)

On-site Closure Location: Latitude _____ Longitude _____ NAD: ☐ 1927 ☐ 1983

Operator Closure Certification:

I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.

Name (Print): _____ Title: _____

Signature: _____ Date: _____

e-mail address: _____ Telephone: _____

**Logos Operating, LLC
San Juan Basin
Variance Explanation for BGT**

All requested variances provide equal or better protection of fresh water, public health and the environment.

C-144 Item #5 Fencing

Rule 19.15.17.11 D (3) The BGT will be contained within the operating berm and Logos will build a fence with 4' hog wire fencing with one strand of barbed wire on top to deter unauthorized access.

OIL CONS. DIV DIST. 3

BGT Design - Liner

JUN 14 2017

Rule 19.15.17.11 I. An impermeable liner will be installed below the BGT so that any leak in the BGT will flow to a visible point on top of the impermeable liner. The geomembrane liner consists of a 45-mil flexible LLDPE material manufactured by Raven Industries as K45B. This product is four layer reinforced laminated containing no adhesives. The outer layers consist of a high strength polyethylene film manufactured using virgin grade resins and stabilizers for UV resistance in exposed applications. K45B is reinforced with 1300 denier polyester bi-directional scrim reinforcement. It exceeds ASTM D3083 standard by 10%. It is typically used in Brine Pond, Oilfield Pit liner and other industrial applications.

BGT Closure Notification

Rule 19.15.17.13 E. If the surface owner is a public entity (BLM/State/Tribal) then an email notification will be sent, of plans to close the BGT at least 72 hours, but no more than 1 week, prior to any closure operation. The notice will include the well name, API number, and location.



New Mexico Office of the State Engineer

Water Column/Average Depth to Water

(A CLW##### in the POD suffix indicates the POD has been replaced & no longer serves a water right file.)

(R=POD has been replaced, O=orphaned, C=the file is closed)

(quarters are 1=NW 2=NE 3=SW 4=SE)

(quarters are smallest to largest)

(NAD83 UTM in meters)

(In feet)

POD Number	POD Sub-Code	basin	County	Q 64	Q 16	Q 4	Sec	Tws	Rng	X	Y	Distance	Depth Well	Depth Water	Water Column
SJ 00681 14		RA		3	4	24	24N	06W		282864	4019157*	6116	127		
SJ 01156		RA		2	2	1	18	23N	06W	274330	4012555*	6363	1500	200	1300
SJ 00074		RA		2	3	3	18	24N	05W	283811	4020835*	7421	1004	216	788
RG 26087	TA									269459	4019931	7486	440		
SJ 00681 12		RA		4	4	4	33	25N	06W	278833	4025662*	7521	435		
SJ 00681 37		RA		2	1	1	15	24N	07W	269408	4022501*	8435	190		
SJ 00068		RA		1	2	4	18	24N	05W	284837	4021202*	8511	789	223	566
SJ 00069		RA		1	2	4	18	24N	05W	284837	4021202*	8511	795	350	445
SJ 00211		RA		4	4	4	18	24N	05W	285025	4020601*	8516	800	240	560
SJ 01506		SA		1	1	3	22	23N	06W	278535	4010015*	8586	280		
SJ 04054 POD1		RA			1	14	23N	07W		270627	4012298	8689	273	180	93
SJ 01507		RA		3	3	4	10	23N	07W	269889	4013098*	8718	1709	900	809
SJ 02233		RA		1	1	2	15	23N	07W	269856	4012864*	8888	1100		
SJ 02233 CLW223636	O	RA		1	1	2	15	23N	07W	269856	4012864*	8888	1100		

Average Depth to Water: **329 feet**

Minimum Depth: **180 feet**

Maximum Depth: **900 feet**

Record Count: 14

UTMNAD83 Radius Search (in meters):

Easting (X): 276792

Northing (Y): 4018423

Radius: 10000

*UTM location was derived from PLSS - see Help


The data is furnished by the NMOSE/ISC and is accepted by the recipient with the expressed understanding that the OSE/ISC make no warranties, expressed or implied, concerning the accuracy, completeness, reliability, usability, or suitability for any particular purpose of the data.



U.S. Fish and Wildlife Service

National Wetlands Inventory

LOGOS 2406 29H Com 13

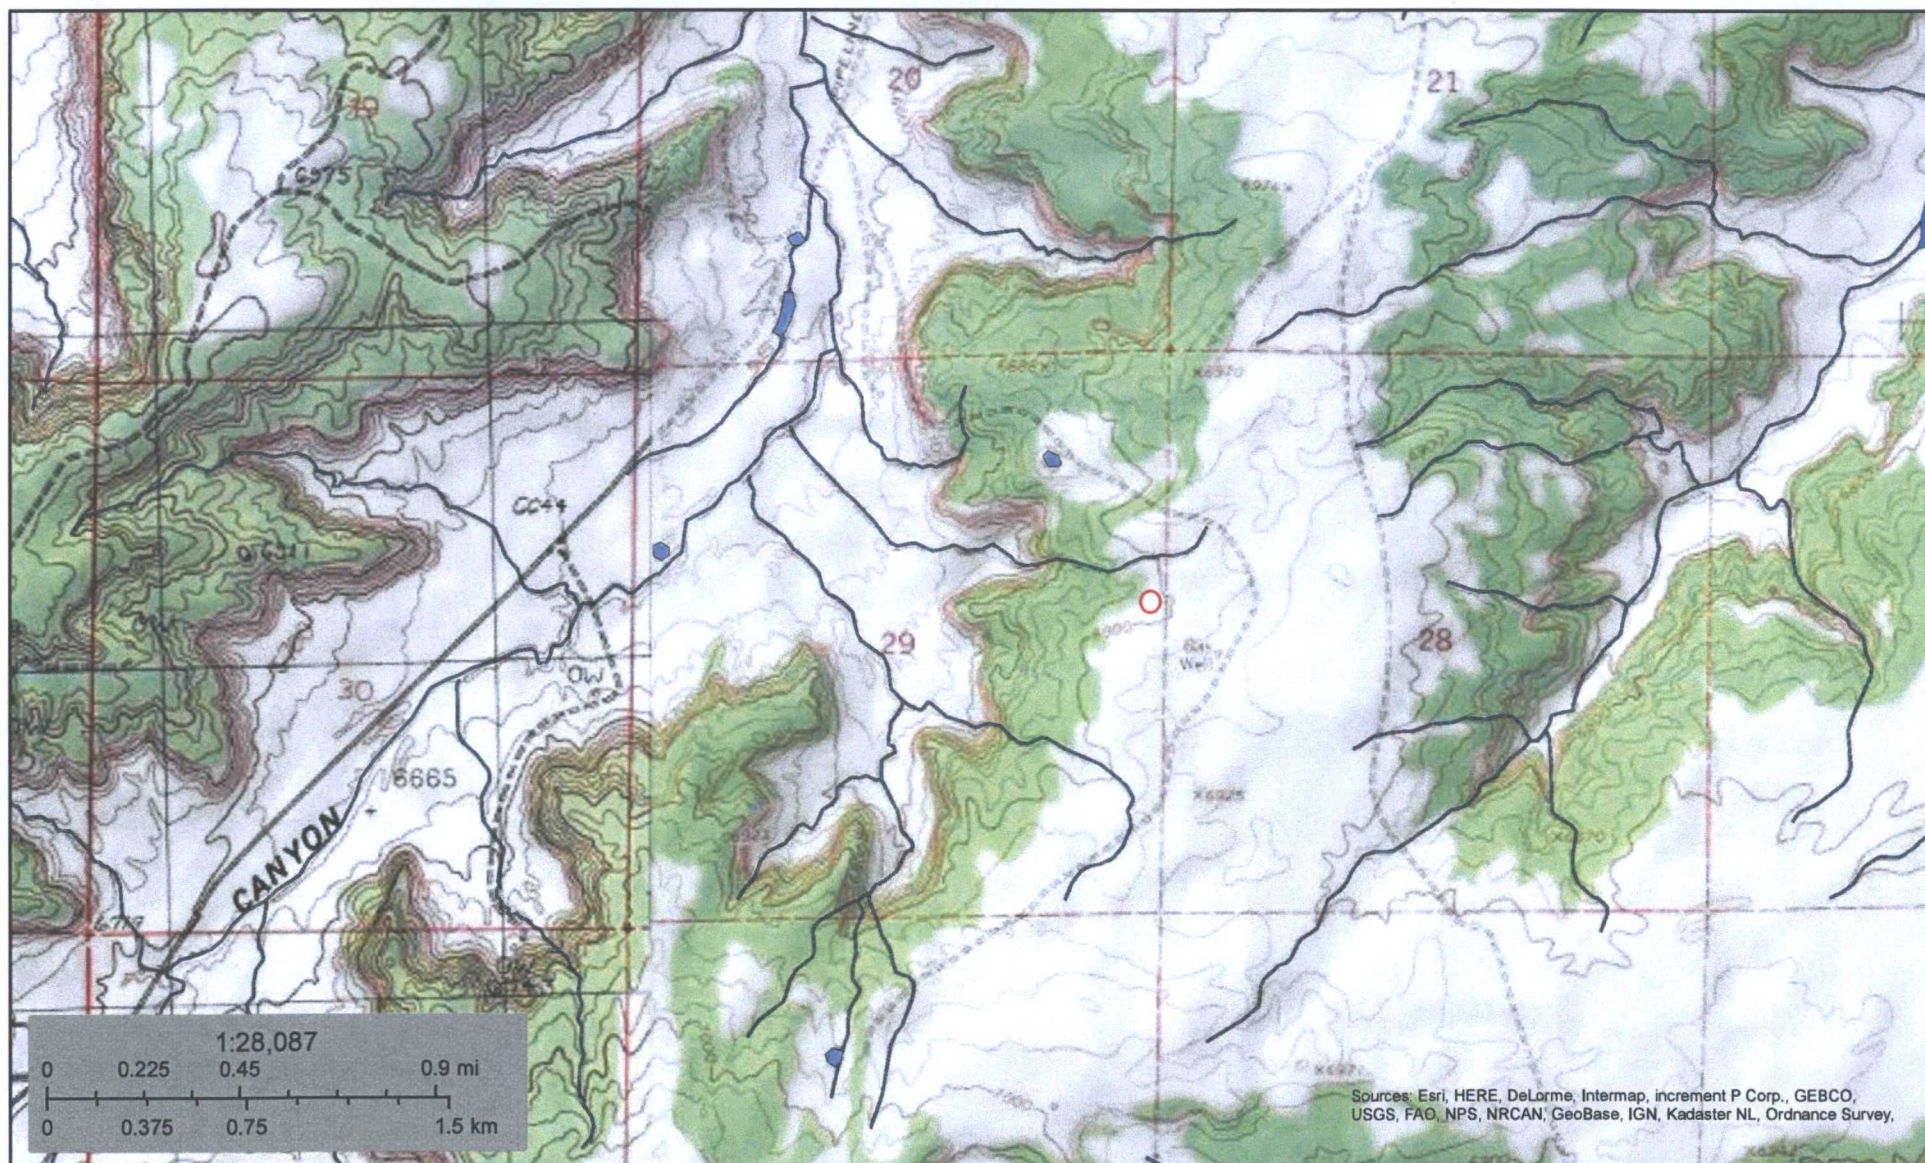


Sources: Esri, HERE, DeLorme, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey,

September 8, 2016

- | | | |
|--------------------------------|-----------------------------------|----------|
| Estuarine and Marine Deepwater | Freshwater Forested/Shrub Wetland | Other |
| Estuarine and Marine Wetland | Freshwater Pond | Riverine |
| Freshwater Emergent Wetland | Lake | |

This map is for general reference only. The US Fish and Wildlife Service is not responsible for the accuracy or currentness of the base data shown on this map. All wetlands related data should be used in accordance with the layer metadata found on the Wetlands Mapper web site.

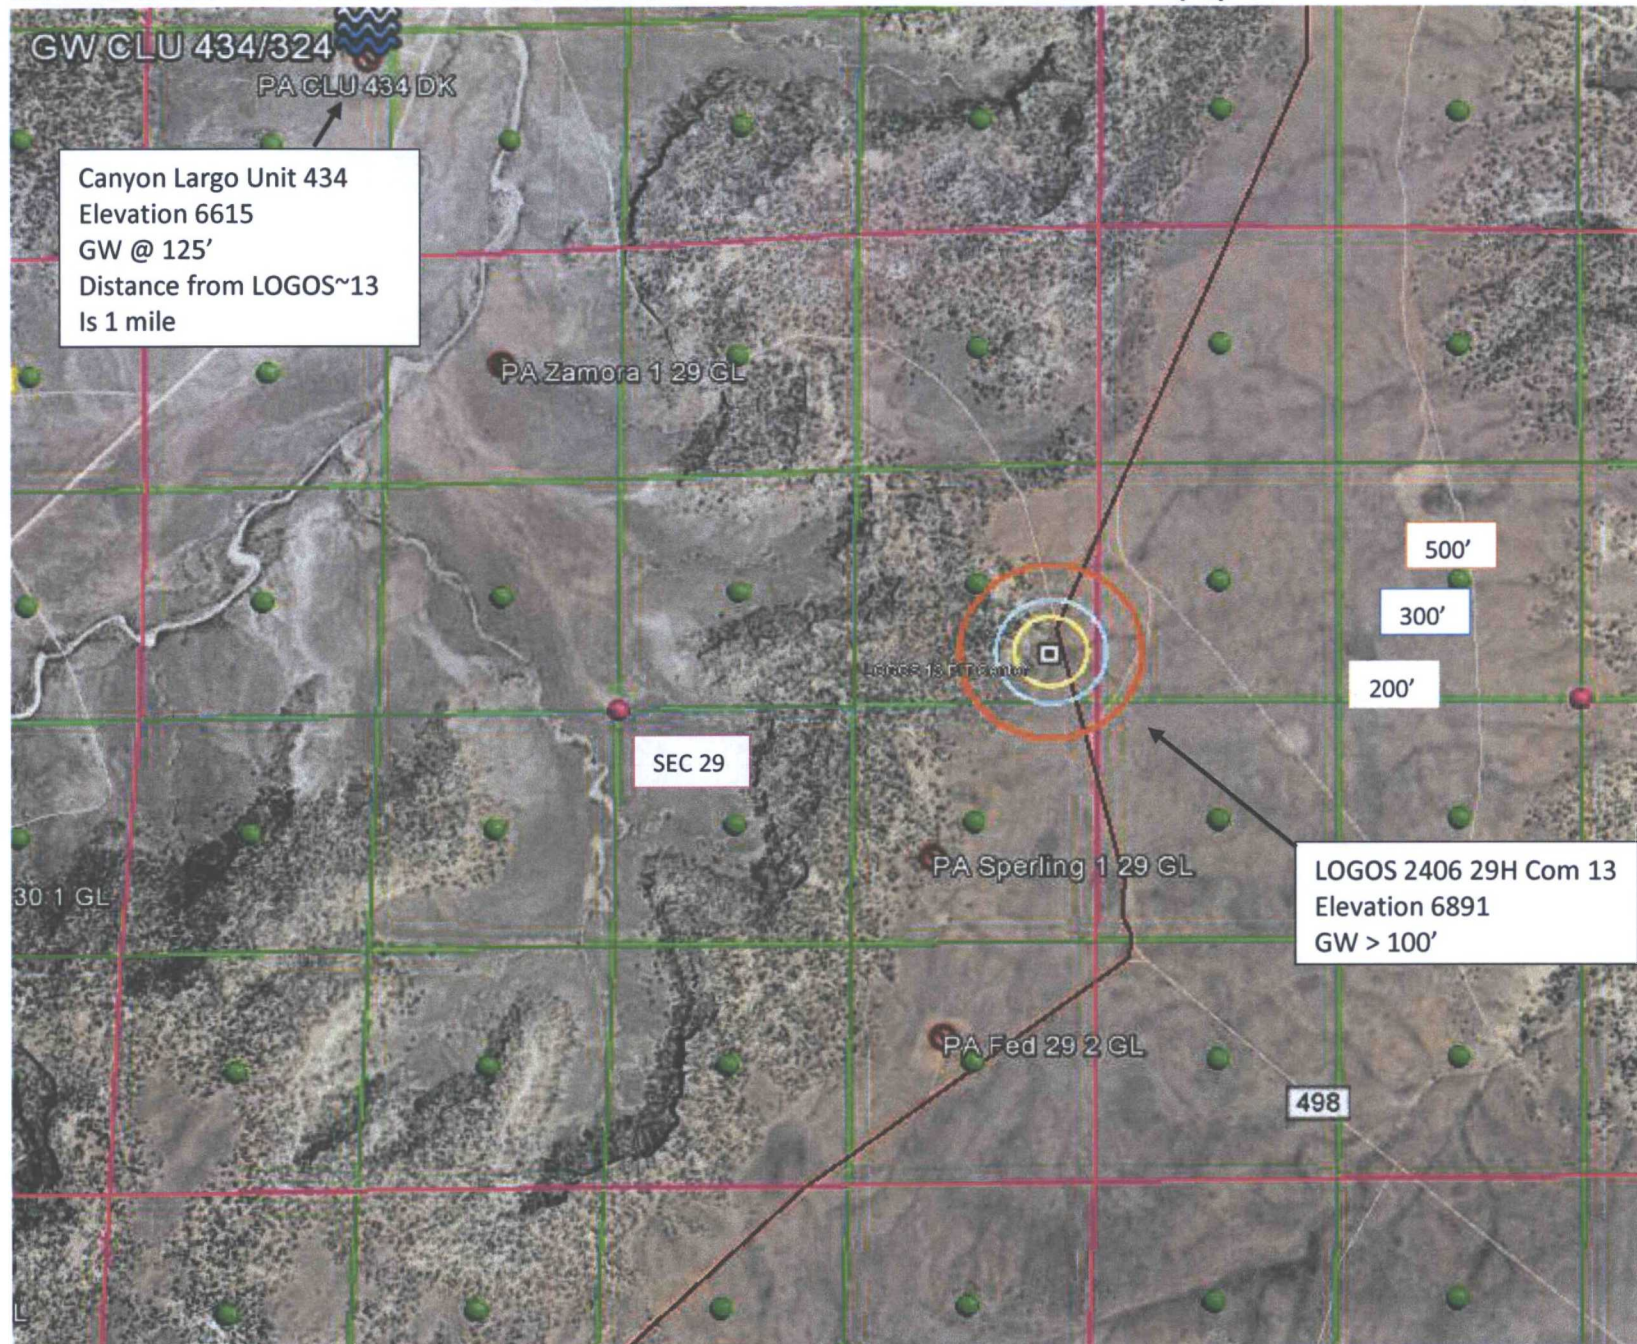

6615' . 36,293,721 - 107,496,905 #434 30-039-25402
6585' 36,295,558 - 107,495,942 #324 30-039-23338

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

Operator Meridian Oil Inc. Location: Unit M Sec. 20 Twp 24 Rng 06

Name of Well/Wells or Pipeline Serviced

CANYON LAT90 #434 AND CANYON LAT90 #324 (Meridian Oil)

Elevation 6615' Completion Date 5/31/95 Total Depth 375' Land Type P

Casing Strings, Sizes, Types & Depths H/3 SET 99' OF 8" PVC CASING.

NO GAS, WATER, OR BOULDERS WERE ENCOUNTERED DURING CASING.

If Casing Strings are cemented, show amounts & types used Cemented
WITH 20 SACKS.

If Cement or Bentonite Plugs have been placed, show depths & amounts used
NONE

Depths & thickness of water zones with description of water: Fresh, Clear,
Salty, Sulphur, Etc. HIT FRESH WATER AT 125'

Depths gas encountered: NONE

Ground bed depth with type & amount of coke breeze used: 375' Depth.
Used 90 SACKS OF ASBURY 218R (4500#)

Depths anodes placed: 355', 345', 330', 320', 310', 300', 290', 280', 270', 250', 240', 230', 220', 210', + 165'.

Depths vent pipes placed: SURFACE TO 375'.

Vent pipe perforations: BOTTOM 250'.

Remarks:

RECEIVED
JAN 11 1996

OIL CON. DIV.
DIST. 3

IF any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

Hydro geological report for LOGOS 2406 29H Com 13

The LOGOS 2406 29H Com 13 is located on federal lands managed by the Bureau of Land Management in Rio Arriba County, New Mexico. The general region surrounding the proposed project area is characterized by badlands, mesas, and relatively flat lowland valleys. The proposed project area is situated on the top of an unnamed mesa, overlooking Johnson Canyon to the west. With vegetation consisting of pinyon, juniper, sagebrush and grass terrain. Ground elevation at the proposed well head is 6891 feet.

General Regional Groundwater Description:

As a portion of the San Juan Basin, the FFO region is underlain by sandstone aquifers of the Colorado Plateau. The primary aquifer of potential concern at this location is the Uinta-Animas Aquifer, composed primarily of Lower Tertiary rocks in the San Juan Basin. The aquifer consists of the San Jose Formation; the underlying Animas formation and its lateral equivalent, the Nacimiento formation; and the Ojo Alamo Sandstone. The thickness of the Uinta-Animas aquifer generally increases toward the central part of the basin. In this region, the maximum thickness of the aquifer is approximately 3500 feet (USGS, 2001). This aquifer contains fresh to moderately saline water. Groundwater generally flows toward the San Juan River and its tributaries, where it becomes alluvial groundwater or is discharged to stream flow.

Site Specific Information:

Surface Hydrology: The BGT area is situated on a gentle, northeast-facing slope. A playa is located approximately 1500' to the northwest. A continuously flowing watercourse as noted by National Wetlands map is approximately 450' to the north of BGT center and drains to the west. The confluence of Rincon Largo and Canon Largo is approximately 4.15 miles northeast of the project area.

1st Water Bearing Formation: San Jose, Tertiary; Formation Thickness: Approximately 200 - 700 ft.

Underlying Formation: Nacimiento, Tertiary

Depth to Groundwater:

Depth to groundwater is estimated at greater than 100' below bottom of the BGT. Approximately one mile to the northwest, a cathodic well was drilled on the Canyon Largo Unit 434 at 6615' elevation. The well was drilled to 375' and water was encountered at 125'. The new proposed site is located at a higher elevation of 6891' and overlooks the canyon where the Canyon Largo Unit 434 is located.

Siting Criteria

1. According to the iWaters Database from the State Engineers Office the closest known water well (SJ00681 14) is 6116 meters (3.8miles) away in Section 24 of T24N R6W. The depth of the well is 127 with no water depth noted.
2. As shown on the attached topographic map and aerial photos, there are no continuously flowing watercourses within 100' of the BGT, or any significant watercourses, lakebeds, sinkholes or playa lakes within 100' of the BGT.
3. There are no domestic water wells or springs within 200' of the BGT. See iWaters Database printout.



Logos Operating Below Grade Tank Design and Construction Plan

In accordance with NMAC 19.15.17, the following information describes the design and construction plan for below grade tanks (BGT) for Logos Operating, LLC (Logos). This is a standard design and construction plan for Logos.

General Plan in Accordance with 19.15.17.11


1. Logos will design and construct a BGT to contain liquids and solids that is designed to prevent contamination of fresh water and protect public health and the environment.
2. The location of the BGT will be at a battery or well location which contains proper upright signs (in compliance with 19.15.17.11C).
3. The BGT will be contained within the operating berm and will be protected with 4' hog wire fencing with one strand of barbed wire on top to deter unauthorized access. A six foot chain link fence topped with two strands of barbed wire will be used if the BGT is within 1000 feet of permanent residence, school, hospital, institution or church. Logos ensures that all gates associated with the fence are closed and locked when responsible personnel are not onsite.
4. The BGT will have an expanded metal cover.
5. The BGT will be constructed out of steel which is resistant to the particular contents and resistant to damage from sunlight. The pit will be painted to minimize rust and corrosion.
6. The foundation will be level, free of rocks, debris, sharp edges or irregularities to prevent punctures, cracks, indentations of the liner or tank bottom.
7. The BGT will be designed and constructed to prevent surface water run-on from entering the tank. The corrugated steel wall surrounding the pit will be above grade and will prevent water from running into the BGT.
8. The BGT will have a single wall that is capable of being inspected. The BGT will have a corrugated steel wall barrier that prevents the ground from collapsing around the BGT and allows for the BGT to be thoroughly inspected by providing a direct sight line to the BGT bottom and to the BGT impermeable liner.
9. The BGT will be set on beams, six inches or greater, on the liner in a way that will protect the bottom of the BGT from sharp objects.
10. The BGT system is equipped with an ESD (Emergency Shut Down) with the ability to detect a high level in the tank which will provide alarm notification and initiate the shutdown process. This design is based on 19.15.17.11.I.4.a.
11. An impermeable liner will be installed below the BGT so that any leak in the BGT will flow to a visible point on top of the impermeable liner. The geomembrane liner consists of a 45-mil flexible LLDPE material manufactured by Raven Industries as K45B. This product is four layer reinforced laminated containing no adhesives. The outer layers consist of a high strength polyethylene film manufactured using virgin grade resins and stabilizers for UV resistance in exposed applications. K45B is reinforced with 1300 denier polyester bi-directional scrim reinforcement. It exceeds ASTM D3083 standard by 10%. It is typically used in Brine Pond, Oilfield Pit liner and other industrial applications. The manufacture spec sheet is attached.



**Logos Operating
Below Grade Tank Design**

OIL CONS. DIV DIST. 3

JUN 14 2017

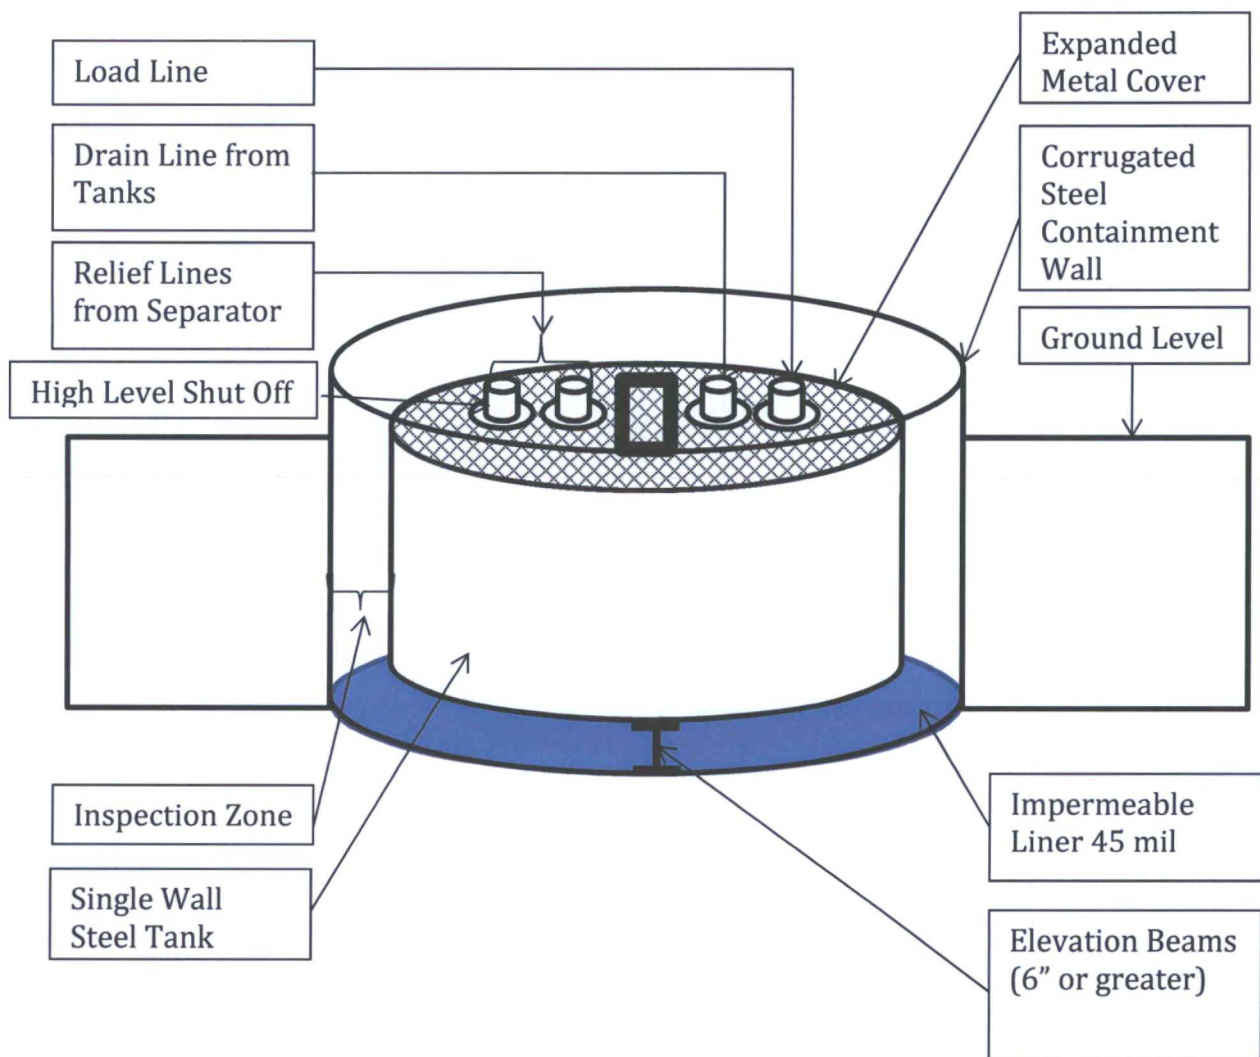

DURA•SKRIM® K30B, K36B & K45B

Scrim Reinforced Polyethylene

RAVEN
INDUSTRIES

Product Description

DURA•SKRIM® K30B, K36B and K45B are linear low density polyethylene geomembranes reinforced with a heavy dense scrim reinforcement. In addition to excellent dimensional stability the K-Series reinforcement provides unmatched tear and tensile strength. DURA•SKRIM® K-Series membranes are formulated with thermal and UV stabilizers to assure a long service life.

Product Use

DURA•SKRIM® K30B, K36B and K45B are used in applications that require exceptional outdoor life and demand high tear strength and resistance to thermal expansion.

DURA•SKRIM® K30B, K36B and K45B are manufactured from a very chemical-resistant, Linear Low Density Polyethylene with excellent cold crack performance.

Size & Packaging

DURA•SKRIM® K30B, K36B and K45B are available in a variety of widths and lengths to meet the project requirements. Large diameter mill rolls are available to assure an efficient seaming process. Factory welded panels are accordion folded and tightly rolled on a heavy-duty core for ease of handling and time saving installation.



Containment Liner

Product	Part #
DURA•SKRIM	K30B
DURA•SKRIM	K36B
DURA•SKRIM	K45B


APPLICATIONS

Waste Lagoon Liners	Remediation Covers
Floating Covers	Landfill Caps
Daily Landfill Covers	Erosion Control Covers
Modular Tank Liners	Canal Liners
Tunnel Liners	Disposal Pit Liner
Remediation Liners	Water Containment Ponds
Earthen Liners	Heap Leach Liner
Interim Landfill Covers	

OIL CONS. DIV DIST. 3
JUN 14 2017

DURA-SKRIM® K30B, K36B & K45B

Scrim Reinforced Polyethylene



PRO-FORMA DATA SHEET

PROPERTIES	TEST METHOD	DURA-SKRIM K30B		DURA-SKRIM K36B		DURA-SKRIM K45B	
		Minimum Roll Averages	Typical Roll Averages	Minimum Roll Averages	Typical Roll Averages	Minimum Roll Averages	Typical Roll Averages
APPEARANCE		Black	Black	Black	Black	Black	Black
THICKNESS		27 mil	30 mil	32 mil	36 mil	40 mil	45 mil
WEIGHT LBS/MSF, (OZ/YD ²)		116 (16.7)	125 (18.0)	136 (19.6)	155 (22.3)	175 (25.2)	200 (28.8)
CONSTRUCTION		Dense scrim reinforced polyethylene					
*PLY ADHESION - LBF/IN	ASTM D 6636	17 or FTB	20 or FTB	21 or FTB	28 or FTB	24 or FTB	32 or FTB
TENSILE STRENGTH - LBF/IN	ASTM D 7003	165 MD 159 TD	182 MD 170 TD	170 MD 166 TD	186 MD 175 TD	178 MD 170 TD	195 MD 180 TD
TENSILE ELONGATION AT BREAK % (FILM BREAK)	ASTM D 7003	480 MD 430 TD	540 MD 500 TD	500 MD 450 TD	575 MD 520 TD	520 MD 470 TD	590 MD 550 TD
TENSILE ELONGATION AT BREAK % (SCRIM BREAK)	ASTM D 7003	32 MD 32 TD	35 MD 35 TD	32 MD 32 TD	35 MD 35 TD	32 MD 32 TD	35 MD 35 TD
TONGUE TEAR STRENGTH - LBF	ASTM D 5884	185 MD 160 TD	195 MD 185 TD	160 MD 120 TD	180 MD 140 TD	140 MD 120 TD	175 MD 145 TD
GRAB TENSILE - LBF (SCRIM BREAK)	ASTM D 7004	260 MD 245 TD	270 MD 255 TD	280 MD 270 TD	300 MD 290 TD	260 MD 245 TD	270 MD 255 TD
GRAB TENSILE ELONGATION AT BREAK % (SCRIM BREAK)	ASTM D 7004	25	32	25	32	25	32
HIGH PRESSURE OIT (HPOIT)	ASTM D 5885	1000 min	2400 min	1000 min	2400 min	1000 min	2400 min
PUNCTURE RESISTANCE - LBF	ASTM D 4833	85	100	110	120	120	133
MAXIMUM USE TEMPERATURE		180° F		180° F		180° F	
MINIMUM USE TEMPERATURE		-70° F		-70° F		-70° F	

*Raven modified QC procedure

PRO-FORMA Sheet Contents:

The data listed in this Pro-Forma data sheet is representative of initial production runs. These values may be revised at anytime without notice as additional test data becomes available.

OIL CONS. DIV DIST. 3

JUN 14 2017



DURA-SKRIM® K30B, K36B and K45B are linear low density polyethylene geomembranes reinforced with a heavy dense scrim reinforcement. In addition to excellent dimensional stability the K-Series reinforcement provides unmatched tear and tensile strength. DURA-SKRIM® K-Series membranes are formulated with thermal and UV stabilizers to assure a long service life.

Note: To the best of our knowledge, unless otherwise stated, these are typical property values and are intended as guides only, not as specification limits. Chemical resistance, odor transmission, longevity as well as other performance criteria is not implied or given and actual testing must be performed for applicability in specific applications and/or conditions. RAVEN INDUSTRIES MAKES NO WARRANTIES AS TO THE FITNESS FOR A SPECIFIC USE OR MERCHANTABILITY OF PRODUCTS REFERRED TO, no guarantee of satisfactory results from reliance upon contained information or recommendations and disclaims all liability for resulting loss or damage.

RAVEN
INDUSTRIES

Engineered Films Division

P.O. Box 5107
Sioux Falls, SD 57117-5107
Ph: (605) 335-0174 • Fx: (605) 331-0333

Limited Warranty available at www.RavenEFD.com

Toll Free: 800-635-3456
Email: efdsales@ravenind.com
www.ravenefd.com

9/11 EFD 1251

Appendix A

REINFORCED POLYETHYLENE GEOMEMBRANE SPECIFICATION

Reinforced Polyethylene Geomembranes serve as liners and covers to contain water, leachate or other liquids. As a liner they can contain the liquid to prevent leakage or environmental impact and as a cover to minimize evaporation or contamination. It is of great importance that the Reinforced Polyethylene Geomembrane be free from defects and installed without damage.

A. DESCRIPTION

1. General:

The purpose of this specification is to provide details of Manufacturing Quality Control (MQC), Manufacturing Quality Assurance (MQA), Construction Quality Control (CQC), and Construction Quality Assurance (CQA) for the manufacture and pre-assembly of geomembrane products. The Contractor shall furnish all labor, material, and equipment to install the Reinforced Polyethylene Geomembrane including all necessary and incidental items as detailed or required to complete the installation in accordance with the Contract Drawing and these Specifications

2. Related Work:

Related Contract Work is described in the following section of the specification as approved by the CQA Engineer.

3. Reference Standards:

ASTM D5199 *Standard Test Method for Measuring the Nominal Thickness of Geosynthetics.*

ASTM D5261 *Standard Test Method for Measuring Mass per Unit Area of Geotextiles.*

ASTM D6636 *Standard Test Method for Determination of Ply Adhesion Strength of Reinforced Geomembranes.*

ASTM D7003 *Standard Test Method for Strip Tensile Properties of Reinforced Geomembranes.*

ASTM D5884 *Standard Test Method for Determining Tearing Strength of Internally Reinforced Geomembranes.*

ASTM D7004 *Standard Test Method for Grab Tensile Properties of Reinforced Geomembranes.*

GR. CONS. DIV. DIST. 3

JUN 14 2017

ASTM D4533 *Standard Test Method for Trapezoid Tearing Strength of Geotextiles.*

ASTM D4833 *Standard Test Method for Index Puncture Resistance of Geomembranes and Related Products.*

4. Quality Assurance:

Quality Assurance during installation of Reinforced Polyethylene Geomembrane will be provided by the Owner as described in the accompanying Project CQA Manual.

5. Manufacturers Qualifications:

a. The Manufacturer shall have previously demonstrated his ability to produce the required Reinforced Polyethylene Geomembrane by having successfully manufactured a minimum of 10,000,000 ft² of scrim reinforced Polyethylene Geomembrane.

b. Manufacturer must be ISO 9001 certified

6. Installer Qualifications:

The Reinforced Polyethylene Geomembrane Installer shall have installed a minimum of 500,000 ft² of Reinforced Polyethylene Geomembrane (or similar material).

7. Warranties:

The manufacturer of the Reinforced Polyethylene Geomembrane will warrant the material to the installer on a pro rata basis for up to 20 years after the final acceptance of the work, based on thickness of product, the application and location of the installation. This warranty shall include but not be limited to defects related to workmanship and manufacturing.

B. MATERIALS

1. General:

The materials supplied under these Specifications shall consist of first-quality 100% virgin products designed and manufactured specifically for the purpose of this work, which shall have been satisfactorily demonstrated, by prior use, to be suitable and durable for such purposes.

2. Reinforced Polyethylene Geomembrane Materials:

- a. Reinforced Polyethylene Geomembrane shall be manufactured to meet the following requirements:
 - (1) Provide finished product free from holes, pin holes, bubbles, blisters, excessive gels, undispersed resins and/or carbon black, or contamination by foreign matter.
 - (2) Reinforced Polyethylene Geomembrane shall be a Linear Low Density Polyethylene Geomembrane composed of a heavy encapsulated 1300 denier polyester tri-directional reinforcement for the 30 ml geomembrane and bi-directional for the 36ml and 45ml geomembrane.
- b. Approved Reinforced Polyethylene Geomembrane:
 - (1) Dura-Skrim J30BB
Dura-Skrim K36B
Dura-Skrim K45B

As manufactured by Raven Industries of Sioux Falls, SD.
 - (2) Equal material, as approved by the Engineer.

C. FACTORY FABRICATION

- 1. The Reinforced Polyethylene Geomembrane shall be supplied in panels which shall be of maximum size to provide the largest manageable sheet for the fewest seams.
- 2. Factory seams are produced by thermal sealing methods and shall have a minimum seam width of 1 ½ inch scrim to scrim.
- 3. Factory seams are 100% visually inspected and destructive testing is done to verify quality compliance.
- 4. Labels on the panels shall identify the thickness, length, width, lot and panel numbers, and name of Manufacturer.
- 5. Factory pre-assembled panels are accordion folded and rolled on a cardboard core. Rolled panels are wrapped in a protective layer for shipment.

D. SUBMITTALS

The Contractor shall submit the following to the CQA Engineer:

1. Pre-Installation Requirements:

Prior to Reinforced Polyethylene Geomembrane installation the Contractor shall submit the following:

- a. Certificate of Conformance and Sample: Prior to shipping to the site, the Contractor shall submit a certificate or affidavit signed by a legally authorized official of the Manufacturer for the Reinforced Polyethylene Geomembrane attesting that the Reinforced Polyethylene Geomembrane meets the physical and manufacturing requirements stated in these Specifications. The Contractor shall also submit a sample of the Reinforced Polyethylene Geomembrane to be used (sample may be of different color). The sample shall be labeled with the product name and be accompanied by the Manufacturer's specifications.
- b. Shipping, Handling, and Storage Instructions: The Manufacturer's plan for shipping, handling, and storage shall be submitted for review.
- c. Installation Procedures:

Submit installation procedures for carrying out the work. Installation procedures to be addressed shall include but not be limited to material installation, repair, and protection to be provided in the event of rain or strong winds. With regard to protection, the Contractor shall provide a plan of anchoring the Reinforced Polyethylene Geomembrane sufficient to satisfy the Contractor's Performance Warranty. This plan shall be approved by the Engineer prior to construction.
- d. Furnish copies of the delivery tickets or other approved receipts as evidence for materials received that will be incorporated into the construction.

2. Post-Installation Requirements:

Upon completion of the Reinforced Polyethylene Geomembrane installation, the Contractor shall submit the following:

- a. Completed material performance warranty.

E. SITE PREPERATION AND INSTALLATION

1. Installation shall be in done in accordance with the manufactures Geomembrane Installation Guidelines.

TABLE 1:
REQUIRED REINFORCED POLYETHYLENE GEOMEMBRANE
PROPERTIES 30 MIL.

PROPERTY	TEST METHOD	UNITS	MIMIMUM ROLL AVERAGES	TYPICAL ROLL AVERAGES
Thickness	ASTM D5199	Mils	27	30
Weight	ASTM D5261	Lbs.	126	140
Ply Adhesion	ASTM D6636	Lbs.	16	20
1" strip tensile	ASTM D7003	Lbf.	88 MD 63 DD	110 MD 79 DD
Tongue Tear	ASTM D5884	Lbf.	75 MD 75 DD	97 MD 90 DD
Grab Tensile Strength	ASTM D7004	Lbf.	180 MD 180 DD	218 MD 210 DD
Trap Tear	ASTM D4533	Lbf.	120 MD 120 DD	146 MD 141 DD
Puncture Resistance	ASTM D4833	Lbf.	50	64

MD Machine Direction DD Diagonal Direction

TABLE 2:
REQUIRED REINFORCED POLYETHYLENE GEOMEMBRANE
PROPERTIES 36 MIL.

PROPERTY	TEST METHOD	UNITS	MIMIMUM ROLL AVERAGES	TYPICAL ROLL AVERAGES
Thickness	ASTM D5199	Mils	32	36
Weight	ASTM D5261	Lbs.	156	173
Ply Adhesion	ASTM D6636	Lbs.	31	34
1" strip tensile	ASTM D7003	Lbf.	183 MD 165 DD	201 MD 180 DD
Tongue Tear	ASTM D5884	Lbf.	112 MD 96 DD	122 MD 106 DD
Grab Tensile Strength	ASTM D7004	Lbf.	340 MD 325 DD	354 MD 338 DD

Puncture Resistance	ASTM D4833	Lbf.	138	153
---------------------	------------	------	-----	-----

MD Machine Direction DD Diagonal Direction

**TABLE 3:
REQUIRED REINFORCED POLYETHYLENE GEOMEMBRANE
PROPERTIES 45 MIL.**

PROPERTY	TEST METHOD	UNITS	MINIMUM ROLL AVERAGES	TYPICAL ROLL AVERAGES
Thickness	ASTM D5199	Mils	40	45
Weight	ASTM D5261	Lbs.	198	220
Ply Adhesion	ASTM D6636	Lbs.	34	38
1" strip tensile	ASTM D7003	Lbf.	187 MD 182 DD	211 MD 195 DD
Tongue Tear	ASTM D5884	Lbf.	150 MD 123 DD	159 MD 132 DD
Grab Tensile Strength	ASTM D7004	Lbf.	378 MD 361 DD	408 MD 372 DD
Puncture Resistance	ASTM D4833	Lbf.	144	163

MD Machine Direction DD Diagonal Direction

Notes:

1. The Engineer may allow alternates to these requirements.



Logos Operating Below Grade Tank Operation and Maintenance Plan

In accordance with NMAC 19.15.17, the following information describes the operation and maintenance plan for below grade tanks (BGT) for Logos Operating, LLC (Logos). This is a standard procedure for Logos.

General Plan in Accordance with 19.15.17.12

1. Logos will operate and maintain the BGT to contain liquids and solids while maintaining the integrity of the liner, BGT, and corrugated steel wall. The operation and maintenance are plan are designed to prevent contamination of fresh water and protect public health and safety.
2. Logos will not store or discharge hazardous waste into the BGT.
3. If the BGT develops a leak, Logos will remove all of the fluids from the BGT within 48 hours and notify the appropriate division office pursuant to 19.15.29 NMAC. Logos will immediately take the BGT out of service until it is properly repaired or replaced.
4. The BGT will be operated and designed to prevent the collection of surface water run-on.
5. The BGT will be bounded by a corrugated steel wall which will contain an unanticipated release. The BGT and corrugated steel wall are also located inside of the berm which will act as a secondary containment barrier in the event of an unanticipated release.
6. Logos will not allow the BGT to overflow or collect surface water run on. Discharges to the pit will be shutoff automatically if the high level alarm is triggered from the ESD or manually if the ESD is not functional. Surface water run-on is prevented by having a corrugated steel ring that is above ground level which will prevent water run-on from entering the BGT as well as a radial space that keeps the BGT walls away from the ground level which will also prevent water-run on from entering and overfilling the BGT.
7. Logos will remove any measurable layer of oil from the BGT.
8. The BGT will be inspected for leak and damage at least monthly and the integrity will be documented annually with records maintained for at least 5 years.
9. The BGT will be operated with adequate freeboard to prevent overflow of the BGT.
10. The BGT sidewalls will be kept free of anything that could not allow for inspection of liner and sidewalls.



Logos Operating Below Grade Tank Closure Plan

In accordance with NMAC 19.15.17.13, the following information describes the closure plan for below grade tanks (BGT) for Logos Operating, LLC (Logos).

General Plan in Accordance with 19.15.17.13

1. Logos will obtain approval of a closure plan prior to commencing closure operations.
2. Logos will notify the surface owner by certified mail, return receipt requested, unless surface owner is a public entity (BLM/State/Tribal) then an email notification will be sent, of plans to close the BGT at least 72 hours, but no more than 1 week, prior to any closure operation. The notice will include the well name, API number, and location.
3. Logos will notify the appropriate district office verbally and in writing with at least 72 hours of notice but no more than 1 week. The notice will include well name and API number as well as the location containing unit letter, section, township, and range.
4. Logos will remove liquids and sludge from the BGT within 60 days of cessation of operations and dispose of those at a division approved facility.
5. Within 6 months of cessation of operations, Logos will dispose, reuse/recycle or reclaim in a division approved manner the BGT, and all unused equipment associated with the BGT.
6. The soils beneath the BGT will be tested as follows:
 - a. A five point composite sample including any obvious staining or wet soils shall be taken under BGT and will be analyzed for constituents listed in Table I (see page 2) of 19.15.17.13 NMAC.
 - b. Based on the results of the soil test, Logos will obtain NMOCD District approval prior to completing any necessary additional delineation for closure. If the soil tests are at or below the standards of closure, Logos will proceed with closure.
7. Upon closing of the BGT, Logos will reclaim the unused BGT location to a safe and stable condition that blends with the surrounding undisturbed area as provided in Paragraph 2 of subsection H of 19.15.17.13 as well as recontouring the area in accordance with paragraph 5 in subsection H of 19.15.17.13 NMAC. The soil cover will be constructed to prevent ponding of water and erosion of the cover material.
8. The reclamation of the BGT area will contain a uniform vegetative cover that reflects a life-form ratio of plus or minus fifty (50%) of pre-disturbance levels and a total percent plant cover of at least seventy (70%) of pre-disturbance levels, excluding noxious weeds. The re-vegetation and reclamation obligations imposed by other applicable federal or tribal agencies that manage the lands will supersede these provisions and govern the obligations.

9. Logos will notify the division when reclamation and re-vegetation is complete.
10. Logos will submit a closure report on form C-144 within 60 days of closure completion. The closure report will contain back filling details, capping and covering where applicable, all necessary attachments, certification that all information contained in the report is correct and that the operator has complied with all applicable closure requirements to the best of its knowledge.

Components	Tests Method	Limit (mg/Kg)
		≤50' bottom of BGT to GW
Benzene	EPA SW-846 8021B or 8015M	10
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	100
Chlorides	EPA 300.0	600
GRO/DRO	EPA SW-846 80165M	n/a
		51'-100' bottom of BGT to GW
Benzene	EPA SW-846 8021B or 8015M	10
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	2500
Chlorides	EPA 300.0	10,000
GRO/DRO	EPA SW-846 80165M	1000
		>100' bottom of BGT to GW
Benzene	EPA SW-846 8021B or 8015M	10
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	2500
Chlorides	EPA 300.0	20,000
GRO/DRO	EPA SW-846 80165M	1000