

Well Name: CLAWHAMMER 33-28-21 FED COM	Well Location: T26S / R30E / SEC 33 / LOT L3 /	County or Parish/State:
Well Number: 413H	Type of Well: OTHER	Allottee or Tribe Name:
Lease Number: NMNM35607	Unit or CA Name:	Unit or CA Number:
US Well Number: 3001549832	Well Status: Approved Application for Permit to Drill	Operator: WPX ENERGY PERMIAN LLC

Notice of Intent

Sundry ID: 2704675

Type of Submission: Notice of Intent

Type of Action: APD Change

Date Sundry Submitted: 12/01/2022

Time Sundry Submitted: 02:19

Date proposed operation will begin: 11/28/2022

Procedure Description: WPX Energy Permian, LLC respectfully requests to have a BHL revision on the subject well. Please see attached drilling plan, directional and break test variance. Permitted BHL: NENW, 21-26S-30E, 230 FNL, 2080 FWL Proposed BHL: NWSE, 21-26S-30E, 2609 FSL, 2550 FEL

NOI Attachments

Procedure Description

- CLAWHAMMER_33_28_21_FEDERAL_COM_413H_20221201141920.pdf
- 2022020349_DEVON_ENERGY_CLAWHAMMER_33_28_21_FEDERAL_COM_413H_C_102_FINAL_SET_11_28_2022_20221129100126.pdf
- CLAWHAMMER_33_28_21_FEDERAL_COM_413H_Directional_Plan_11_22_22_20221129100126.pdf
- break_test_variance_BOP_20221129100126.pdf
- 10.750_40.5lb_H40_20221129100126.pdf

Well Name: CLAWHAMMER 33-28-21 FED COM		Well Location: T26S / R30E / SEC 33 / LOT L3 /	County or Parish/State:
Well Number: 413H	Type of Well: OTHER		Allottee or Tribe Name:
Lease Number: NMNM35607	Unit or CA Name:	Unit or CA Number:	
US Well Number: 3001549832	Well Status: Approved Application for Permit to Drill	Operator: WPX ENERGY PERMIAN LLC	

Conditions of Approval

Additional

Clawhammer_33_28_21_Fed_Com_413H_Sundry_ID_2704675_20221220110041.pdf

33_26_30_3_Sundry_ID_2704675_Clawhammer_33_28_21_Fed_Com_413H_Eddy_NM35607_DEVON_ENERGY_PR
DUCTION_COMPANY_LP_13_22d_12_20_2022_LV_20221220110041.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: JENNY HARMS

Signed on: DEC 01, 2022 02:19 PM

Name: WPX ENERGY PERMIAN LLC

Title: Regulatory Compliance Professional

Street Address: 333 West Sheridan Avenue

City: Oklahoma City **State:** OK

Phone: (405) 552-6560

Email address: jennifer.harms@dvn.com

Field

Representative Name:

Street Address:

City: **State:** **Zip:**

Phone:

Email address:

BLM Point of Contact

BLM POC Name: CHRISTOPHER WALLS	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5752342234	BLM POC Email Address: cwalls@blm.gov
Disposition: Approved	Disposition Date: 03/01/2023
Signature: Chris Walls	

District I

1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

District III

1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102

Revised August 1, 2011

Submit one copy to appropriate

District Office

☒ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-015-49832		² Pool Code 98220	³ Pool Name PURPLE SAGE; WOLFCAMP (GAS)
⁴ Property Code 333164	⁵ Property Name CLAWHAMMER 33-28-21 FEDERAL COM		⁶ Well Number 413H
⁷ OGRID No. 246289	⁸ Operator Name WPX ENERGY PERMIAN, LLC		⁹ Elevation 2,958'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
3	33	26 S	30 E		367	SOUTH	2,354	WEST	EDDY

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
J	21	26 S	30 E		2,609	SOUTH	2,550	EAST	EDDY

¹² Dedicated Acres 1219.08	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No. NSL-8444
------------------------------------------	-------------------------------	----------------------------------	-------------------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

¹⁶ SHL (NAD83 NME) LTP (NAD83 NME) Y = 364,439.5 Y = 374,101.9 X = 679,634.2 X = 679,989.6 LAT. = 32.001140 °N LAT. = 32.027697 °N LONG. = 103.887194 °W LONG. = 103.885919 °W FTP (NAD83 NME) BHL (NAD83 NME) Y = 364,174.5 Y = 374,151.9 X = 680,045.9 X = 679,989.2 LAT. = 32.000407 °N LAT. = 32.027834 °N LONG. = 103.885870 °W LONG. = 103.885919 °W CORNER COORDINATES (NAD83 NME) A - Y = 374,201.2 N X = 679,876.0 E B - Y = 371,542.6 N X = 679,896.9 E C - Y = 368,884.4 N X = 679,913.7 E D - Y = 366,226.2 N X = 679,930.6 E E - Y = 364,074.0 N X = 679,939.1 E F - Y = 374,209.6 N X = 681,207.4 E G - Y = 371,550.7 N X = 681,227.5 E H - Y = 368,892.0 N X = 681,243.4 E I - Y = 366,233.3 N X = 681,259.3 E J - Y = 364,080.2 N X = 681,267.7 E SHL (NAD27 NME) LTP (NAD27 NME) Y = 364,382.3 Y = 374,044.4 X = 638,448.0 X = 638,803.6 LAT. = 32.001014 °N LAT. = 32.027571 °N LONG. = 103.886716 °W LONG. = 103.885440 °W FTP (NAD27 NME) BHL (NAD27 NME) Y = 364,117.3 Y = 374,094.4 X = 638,859.7 X = 638,803.3 LAT. = 32.000281 °N LAT. = 32.027709 °N LONG. = 103.885392 °W LONG. = 103.885440 °W CORNER COORDINATES (NAD27 NME) A - Y = 374,143.7 N X = 638,690.1 E B - Y = 371,485.1 N X = 638,710.9 E C - Y = 368,827.0 N X = 638,727.7 E D - Y = 366,168.9 N X = 638,744.5 E E - Y = 364,016.8 N X = 638,752.9 E F - Y = 374,152.1 N X = 640,021.4 E G - Y = 371,493.3 N X = 640,041.5 E H - Y = 368,834.7 N X = 640,057.3 E I - Y = 366,176.0 N X = 640,073.2 E J - Y = 364,022.9 N X = 640,081.4 E	① Y=376,839.92 X=677,187.08 ② Y=376,857.78 X=679,855.13 ③ Y=376,875.81 X=682,519.12 ④ Y=374,184.25 X=677,214.12 ⑤ Y=374,218.08 X=682,538.78 ⑥ Y=371,526.64 X=677,240.16 ⑦ Y=371,542.56 X=679,896.89 ⑧ Y=371,558.90 X=682,558.17 ⑨ Y=368,869.09 X=677,256.01 ⑩ Y=368,899.65 X=682,573.11 ⑪ Y=366,211.95 X=677,272.50 ⑫ Y=366,226.18 X=679,930.61 ⑬ Y=366,240.40 X=682,588.05 ⑭ Y=364,061.94 X=677,281.65 ⑮ Y=364,074.03 X=679,939.10 ⑯ Y=364,086.66 X=682,596.21	SEC. 16 SEC. 21 SEC. 28 T26S R30E SEC. 33 LOT 4 - 24.74 ACRES LOT 3 - 24.76 ACRES LOT 2 - 24.78 ACRES LOT 1 - 24.80 ACRES GRID AZ.=359°40'31" HORIZ. DIST.=10,027.52' GRID AZ.=127°24'19" HORIZ. DIST.=518.51' TEXAS NEW MEXICO	¹⁷ OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. Signature: <i>Jenny Harms</i> Date: 11-28-2022 Printed Name: JENNY HARMS E-mail Address: JENNY.HARMS@DVN.COM
	¹⁸ SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Date of Survey: 11-16-2022 Signature and Seal of Professional Surveyor: <i>Mark Dillon Harp</i> MARK DILLON HARP 23786 Certificate Number: 2022020349		

Intent ☒ As Drilled ☐

API # 30-015-		
Operator Name: WPX ENERGY PERMIAN, LLC	Property Name: CLAWHAMMER 33-28-21 FEDERAL COM	Well Number 413H

Kick Off Point (KOP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
	33	26S	30E		55 FSL	2551 FEL			EDDY
Latitude 32.00018913					Longitude -103.88595529				NAD 83

First Take Point (FTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
	33	26 S	30 E	2	100	SOUTH	2,550	EAST	EDDY
Latitude 32.000407°N					Longitude 103.885870°W				NAD 83

Last Take Point (LTP)

UL	Section	Township	Range	Lot	Feet	From N/S	Feet	From E/W	County
J	21	26 S	30 E		2,559	SOUTH	2,550	EAST	EDDY
Latitude 32.027697°N					Longitude 103.885919°W				NAD 83

Is this well the defining well for the Horizontal Spacing Unit? ☒Is this well an infill well? ☐

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #		
Operator Name:	Property Name:	Well Number

KZ 06/29/2018

1. Geologic Formations

TVD of target	10669	Pilot hole depth	N/A
MD at TD:	20487	Deepest expected fresh water	

Basin

Formation	Depth (TVD) from KB	Water/Mineral Bearing/Target Zone?	Hazards*
Rustler	1148		
Salt	1148		
Base of Salt	3388		
Delaware	3481		
Cherry Canyon	4621		
Brushy Canyon	5611		
1st Bone Spring Lime	7345		
Bone Spring 1st	8301		
Bone Spring 2nd	8929		
3rd Bone Spring Lime	9423		
Bone Spring 3rd	10173		
Wolfcamp	10563		

*H2S, water flows, loss of circulation, abnormal pressures, etc.

2. Casing Program (Primary Design)

Hole Size	Csg. Size	Wt (PPF)	Grade	Conn	Casing Interval		Casing Interval	
					From (MD)	To (MD)	From (TVD)	To (TVD)
13 1/2	10 3/4	40 1/2	H40	BTC	0	1173	0	1173
9 7/8	8 5/8	32	P110	TLW	0	10173	0	10173
7 7/8	5 1/2	17	P110	BTC	0	20487	0	10669

• All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 IILB.1.h Must have table for contingency casing.

3. Cementing Program

Casing	# Sks	TOC	Wt. ppg	Yld (ft3/sack)	Slurry Description
Surface	469	Surf	13.2	1.44	Lead: Class C Cement + additives
Int 1 (Conventional Job)	403	Surf	9	3.27	Lead: Class C Cement + additives
	238	8173	13.2	1.44	Tail: Class H / C + additives
Int 1 Top Out (Squeeze)	As Needed	Surf	13.2	1.44	Top Out (Squeeze) Lead: Class C Cement + additives
Int 1 (2 stage Job)	277	Surf	9	3.27	2nd stage Lead: Class C Cement + additives
	524	5653	13.2	1.44	Tail: Class H / C + additives
Production	117	8139	9	3.27	Lead: Class H / C + additives
	1370	10139	13.2	1.44	Tail: Class H / C + additives

Note

Cementing Program (Primary Design) Assuming no returns are established while drilling, Devon requests to pump a two stage cement job on the 8-5/8" intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Brushy Canyon and the second stage performed as a bradenhead squeeze with planned cement from the Brushy Canyon to surface. If necessary, a top out consisting of 500 sacks of Class C cement + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (2.30 yld, 12.91 ppg) will be executed as a contingency. The final cement top will be verified by Echo-meter. Devon will include the Echo-meter verified fluid top and the volume of displacement fluid above the cement slurry in the annulus in all post-drill sundries on wells utilizing this cement program. Devon will report to the BLM the volume of fluid (limited to 1 bbls) used to flush intermediate casing valves following backside cementing procedures.

Casing String	% Excess
Surface	50%
Intermediate 1	30%
Intermediate 1 (Two Stage)	25%
Prod	10%

4. Pressure Control Equipment (Three String Design)

BOP installed and tested before drilling which hole?		Size?	Min. Required WP	Type	✓	Tested to:
Int 1	13-5/8"	5M	Annular		X	50% of rated working pressure
			Blind Ram		X	5M
			Pipe Ram			
			Double Ram		X	
			Other*			
Production	13-5/8"	5M	Annular (5M)		X	50% of rated working pressure
			Blind Ram		X	5M
			Pipe Ram			
			Double Ram		X	
			Other*			
			Annular (5M)			
			Blind Ram			
			Pipe Ram			
			Double Ram			
			Other*			
N	A variance is requested for the use of a diverter on the surface casing. See attached for schematic.					
Y	A variance is requested to run a 5 M annular on a 10M system					

5. Mud Program (Three String Design)

Section	Type	Weight (ppg)
Surface	FW Gel	8.5-9
Intermediate	DBE / Cut Brine	10-10.5
Production	OBM	10-10.5

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	PVT/Pason/Visual Monitoring
---------------------------------------------------------	-----------------------------

6. Logging and Testing Procedures

Logging, Coring and Testing	
X	Will run GR/CNL from TD to surface (horizontal well - vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
	No logs are planned based on well control or offset log information.
	Drill stem test? If yes, explain.
	Coring? If yes, explain.

Additional logs planned	Interval
Resistivity	Int. shoe to KOP
Density	Int. shoe to KOP
X CBL	Production casing
X Mud log	Intermediate shoe to TD
PEX	

7. Drilling Conditions

Condition	Specify what type and where?
BH pressure at deepest TVD	5825
Abnormal temperature	No

Mitigation measure for abnormal conditions. Describe. Lost circulation material/sweeps/mud scavengers.

Hydrogen Sulfide (H2S) monitors will be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered measured values and formations will be provided to the BLM.	
N	H2S is present
Y	H2S plan attached.

8. Other facets of operation

Is this a walking operation? Potentially

- 1 If operator elects, drilling rig will batch drill the surface holes and run/cement surface casing; walking the rig to next wells on the pad.
- 2 The drilling rig will then batch drill the intermediate sections and run/cement intermediate casing; the wellbore will be isolated with a blind flange and pressure gauge installed for monitoring the well before walking to the next well.
- 3 The drilling rig will then batch drill the production hole sections on the wells with OBM, run/cement production casing, and install TA caps or tubing heads for completions.

NOTE: During batch operations the drilling rig will be moved from well to well however, it will not be removed from the pad until all wells have production casing run/cemented.

Will be pre-setting casing? Potentially

- 1 Spudder rig will move in and batch drill surface hole.
 - a. Rig will utilize fresh water based mud to drill surface hole to TD. Solids control will be handled entirely on a closed loop basis.,
- 2 After drilling the surface hole section, the spudder rig will run casing and cement following all of the applicable rules and regulations (OnShore Order 2, all COAs and NMOCD regulations).
- 3 The wellhead will be installed and tested once the surface casing is cut off and the WOC time has been reached.
- 4 A blind flange with the same pressure rating as the wellhead will be installed to seal the wellbore. Pressure will be monitored with a pressure gauge installed on the wellhead.
- 5 Spudder rig operations is expected to take 4-5 days per well on a multi-well pa.
- 6 The NMOCD will be contacted and notified 24 hours prior to commencing spudder rig operations.
- 7 Drilling operations will be performed with drilling rig. At that time an approved BOP stack will be nipped up and tested on the wellhead before drilling operations commences on each well.
 - a. The NMOCD will be contacted / notified 24 hours before the drilling rig moves back on to the pad with the pre-set surface casing.

Attachments


X Directional Plan
 Other, describe



Well: CLAWHAMMER 33-28-21 FEDERAL COM 413H
County: Eddy
Wellbore: Permit Plan
Design: Permit Plan #1

Geodetic System: US State Plane 1983
Datum: North American Datum 1927
Ellipsoid: Clarke 1866
Zone: 3001 - NM East (NAD83)

MD	INC	AZI	TVD	NS	EW	VS	DLS	Comment
(ft)	(°)	(°)	(ft)	(ft)	(ft)	(ft)	(°/100ft)	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	SHL
2000.00	0.00	127.00	2000.00	0.00	0.00	0.00	0.00	Start Tangent
2500.00	10.00	127.00	2497.47	-26.19	34.76	-24.91	2.00	Hold Tangent
4962.16	10.00	127.00	4922.22	-283.50	376.21	-269.56	0.00	Drop to Vertical
5462.16	0.00	127.00	5419.68	-309.69	410.97	-294.47	2.00	Hold Vertical
10138.52	0.00	359.68	10096.04	-309.69	410.97	-294.47	0.00	KOP
11038.52	90.00	359.68	10669.00	263.26	407.77	277.98	10.00	Landing Point
20487.41	90.00	359.68	10669.00	9712.00	355.00	9718.49	0.00	BHL

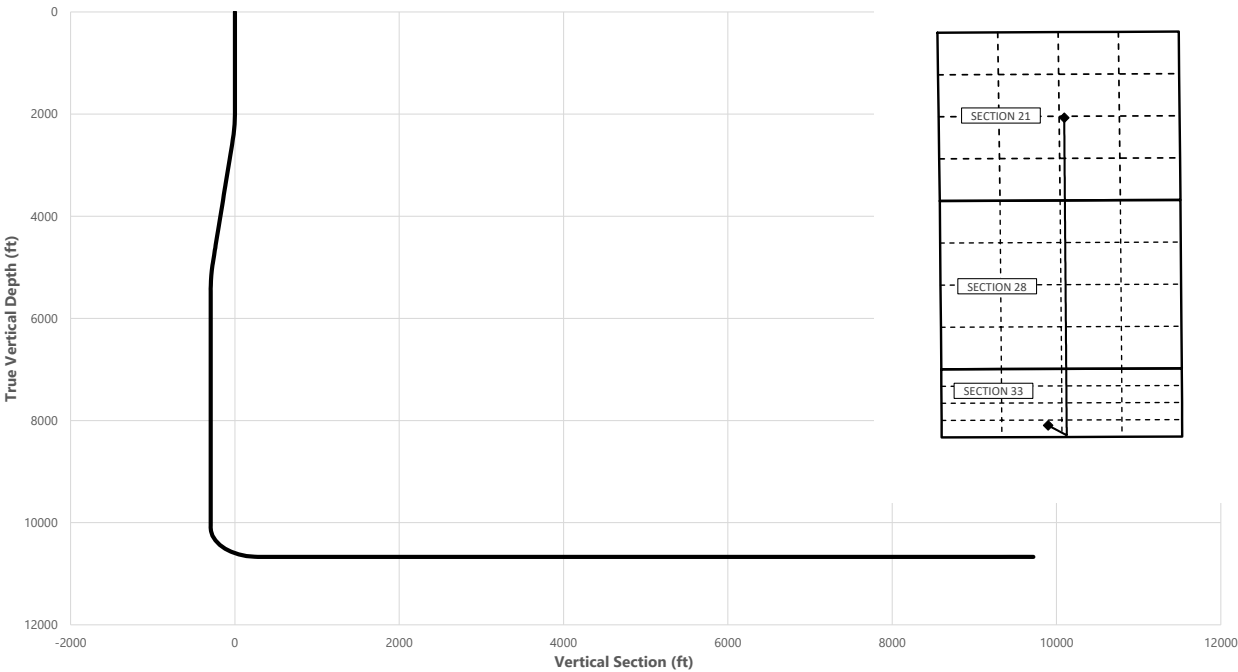

Key Depths	MD	TVD
	(ft)	(ft)
Rustler	1148.00	1148.00
Salt	1148.00	1148.00
Base of Salt	3404.27	3388.00
Delaware	3498.71	3481.00
Cherry Canyon	4656.29	4621.00
Brushy Canyon	5653.47	5611.00
1st Bone Spring Lime	7387.47	7345.00
Bone Spring 1st	8343.47	8301.00
Bone Spring 2nd	8971.47	8929.00
3rd Bone Spring Lime	9465.47	9423.00
Bone Spring 3rd	10215.71	10173.00
Wolfcamp / Point of Penetration	10684.39	10563.00
exit	20407.41	10669.01

SHL
KOP
Point of Penetration
Exit
BHL

MD	TVD	Lat	Long	Section Footages
(ft)	(ft)	(°)	(°)	
0.00	0.00	32.0010	-103.8873	367' FSL, 2354' FWL of Sec 33 in T26S, R30E
10138.52	10096.04	32.0002	-103.8860	55' FSL, 2551' FEL of Sec 33 in T26S, R30E
10684.39	10563.00	32.0004	-103.8859	100' FSL, 2550' FEL of Sec 33 in T26S, R30E
20407.41	10669.01	32.0277	-103.8859	2559' FSL, 2550' FEL of Sec 21 in T26S, R30E
20487.41	10669.00	32.0277	-103.8860	2609' FSL, 2550' FEL of Sec 21 in T26S, R30E

CLAWHAMMER 33-28-21 FEDERAL COM 413H



Well: CLAWHAMMER 33-28-21 FEDERAL COM 413H
County: Eddy
Wellbore: Permit Plan
Design: Permit Plan #1

Geodetic System: US State Plane 1983
Datum: North American Datum 1927
Ellipsoid: Clarke 1866
Zone: 3001 - NM East (NAD83)

MD (ft)	INC (°)	AZI (°)	TVD (ft)	NS (ft)	EW (ft)	VS (ft)	DLS (°/100ft)	Comment
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	SHL
100.00	0.00	127.00	100.00	0.00	0.00	0.00	0.00	
200.00	0.00	127.00	200.00	0.00	0.00	0.00	0.00	
300.00	0.00	127.00	300.00	0.00	0.00	0.00	0.00	
400.00	0.00	127.00	400.00	0.00	0.00	0.00	0.00	
500.00	0.00	127.00	500.00	0.00	0.00	0.00	0.00	
600.00	0.00	127.00	600.00	0.00	0.00	0.00	0.00	
700.00	0.00	127.00	700.00	0.00	0.00	0.00	0.00	
800.00	0.00	127.00	800.00	0.00	0.00	0.00	0.00	
900.00	0.00	127.00	900.00	0.00	0.00	0.00	0.00	
1000.00	0.00	127.00	1000.00	0.00	0.00	0.00	0.00	
1100.00	0.00	127.00	1100.00	0.00	0.00	0.00	0.00	
1148.00	0.00	127.00	1148.00	0.00	0.00	0.00	0.00	Rustler, Salt
1200.00	0.00	127.00	1200.00	0.00	0.00	0.00	0.00	
1300.00	0.00	127.00	1300.00	0.00	0.00	0.00	0.00	
1400.00	0.00	127.00	1400.00	0.00	0.00	0.00	0.00	
1500.00	0.00	127.00	1500.00	0.00	0.00	0.00	0.00	
1600.00	0.00	127.00	1600.00	0.00	0.00	0.00	0.00	
1700.00	0.00	127.00	1700.00	0.00	0.00	0.00	0.00	
1800.00	0.00	127.00	1800.00	0.00	0.00	0.00	0.00	
1900.00	0.00	127.00	1900.00	0.00	0.00	0.00	0.00	
2000.00	0.00	127.00	2000.00	0.00	0.00	0.00	0.00	Start Tangent
2100.00	2.00	127.00	2099.98	-1.05	1.39	-1.00	2.00	
2200.00	4.00	127.00	2199.84	-4.20	5.57	-3.99	2.00	
2300.00	6.00	127.00	2299.45	-9.44	12.53	-8.98	2.00	
2400.00	8.00	127.00	2398.70	-16.78	22.27	-15.95	2.00	
2500.00	10.00	127.00	2497.47	-26.19	34.76	-24.91	2.00	Hold Tangent
2600.00	10.00	127.00	2595.95	-36.64	48.63	-34.84	0.00	
2700.00	10.00	127.00	2694.43	-47.09	62.50	-44.78	0.00	
2800.00	10.00	127.00	2792.91	-57.54	76.36	-54.72	0.00	
2900.00	10.00	127.00	2891.39	-67.99	90.23	-64.65	0.00	
3000.00	10.00	127.00	2989.87	-78.44	104.10	-74.59	0.00	
3100.00	10.00	127.00	3088.35	-88.89	117.97	-84.53	0.00	
3200.00	10.00	127.00	3186.83	-99.35	131.84	-94.46	0.00	
3300.00	10.00	127.00	3285.31	-109.80	145.70	-104.40	0.00	
3400.00	10.00	127.00	3383.79	-120.25	159.57	-114.34	0.00	
3404.27	10.00	127.00	3388.00	-120.69	160.16	-114.76	0.00	Base of Salt
3498.71	10.00	127.00	3481.00	-130.56	173.26	-124.14	0.00	Delaware
3500.00	10.00	127.00	3482.27	-130.70	173.44	-124.27	0.00	
3600.00	10.00	127.00	3580.75	-141.15	187.31	-134.21	0.00	
3700.00	10.00	127.00	3679.23	-151.60	201.18	-144.15	0.00	
3800.00	10.00	127.00	3777.72	-162.05	215.04	-154.08	0.00	
3900.00	10.00	127.00	3876.20	-172.50	228.91	-164.02	0.00	
4000.00	10.00	127.00	3974.68	-182.95	242.78	-173.96	0.00	
4100.00	10.00	127.00	4073.16	-193.40	256.65	-183.89	0.00	
4200.00	10.00	127.00	4171.64	-203.85	270.52	-193.83	0.00	
4300.00	10.00	127.00	4270.12	-214.30	284.39	-203.77	0.00	
4400.00	10.00	127.00	4368.60	-224.75	298.25	-213.70	0.00	
4500.00	10.00	127.00	4467.08	-235.20	312.12	-223.64	0.00	
4600.00	10.00	127.00	4565.56	-245.65	325.99	-233.58	0.00	
4656.29	10.00	127.00	4621.00	-251.53	333.80	-239.17	0.00	Cherry Canyon
4700.00	10.00	127.00	4664.04	-256.10	339.86	-243.51	0.00	
4800.00	10.00	127.00	4762.52	-266.55	353.73	-253.45	0.00	
4900.00	10.00	127.00	4861.00	-277.00	367.59	-263.39	0.00	
4962.16	10.00	127.00	4922.22	-283.50	376.21	-269.56	0.00	Drop to Vertical
5000.00	9.24	127.00	4959.53	-287.30	381.27	-273.19	2.00	
5100.00	7.24	127.00	5058.49	-295.93	392.72	-281.39	2.00	
5200.00	5.24	127.00	5157.89	-302.48	401.40	-287.61	2.00	
5300.00	3.24	127.00	5257.61	-306.93	407.31	-291.85	2.00	
5400.00	1.24	127.00	5357.53	-309.28	410.43	-294.09	2.00	
5462.16	0.00	127.00	5419.68	-309.69	410.97	-294.47	2.00	Hold Vertical
5500.00	0.00	359.68	5457.53	-309.69	410.97	-294.47	0.00	
5600.00	0.00	359.68	5557.53	-309.69	410.97	-294.47	0.00	
5653.47	0.00	359.68	5611.00	-309.69	410.97	-294.47	0.00	Brushy Canyon
5700.00	0.00	359.68	5657.53	-309.69	410.97	-294.47	0.00	
5800.00	0.00	359.68	5757.53	-309.69	410.97	-294.47	0.00	
5900.00	0.00	359.68	5857.53	-309.69	410.97	-294.47	0.00	
6000.00	0.00	359.68	5957.53	-309.69	410.97	-294.47	0.00	
6100.00	0.00	359.68	6057.53	-309.69	410.97	-294.47	0.00	
6200.00	0.00	359.68	6157.53	-309.69	410.97	-294.47	0.00	

CLAWHAMMER 33-28-21 FEDERAL COM 413H



Well: CLAWHAMMER 33-28-21 FEDERAL COM 413H
County: Eddy
Wellbore: Permit Plan
Design: Permit Plan #1

Geodetic System: US State Plane 1983
Datum: North American Datum 1927
Ellipsoid: Clarke 1866
Zone: 3001 - NM East (NAD83)

MD (ft)	INC (°)	AZI (°)	TVD (ft)	NS (ft)	EW (ft)	VS (ft)	DLS (°/100ft)	Comment
6300.00	0.00	359.68	6257.53	-309.69	410.97	-294.47	0.00	
6400.00	0.00	359.68	6357.53	-309.69	410.97	-294.47	0.00	
6500.00	0.00	359.68	6457.53	-309.69	410.97	-294.47	0.00	
6600.00	0.00	359.68	6557.53	-309.69	410.97	-294.47	0.00	
6700.00	0.00	359.68	6657.53	-309.69	410.97	-294.47	0.00	
6800.00	0.00	359.68	6757.53	-309.69	410.97	-294.47	0.00	
6900.00	0.00	359.68	6857.53	-309.69	410.97	-294.47	0.00	
7000.00	0.00	359.68	6957.53	-309.69	410.97	-294.47	0.00	
7100.00	0.00	359.68	7057.53	-309.69	410.97	-294.47	0.00	
7200.00	0.00	359.68	7157.53	-309.69	410.97	-294.47	0.00	
7300.00	0.00	359.68	7257.53	-309.69	410.97	-294.47	0.00	
7387.47	0.00	359.68	7345.00	-309.69	410.97	-294.47	0.00	1st Bone Spring Lime
7400.00	0.00	359.68	7357.53	-309.69	410.97	-294.47	0.00	
7500.00	0.00	359.68	7457.53	-309.69	410.97	-294.47	0.00	
7600.00	0.00	359.68	7557.53	-309.69	410.97	-294.47	0.00	
7700.00	0.00	359.68	7657.53	-309.69	410.97	-294.47	0.00	
7800.00	0.00	359.68	7757.53	-309.69	410.97	-294.47	0.00	
7900.00	0.00	359.68	7857.53	-309.69	410.97	-294.47	0.00	
8000.00	0.00	359.68	7957.53	-309.69	410.97	-294.47	0.00	
8100.00	0.00	359.68	8057.53	-309.69	410.97	-294.47	0.00	
8200.00	0.00	359.68	8157.53	-309.69	410.97	-294.47	0.00	
8300.00	0.00	359.68	8257.53	-309.69	410.97	-294.47	0.00	
8343.47	0.00	359.68	8301.00	-309.69	410.97	-294.47	0.00	Bone Spring 1st
8400.00	0.00	359.68	8357.53	-309.69	410.97	-294.47	0.00	
8500.00	0.00	359.68	8457.53	-309.69	410.97	-294.47	0.00	
8600.00	0.00	359.68	8557.53	-309.69	410.97	-294.47	0.00	
8700.00	0.00	359.68	8657.53	-309.69	410.97	-294.47	0.00	
8800.00	0.00	359.68	8757.53	-309.69	410.97	-294.47	0.00	
8900.00	0.00	359.68	8857.53	-309.69	410.97	-294.47	0.00	
8971.47	0.00	359.68	8929.00	-309.69	410.97	-294.47	0.00	Bone Spring 2nd
9000.00	0.00	359.68	8957.53	-309.69	410.97	-294.47	0.00	
9100.00	0.00	359.68	9057.53	-309.69	410.97	-294.47	0.00	
9200.00	0.00	359.68	9157.53	-309.69	410.97	-294.47	0.00	
9300.00	0.00	359.68	9257.53	-309.69	410.97	-294.47	0.00	
9400.00	0.00	359.68	9357.53	-309.69	410.97	-294.47	0.00	
9465.47	0.00	359.68	9423.00	-309.69	410.97	-294.47	0.00	3rd Bone Spring Lime
9500.00	0.00	359.68	9457.53	-309.69	410.97	-294.47	0.00	
9600.00	0.00	359.68	9557.53	-309.69	410.97	-294.47	0.00	
9700.00	0.00	359.68	9657.53	-309.69	410.97	-294.47	0.00	
9800.00	0.00	359.68	9757.53	-309.69	410.97	-294.47	0.00	
9900.00	0.00	359.68	9857.53	-309.69	410.97	-294.47	0.00	
10000.00	0.00	359.68	9957.53	-309.69	410.97	-294.47	0.00	
10100.00	0.00	359.68	10057.53	-309.69	410.97	-294.47	0.00	
10138.52	0.00	359.68	10096.04	-309.69	410.97	-294.47	0.00	KOP
10200.00	6.15	359.68	10157.41	-306.39	410.95	-291.18	10.00	
10215.71	7.72	359.68	10173.00	-304.50	410.94	-289.28	10.00	Bone Spring 3rd
10300.00	16.15	359.68	10255.40	-287.08	410.85	-271.89	10.00	
10400.00	26.15	359.68	10348.54	-251.05	410.65	-235.88	10.00	
10500.00	36.15	359.68	10434.02	-199.39	410.36	-184.27	10.00	
10600.00	46.15	359.68	10509.22	-133.68	409.99	-118.61	10.00	
10684.39	54.59	359.68	10563.00	-68.75	409.63	-53.74	10.00	Wolfcamp / Point of Penetration
10700.00	56.15	359.68	10571.87	-55.90	409.55	-40.90	10.00	
10800.00	66.15	359.68	10620.07	31.57	409.07	46.50	10.00	
10900.00	76.15	359.68	10652.34	126.09	408.54	140.93	10.00	
11000.00	86.15	359.68	10667.71	224.77	407.99	239.52	10.00	
11038.52	90.00	359.68	10669.00	263.26	407.77	277.98	10.00	Landing Point
11100.00	90.00	359.68	10669.00	324.74	407.43	339.41	0.00	
11200.00	90.00	359.68	10669.00	424.74	406.87	439.32	0.00	
11300.00	90.00	359.68	10669.00	524.74	406.31	539.23	0.00	
11400.00	90.00	359.68	10669.00	624.74	405.75	639.14	0.00	
11500.00	90.00	359.68	10669.00	724.73	405.19	739.05	0.00	
11600.00	90.00	359.68	10669.00	824.73	404.63	838.96	0.00	
11700.00	90.00	359.68	10669.00	924.73	404.08	938.87	0.00	
11800.00	90.00	359.68	10669.00	1024.73	403.52	1038.79	0.00	
11900.00	90.00	359.68	10669.00	1124.73	402.96	1138.70	0.00	
12000.00	90.00	359.68	10669.00	1224.73	402.40	1238.61	0.00	
12100.00	90.00	359.68	10669.00	1324.73	401.84	1338.52	0.00	
12200.00	90.00	359.68	10669.00	1424.72	401.28	1438.43	0.00	
12300.00	90.00	359.68	10669.00	1524.72	400.72	1538.34	0.00	
12400.00	90.00	359.68	10669.00	1624.72	400.16	1638.25	0.00	

CLAWHAMMER 33-28-21 FEDERAL COM 413H



Well: CLAWHAMMER 33-28-21 FEDERAL COM 413H
County: Eddy
Wellbore: Permit Plan
Design: Permit Plan #1

Geodetic System: US State Plane 1983
Datum: North American Datum 1927
Ellipsoid: Clarke 1866
Zone: 3001 - NM East (NAD83)

MD (ft)	INC (")	AZI (")	TVD (ft)	NS (ft)	EW (ft)	VS (ft)	DLS (°/100ft)	Comment
12500.00	90.00	359.68	10669.00	1724.72	399.60	1738.17	0.00	
12600.00	90.00	359.68	10669.00	1824.72	399.04	1838.08	0.00	
12700.00	90.00	359.68	10669.00	1924.72	398.48	1937.99	0.00	
12800.00	90.00	359.68	10669.00	2024.71	397.93	2037.90	0.00	
12900.00	90.00	359.68	10669.00	2124.71	397.37	2137.81	0.00	
13000.00	90.00	359.68	10669.00	2224.71	396.81	2237.72	0.00	
13100.00	90.00	359.68	10669.00	2324.71	396.25	2337.63	0.00	
13200.00	90.00	359.68	10669.00	2424.71	395.69	2437.54	0.00	
13300.00	90.00	359.68	10669.00	2524.71	395.13	2537.46	0.00	
13400.00	90.00	359.68	10669.00	2624.70	394.57	2637.37	0.00	
13500.00	90.00	359.68	10669.00	2724.70	394.01	2737.28	0.00	
13600.00	90.00	359.68	10669.00	2824.70	393.45	2837.19	0.00	
13700.00	90.00	359.68	10669.00	2924.70	392.89	2937.10	0.00	
13800.00	90.00	359.68	10669.00	3024.70	392.34	3037.01	0.00	
13900.00	90.00	359.68	10669.00	3124.70	391.78	3136.92	0.00	
14000.00	90.00	359.68	10669.00	3224.70	391.22	3236.83	0.00	
14100.00	90.00	359.68	10669.00	3324.69	390.66	3336.75	0.00	
14200.00	90.00	359.68	10669.00	3424.69	390.10	3436.66	0.00	
14300.00	90.00	359.68	10669.00	3524.69	389.54	3536.57	0.00	
14400.00	90.00	359.68	10669.00	3624.69	388.98	3636.48	0.00	
14500.00	90.00	359.68	10669.00	3724.69	388.42	3736.39	0.00	
14600.00	90.00	359.68	10669.00	3824.69	387.86	3836.30	0.00	
14700.00	90.00	359.68	10669.00	3924.68	387.30	3936.21	0.00	
14800.00	90.00	359.68	10669.01	4024.68	386.75	4036.12	0.00	
14900.00	90.00	359.68	10669.01	4124.68	386.19	4136.04	0.00	
15000.00	90.00	359.68	10669.01	4224.68	385.63	4235.95	0.00	
15100.00	90.00	359.68	10669.01	4324.68	385.07	4335.86	0.00	
15200.00	90.00	359.68	10669.01	4424.68	384.51	4435.77	0.00	
15300.00	90.00	359.68	10669.01	4524.68	383.95	4535.68	0.00	
15400.00	90.00	359.68	10669.01	4624.67	383.39	4635.59	0.00	
15500.00	90.00	359.68	10669.01	4724.67	382.83	4735.50	0.00	
15600.00	90.00	359.68	10669.01	4824.67	382.27	4835.41	0.00	
15700.00	90.00	359.68	10669.01	4924.67	381.71	4935.33	0.00	
15800.00	90.00	359.68	10669.01	5024.67	381.15	5035.24	0.00	
15900.00	90.00	359.68	10669.01	5124.67	380.60	5135.15	0.00	
16000.00	90.00	359.68	10669.01	5224.66	380.04	5235.06	0.00	
16100.00	90.00	359.68	10669.01	5324.66	379.48	5334.97	0.00	
16200.00	90.00	359.68	10669.01	5424.66	378.92	5434.88	0.00	
16300.00	90.00	359.68	10669.01	5524.66	378.36	5534.79	0.00	
16400.00	90.00	359.68	10669.01	5624.66	377.80	5634.70	0.00	
16500.00	90.00	359.68	10669.01	5724.66	377.24	5734.62	0.00	
16600.00	90.00	359.68	10669.01	5824.65	376.68	5834.53	0.00	
16700.00	90.00	359.68	10669.01	5924.65	376.12	5934.44	0.00	
16800.00	90.00	359.68	10669.01	6024.65	375.56	6034.35	0.00	
16900.00	90.00	359.68	10669.01	6124.65	375.01	6134.26	0.00	
17000.00	90.00	359.68	10669.01	6224.65	374.45	6234.17	0.00	
17100.00	90.00	359.68	10669.01	6324.65	373.89	6334.08	0.00	
17200.00	90.00	359.68	10669.01	6424.65	373.33	6434.00	0.00	
17300.00	90.00	359.68	10669.01	6524.64	372.77	6533.91	0.00	
17400.00	90.00	359.68	10669.01	6624.64	372.21	6633.82	0.00	
17500.00	90.00	359.68	10669.01	6724.64	371.65	6733.73	0.00	
17600.00	90.00	359.68	10669.01	6824.64	371.09	6833.64	0.00	
17700.00	90.00	359.68	10669.01	6924.64	370.53	6933.55	0.00	
17800.00	90.00	359.68	10669.01	7024.64	369.97	7033.46	0.00	
17900.00	90.00	359.68	10669.01	7124.63	369.42	7133.37	0.00	
18000.00	90.00	359.68	10669.01	7224.63	368.86	7233.29	0.00	
18100.00	90.00	359.68	10669.01	7324.63	368.30	7333.20	0.00	
18200.00	90.00	359.68	10669.01	7424.63	367.74	7433.11	0.00	
18300.00	90.00	359.68	10669.01	7524.63	367.18	7533.02	0.00	
18400.00	90.00	359.68	10669.01	7624.63	366.62	7632.93	0.00	
18500.00	90.00	359.68	10669.01	7724.63	366.06	7732.84	0.00	
18600.00	90.00	359.68	10669.01	7824.62	365.50	7832.75	0.00	
18700.00	90.00	359.68	10669.01	7924.62	364.94	7932.66	0.00	
18800.00	90.00	359.68	10669.01	8024.62	364.38	8032.58	0.00	
18900.00	90.00	359.68	10669.01	8124.62	363.82	8132.49	0.00	
19000.00	90.00	359.68	10669.01	8224.62	363.27	8232.40	0.00	
19100.00	90.00	359.68	10669.01	8324.62	362.71	8332.31	0.00	
19200.00	90.00	359.68	10669.01	8424.61	362.15	8432.22	0.00	
19300.00	90.00	359.68	10669.01	8524.61	361.59	8532.13	0.00	
19400.00	90.00	359.68	10669.01	8624.61	361.03	8632.04	0.00	



Well: CLAWHAMMER 33-28-21 FEDERAL COM 413H
County: Eddy
Wellbore: Permit Plan
Design: Permit Plan #1

Geodetic System: US State Plane 1983
Datum: North American Datum 1927
Ellipsoid: Clarke 1866
Zone: 3001 - NM East (NAD83)

MD	INC	AZI	TVD	NS	EW	VS	DLS	Comment
(ft)	(°)	(°)	(ft)	(ft)	(ft)	(ft)	(°/100ft)	
19500.00	90.00	359.68	10669.01	8724.61	360.47	8731.95	0.00	
19600.00	90.00	359.68	10669.01	8824.61	359.91	8831.87	0.00	
19700.00	90.00	359.68	10669.01	8924.61	359.35	8931.78	0.00	
19800.00	90.00	359.68	10669.01	9024.60	358.79	9031.69	0.00	
19900.00	90.00	359.68	10669.01	9124.60	358.23	9131.60	0.00	
20000.00	90.00	359.68	10669.01	9224.60	357.68	9231.51	0.00	
20100.00	90.00	359.68	10669.01	9324.60	357.12	9331.42	0.00	
20200.00	90.00	359.68	10669.01	9424.60	356.56	9431.33	0.00	
20300.00	90.00	359.68	10669.01	9524.60	356.00	9531.24	0.00	
20400.00	90.00	359.68	10669.01	9624.60	355.44	9631.16	0.00	
20407.41	90.00	359.68	10669.01	9632.00	355.40	9638.55	0.00	exit
20487.41	90.00	359.68	10669.00	9712.00	355.00	9718.49	0.00	BHL

Well: CLAWHAMMER 33-28-21 FEDERAL COM 413H
County: Eddy
Wellbore: Permit Plan
Design: Permit Plan #1

Geodetic System: US State Plane 1983
Datum: North American Datum 1927
Ellipsoid: Clarke 1866
Zone: 3001 - NM East (NAD83)

MD	INC	AZI	TVD	NS	EW	VS	DLS	Comment
(ft)	(°)	(°)	(ft)	(ft)	(ft)	(ft)	(°/100ft)	



U. S. Steel Tubular Products

10.750" 40.50lb/ft (0.350" Wall) H40

11/4/2021 10:14:32 AM

MECHANICAL PROPERTIES	Pipe	BTC	LTC	STC		--
Minimum Yield Strength	40,000	--	--	--	psi	--
Maximum Yield Strength	80,000	--	--	--	psi	--
Minimum Tensile Strength	60,000	--	--	--	psi	--
DIMENSIONS	Pipe	BTC	LTC	STC		--
Outside Diameter	10.750	0.000	0.000	11.750	in.	--
Wall Thickness	0.350	--	--	--	in.	--
Inside Diameter	10.050	--	--	10.050	in.	--
Standard Drift	9.894	9.894	9.894	9.894	in.	--
Alternate Drift	--	--	--	--	in.	--
Nominal Linear Weight, T&C	40.50	--	--	--	lb/ft	--
Plain End Weight	38.91	--	--	--	lb/ft	--
PERFORMANCE	Pipe	BTC	LTC	STC		--
Minimum Collapse Pressure	1,390	1,390	1,390	1,390	psi	--
Minimum Internal Yield Pressure	2,280	2,280	2,280	2,280	psi	--
Minimum Pipe Body Yield Strength	457	--	--	--	1,000 lbs	--
Joint Strength	--	--	--	314	1,000 lbs	--
Reference Length	--	--	--	5,164	ft	--
MAKE-UP DATA	Pipe	BTC	LTC	STC		--
Make-Up Loss	--	--	--	3.50	in.	--
Minimum Make-Up Torque	--	--	--	2,360	ft-lb	--
Maximum Make-Up Torque	--	--	--	3,930	ft-lb	--

UNCONTROLLED

Notes

Legal Notice

All material contained in this publication is for general information only. This material should not therefore be used or relied upon for any specific application without independent competent professional examination and verification of accuracy, suitability and applicability. Anyone making use of this material does so at their own risk and assumes any and all liability resulting from such use. U. S. Steel disclaims any and all expressed or implied warranties of fitness for any general or particular application.

U. S. Steel Tubular Products
460 Wildwood Forest Drive, Suite 300S
Spring, Texas 77380

1-877-893-9461
connections@uss.com
www.usstubular.com

Section 2 - Blowout Preventer Testing Procedure

Variance Request

Devon Energy requests to only test BOP connection breaks after drilling out of surface casing and while skidding between wells which conforms to API Standard 53 and industry standards. This test will include the Top Pipe Rams, HCR, Kill Line Check Valve, QDC (quick disconnect to wellhead) and Shell of the 10M BOPE to 5M for 10 minutes. If a break to the flex hose that runs to the choke manifold is required due to repositioning from a skid, the HCR will remain open during the shell test to include that additional break. The variance only pertains to intermediate hole-sections and no deeper than the Bone Springs Formation where 5M BOP tests are required. The initial BOP test will follow OOGO2.III.A.2.i, and subsequent tests following a skid will only test connections that are broken. The annular preventer will be tested to 100% working pressure. This variance will meet or exceed OOGO2.III.A.2.i per the following: Devon Energy will perform a full BOP test per OOGO2.III.A.2.i before drilling out of the intermediate casing string(s) and starting the production hole, before starting any hole section that requires a 10M test, before the expiration of the allotted 14-days for 5M intermediate batch drilling or when the drilling rig is fully mobilized to a new well pad, whichever is sooner. We will utilize a 200' TVD tolerance between intermediate shoes as the cutoff for a full BOP test. The BLM will be contacted 4hrs prior to a BOPE test. The BLM will be notified if and when a well control event is encountered. Break test will be a 14 day interval and not a 30 day full BOPE test interval. If in the event break testing is not utilized, then a full BOPE test would be conducted.

1. Well Control Response:
 1. Primary barrier remains fluid
 2. In the event of an influx due to being underbalanced and after a realized gain or flow, the order of closing BOPE is as follows:
 - a) Annular first
 - b) If annular were to not hold, Upper pipe rams second (which were tested on the skid BOP test)
 - c) If the Upper Pipe Rams were to not hold, Lower Pipe Rams would be third

Cactus
Wellhead

2-9-17
E Bell

80.7 °F

15:49



50

Date 02-09-17

Tested By E.BELL

Transducer bay2

Transducer Serial 181504

Calibration Date 9/6/15

Job#	Part#	Serial#	Description	Test Pressure
1	TRJ0006341-0007	116966	TRJ6341-7-1 ADPT,DRLG,CW,MBU-3T,13-5/8 10M	15000
2				
3				
4				
5			TRANSDUCER CALIBRATION DUE 03/13/2017	
6				
7				
8				



Start



Stop



Zero



Config



Save



Print

EXIT

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	WPX Energy Permian LLC
LEASE NO.:	NMNM35607
LOCATION:	Section 33, T.26 S., R.30 E., NMPM
COUNTY:	Eddy County, New Mexico

WELL NAME & NO.:	Clawhammer 33-28-21 Federal Com 413H
SURFACE HOLE FOOTAGE:	367'/S & 2354'/W
BOTTOM HOLE FOOTAGE:	2609'/S & 2550'/E
ATS/API ID:	3001549832
APD ID:	
Sundry ID:	2704675

COA

H2S	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No	
Potash	<input checked="" type="checkbox"/> None	<input type="checkbox"/> Secretary	<input type="checkbox"/> R-111-P
Cave/Karst Potential	<input type="checkbox"/> Low	<input checked="" type="checkbox"/> Medium	<input type="checkbox"/> High
Cave/Karst Potential	<input type="checkbox"/> Critical		
Variance	<input type="checkbox"/> None	<input checked="" type="checkbox"/> Flex Hose	<input type="checkbox"/> Other
Wellhead	<input type="checkbox"/> Conventional	<input type="checkbox"/> Multibowl	<input checked="" type="checkbox"/> Both
Wellhead Variance	<input type="checkbox"/> Diverter		
Other	<input type="checkbox"/> 4 String	<input type="checkbox"/> Capitan Reef	<input type="checkbox"/> WIPP
Other	<input checked="" type="checkbox"/> Fluid Filled	<input type="checkbox"/> Pilot Hole	<input type="checkbox"/> Open Annulus
Cementing	<input checked="" type="checkbox"/> Cement Squeeze	<input checked="" type="checkbox"/> EchoMeter	
Special Requirements	<input type="checkbox"/> Water Disposal	<input checked="" type="checkbox"/> COM	<input type="checkbox"/> Unit
Special Requirements Variance	<input checked="" type="checkbox"/> Break Testing	<input type="checkbox"/> Offline Cementing	

A. HYDROGEN SULFIDE

Hydrogen Sulfide (H2S) monitors shall be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

1. The **10-3/4** inch surface casing shall be set at approximately **390 feet** (a minimum of **70 feet (Eddy County)** into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.

- a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
- d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Intermediate casing must be kept fluid filled to meet BLM minimum collapse requirement.

2. The minimum required fill of cement behind the **8-5/8** inch intermediate casing is:

Option 1 (Single Stage):

- Cement to surface. If cement does not circulate see B.1.a, c-d above.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.

Option 2:

Operator has proposed to cement in two stages by conventionally cementing the first stage and performing a bradenhead squeeze on the second stage, contingent upon no returns to surface.

- a. First stage: Operator will cement with intent to reach the top of the **Brushy Canyon at 5611' (524 sxs Class H/C+ additives)**.
 - b. Second stage:
 - Operator will perform bradenhead squeeze and top-out. Cement to surface. If cement does not reach surface, the appropriate BLM office shall be notified. **(Squeeze 277 sxs Class C)**
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.
- ❖ In Medium Cave/Karst Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.

Operator has proposed to pump down 10-3/4" X 8-5/8" annulus after primary cementing stage. Operator must run Echo-meter to verify Cement Slurry/Fluid top in the annulus Or operator shall run a CBL from TD of the 8-5/8" casing to surface after the second stage BH to verify TOC.

Submit results to the BLM. No displacement fluid/wash out shall be utilized at the top of the cement slurry between second stage BH and top out. Operator must run one CBL per Well Pad.

If cement does not reach surface, the next casing string must come to surface.

Operator must use a limited flush fluid volume of 1 bbl following backside cementing procedures.

3. The minimum required fill of cement behind the 5-1/2 inch production casing is:

- Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'

2.

Option 1:

- a. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M) psi. Annular which shall be tested to 3500 (70% Working Pressure) psi.**
- b. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the 8-5/8 inch intermediate casing shoe shall be **5000 (5M) psi.**

Option 2:

Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the 10-3/4 inch surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M) psi.**

- a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
- b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
- c. Manufacturer representative shall install the test plug for the initial BOP test.
- d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- The operator will submit an as-drilled survey well plat of the well completion, but are not limited to, those specified in Onshore Order 1 and 2.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

BOPE Break Testing Variance

- BOPE Break Testing is ONLY permitted for 5M BOPE or less. **(Annular preventer must be tested to a minimum of 70% of BOPE working pressure and shall be higher than the MASP)**
- BOPE Break Testing is NOT permitted to drilling the production hole section.
- Variance only pertains to the intermediate hole-sections and no deeper than the Bone Springs formation.
- While in transfer between wells, the BOPE shall be secured by the hydraulic carrier or cradle.
- Any well control event while drilling require notification to the BLM Petroleum Engineer **(575-706-2779)** prior to the commencement of any BOPE Break Testing operations.

- A full BOPE test is required prior to drilling the first deep intermediate hole section. If any subsequent hole interval is deeper than the first, a full BOPE test will be required. (200' TVD tolerance between intermediate shoes is allowable).
- The BLM is to be contacted **(575-361-2822 Eddy County)** 4 hours prior to BOPE tests.
- As a minimum, a full BOPE test shall be performed at **14-day** intervals.
- In the event any repairs or replacement of the BOPE is required, the BOPE shall test as per Onshore Oil and Gas Order No. 2.
- If in the event break testing is not utilized, then a full BOPE test would be conducted.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)
689-5981

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not

hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

LVO 12/20/2022

33-26-30-3 Sundry ID 2704675 Clawhammer 33-28-21 Fed Com 413H Eddy NM35607 DEVON ENERGY PRODUCTION COMPANY
LP 13-22d 12-20-2022 LV.xlsm

Clawhammer 33-28-21 Fed Com 413H

10 3/4		surface csg in a		13 1/2	inch hole.		Design Factors			Surface				
Segment	#/ft	Grade			Coupling	Joint	Collapse	Burst	Length	B@s	a-B	a-C	Weight	
"A"	40.50			h 40	btc	28.93	7.62	0.41	390	13	0.69	14.40	15,795	
"B"					btc				0				0	
w/8.4#/g mud, 30min Sfc Csg Test psig: 1,426									Tail Cmt	does not	circ to sfc.	Totals:	390	15,795
Comparison of Proposed to Minimum Required Cement Volumes														
Hole Size	Annular Volume	1 Stage Cmt Sx	1 Stage CuFt Cmt	Min Cu Ft	1 Stage % Excess	Drilling Mud Wt	Calc MASP	Req'd BOPE	Min Dist Hole-Cplg					
13 1/2	0.3637	469	675	142	376	9.00	3311	5M	1.38					
Burst Frac Gradient(s) for Segment(s) A, B = , b All > 0.70, OK.														
Site plot (page racks S or E) as per O.G. L.H.D.A. not found.														

8 5/8		casing inside the		10 3/4	-		Design Factors			Int 1			
Segment	#/ft	Grade			Coupling	Joint	Collapse	Burst	Length	B@s	a-B	a-C	Weight
"A"	32.00			p 110	tlw	3.31	0.76	1.53	10,173	2	2.57	1.28	325,536
"B"									0				0
w/8.4#/g mud, 30min Sfc Csg Test psig: 2,238									Totals:	10,173	325,536		
The cement volume(s) are intended to achieve a top of 0 ft from surface or a									390	overlap.			
Hole Size	Annular Volume	1 Stage Cmt Sx	1 Stage CuFt Cmt	Min Cu Ft	1 Stage % Excess	Drilling Mud Wt	Calc MASP	Req'd BOPE	Min Dist Hole-Cplg				
9 7/8	0.1261	524	755	1291	-42	10.50	3472	5M	0.44				
D V Tool(s):									sum of sx	Σ CuFt	Σ%excess		
t by stage % :									801	1660	29		
Class 'C' tail cmt yld > 1.35													

Tail cmt		casing inside the		8 5/8	-		Design Factors			Prod 1			
Segment	#/ft	Grade			Coupling	Body	Collapse	Burst	Length	B@s	a-B	a-C	Weight
"A"	17.00			p 110	btc	3.01	1.29	1.83	20,487	2	3.06	2.15	348,279
"B"									0				0
w/8.4#/g mud, 30min Sfc Csg Test psig: 2,347									Totals:	20,487	348,279		
The cement volume(s) are intended to achieve a top of 9973 ft from surface or a									200	overlap.			
Hole Size	Annular Volume	1 Stage Cmt Sx	1 Stage CuFt Cmt	Min Cu Ft	1 Stage % Excess	Drilling Mud Wt	Calc MASP	Req'd BOPE	Min Dist Hole-Cplg				
7 7/8	0.1733	1487	2355	1822	29	10.50			0.91				
Class 'C' tail cmt yld > 1.35													

#N/A		5 1/2		-		Design Factors			<Choose Casing>				
Segment	#/ft	Grade			Coupling	#N/A	Collapse	Burst	Length	B@s	a-B	a-C	Weight
"A"					0.00				0				0
"B"					0.00				0				0
w/8.4#/g mud, 30min Sfc Csg Test psig:									Totals:	0	0		
Cmt vol calc below includes this csg, TOC intended									#N/A	ft from surface or a		#N/A	overlap.
Hole Size	Annular Volume	1 Stage Cmt Sx	1 Stage CuFt Cmt	Min Cu Ft	1 Stage % Excess	Drilling Mud Wt	Calc MASP	Req'd BOPE	Min Dist Hole-Cplg				
0		#N/A	#N/A	0	#N/A								
#N/A Capitan Reef est top XXXX.													

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 192801

CONDITIONS

Operator: WPX Energy Permian, LLC Devon Energy - Regulatory Oklahoma City, OK 73102	OGRID: 246289
	Action Number: 192801
	Action Type: [C-103] NOI Change of Plans (C-103A)

CONDITIONS

Created By	Condition	Condition Date
kpickford	Adhere to previous NMOCD Conditions of Approval	3/10/2023
kpickford	• NSL Will require an administrative order for non-standard location prior to placing the well on production.	3/10/2023