District I 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505 232	State of New Mexico Energy Minerals and Natural Resources Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505	Form C-144 July 21, 2008 For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office. For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.
	osed-Loop System, Below-Grade	
Proposed Alter	rnative Method Permit or Closure F	Plan Application
⊠ Closur □ Modifi □ Closur	of a pit, closed-loop system, below-grade tank, o e of a pit, closed-loop system, below-grade tank, cation to an existing permit e plan only submitted for an existing permitted or	or proposed alternative method
below-grade tank, or propose	d alternative method	
	ion (Form C-144) per individual pit, closed-loop syst	
	relieve the operator of liability should operations result i f its responsibility to comply with any other applicable go	
Operator: Elm Ridge Exploration		4: <u>149052</u>
Address: P.O. Box 156; Bloomfield, NM 874	13	
Facility or well name: State 16-4		
API Number: <u>3003926645</u>	OCD Permit Number:	
U/L or Qtr/Qtr <u>N</u> Section <u>16</u> To	wnship <u>23N</u> Range <u>6W</u> County	y: <u>Rio Arriba</u>
Center of Proposed Design: Latitude 36.220103	Longitude <u>-107.476999</u> NAD: 1	1927 🛛 1983
Surface Owner: 🗌 Federal 🛛 State 🗌 Private] Tribal Trust or Indian Allotment	
2. 2. 2. 2. 2. 2. 2. 2. 2. 2. 2. 2. 2.	P&Amil	ther I Dimensions: L x W x D
3.		
Closed-loop System: Subsection H of 19.15		
intent)	well Workover or Drilling (Applies to activities wh	inch require prior approval of a permit or notice of
Drying Pad Above Ground Steel Tanks	Haul-off Bins Other	
Lined Unlined Liner type: Thickness	mil LLDPE HDPE PVC	Other
Liner Seams: Welded Factory Other		
4.		
Below-grade tank: Subsection I of 19.15.17	.11 NMAC	
Volume: <u>40</u> bbl Type of fluid: <u>Produce</u>	<u>d water</u>	
Tank Construction material: <u>Steel tank</u>		
	Visible sidewalls, liner, 6-inch lift and automatic ov	verflow shut-off
□ Visible sidewalls and liner ☑ Visible sidew		
Liner type: Thickness	_mil HDPE PVC Other	
5.		
Alternative Method:		
Submittal of an exception request is required. Ex-	ceptions must be submitted to the Santa Fe Environme	ental Bureau office for consideration of approval.

20

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pits, temporary pits, and below-grade tanks)

Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church)

Four foot height, four strands of barbed wire evenly spaced between one and four feet

Alternate. Please specify <u>4' tall hogwire fencing with pipe top railing</u>

Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)

Screen 🖾 Netting 🗌 Other_

Monthly inspections (If netting or screening is not physically feasible)

Signs: Subsection C of 19.15.17.11 NMAC

🛛 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers

Signed in compliance with 19.15.3.103 NMAC

Administrative Approvals and Exceptions:

Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.

Please check a box if one or more of the following is requested, if not leave blank:

Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau office for consideration of approval.

Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

10. Siting Criteria (regarding permitting): 19.15.17.10 NMAC

Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of accept material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appro office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of a Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to dry above-grade tanks associated with a closed-loop system.	ppriate district pproval.
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. The IWATERS database search shows a water well approximately 4,000 feet to the north with a depth to groundwater of 200 feet. This water well is at an elevation approximately 16 feet lower than the well site, indicating that the groundwater level is greater than 50 feet from the bottom of the BGT.	🗌 Yes 🛛 No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). The attached topographic map indicates that the well site is greater than 300 feet from any significant watercourse.	🗆 Yes 🛛 No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. The attached aerial photograph and visual inspection sheet indicate that none of the above locations are within 1000 feet of the well site.	□ Yes ⊠ No □ NA
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits)	☐ Yes ☐ No ⊠ NA
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. The attached iWATERS database search and visual inspection sheet indicate that there are no water wells within 1000 feet of the well site.	🗋 Yes 🛛 No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. The site is not within incorporated municipal boundaries, indicated by the attached topographic map and visual inspection sheet.	🗋 Yes 🛛 No
Within 500 feet of a wetland. The USFWS data file, WetlandsData.kmz, dated July 2, 2008 was opened using Google Earth. Electronic data was not available. Wetland-type vegetation was not noted during the site visit.	🗋 Yes 🖾 No
Within the area overlying a subsurface mine. The attached NM EMNRD web map indicates that the well is not in an area overlying a subsurface mine.	🗌 Yes 🖾 No
Within an unstable area. The attached topographical map and visual inspection indicate that the site is not in an unstable area.	🗌 Yes 🛛 No
Within a 100-year floodplain.	

The attached topographical map and visual inspection indicate that the site is not within a 100-year flood plain.

Ϋ́Γ Ι΄	
	nit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC application. Please indicate, by a check mark in the box, that the documents are
 Hydrogeologic Report (Below-grade Tanks) - based upon th Hydrogeologic Data (Temporary and Emergency Pits) - based Siting Criteria Compliance Demonstrations - based upon the Design Plan - based upon the appropriate requirements of 19 Operating and Maintenance Plan - based upon the appropriate 	15.17.11 NMAC e requirements of 19.15.17.12 NMAC
and 19.15.17.13 NMAC	able) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC
Previously Approved Design (attach copy of design) API N	mber: or Permit Number:
12. <u>Closed-loop Systems Permit Application Attachment Checklist</u> <i>Instructions: Each of the following items must be attached to the</i> <i>attached.</i>	Subsection B of 19.15.17.9 NMAC application. Please indicate, by a check mark in the box, that the documents are
 Geologic and Hydrogeologic Data (only for on-site closure) Siting Criteria Compliance Demonstrations (only for on-site Design Plan - based upon the appropriate requirements of 19 Operating and Maintenance Plan - based upon the appropriate 	
Previously Approved Design (attach copy of design) API	Number:
Previously Approved Operating and Maintenance Plan API	
above ground steel tanks or haul-off bins and propose to implement	t waste removal for closure)
 13. Permanent Pits Permit Application Checklist: Subsection B of Instructions: Each of the following items must be attached to the attached. Hydrogeologic Report - based upon the requirements of Par Siting Criteria Compliance Demonstrations - based upon the Climatological Factors Assessment Certified Engineering Design Plans - based upon the approp Dike Protection and Structural Integrity Design - based upon Leak Detection Design - based upon the appropriate require Liner Specifications and Compatibility Assessment - based Quality Control Quality Assurance Construction and Install Operating and Maintenance Plan - based upon the appropriate require Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of 24 	application. Please indicate, by a check mark in the box, that the documents are graph (1) of Subsection B of 19.15.17.9 NMAC appropriate requirements of 19.15.17.10 NMAC tiate requirements of 19.15.17.11 NMAC the appropriate requirements of 19.15.17.11 NMAC ments of 19.15.17.11 NMAC mon the appropriate requirements of 19.15.17.11 NMAC tion Plan e requirements of 19.15.17.12 NMAC appropriate requirements of 19.15.17.11 NMAC appropriate requirements of 19.15.17.11 NMAC appropriate requirements of 19.15.17.12 NMAC appropriate requirements of 19.15.17.11 NMAC
 ☐ Alternative Proposed Closure Method: Waste Excavation and Removal ☐ Waste Removal (Closed-loop systering) ☐ On-site Closure Method (Only for ☐ In-place Burial ☐ O 	P&A
15.	
 closure plan. Please indicate, by a check mark in the box, that the Protocols and Procedures - based upon the appropriate required Confirmation Sampling Plan (if applicable) - based upon the Disposal Facility Name and Permit Number (for liquids, drived) 	rements of 19.15.17.13 NMAC appropriate requirements of Subsection F of 19.15.17.13 NMAC ling fluids and drill cuttings) he appropriate requirements of Subsection H of 19.15.17.13 NMAC s of Subsection I of 19.15.17.13 NMAC

- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells NA Ground water is between 50 and 100 feet below the bottom of the buried waste Yes] - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells NA Ground water is more than 100 feet below the bottom of the buried waste. NA - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells NA Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa Yes] - Topographic map; Visual inspection (certification) of the proposed site Yes] Within 300 feet of a continuously flowing watercourse, or 200 feet of any other resh water well or spring, in existence at the time of initial application. Yes] - Topographic map; Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Yes] Within 500 horizontal feet of a private, domestic fresh water well or spring, in existence at the time of initial application. Yes] - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Yes] Within 500 horizontal feet of a private, domestic fresh water well or spring, in existence at the time of initial application. Yes] <	Waste Removal Closure For Closed-loop Systems That Utilize Above Ground		
Disposal Facility Name: Disposal Facility Permit Number; Will any of the proposed closed-loop system openations and associated activities occur on or in areas that will not be used for future service and openal Yes (17 yes, please provide the information below) No Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection 1 of 19.15.17.13 NMAC Required for impacted areas which will not be used for future service and operations: Subsection 1 of 19.15.17.13 NMAC Restanding Cover Design Specifications - based upon the appropriate requirements of Subsection 5 of 19.15.17.13 NMAC Instructions: Each sitting orients requires addition of compliance in the closure plan. Recommendations of acceptable source material of provided below. Requests regarding changes to certain stills or feral may require administrative approval from the appropriate flattic diffice or provided below. Requests regarding changes to certain stills or feral may require administrative approval from the appropriate flattic diffice or nonifiered an acception within nucles bubmitted to the Sante E arbivenomental Bubmerea of 19.15.17.10 NMAC Ground water is less than 50 feet below the bottom of the buried waste. Image: Santa Sinta S		drilling fluids and drill cuttings. Use attachment if n	iore than two
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future service and operations: Presulted for interpreted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specifications hased upon the appropriate requirements of Subsection Plan - hased upon the appropriate requirements of Subsection I of 19, 15, 17, 13 NMAC	Disposal Facility Name:	Disposal Facility Permit Number:	
□ Yes (if yes, please provide the information below) □ NO Required for impacted areas which will not be used for future service and operations: □ Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC □ Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC □ Site Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC □ Site Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC □ Site Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC □ Site Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC □ Site Reclamation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC □ restrictions: Each siting criteria requirements of Subsection I of 19.15.17.10 NMAC □ restrictions: Considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justifications and atomations of equivalency are required. Hease refer to 19.15.17.10 NMAC for guidance Ground water is less than 50 feet below the bottom of the buried waste. □ Yes □ NM Office of the State Engineer - IWATERS database search; USGS; Data obtained from nearby wells □ NA Ground water is between 50 and 100 feet below the bottom of the buried waste. □ NA	Disposal Facility Name:	Disposal Facility Permit Number:	<u> </u>
Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection of 10 (9.15.17.13 NMAC Iff. Site Reclamation Plan - based upon the appropriate requirements of Subsection of 10 (9.15.17.13 NMAC Instructors: Each siting orkeria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material of provided below. Request sregarding changes to certain siting orkeria any requires deministrative approval from the appropriate district office or consideration of approval. Justifications and demonstrations of equivalency are required. Hease refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells NA Ground water is between 50 and 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells NA Ground water is nore than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells NA Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or plays lake (measured from the domest regimeer - iWATERS database; Visual inspection (certification) of the proposed site; Visual inspection (certification) of the proposed site; Visual inspection (certification) of the proposed site; Visual inspect		ccur on or in areas that will not be used for future serv	ice and operations?
Stiting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each stilling criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material a demonstration of compliance in the closure plan. Recommendations of acceptable source material a demonstrations of equivalency are required. Hease refer to 19.15.17.10 NMAC for guidance. Ground water is less than 50 feet below the bottom of the buried waste.	 Soil Backfill and Cover Design Specifications based upon the appropriate Re-vegetation Plan - based upon the appropriate requirements of Subsection 	requirements of Subsection H of 19.15.17.13 NMAC I of 19.15.17.13 NMAC	2
NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 500 horizontal feet of a private, domestic fresh water well or spring in existence at the time of initial application. Within 500 horizontal feet of a private, domestic fresh water well or spring, in existence at the time of initial application. Within incorporated municipal boundaries or within a defined municipal fresh water well or spring, in existence at the time of initial application. Writhin s00 feet of a vertification on the municipality. Written approval obtained from the municipality Within 500 feet of a vertification map; Topographic map; Visual inspection (certification) of the proposed site Within the eare overlying a subsurface mine. Writhen confirmation or verification or map from the NM EMNRD-Mining and Mineral Division Within a 100-year floodplain. FieldA map	<u>Siting Criteria (regarding on-site closure methods only)</u> : 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the provided below. Requests regarding changes to certain siting criteria may requir considered an exception which must be submitted to the Santa Fe Environmental	e administrative approval from the appropriate distr Bureau office for consideration of approval. Justig	ict office or may be
NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells NA Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells NA Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Ves □ Ves □ Visual inspection (certification) of the proposed site Within 500 feet of a private, domestic fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well or spring, in existence at the time of initial application. NM Office of a private, domestic fresh water well or spring, in existence at municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. Written confirmation or verification map; Topographic map; Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Within a 100-year floodplain. FEMA map		a obtained from nearby wells	☐ Yes ☐ No ☐ NA
NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells NA NA Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within 500 horizontal feet of a water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within 500 feet of a water, within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. Written confirmation or verification map; Topographic map; Visual inspection (certification) of the proposed site Within 500 feet of a watend. Written confirmation or verification map; Topographic map; Visual inspection (certification) of the proposed site Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map Within a 100-year floodplain. FEMA map		a obtained from nearby wells	□ Yes □ No □ NA
lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Yes □ Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - Yes □ Within 500 horizontal feet of a private, domestic fresh water well or spring, in existence at the time of initial application. - Yes □ - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site - Yes □ Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Writen confirmation or verification from the municipality; Written approval obtained from the municipality Yes □ Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site - Yes □ Within a unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map Yes □		a obtained from nearby wells	□ Yes □ No □ NA
 Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. Written confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Within a unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map Within a 100-year floodplain. FEMA map 	lake (measured from the ordinary high-water mark).	nificant watercourse or lakebed, sinkhole, or playa	Yes No
watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. Yes □ - Written confirmation or verification from the municipality; Written approval obtained from the municipality Yes □ Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Yes □ Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division Yes □ Within a unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map Yes □ Within a 100-year floodplain. - Yes □ - FEMA map - Yes □ 18. On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please in by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC <th></th> <td></td> <td>🔲 Yes 🗌 No</td>			🔲 Yes 🗌 No
adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - - Written confirmation or verification from the municipality, Written approval obtained from the municipality Within 500 feet of a wetland. - - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine. - - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division Within an unstable area. - - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map Within a 100-year floodplain. - - FEMA map	watering purposes, or within 1000 horizontal feet of any other fresh water well or s	pring, in existence at the time of initial application.	Yes 🗋 No
 US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine. Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map Within a 100-year floodplain. FEMA map Yes □ Mage: Construction of the following items must be attached to the closure plan. Please in by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC 	adopted pursuant to NMSA 1978, Section 3-27-3, as amended.		🗌 Yes 🗌 No
 Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map Within a 100-year floodplain. 		al inspection (certification) of the proposed site	🗌 Yes 🗌 No
Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map Within a 100-year floodplain. FEMA map I. On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please in by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC		and Mineral Division	🗌 Yes 🗌 No
 FEMA map 18. On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please in by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC 	- Engineering measures incorporated into the design; NM Bureau of Geolog	y & Mineral Resources; USGS; NM Geological	🗌 Yes 🗌 No
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please in by a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC			🗌 Yes 🗌 No
 Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.15 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieve Soil Cover Design - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC 	On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the by a check mark in the box, that the documents are attached. □ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of Or Surface Owner Notice - based upon the appropriate requirements of Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15 □ Construction/Design Plan of Temporary Pit (for in-place burial of a drying p □ Protocols and Procedures - based upon the appropriate requirements of 19.15 □ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15 □ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of 19.15 □ Soil Cover Design - based upon the appropriate requirements of Subsection 1	uirements of 19.15.17.10 NMAC Subsection F of 19.15.17.13 NMAC opropriate requirements of 19.15.17.11 NMAC ad) - based upon the appropriate requirements of 19.1 5.17.13 NMAC uirements of Subsection F of 19.15.17.13 NMAC Subsection F of 19.15.17.13 NMAC rill cuttings or in case on-site closure standards cannot H of 19.15.17.13 NMAC	5.17.11 NMAC

19.	
Operator Application Certification: I hereby certify that the information submitted with this application is true, acc	urate and complete to the best of my knowledge and belief.
Name (Print): Ms. Any Mackey Tit	tle: <u>Administrative Manager</u>
Signature: actel Da	te: 1-22-09
E-mail address: Te	lephone:505-632-3476 ext. 201
20. OCD Approval: Permit Application (including closure plan) Closure	Plan (only) OCD Conditions (see attachment)
OCD Representative Signature:	Approval Date:
Title:	OCD Permit Number:
21. <u>Closure Report (required within 60 days of closure completion)</u> : Subsection Instructions: Operators are required to obtain an approved closure plan prior The closure report is required to be submitted to the division within 60 days of section of the form until an approved closure plan has been obtained and the	r to implementing any closure activities and submitting the closure report. f the completion of the closure activities. Please do not complete this
	Closure Completion Date:
22. Closure Method: □ Waste Excavation and Removal □ On-Site Closure Method □ Alter □ If different from approved plan, please explain.	native Closure Method 🔲 Waste Removal (Closed-loop systems only)
23. <u>Closure Report Regarding Waste Removal Closure For Closed-loop System</u> <i>Instructions: Please indentify the facility or facilities for where the liquids, du</i> <i>two facilities were utilized.</i>	
Disposal Facility Name:	Disposal Facility Permit Number:
Disposal Facility Name:	Disposal Facility Permit Number:
Were the closed-loop system operations and associated activities performed on Yes (If yes, please demonstrate compliance to the items below) No	or in areas that will not be used for future service and operations?
Required for impacted areas which will not be used for future service and operation Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique	ations:
24. Closure Report Attachment Checklist: Instructions: Each of the following mark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division) Proof of Deed Notice (required for on-site closure) Plot Plan (for on-site closures and temporary pits) Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (required for on-site closure Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation) On-site Closure Location: Latitude	
25. Operator Closure Certification:	
I hereby certify that the information and attachments submitted with this closure belief. I also certify that the closure complies with all applicable closure require	
Name (Print):	Title:
Signature:	Date:
E-mail address:	Telephone:

New Mexico Office of the State Engineer

ŝ

New Mexico Office of the State Engineer Point of Diversion Summary

Back

	•	•	e 1=NW 2=NE 3=S e biggest to sm	•
POD Number SJ 01156		Sec q q q 18 1 2 2	Zone X	¥
Driller Licence: Driller Name:	867 HUTCHESON WESTERN DRILLI			ource:
Drill Start Date: Log File Date:			PCW Received	
Pump Type: Casing Size:			Pipe Discharge Estimated	Yield:
Depth Well:	1500.		Depth	Water: 200


http://iwaters.ose.state.nm.us:7001/iWATERS/WellAndSurfaceDispatcher?email_address... 12/17/2008


ы;

· · · · · · · · · · · · · · · · · · ·	Township: 2	3N Range:	06W Section	ns: 16		
NA	AD27 X:	Y:	Zor	e:	Search Radius:	
County:		Basin:		Numbe	er: Sut	ffix:
Owner Name	(First)		(Last)	C	D Non-Domestic	© Domestic 🔹 🕷
	POD / Surfac	e Data Report	Avg Depth to V	Vater Report	Water Column I	Report

	1	AVERA	GE I	depth	OF WAT	ER REP	ORT 0	9/29/200	8		
									(Depth	Water in	Feet)
Bsn T	lws	Rng	Sec	Zone	9	X	Y	Wells	Min	Max	Avg
No Rec	cord	s foi	ınd,	try a	again						

1 of 1

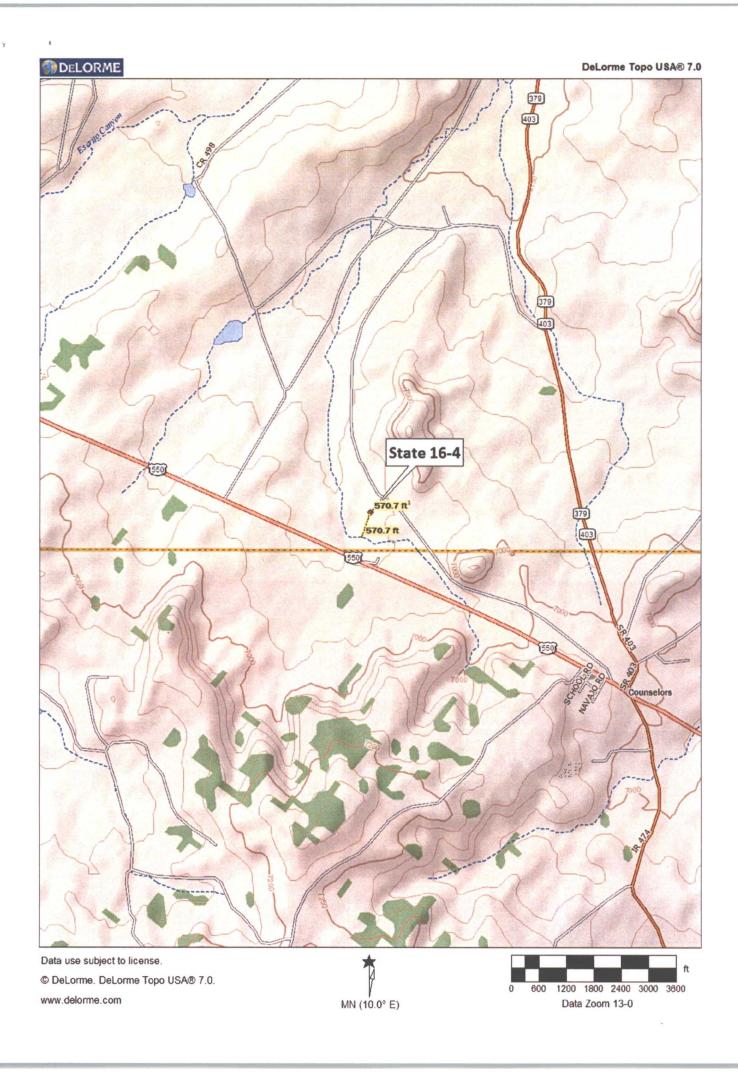

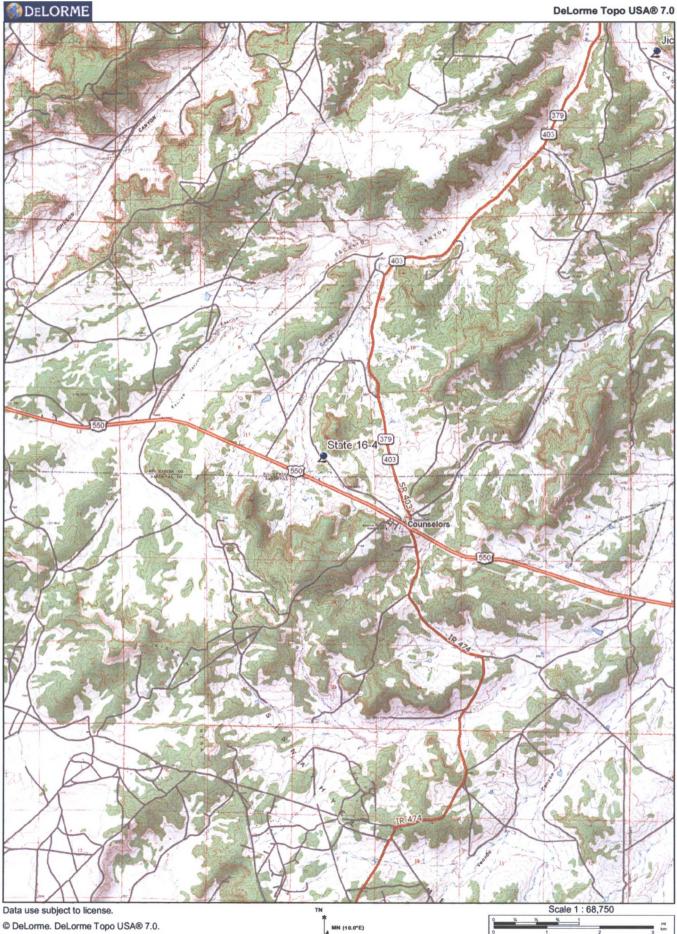


© DeLorme. DeLorme Topo USA® 7.0. www.delorme.com

¥

MN (10.0°E)


1" = 1.09 mi Data Zoom 11-5




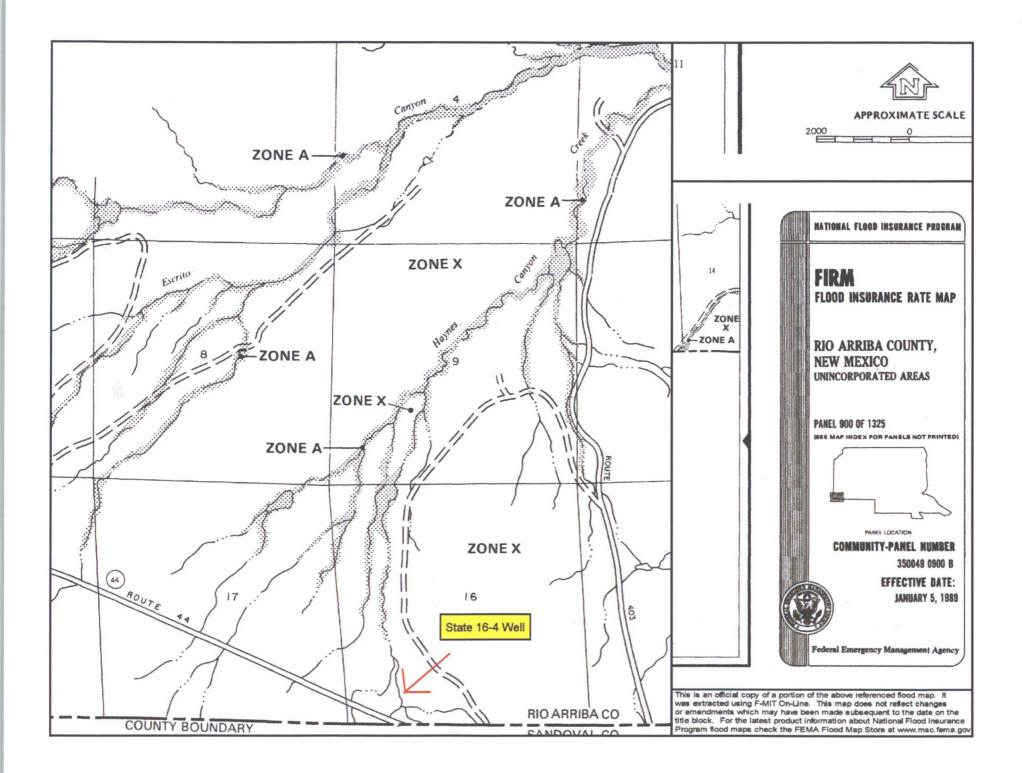

Elm Ridge Exploration Mine Map





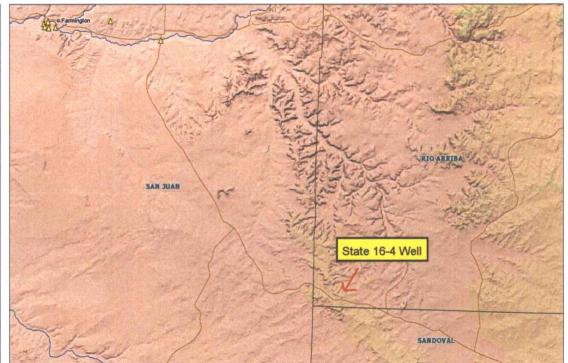



	Elm Ridge Site Inventory Sheet
•	Date: 8/6/8 Initials: Sla Time: Started: 11:31 Ended: 11:45
٠	Well Name & Number: <u>Statc16-4</u>
٠	API#: 3003926645
٠	Lease #:
•°	Quarter/Quarter: N Section: 16 Township: 23N Range: 60
٠	Lat: 36,220103° Long: 107,476999° GPS Point ID: State16-4
	Pit Tank #1: Manufacturer: Benchmark Equipment + Tank Inc.
•	Serial #: 0052 DOM: $4-06$ Size 40 bbl
•	o If N/A - Dimensions: Diameter/0/ Height
-	Material: Steel X Galvanized Fiberglass
•	
•	Tank Configuration: Double Wall Single Wall X Burled or Exposed X Visible Walle: X N X N X N X
•	Visible Walls: Y_X_N Leak Detection: Y N_X_ Contents: Produced Water_X Condensate Recycled Oil
•	Tank Top Covering: Solid/Cone-top Netting X (Solid Keing)
•	Secondary Containment: Yes X No
•	Fencing around berm: Yes \times No
•	 ○ Fence Type: Cattle Panel Field Fence X Barbwire
	o rence type, calle ranei rield rence /* baibwire
V.	Pit Tank #2: Manufacturer:
~	Pit Tank #2: Manufacturer:
••••	Serial #: DOM: Sizebbt
	Serial #: DOM: Sizebbl o If N/A - Dimensions: Diameter Height
••••	Serial #: DOM: Size bbl o If N/A - Dimensions: Diameter Height Height Material: Staal Galvanized Fiberglass
	Serial #: DOM: Size bbl o If N/A - Dimensions: Diameter Height Height Material: Staal Galvanized Fiberglass Tank Configuration: Double Wall Single Wall (Burled or Exposed)
•••••	Serial #: DOM: Size bbl o If N/A - Dimensions: Diameter Height Height Material: Staal Galvanized Fibergiass Tank Configuration: Double Wall Single Wall (Burled or Exposed) Visible Walls: Y_ N_ Leak Detection: Y_
•••••	Serial #: DOM: Size bb/ o If N/A - Dimensions: Diameter Height Height Material: Staal Galvanized Fiberglass Tank Configuration: Double Wall Single Wall (Burled or Exposed) Visible Walls: Y_ N_ Leak Detection: Y_ Contents: Produced Water Gondensate Recycled Oil
•••••	Serial #: DOM: Size bb/ o If N/A - Dimensions: Diameter Height Material: Steal Galvanized Fiberglass Tank Configuration: Double-Wall Single Wall (Burled or Exposed) Visible Walls: Y N Leak Detection: Y Contents: Produced Water Gondensate Recycled Oil Tank Top Covering: Solid/Cone-top Netting (Solid_Fiber_) Secondary Containment: Yes No
· · · · · · · · · · · · · · · · · · ·	Serial #: DOM: Size bbl o If N/A - Dimensions: Diameter Height Material: Staal Galvanized Fiberglass Tank Configuration: Double-Wall Single Wall (Burled_ or Exposed_) Visible Walls: Y N Leak Detection: Y N Contents: Produced Water Gondensate Recycled Oil Tank Top Covering: Solid/Cone-top Netting (Solid_Fiber_) Secondary Containment: Yes No
· · · · · · · · · · · · · · · · · · ·	Serial #: DOM: Size bbt o If N/A - Dimensions: Diameter Height Material: Steal Galvanized Fiberglass Tank Configuration: Double-Wall Single Wall (Burled or Exposed) Visible Walls: Y N Leak Detection: Y N Contents: Produced Water Gondensate Recycled Oil Tank Top Covering: Solid/Cone-top Netting (Solid Fiber_) Secondary Containment: Yes No
· · · · · · · · · · · · · · · · · · ·	Serial #: DOM: Size bb/ o If N(A - Dimensions: Diameter Height Material: Steel Galvanized Fiberglass Tank Configuration: Double-Wall Single Wall (Burled or Exposed) Visible Walls: Y N Leak Detection: Y N Contents: Produced Water GondenSate Recycled Oil Tank Top Covering: Solid/Cone-top Netting Secondary Containment: Yes No Fiberglas around berm: Yes No o Fence Type: Cattle Panel Field Fence Barbwire Above-Ground Tank #1: Manufacturer:
· · · · · · · · · · · · · · · · · · ·	Serial #: DOM: Size bbi o If NA - Dimensions: Diameter Height Material: Staal Galvanized Fibergiass Tank Configuration: Double-Wall Single Wall (Burled or Exposed) Visible Walls: Y N Leak Detection: Y N Contents: Produced Water Gondensate Recycled Oil Image: Solid/Cone-top Netting Isolid Fiber
· · · · · · · · · · · · · · · · · · ·	Serial #: DOM: Size bbi o If N/A - Dimensions: Diameter Height Material: Steal Galvanized Fibergiass Tank Configuration: Double Vall Single Wall (Burled_ or Exposed_) Visible Walls: Y_ N_ Leak Detection: Y_ N_ Contents: Produced Water Gondensate Recycled Oil Tank Top Covering: Solid/Cone-top Netting (Solid_Fiber_) Secondary Containment: Yes No
· · · · · · · · · · · · · · · · · · ·	Serial #: DOM: Size bbit o If N/A - Dimensions: Diameter Height Height Material: Steel Galvanized Fibergiass Tank Configuration: Double-Wall Single Wall (Burled or Exposed) Visible Walls: Y N Leak Detection: Y N Contents: Produced Water CondenSate Recycled Oil Tank Top Covering: Solid/Cone-top Netting (Solid
· · · · · · · · · · · · · · · · · · ·	Serial #:

NORTH	Well Schematic
+	
	10° 00° 00° 00° 00° 00° 00° 00° 00° 00°
	RET CELL AND FMRT
Schematic Key Separator	SEP Artificial Lift AL Condensate Tank COND
Compressor	COIS Meter Run
Dehydrator	DEH Well Head O Vilater Tank WATER
-	distance 1000ft or less of the following: ead to any continuous flowing or significant water course. <u>N/17</u>
• From below Scho	grade tanks to any permanent residence, school, church, hospital, etc of is possible of in 2500' - unable to ablain f mcasurement

BELOW GRADE TANK (BGT) CLOSURE PLAN

SITE NAME:

STATE 16-4 UNIT LETTER N, SECTION 16, TOWNSHIP 23N, RANGE 6W RIO ARRIBA COUNTY, NEW MEXICO LATITUDE 36.220103 LONGITUDE -107.476999

SUBMITTED TO:

MR. WAYNE PRICE New MEXICO OIL CONSERVATION DIVISION 1220 SOUTH ST. FRANCIS DRIVE SANTA FE, NEW MEXICO 87505 (505) 476-3490

SUBMITTED BY:

MS. AMY MACKEY ELM RIDGE EXPLORATION P.O. BOX 156 BLOOMFIELD, NEW MEXICO 87413 (505) 632-3476 EXT. 201

JANUARY 2009

BELOW GRADE TANK (BGT) CLOSURE PLAN ELM RIDGE EXPLORATION STATE 16-4 RIO ARRIBA COUNTY, NEW MEXICO

TABLE OF CONTENTS

INTRODUCTION	1
SCOPE OF CLOSURE ACTIVITIES	1
REPORTING.	3

Below Grade Tank (BGT) Closure Plan Elm Ridge Exploration State 16-4 Page 1

INTRODUCTION

Elm Ridge Exploration would like to submit a closure plan for the below grade tank (BGT) at the State 16-4 well site located in the SE ¼ SW ¼ of Section 16, Township 23N, Range 6W, Rio Arriba County, New Mexico. This closure plan has been prepared in conformance with the closure requirements of 19.15.17.13 NMAC.

SCOPE OF CLOSURE ACTIVITIES

The purpose of this closure plan is to provide the details of activities involved in the closure of the BGT at the State 16-4 well site. The following scope of closure activities has been designed to meet this objective:

- Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will close all of the BGTs currently in service within the five (5) years allotted. Elm Ridge Exploration does not operate any BGTs which would qualify to be upgraded or retrofitted; as such they will be closing all their current BGTs and replacing them with above ground storage tanks.
- 2) Elm Ridge Exploration will close BGTs deemed to be an imminent danger to fresh water, public health, or the environment by an earlier date that the division requires as specified in Subsection A of 19.15.17.13 NMAC.
- 3) Elm Ridge Exploration will close any BGT which demonstrates a compromise of integrity before the five (5) years allotted by the division per Paragraph (6) of Subsection I of 19.15.17.11 NMAC.
- 4) Elm Ridge Exploration will close any BGT within 60 days of cessation of the BGTs operation per Subsection A of 19.15.17.13 NMAC.
- 5) No less than 72 hours and no greater than one (1) week prior to BGT removal Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will provide written notification to the appropriate division district office as well as a schedule of on-site activities, as in accordance with 19.15.17.13 Subsection J Paragraph (2) NMAC. Written notification will include the name of the well operator, the well's API number, the well's name and number, and the well's unit letter, section, township, and range.
- 6) No less than 24 hours and no greater than one (1) week prior to beginning BGT closure activities Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will provide written notification to the appropriate surface owner, as in accordance with 19.15.17.13 Subsection J Paragraph (1) NMAC. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will notify the surface owner by certified mail, return receipt requested, that the operator plans to close a below-grade tank. The return receipt will be used to ensure that the surface owner has received written notification no less than 24 hours and no greater than one (1) week prior to the beginning of BGT closure activities. Evidence of mailing of the notice to the address of the surface owner shown in the county tax records is sufficient to demonstrate compliance with this requirement. Closure activities that will take place on tribal land will have notifications sent by certified mail, return

receipt requested, to the appropriate tribal office. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will notify the Bureau of Land Management (BLM) of closure activities for wells located on federal land per a Sundry Notice, as in accordance with 19.15.17.13 Subsection J Paragraph (1) NMAC. All notices will be sent in such a way that the surface owner received notice at least 24 hours prior to the beginning of closure activities.

- 7) Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will remove all liquids, and/or sludge, if applicable, prior to closure. Material will be disposed of at Envirotech's Landfarm #2, Permit # NM-01-0011, TNT Environmental Inc. Landfarm, Permit # NM-01-0008, Industrial Ecosystems Inc. (IEI) Landfarm, Permit # NM-01-0010B or Basin Disposal, Permit # NM-01-0005, depending on the consistence of the material removed, as in accordance with 19.15.17.13 Subsection E Paragraph (1) NMAC.
- 8) Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will remove all on-site equipment associated with this BGT that is no longer required for some other purpose, as in accordance with 19.15.17.13 Subsection E Paragraphs (3) NMAC.
- 9) If applicable, any liners or leak detection systems removed from a BGT closure will be cleaned off and disposed of at San Juan County Regional Landfill in accordance with Subparagraph (m) of Paragraph (1) of Subsection D of 19.15.9.712 NMAC.
- 10) Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will obtain prior approval from the OCD to dispose, recycle, reuse, or reclaim the BGT. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will provide the OCD with documentation concerning the final disposition of the BGT with the closure report.
- 11) Once the BGT is removed a five (5)-point composite sample will be collected from directly below the tank or below the leak detection system if present. Grab samples will be collected from any area that are wet, discolored, or showing other evidence of a release. All samples being collected will be analyzed for benzene and total BTEX via USEPA Method 8021B, TPH via USEPA Method 418.1, and chlorides via USEPA 300.1, as in accordance with 19.15.17.13 Subsection E Paragraph (4) NMAC.
- 12) Depending on soil sample results the area will be either backfilled or the area will be excavated.
 - a. If soil samples do not exceed the regulatory standards of 0.2 mg/kg benzene, 50 mg/kg BTEX, 100 mg/kg TPH, and 250 mg/kg or background concentration of chlorides, as in accordance with 19.15.17.13 Subsection E Paragraph (4) NMAC.
 - i. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, shall submit a Form C-141 with the laboratory results so that the division may review the results to determine if additional delineation is required in accordance with Paragraph (5) of Subsection E of 19.15.17.13 NMAC.
 - ii. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will backfill the excavation or impacted area with non-waste containing, earthen material, in accordance with 19.15.17.13

Subsection E Paragraph (6) NMAC. A soil cover shall be installed for all backfilled excavations consisting of the background thickness of topsoil or one foot of suitable material to establish vegetation at the site, whichever is greater in accordance with Subsections H of 19.15.17.13 NMAC. The operator shall construct the soil cover to the site's existing grade and prevent ponding of water and erosion of the cover material.

- iii. All areas of the well site that are no longer utilized on a day to day basis for the production of oil and/or gas, Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will substantially restore, recontour, and re-vegetate the areas, in accordance with 19.15.17.13 Subsections G and I NMAC. The operator shall notify the division when it has been re-seeded and when it has achieved successful re-vegetation. For re-vegetation methods, please see attached re-vegetation plan.
- b. If soil samples exceed the regulatory standards stated above.
 - i. Elm Ridge Exploration will submit a Release Notification by Form C-141 with the appropriate analytical laboratory results to the appropriate division district office, in accordance with 19.15.17.13 Subsection E Paragraph (4) NMAC.
 - ii. In accordance with Paragraph (5) of Subsection E of 19.15.17.13 NMAC, once the operator or the OCD has determined that a release has occurred, Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will comply with rule 19.15.3.116 NMAC and 19.15.1.19 NMAC as appropriate.

REPORTING

×

Elm Ridge Exploration will submit a closure report within 60 days following the BGT closure. The closure report will consist of a form C-144 with all supporting data and a form C-141 with all supporting data. The supporting data will include proof of closure notice to the surface owner and the OCD, confirmation sampling analytical results, a site diagram, soil backfilling and cover installation, re-vegetation rates, re-seeding techniques, and site reclamation photo documentation, if applicable, along with all other information related to the onsite activities.

We appreciate the opportunity to be of service. If you have any questions or require further information, please do not hesitate to contact our office at (505) 632-3476 Ext. 201.

Respectfully Submitted:

Elm Ridge Exploration

Amy Mackey

Elm Ridge Exploration

Elm Ridge Exploration

Re-Seeding Techniques and Seed Mixture Ratios

These applied practices by Elm Ridge Exploration will at a minimum comply with the New Mexico Oil Conservation Divisions rule 19.15.17.13, Subsection I NMAC Elm Ridge Exploration has adopted these re-seeding application techniques, ratios and mixtures as their standard operating procedures.

- 1. The first growing season after closure of a below grade tank or pit, all areas of the well site not utilized for the production of oil and/or gas on a daily basis will be re-seeded with the specified seed mixture.
- 2. The seed mixture used will be certified with no primary or secondary noxious weeds in seed mixtures. The seed labels from each bag shall be available for inspection while seed is being sown.
- 3. The operator shall accomplish seeding by drilling on the contour whenever practical or by other division-approved methods. The operator shall obtain vegetative cover that equals 70% of the native perennial vegetative cover (un-impacted by overgrazing, fire or other intrusion damaging to native vegetation) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. During the two growing seasons that prove viability, there shall be no artificial irrigation of the vegetation.
- 4. Hand seeding with hydro-mulch, excelsior netting or mulch with netting is required on the cut/fill slopes. Mulch will be spread at a rate of 2,000-3,000 pounds per acre.
- 5. Compacted areas determined by visual inspection will be shall be ripped to a depth of 12 inches below ground surface and disked to a depth of six (6) inches before seeding. Seeding shall be done with a disk type drill with two (2) boxes for various seed sizes. The drill rows shall be eight (8) to ten (10) inches apart. Seed shall be planted at no less than one-half (1/2) inch deep or more than one (1) inch deep. The seeder shall be followed with a drag, packer, or roller to ensure uniform coverage of the seed and adequate compaction. Drilling shall be done on the contour where possible, but not up and down the slope.
- 6. Where slopes are too steep for contour drilling a hand seeder shall be used. Seed shall be covered to the depth stated above by whatever means is practical. If the seed is unable to be covered by the means listed above, the prescribed seed mixture amount will be doubled.

7. Elm Ridge Exploration shall repeat seeding or planting until it successfully achieves the required vegetative cover of 70% of the native perennial vegetation cover.

- 8. Upon abandonment of a well site, if the retention of the access road is not considered necessary for the management and multiple uses of the natural resources, or by the surface owner, it will be ripped a minimum of 12 inches in depth. After ripping, water bars will be installed. All ripped surfaces are to be protected from vehicular travel by construction of a dead end ditch and earthen barricade at the entrance to these ripped areas. Re-seeding of areas affected by the ditch and barriers will be re-seeded if necessary.
- 9. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will inform the division once successful re-vegetation has occurred.

Elm Ridge Exploration

San Juan Basin

Below Grade Tank Maintenance and Operating Plan

In accordance with Rule 19.15.17 the following information describes the operation and maintenance of a Below Grade Tank (BGT) on Elm Ridge Exploration locations. This particular location does not meet the siting criteria to operate a BGT, and thus will be closing the BGT within five (5) years, or upon failure of integrity, and replacing it with an above ground storage tank.

GENERAL PLAN:

- Elm Ridge Exploration, or a contractor representing Elm Ridge Exploration, will operate and maintain a BGT to contain liquids and solids to prevent contamination of fresh water and to protect public health and environment. This will be accomplished by performing monthly inspections of the BGT, any liners or leak detection if applicable, netting, secondary containment, fencing, and maintaining adequate freeboard.
- 2. Elm Ridge Exploration, or a contractor representing Elm Ridge Exploration, shall not allow a BGT to overflow or allow surface water run-on to enter the BGT. This will be accomplished by a secondary containment consisting of a soil berm around the BGT that will be monitored by monthly inspections. Overflowing will be prevented by maintaining an adequate freeboard of eight (8) inches, maintained by monthly inspections. This process will be performed on the current BGT located at this well site.
- 3. Elm Ridge Exploration, or a contractor representing Elm Ridge Exploration, shall continuously remove any visible or measurable layer of oil from the fluid surface of a BGT in an effort to prevent the accumulation of oil over time.
- 4. Elm Ridge Exploration, or a contractor representing Elm Ridge Exploration, shall inspect the BGT at least once monthly and maintain a written record of each inspection for at least five (5) years. The monthly inspection form to be used by Elm Ridge Exploration is attached to this document.
- 5. Elm Ridge Exploration, or a contractor representing Elm Ridge Exploration, shall maintain adequate freeboard to prevent overtopping of the BGT. The standard freeboard to be maintained by Elm Ridge Exploration is eight (8) inches.


- 6. Elm Ridge Exploration, or a contractor representing Elm Ridge Exploration, shall maintain an expanded metal covering on the BGT.
- 7. Elm Ridge Exploration will not discharge into or store any hazardous wastes in the BGT.
- 8. If Elm Ridge Exploration, or a contractor representing Elm Ridge Exploration, determines that a BGT has developed a leak below the liquid's surface, then Elm Ridge Exploration, or a contractor representing Elm Ridge Exploration, will notify the appropriate division office within 48 hours of discovering the leak. Elm Ridge Exploration, or a contractor representing Elm Ridge Exploration, shall remove all liquids above the damage or leak line within 48 hours in accordance with Subsection A of 19.15.17.12 NMAC. The damaged tank will then be removed, and closure activities will begin in accordance with the submitted closure plan.
- 9. Elm Ridge Exploration will close any BGT within 60 days of cessation of the BGTs operation per Subsection A of 19.15.17.13 NMAC.
- 10. Elm Ridge Exploration, or a contractor representing Elm Ridge Exploration, will close the BGT within the NMOCD allotted five (5) years, within 60 days of cessation of operation of the BGT or upon failure of integrity, and put into service an above ground storage tank to meet the needs previously fulfilled by the BGT.

Figure A, Site Map

...

Attachment 1, Monthly BGT Inspection Form



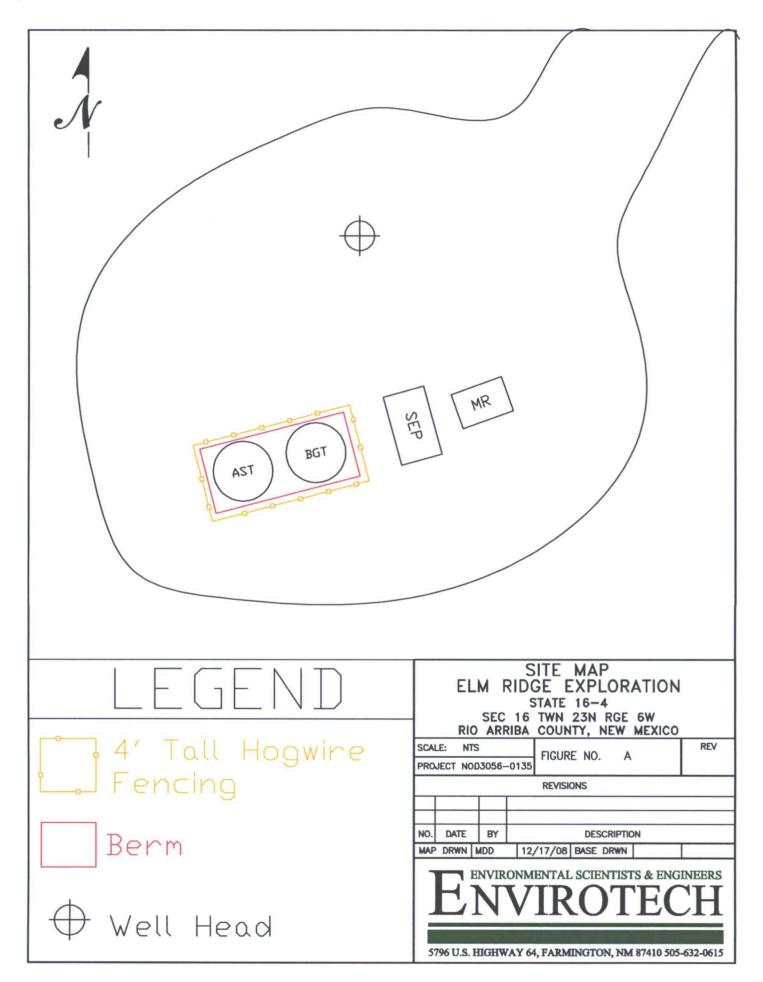

Elm Ridge Exploration, LLC

Monthly Below Grade Tank Inspection Form
Inspection Performed By: Date:
Well Site Name:
Unit: Section: Township: Range: County:
Quarter Footage:
Latitude: Longitude:
Below Grade Tank
Construction Material of BGT (circle one): Steel Fiberglass Galvanized Other:
Tank Capacity (BBLS):
Status of Tank (circle one): NA poor fair good excellent
Leaks Detected (circle one): Yes No Unknown
Liquid level in tank from the top:
Recent overflow detected (circle one): Yes No Unknown
BGT Cover present: Yes No NA
Cover Type (circle one): wire mesh steel mesh fibrous netting other:
Berm Present (circle one): Yes No
Secondary Containment
Type of secondary containment:
Status of secondary containment (circle one): NA poor fair good excellent
Fencing
Fencing Present (circle one): Yes No
Describe Fencing:
Status of Fencing (circle one): NA poor fair good excellent

*Maintain this document on record for a minimum of five (5) years from the date performed.

OCD Aztec District III ELM RIDGE Checklist Below Grade Tank Closure Plans

19.15.17.9 Permit application

Signed C-144 (Page 5 of C-144)

Site Specific Hydrogeology (Iwaters)

19,15.17.10 Siting requirements

Proximity to watercourses (Topo map)

Proximity to Permanent Structure (Aerial Map)

Proximity to Flood Plain Map (Aerial Map)

Z Proximity to Subsurface Mines Map (Aerial Map)

19.15.17.13 Closure Plan

D Below Grade Tank Closure Plan

19.15.17.12 Operating and Maintenance Plan

D Below Grade Tank Operating and Maintenance Plan

Requirements: (Application Marked Closure Plan Only

Registration Date: VF CS 5/17/18