\*(Instructions on page 2)

.

| Form 3160-3<br>(June 2015)<br>UNITED STATE<br>DEPARTMENT OF THE I  | FORM APPROVED<br>OMB No. 1004-0137<br>Expires: January 31, 2018<br>5. Lease Serial No. |   |                                |                                       |              |                   |  |  |
|--|--|---|--------------------------------|---------------------------------------|--------------|-------------------|--|--|
| BUREAU OF LAND MAN   |  |   |                                | NMNM017589                            |              |                   |  |  |
| APPLICATION FOR PERMIT TO D  | 6. If Indian, Allotee  | or Tribe I                                    | Name                           |                                       |              |                   |  |  |
| 1a. Type of work:   Image: Contract of Well  | 7. If Unit or CA Agr<br>NMNM 070992X   | eement, l                                     | Name and No.                   |                                       |              |                   |  |  |
|  | ther<br>ingle Zone   | Multiple Zone                                 |                                | 8. Lease Name and                     | Well No.     |                   |  |  |
|  |  |   |                                | NASH UNIT                             |              |                   |  |  |
| 2. Name of Operator<br>XTO ENERGY INCORPORATED   | 218H<br>9. API Well No.<br>30-015-53   | 660   |                                |                                       |              |                   |  |  |
| 3a. Address<br>222777 SPRINGSWOODS VILLAGE PKWY, SPRING, TX  |  | No. <i>(include area cod</i><br>-2800         | le)                            | 10. Field and Pool, of FORTY NINER RI | -            | -                 |  |  |
| 4. Location of Well (Report location clearly and in accordance   | with any Stai  | te requirements.*)                            |                                | 11. Sec., T. R. M. or                 | Blk. and     | Survey or Area    |  |  |
| At surface NESW / 1364 FSL / 409 FWL / LAT 32.301  | 488 / LONG   | 6 -103.92833                                  |                                | SEC 18/T23S/R30                       | E/NMP        | •                 |  |  |
| At proposed prod. zone NWNW / 17 FNL / 200 FWL / LA  | T 32.31239   | ) / LONG -103.9634                            | 25                             |                                       |              |                   |  |  |
| 14. Distance in miles and direction from nearest town or post off  |  |   |                                | 12. County or Parish<br>EDDY          | ı            | 13. State<br>NM   |  |  |
| 15. Distance from proposed*<br>location to nearest<br>property or lease line, ft.<br>(Also to nearest drig, unit line, if any)                                   | 16. No of a  | acres in lease                                | ng Unit dedicated to this well |                                       |              |                   |  |  |
| 18. Distance from proposed location*   | 19. Propos   | ed Depth                                      | 20. BLM                        | BIA Bond No. in file                  |              |                   |  |  |
| to nearest well, drilling, completed, 30 feet applied for, on this lease, ft.  | 8905 feet  | / 19354 feet                                  | FED: UT                        | B0000138                              |              |                   |  |  |
| 21. Elevations (Show whether DF, KDB, RT, GL, etc.)<br>3036 feet   | 22. Approx<br>10/14/202  | kimate date work will<br>2                    | start*                         | 23. Estimated durati<br>45 days       | on           |                   |  |  |
|  | 24. Atta   | chments                                       |                                |                                       |              |                   |  |  |
| The following, completed in accordance with the requirements of (as applicable)  | f Onshore O  | il and Gas Order No.                          | l, and the H                   | Iydraulic Fracturing ru               | ule per 43   | CFR 3162.3-3      |  |  |
| <ol> <li>Well plat certified by a registered surveyor.</li> <li>A Drilling Plan.</li> </ol>  |  | 4. Bond to cover the Item 20 above).          | ne operatior                   | as unless covered by an               | n existing   | bond on file (see |  |  |
| <ol> <li>A Surface Use Plan (if the location is on National Forest System<br/>SUPO must be filed with the appropriate Forest Service Office</li> </ol>           |  |   |                                | mation and/or plans as                | may be re    | equested by the   |  |  |
| 25. Signature  | Nam  | e (Printed/Typed)                             |                                |                                       | Date         |                   |  |  |
| (Electronic Submission)  | JESS   | SICA DOOLING / P                              | h: (432) 6                     | 20-6700                               | 06/17/2      | 022               |  |  |
| Title<br>Lead Regulatory Coordinator   |  |   |                                |                                       |              |                   |  |  |
| Approved by (Signature)<br>(Electronic Submission)   |  | e <i>(Printed/Typed)</i><br>Y LAYTON / Ph: (5 | 75) 234-5                      | 959                                   | Date 12/07/2 | 022               |  |  |
| Title<br>Assistant Field Manager Lands & Minerals  | Offic  |   | 10) 204 0                      |                                       | 12/07/12     |                   |  |  |
| Application approval does not warrant or certify that the applicant<br>applicant to conduct operations thereon.<br>Conditions of approval, if any, are attached. |  |   | nose rights                    | in the subject lease wh               | hich woul    | d entitle the     |  |  |
| Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, m of the United States any false, fictitious or fraudulent statements of                          |  |   |                                |                                       | ny depart    | ment or agency    |  |  |
|  |  | TH CONDIT                                     | IONS                           |                                       |              |                   |  |  |

(Continued on page 2)

APP

Approval Date: 12/07/2022

# State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505

WELL LOCATION AND ACREAGE DEDICATION PLAT


Form C-102 Revised August 1, 2011 Submit one copy to appropriate District Office

AMENDED REPORT

Page 2 of 57

| 1 A                            | PI Number              | •                        |              | <sup>2</sup> Pool Code |                                     | <sup>3</sup> Pool Name |               |              |                          |  |  |  |  |
|--------------------------------|------------------------|--------------------------|--------------|------------------------|-------------------------------------|------------------------|---------------|--------------|--------------------------|--|--|--|--|
|                                | 30-015- <mark>5</mark> | 3660                     |              | 96526                  | 5 Forty Niner Ridge; Bone Spring, W |                        |               |              |                          |  |  |  |  |
| <sup>4</sup> Property C        | ode                    |                          |              |                        | <sup>5</sup> Property N             | Name                   |               |              | <sup>6</sup> Well Number |  |  |  |  |
| 303152                         | 2                      |                          |              |                        | NASH U                              |                        |               | 218H         |                          |  |  |  |  |
| <sup>7</sup> OGRID N           | lo.                    |                          |              |                        | <sup>8</sup> Operator 1             | Name                   |               |              | <sup>9</sup> Elevation   |  |  |  |  |
| 005380                         |                        |                          |              |                        | XTO ENERC                           | Y, INC.                |               |              | 3,036'                   |  |  |  |  |
| <sup>10</sup> Surface Location |                        |                          |              |                        |                                     |                        |               |              |                          |  |  |  |  |
| UL or lot no.                  | Section                | Township                 | Range        | Lot Idn                | Feet from the                       | North/South line       | Feet from the | East/West li | ne County                |  |  |  |  |
| 3                              | 18                     | 23 S                     | 30 E         |                        | 1,364                               | SOUTH                  | 409           | WEST         | EDDY                     |  |  |  |  |
|                                |                        |                          | 11 Bo        | ttom Hole              | e Location If                       | Different Fror         | n Surface     |              |                          |  |  |  |  |
| UL or lot no.                  | Section                | Township                 | Range        | Lot Idn                | Feet from the                       | North/South line       | Feet from the | East/West li | ne County                |  |  |  |  |
| D                              | 14                     | 23 S                     | 29 E         |                        | 17                                  | NORTH                  | 200           | WEST         | EDDY                     |  |  |  |  |
| <sup>12</sup> Dedicated Acres  | 13 Joint of            | r Infill <sup>14</sup> C | onsolidation | Code 15 Ord            | der No.                             |                        |               |              |                          |  |  |  |  |
| 520                            |                        |                          |              |                        |                                     |                        |               |              |                          |  |  |  |  |

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

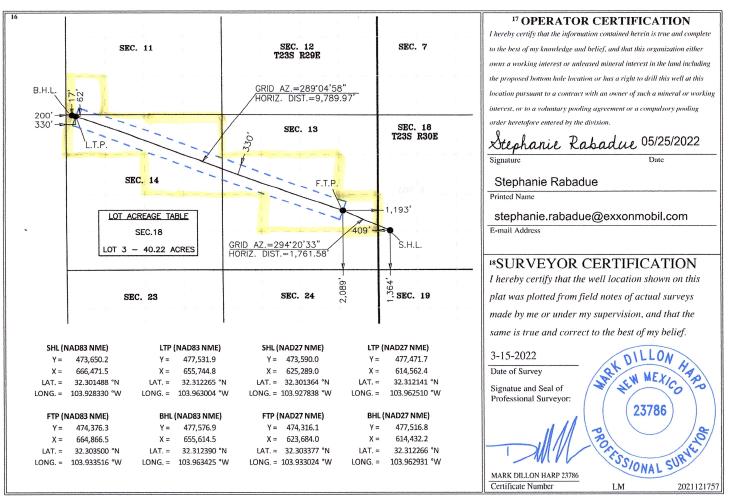

Submit Electronically Via E-permitting

State of New Mexico Energy, Minerals and Natural Resources Department

> Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

# NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

# <u>Section 1 – Plan Description</u> <u>Effective May 25, 2021</u>

I. Operator: \_XTO Energy, INC. OGRID: \_05380 \_\_\_\_\_ Date: \_2/15/2023 \_\_\_\_

**II. Type:** ⊠ Original □ Amendment due to □ 19.15.27.9.D(6)(a) NMAC □ 19.15.27.9.D(6)(b) NMAC □ Other.

If Other, please describe:

**III. Well(s):** Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

| Well Name      | API | ULSTR         | Footages            | Anticipated<br>Oil BBL/D | Anticipated<br>Gas MCF/D | Anticipated<br>Produced<br>Water BBL/D |
|----------------|-----|---------------|---------------------|--------------------------|--------------------------|--|
| Nash Unit 207H |     | 3-18-23S-30E  | 1884' FSL, 414' FWL | 2000                     | 3200                     | 5500                                   |
| Nash Unit 208H |     | 3-18-23S-30E  | 1854' FSL, 413' FWL | 2000                     | 3200                     | 5500                                   |
| Nash Unit 209H |     | 3-18-23S-30E  | 1824' FSL, 413' FWL | 2000                     | 3200                     | 5500                                   |
| Nash Unit 210H |     | 3-18-23S-30E  | 1794' FSL, 413' FWL | 2000                     | 3200                     | 5500                                   |
| Nash Unit 211H |     | 3-18-23S-30E  | 1669' FSL, 412' FWL | 2000                     | 3200                     | 5500                                   |
| Nash Unit 212H |     | 3-18-23S-30E  | 1639' FSL, 412' FWL | 2000                     | 3200                     | 5500                                   |
| Nash Unit 213H |     | 3-18-23S-30E  | 1609' FSL, 411' FWL | 2000                     | 3200                     | 5500                                   |
| Nash Unit 214H |     | 3-18-23S-30E  | 1578' FSL, 411' FWL | 2000                     | 3200                     | 5500                                   |
| Nash Unit 215H |     | 3-18-23S-30E  | 1454' FSL, 410' FWL | 2000                     | 3200                     | 5500                                   |
| Nash Unit 216H |     | 3-18-23S-30E  | 1424' FSL, 410' FWL | 2000                     | 3200                     | 5500                                   |
| Nash Unit 217H |     | 3-18-23S-30E  | 1394' FSL, 409' FWL | 2000                     | 3200                     | 5500                                   |
| Nash Unit 218H |     | 4-18-23S-30E  | 1239' FSL, 408' FWL | 2000                     | 3200                     | 5500                                   |
| Nash Unit 219H |     | 4-18-23S-30E  | 1239' FSL, 408' FWL | 2000                     | 3200                     | 5500                                   |
| Nash Unit 220H |     | 4-18-23S-30E  | 1209' FSL, 408' FWL | 2000                     | 3200                     | 5500                                   |
| Nash Unit 221H |     | 4-18-23S-30E  | 1179' FSL, 407' FWL | 2000                     | 3200                     | 5500                                   |
| Nash Unit 222H |     | 4-18-23S-30E  | 1149' FSL, 407' FWL | 2000                     | 3200                     | 5500                                   |
| Nash Unit 601H |     | P-18-23S-30E  | 12' FSL, 539' FEL   | 2000                     | 3200                     | 5500                                   |
| Nash Unit 602H |     | A-19-23S-30E  | 205' FNL, 1216' FEL | 2000                     | 3200                     | 5500                                   |
| Nash Unit 606H |     | L4-18-23S-30E | 400' FSL, 1329' FWL | 2000                     | 3200                     | 5500                                   |
| Nash Unit 701H |     | P-18-23S-30E  | 12' FSL, 569' FEL   | 2000                     | 3200                     | 5500                                   |
| Nash Unit 702H |     | A-19-23S-30E  | 216' FNL, 1244' FEL | 2000                     | 3200                     | 5500                                   |
| Nash Unit 706H |     | L4-18-23S-30E | 400' FSL, 1299' FWL | 2000                     | 3200                     | 5500                                   |
| Nash Unit 801H |     | P-18-23S-30E  | 12' FSL, 599' FEL   | 2000                     | 3200                     | 5500                                   |
| Nash Unit 802H |     | A-19-23S-30E  | 227' FNL, 1272' FEL | 2000                     | 3200                     | 5500                                   |

**IV. Central Delivery Point Name:** Nash Central Tank Battery [See 19.15.27.9(D)(1) NMAC]

| Page | 4 | of | 5 | 7 |
|------|---|----|---|---|
|------|---|----|---|---|

| Well Name      | API | Spud Date | TD Reached<br>Date | Completion<br>Commencement Date | Initial Flow<br>Back Date | First Production<br>Date |
|----------------|-----|-----------|--------------------|---------------------------------|---------------------------|--------------------------|
| Nash Unit 207H |     | TBD       | TBD                | TBD                             | TBD                       | TBD                      |
| Nash Unit 208H |     | TBD       | TBD                | TBD                             | TBD                       | TBD                      |
| Nash Unit 209H |     | TBD       | TBD                | TBD                             | TBD                       | TBD                      |
| Nash Unit 210H |     | TBD       | TBD                | TBD                             | TBD                       | TBD                      |
| Nash Unit 211H |     | TBD       | TBD                | TBD                             | TBD                       | TBD                      |
| Nash Unit 212H |     | TBD       | TBD                | TBD                             | TBD                       | TBD                      |
| Nash Unit 213H |     | TBD       | TBD                | TBD                             | TBD                       | TBD                      |
| Nash Unit 214H |     | TBD       | TBD                | TBD                             | TBD                       | TBD                      |
| Nash Unit 215H |     | TBD       | TBD                | TBD                             | TBD                       | TBD                      |
| Nash Unit 216H |     | TBD       | TBD                | TBD                             | TBD                       | TBD                      |
| Nash Unit 217H |     | TBD       | TBD                | TBD                             | TBD                       | TBD                      |
| Nash Unit 218H |     | TBD       | TBD                | TBD                             | TBD                       | TBD                      |
| Nash Unit 219H |     | TBD       | TBD                | TBD                             | TBD                       | TBD                      |
| Nash Unit 220H |     | TBD       | TBD                | TBD                             | TBD                       | TBD                      |
| Nash Unit 221H |     | TBD       | TBD                | TBD                             | TBD                       | TBD                      |
| Nash Unit 222H |     | TBD       | TBD                | TBD                             | TBD                       | TBD                      |
| Nash Unit 601H |     | TBD       | TBD                | TBD                             | TBD                       | TBD                      |
| Nash Unit 601H |     | TBD       | TBD                | TBD                             | TBD                       | TBD                      |
| Nash Unit 602H |     | TBD       | TBD                | TBD                             | TBD                       | TBD                      |
| Nash Unit 606H |     | TBD       | TBD                | TBD                             | TBD                       | TBD                      |
| Nash Unit 701H |     | TBD       | TBD                | TBD                             | TBD                       | TBD                      |
| Nash Unit 702H |     | TBD       | TBD                | TBD                             | TBD                       | TBD                      |
| Nash Unit 706H |     | TBD       | TBD                | TBD                             | TBD                       | TBD                      |
| Nash Unit 801H |     | TBD       | TBD                | TBD                             | TBD                       | TBD                      |
| Nash Unit 802H |     | TBD       | TBD                | TBD                             | TBD                       | TBD                      |

**V. Anticipated Schedule:** Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

VI. Separation Equipment: 🖂 Attach a complete description of how Operator will size separation equipment to optimize gas capture.

**VII. Operational Practices:**  $\boxtimes$  Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: 🛛 Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

# Section 2 – Enhanced Plan EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

 $\boxtimes$  Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

# IX. Anticipated Natural Gas Production:

| Well | API | Anticipated Average<br>Natural Gas Rate MCF/D | Anticipated Volume of Natural<br>Gas for the First Year MCF |
|------|-----|---|---|
|      |     |   |   |
|      |     |   |   |

# X. Natural Gas Gathering System (NGGS):

| Operator | System | ULSTR of Tie-in | Anticipated Gathering<br>Start Date | Available Maximum Daily Capacity<br>of System Segment Tie-in |
|----------|--------|-----------------|-------------------------------------|--|
|          |        |                 |                                     |  |
|          |        |                 |                                     |  |

**XI. Map.**  $\Box$  Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

**XII. Line Capacity.** The natural gas gathering system  $\Box$  will  $\Box$  will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

**XIII.** Line Pressure. Operator  $\Box$  does  $\Box$  does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

 $\Box$  Attach Operator's plan to manage production in response to the increased line pressure.

**XIV. Confidentiality:**  $\Box$  Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

# <u>Section 3 - Certifications</u> <u>Effective May 25, 2021</u>

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

 $\Box$  Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

 $\boxtimes$  Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system. *If Operator checks this box, Operator will select one of the following:* 

Well Shut-In. 🖂 Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

**Venting and Flaring Plan.**  $\Box$  Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

# Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

| Signature: Cassie Evans                               |  |  |  |  |  |  |
|---|--|--|--|--|--|--|
| Printed Name: Cassie Evans                            |  |  |  |  |  |  |
| Title: Regulatory Analyst                             |  |  |  |  |  |  |
| E-mail Address: <u>cassie.evans@exxonmobil.com</u>    |  |  |  |  |  |  |
| Date: 08/09/2022                                      |  |  |  |  |  |  |
| Phone: 432.218.3671                                   |  |  |  |  |  |  |
| OIL CONSERVATION DIVISION                             |  |  |  |  |  |  |
| (Only applicable when submitted as a standalone form) |  |  |  |  |  |  |
| Approved By:  |  |  |  |  |  |  |
| Title:  |  |  |  |  |  |  |
| Approval Date:  |  |  |  |  |  |  |
| Conditions of Approval:                               |  |  |  |  |  |  |
|   |  |  |  |  |  |  |
|   |  |  |  |  |  |  |
|   |  |  |  |  |  |  |
|   |  |  |  |  |  |  |

#### VI. Separation Equipment:

XTO Permian Operating, LLC. production tank batteries include separation equipment designed to efficiently separate gas from liquid phases to optimize gas capture based on projected and estimated volumes from the targeted pool in conjunction with the total number of wells planned to or existing within the facility. Separation equipment is upgraded prior to well being drilled or completed, if determined to be undersized or needed. The separation equipment is designed and built according to the relevant industry specifications (API Specification 12J and ASME Sec VIII Div I). Other recognized industry publications such as the Gas Processors Suppliers Association (GPSA) are referenced when designing separation equipment to optimize gas capture.

#### VII. Operational Practices:

- 1. Subsection B.
  - During drilling, flare stacks will be located a minimum of 150 feet from the nearest surface hole location. All gas is captured or combusted. If an emergency or malfunction occurs, gas will be flared or vented for public health, safety and the environment and be properly reported to the NMOCD pursuant to 19.15.27.8.G.
  - Measure or estimate the volume of natural gas that is vented, flared or beneficially used during drilling, completion and production operations, regardless of the reason or authorization for such venting or flaring.
  - At any point in the well life (drilling, completion, production, inactive) an audio, visual and olfactory (AVO) inspection will be performed weekly (at minimum) to confirm that all production equipment is operating properly and there are no leaks or releases except as allowed in Subsection D of 19.15.27.8 NMAC.
- 2. Subsection C.
  - During completion operations, operator does not produce oil or gas but maintains adequate well control through completion operations.

For emergencies, equipment malfunction, or if the operator decides to produce oil and gas during well completion:

- Flowlines will be routed for flowback fluids into a completion or storage tank and, if feasible under well conditions, flare rather than vent and commence operation of a separator as soon as it is technically feasible for a separator to function.
- Measure or estimate the volume of natural gas that is vented, flared or beneficially used during drilling, completion and production operations, regardless of the reason or authorization for such venting or flaring.
- At any point in the well life (drilling, completion, production, inactive) an audio, visual and olfactory (AVO) inspection will be performed weekly (at minimum) to confirm that all production equipment is operating properly and there are no leaks or releases except as allowed in Subsection D of 19.15.27.8 NMAC.
- 3. Subsection D.
  - At any point in the well life (drilling, completion, production, inactive) an audio, visual and olfactory (AVO) inspection will be performed weekly (at minimum) to confirm that all production equipment is operating properly and there are no leaks or releases except as allowed in Subsection D of 19.15.27.8 NMAC.
  - Monitor manual liquid unloading for wells on-site or in close proximity (<30 minutes' drive time), take reasonable actions to achieve a stabilized rate and pressure at the earliest practical time, and take reasonable actions to minimize venting to the maximum extent practicable.

- Measure or estimate the volume of natural gas that is vented, flared or beneficially used during drilling, completion and production operations, regardless of the reason or authorization for such venting or flaring.
- 4. Subsection E.
  - All tanks and separation equipment are designed for maximum throughput and pressure to minimize waste.
  - Flare stack was installed prior to May 25, 2021 but has been designed for proper size and combustion efficiency. Flare currently has a continuous pilot and is located more than 100 feet from any known well and storage tanks.
  - At any point in the well life (drilling, completion, production, inactive) an audio, visual and olfactory (AVO) inspection will be performed weekly (at minimum) to confirm that all production equipment is operating properly and there are no leaks or releases except as allowed in Subsection D of 19.15.27.8 NMAC.
- 5. Subsection F.
  - Measurement equipment is installed to measure the volume of natural gas flared from process piping or a flowline piped from the equipment associated with a well and facility associated with the approved application for permit to drill that has an average daily production greater than 60 mcf of natural gas.
  - Measurement equipment installed is not designed or equipped with a manifold to allow diversion of natural gas around the metering equipment, except for the sole purpose of inspecting and servicing the measurement equipment, as noted in NMAC 19.15.27.8 Subsection G.

## VIII. Best Management Practices:

- 1. During completion operations, operator does not produce oil or gas but maintains adequate well control through completion operations.
- 2. Operator does not flow well (well shut in) during initial production until all flowlines, tank batteries, and oil/gas takeaway are installed, tested, and determined operational.
- 3. Operator equips storage tanks with an automatic gauging system to reduce venting of natural gas.
- 4. Operator reduces the number of blowdowns by looking for opportunities to coordinate repair and maintenance activities.
- 5. Operator combusts natural gas that would otherwise be vented or flared, when feasible.
- 6. Operator has a flare stack designed in accordance with need and to handle sufficient volume to ensure proper combustion efficiency. Flare stacks are equipped with continuous pilots and securely anchored at least 100 feet (at minimum) from storage tanks and wells.
- 7. Operator minimizes venting (when feasible) through pump downs of vessels and reducing time required to purge equipment before returning equipment to service.
- 8. Operator will shut in wells (when feasible) in the event of a takeaway disruption, emergency situation, or other operations where venting or flaring may occur due to equipment failures.

Drilling Plan Data Report

# AFMSS

| U.S. Department of the Interior        |  | 12/13/2022                          |  |  |
|--|--|-------------------------------------|--|--|
| BUREAU OF LAND MANAGEMENT              | and the second sec | - Freedow                           |  |  |
| (APD ID: 10400085800                   | Submission Date: 06/17/2022  | Highlighted data                    |  |  |
| Operator Name: XTO ENERGY INCORPORATED | )  | reflects the most<br>recent changes |  |  |
| Well Name: NASH UNIT                   | Well Number: 218H  | A 100 A 100 A                       |  |  |
| Well Type: OIL WELL                    | Well Work Type: Drill  | Show Final Text                     |  |  |

# **Section 1 - Geologic Formations**

| Formation<br>ID | Formation Name | Elevation | True Vertical | Measured<br>Depth | Lithologies             | Mineral Resources                  | Producing<br>Formatio |
|-----------------|----------------|-----------|---------------|-------------------|-------------------------|------------------------------------|-----------------------|
| 8688505         | QUATERNARY     | 3036      | 0             | 0                 | ALLUVIUM                | USEABLE WATER                      | N                     |
| 8688506         | RUSTLER        | 2898      | 138           | 138               | ANHYDRITE,<br>SANDSTONE | USEABLE WATER                      | N                     |
| 8688507         | TOP SALT       | 2697      | 339           | 339               | POTASH, SALT            | POTASH                             | N                     |
| 8688508         | BASE OF SALT   | -73       | 3109          | 3109              | POTASH, SALT            | POTASH                             | N                     |
| 8688509         | DELAWARE       | -237      | 3273          | 3273              | LIMESTONE,<br>SANDSTONE | NATURAL GAS, OIL,<br>USEABLE WATER | N                     |
| 8688510         | Bone Spring    | -3993     | 7029          | 7029              | LIMESTONE,<br>SANDSTONE | NATURAL GAS, OIL,<br>USEABLE WATER | Y                     |

# Section 2 - Blowout Prevention

Pressure Rating (PSI): 3M

Rating Depth: 8905

Equipment: Once the permanent WH is installed on the 13.375 casing, the blow out preventer equipment (BOP) will consist of a 13-5/8 minimum 3M Hydril and a 13-5/8 minimum 3M Double Ram BOP. MASP should not exceed 2979 psi. In any instance where 10M BOP is required by BLM, XTO requests a variance to utilize 5M annular with 10M ram preventers (a common BOP configuration, which allows use of 10M rams in unlikely event that pressures exceed 5M).

# Requesting Variance? YES

Variance request: A variance is requested to allow use of a flex hose as the choke line from the BOP to the Choke Manifold. If this hose is used, a copy of the manufacturer's certification and pressure test chart will be kept on the rig. Attached is an example of a certification and pressure test chart. The manufacturer does not require anchors. XTO requests a variance to be able to batch drill this well if necessary. In doing so, XTO will set casing and ensure that the well is cemented properly (unless approval is given for offline cementing) and the well is static. With floats holding, no pressure on the csg annulus, and the installation of a 10K TA cap as per Cactus recommendations, XTO will contact the BLM to skid the rig to drill the remaining wells on the pad. Once surface and both intermediate strings are all completed, XTO will begin drilling the production hole on each of the wells. A variance is requested to ONLY test broken pressure seals on the BOP equipment when moving from wellhead to wellhead which is in compliance with API Standard 53, API standard 53 states, that for pad drilling operation. moving from one wellhead to another within 21 days, pressure testing is required for pressure-containing and pressurecontrolling connections when the integrity of a pressure seal is broken. Based on discussions with the BLM on February 27th 2020, we will request permission to ONLY retest broken pressure seals if the following conditions are met: 1. After a full BOP test is conducted on the first well on the pad 2. When skidding to drill an intermediate section that does not penetrate into the Wolfcamp.

# Operator Name: XTO ENERGY INCORPORATED

Well Name: NASH UNIT

Well Number: 218H

**Testing Procedure:** All BOP testing will be done by an independent service company. Annular pressure tests will be limited to 50% of the working pressure. When nippling up on the 13.375, 3M bradenhead and flange, the BOP test will be limited to 3000 psi. When nippling up on the 7.625, the BOP will be tested to a minimum of 3000 psi. All BOP tests will include a low pressure test as per BLM regulations. The 3M BOP diagrams are attached. Blind rams will be functioned tested each trip, pipe rams will be functioned tested each day.

#### **Choke Diagram Attachment:**

Nash\_2M3MCM\_20220524031438.pdf

#### **BOP Diagram Attachment:**

Nash\_3MBOP\_20220524031458.pdf

Section 3 - Casing

| Casing ID | String Type      | Hole Size | Csg Size | Condition | Standard | Tapered String | Top Set MD | Bottom Set MD | Top Set TVD | Bottom Set TVD | Top Set MSL | Bottom Set MSL | Calculated casing<br>length MD | Grade      | Weight | Joint Type            | Collapse SF | Burst SF | Joint SF Type | Joint SF  | Body SF Type | Body SF   |
|-----------|------------------|-----------|----------|-----------|----------|----------------|------------|---------------|-------------|----------------|-------------|----------------|--------------------------------|------------|--------|-----------------------|-------------|----------|---------------|-----------|--------------|-----------|
| 1         | SURFACE          | 17.5      | 13.375   | NEW       | API      | N              | 0          | 314           | 0           | 314            | 3036        | 2722           | 314                            | J-55       | 54.5   | BUTT                  | 8.14        | 2.85     | DRY           | 49.8<br>5 | DRY          | 49.8<br>5 |
|           | INTERMED<br>IATE | 12.2<br>5 | 9.625    | NEW       | API      | N              | 0          | 3209          | 0           | 3209           | 3033        | -173           | 3209                           | J-55       | 40     | BUTT                  | 2.63        | 2.01     | DRY           | 4.91      | DRY          | 4.91      |
|           | INTERMED<br>IATE | 8.75      | 7.625    | NEW       | API      | Y              | 0          | 8650          | 0           | 8650           | 3033        | -5614          | 8650                           | HCL<br>-80 |        | OTHER -<br>FLUSH      | 4.19        | 2.52     | DRY           | 2.56      | DRY          | 2.56      |
|           | PRODUCTI<br>ON   | 6.75      | 5.5      | NEW       | API      | Y              | 0          | 19354         | 0           | 8905           | 3033        | -5869          | 19354                          | P-<br>110  |        | OTHER -<br>Semi-Flush | 2.34        | 1.05     | DRY           | 5.63      | DRY          | 5.63      |

#### **Casing Attachments**

Casing ID: 1 String SURFACE

**Inspection Document:** 

Spec Document:

**Tapered String Spec:** 

#### Casing Design Assumptions and Worksheet(s):

Nash\_Unit\_218H\_Csg\_20220602084949.pdf

| Operator Name: XTO ENERGY INCORPORATED |  |
|--|--|
| Well Name: NASH UNIT                   |  |

Well Number: 218H

| Casing | Attachments |
|--------|-------------|
|--------|-------------|

| Casing ID: 2 String INTERMEDIATE            |
|---|
| Inspection Document:                        |
|   |
| Spec Document:                              |
|   |
| Tapered String Spec:                        |
|   |
| Casing Design Assumptions and Worksheet(s): |
|   |
| Nash_Unit_218H_Csg_20220602084835.pdf       |
| Casing ID: 3 String INTERMEDIATE            |
| Inspection Document:                        |
|   |
| Spec Document:                              |
|   |
| Tapered String Spec:                        |
| Nash_Unit_218H_Csg_20220602085048.pdf       |
| Casing Design Assumptions and Worksheet(s): |
| Nash_Unit_218H_Csg_20220602085234.pdf       |
|   |
| Casing ID: 4 String PRODUCTION              |
| Inspection Document:                        |
|   |
| Spec Document:                              |
|   |
| Tapered String Spec:                        |
| Nash_Unit_218H_Csg_20220602085403.pdf       |
| Casing Design Assumptions and Worksheet(s): |
| Nash_Unit_218H_Csg_20220602085447.pdf       |
|   |

Section 4 - Cement

•

# Operator Name: XTO ENERGY INCORPORATED

Well Name: NASH UNIT

#### Well Number: 218H

| String Type  | Lead/Tail | Stage Tool<br>Depth | Top MD | Bottom MD | Quantity(sx) | Yield | Density | Cu Ft      | Excess% | Cement type | Additives |
|--------------|-----------|---------------------|--------|-----------|--------------|-------|---------|------------|---------|-------------|-----------|
| SURFACE      | Lead      |                     | 0      | 314       | 320          | 1.35  | 14.8    | 432        | 100     | Class C     | 2% CaCl   |
| SURFACE      | Tail      |                     | 0      | 314       | 640          | 1.35  | 14.8    | 864        | 100     | Class C     | 2% CaCl   |
| INTERMEDIATE | Lead      |                     | 0      | 3209      | 1310         | 1.39  | 12.9    | 1820.<br>9 | 100     | Class C     | None      |
| INTERMEDIATE | Tail      |                     | 0      | 3209      | 130          | 1.35  | 14.8    | 175.5      | 100     | Class C     | 2% CaCl   |
| INTERMEDIATE | Lead      |                     | 0      | 8650      | 410          | 1.35  | 14.8    | 553.5      | 100     | Class C     | None      |
| INTERMEDIATE | Tail      |                     | 0      | 8650      | 340          | 1.33  | 14.8    | 452.2      | 100     | Class C     | None      |
| PRODUCTION   | Lead      |                     | 0      | 1935<br>4 | 20           | 2.69  | 11.5    | 53.8       | 20      | NeoCem      | None      |
| PRODUCTION   | Tail      |                     | 0      | 1935<br>4 | 750          | 1.51  | 13.2    | 1132.<br>5 | 20      | VersaCem    | None      |

# Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

**Describe what will be on location to control well or mitigate other conditions:** The necessary mud products for weight addition and fluid loss control will be on location at all times.

**Describe the mud monitoring system utilized:** Spud with fresh water/native mud. Drill out from under 13-3/8" surface casing with brine solution. A 9.8 ppg -10.2 ppg brine mud will be used while drilling through the salt formation. Use fibrous materials as needed to control seepage and lost circulation. Pump viscous sweeps as needed for hole cleaning. Pump speed will be recorded on a daily drilling report after mudding up. A Pason or Totco will be used to detect changes in loss or gain of mud volume. A mud test will be performed every 24 hours to determine: density, viscosity, strength, filtration and pH as necessary. Use available solids controls equipment to help keep mud weight down after mud up. Rig up solids control equipment to operate as a closed loop system.

Circulating Medium Table

# Operator Name: XTO ENERGY INCORPORATED

Well Name: NASH UNIT

#### Well Number: 218H

| Top Depth | Bottom Depth | Mud Type                         | Min Weight (Ibs/gal) | Max Weight (Ibs/gal) | Density (lbs/cu ft) | Gel Strength (lbs/100 sqft) | Hd | Viscosity (CP) | Salinity (ppm) | Filtration (cc) | Additional Characteristics   |
|-----------|--------------|----------------------------------|----------------------|----------------------|---------------------|-----------------------------|----|----------------|----------------|-----------------|--|
| 314       | 3209         | OTHER : BRINE                    | 9.8                  | 10.5                 |                     |                             |    |                |                |                 | Spud with fresh water/native<br>mud. Drill out from under 13-<br>3/8" surface casing with brine<br>solution. A 9.8 ppg -10.2 ppg<br>brine mud will be used while<br>drilling through the salt<br>formation. Use fibrous<br>materials as needed to control<br>seepage and lost circulation.<br>Pump viscous sweeps as<br>needed for hole cleaning.<br>Pump speed will be recorded<br>on a daily drilling report after<br>mudding up. A Pason or<br>Totco will be used to detect<br>changes in loss or gain of<br>mud volume. A mud test will<br>be performed every 24 hours<br>to determine: density,<br>viscosity, strength, filtration<br>and pH as necessary. Use<br>available solids controls<br>equipment to help keep mud<br>weight down after mud up.<br>Rig up solids control<br>equipment to operate as a<br>closed loop system. |
| 0         | 314          | OTHER :<br>FRESH<br>WATER/NATIVE | 8.5                  | 9                    |                     |                             |    |                |                |                 | Spud with fresh water/native<br>mud. Drill out from under 13-<br>3/8" surface casing with brine<br>solution. A 9.8 ppg -10.2 ppg<br>brine mud will be used while<br>drilling through the salt<br>formation. Use fibrous<br>materials as needed to control<br>seepage and lost circulation.<br>Pump viscous sweeps as<br>needed for hole cleaning.<br>Pump speed will be recorded<br>on a daily drilling report after<br>mudding up. A Pason or<br>Totco will be used to detect<br>changes in loss or gain of<br>mud volume. A mud test will<br>be performed every 24 hours<br>to determine: density,<br>viscosity, strength, filtration<br>and pH as necessary. Use<br>available solids controls<br>equipment<br>Page 5 of 8   |

Page 5 of 8

.


|           |              | e: XTO ENERGY I<br>ASH UNIT          | NCOR                 | PORA                 | TED                 |                             | Well N | lumbe          | <b>r:</b> 218H |                 |  |
|-----------|--------------|--------------------------------------|----------------------|----------------------|---------------------|-----------------------------|--------|----------------|----------------|-----------------|--|
| Top Depth | Bottom Depth | Mud Type                             | Min Weight (Ibs/gal) | Max Weight (Ibs/gal) | Density (lbs/cu ft) | Gel Strength (lbs/100 sqft) | Hd     | Viscosity (CP) | Salinity (ppm) | Filtration (cc) | Additional Characteristics   |
|           |              |                                      |                      | 1                    | 1                   | 1                           |        |                |                | 1               | to help keep mud weight<br>down after mud up. Rig up<br>solids control equipment to<br>operate as a closed loop<br>system.   |
| 3209      | 8650         | OTHER :<br>FRESH WATER/<br>CUT BRINE | 8.6                  | 9.1                  |                     |                             |        |                |                |                 | Spud with fresh water/native<br>mud. Drill out from under 13-<br>3/8" surface casing with brine<br>solution. A 9.8 ppg -10.2 ppg<br>brine mud will be used while<br>drilling through the salt<br>formation. Use fibrous<br>materials as needed to control<br>seepage and lost circulation.<br>Pump viscous sweeps as<br>needed for hole cleaning.<br>Pump speed will be recorded<br>on a daily drilling report after<br>mudding up. A Pason or<br>Totco will be used to detect<br>changes in loss or gain of<br>mud volume. A mud test will<br>be performed every 24 hours<br>to determine: density,<br>viscosity, strength, filtration<br>and pH as necessary. Use<br>available solids controls<br>equipment to help keep mud<br>weight down after mud up.<br>Rig up solids control<br>equipment to operate as a<br>closed loop system. |
| 8650      | 1935<br>4    | OIL-BASED<br>MUD                     | 10                   | 10.5                 |                     |                             |        |                |                |                 | Spud with fresh water/native<br>mud. Drill out from under 13-<br>3/8" surface casing with brine<br>solution. A 9.8 ppg -10.2 ppg<br>brine mud will be used while<br>drilling through the salt<br>formation. Use fibrous<br>materials as needed to control<br>seepage and lost circulation.<br>Pump viscous sweeps as<br>needed for hole cleaning.<br>Pump speed will be recorded<br>on a daily drilling report after<br>mudding up. A Pason or<br>Totco will be used to detect<br>changes in loss or gain of<br>mud volume. A mud test will<br>be performed every 24 hours   |

•

# Operator Name: XTO ENERGY INCORPORATED

Well Name: NASH UNIT

Well Number: 218H



to determine: density, viscosity, strength, filtration and pH as necessary. Use available solids controls equipment to help keep mud weight down after mud up. Rig up solids control equipment to operate as a closed loop system.

# Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Mud Logger: Mud Logging Unit (2 man) below intermediate casing. Open hole logging will not be done on this well. List of open and cased hole logs run in the well:

CEMENT BOND LOG, DIRECTIONAL SURVEY, GAMMA RAY LOG, MEASUREMENT WHILE DRILLING, MUD LOG/GEOLOGICAL LITHOLOGY LOG, **Coring operation description for the well:** 

No coring is planned for the well.

# **Section 7 - Pressure**

Anticipated Bottom Hole Pressure: 4630

Anticipated Surface Pressure: 2624

Anticipated Bottom Hole Temperature(F): 175

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geoharzards description:

**Contingency Plans geohazards** 

Hydrogen Sulfide drilling operations plan required? YES

### Hydrogen sulfide drilling operations

Nash\_H2S\_Plan\_20220524053213.pdf Nash\_Unit\_H2S\_DiaF\_20220524053243.pdf

#### Operator Name: XTO ENERGY INCORPORATED

Well Name: NASH UNIT

Well Number: 218H

# **Section 8 - Other Information**

Proposed horizontal/directional/multi-lateral plan submission:

Nash\_Unit\_218H\_DD\_20220602090547.pdf

Other proposed operations facets description:


#### Other proposed operations facets attachment:


Nash\_Unit\_218H\_Cmt\_20220602090615.pdf

#### Other Variance attachment:

Nash\_BOP\_BTV\_20220524053540.pdf Nash\_FH\_20220524053536.pdf Nash\_MBS\_20220531064658.pdf Nash\_OLCV\_20220524053532.pdf Nash\_Spud\_20220524053529.pdf



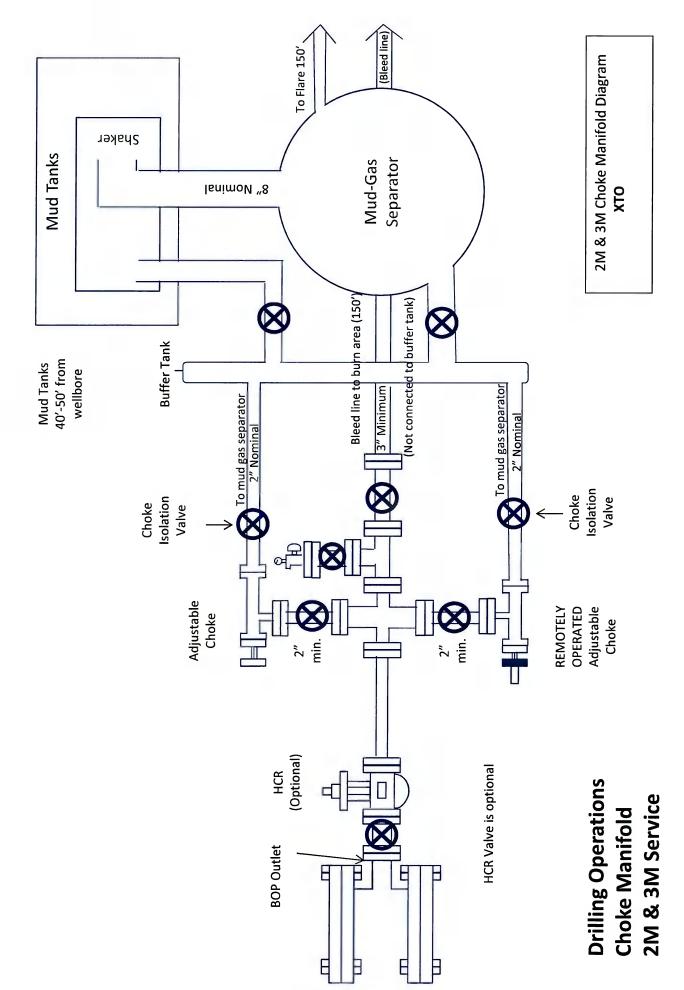

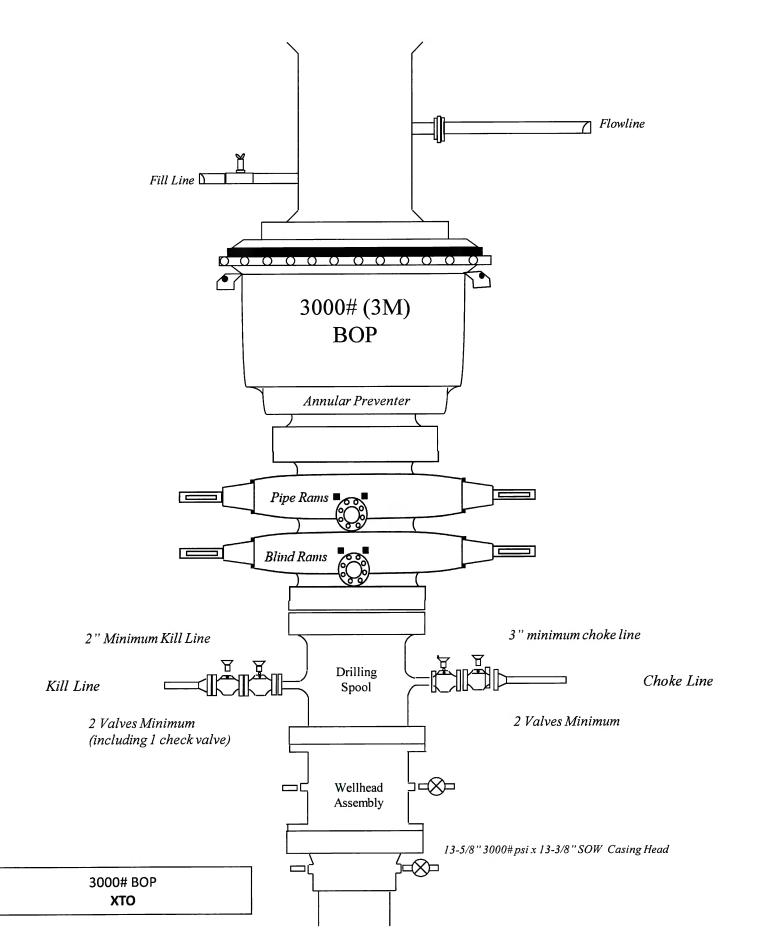

# **Casing Assumptions**

## **Casing Design**

| Hole Size | MD             | TVD   | OD Csg | Weight | Grade    | Collar       | New/Used | SF<br>Burst        | SF<br>Collapse      | SF<br>Tension      |
|-----------|----------------|-------|--------|--------|----------|--------------|----------|--------------------|---------------------|--------------------|
| 17.5      | 0' - 314'      | 571'  | 13.375 | 54.5   | J-55     | BTC          | New      | <mark>2.8</mark> 5 | 8. <mark>1</mark> 4 | <mark>49.85</mark> |
| 12.25     | 0' – 3209'     | 3688' | 9.625  | 40     | J-55     | BTC          | New      | 2.01               | 2.63                | 4.91               |
| 8.75      | 0' - 3309'     | 3588' | 7.625  | 29.7   | RY P-110 | Flush Joint  | New      | 3.46               | 3.62                | 2.17               |
| 8.75      | 3309' - 8650'  | 9053' | 7.625  | 29.7   | HC L-80  | Flush Joint  | New      | 2.52               | 4.19                | 2.56               |
| 6.75      | 0' - 8550'     | 8961' | 5.5    | 20     | RY P-110 | Semi-Premium | New      | 1.05               | 2.50                | 2.47               |
| 6.75      | 8550' - 19354' | 9864' | 5.5    | 20     | RY P-110 | Semi-Flush   | New      | 1.05               | 2.34                | 5.63               |

## **Cement Variance Request**

XTO requests to pump a two stage cement job on the 7-5/8" intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Brushy Canyon (5746') and the second stage performed as a bradenhead squeeze with planned cement from the Brushy Canyon to surface. If cement is not visually confirmed to circulate to surface, the final cement top after the second stage job will be verified by Echo-meter. If necessary, a top out consisting of 1,500 sack of Class C cement + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (2.30 yld, 12.91 ppg) will be executed as a contingency. If cement is still unable to circulate to surface, another Echo-meter run will be performed for cement top verification.

XTO will include the Echo-meter verified fluid top and the volume of displacement fluid above the cement slurry in the annulus in all post-drill sundries on wells utilizing this cement program.

XTO will report to the BLM the volume of fluid (limited to 5 bbls) used to flush intermediate casing valves following backside cementing procedures.

XTO requests to pump an Optional Lead if well conditions dictate in an attempt to bring cement to surface on the first stage. If cement is brought to surface, the BLM will be notified and the second stage bradenhead squeeze and subsequent TOC verification will be negated.

In the event cement is not circulated to surface on the first stage, whether intentionally or unintentionally, XTO requests the option to conduct the bradenhead squeeze and TOC verification offline as per standard approval from BLM when unplanned remediation is needed and batch drilling is approved. In the event the bradenhead is conducted, we will ensure first stage cement job is cemented properly and the well is static with floats holding and no pressure on the csg annulus as with all other casing strings where batch drilling operations occur before moving off the rig. The TA cap will also be installed per GE procedure and pressure inside the casing will be monitored via the valve on the TA cap as per standard batch drilling ops.

Subject: Request for a Variance Allowing break Testing of the Blowout Preventer Equipment (BOPE)

XTO Energy requests a variance to ONLY test broken pressure seals on the BOPE and function test BOP when skidding a drilling rig between multiple wells on a pad.

#### **Background**

Onshore Oil and Gas Order (OOGO) No. 2, Drilling Operations, Sections III.A.2.i.iv.B states that the BOP test must be performed whenever any seal subject to test pressure is broken. The current interpretation of the Bureau of Land Management (BLM) requires a complete BOP test and not just a test of the affected component. OOGO No. 2, Section I.D.2 states, "Some situation may exist either on a well-by-well basis or field-wide basis whereby it is commonly accepted practice to vary a particular minimum standard(s) established in this order. This situation can be resolved by requesting a variance...". XTO Energy feels the break testing the BOPE is such a situation. Therefore, as per OOGO No. 2, Section IV., XTO Energy submits this request for the variance.

#### **Supporting Documentation**

OOGO No. 2 became effective on December 19, 1988 and has remained the standard for regulating BLM onshore drilling operations for over 30 years. During this time there have been significant changes in drilling technology. BLM continues to use the variance request process to allow for the use of modern technology and acceptable engineering practices that have arisen since OOGO No. 2 was originally released. The XTO Energy drilling rig fleet has many modern upgrades that allow the intact BOP stack to be moved between well slots on a multi-well pad, as well as, wellhead designs that incorporate quick connects facilitating release of the BOP from the wellhead without breaking any BOP stack components apart. These technologies have been used extensively offshore, and other regulators, API, and many operators around the world have endorsed break testing as safe and reliable.

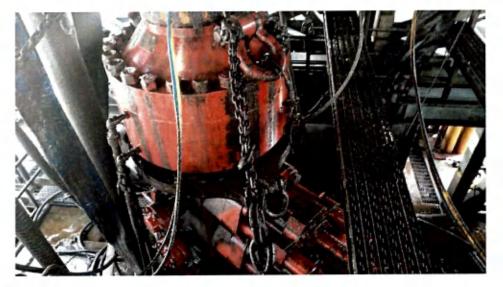


Figure 1: Winch System attached to BOP Stack



Figure 2: BOP Winch System

American Petroleum Institute (API) standards, specification and recommended practices are considered the industry standard and are consistently utilized and referenced by the industry. OOGO No. 2 recognizes API recommended Practices (RP) 53 in its original development. API Standard 53, *Well Control Equipment Systems for Drilling Wells* (Fifth Edition, December 2018, Annex C, Table C.4) recognizes break testing as an acceptable practice. Specifically, API Standard 53, Section 5.3.7.1 states "A pressure test of the pressure containing component shall be performed following the disconnection or repair, limited to the affected component." See Table C.4 below for reference.

|  | Pressure Test-Low   | Pressure Test—High Pressure*  |   |  |  |  |  |  |
|--|---|---|---|--|--|--|--|--|
| Component to be Pressure<br>Tested   | Pressure <sup>20</sup><br>psig (MPa)  | Change Out of<br>Component, Elastomer,<br>or Ring Gasket                        | No Change Out of<br>Component, Elastomer,<br>or Ring Gasket |  |  |  |  |  |
| Annular preventer <sup>a</sup>   | 250 to 350 (1.72 to 2.41)   | RWP of annular preventer  | MASP or 70% annular<br>RWP, whichever is lower.             |  |  |  |  |  |
| Fixed pipe, variable bore,<br>blind, and BSR preventers <sup>ad</sup>                  | 250 to 350 (1.72 to 2.41)   | RWP of ram preventer or<br>wellhead system.<br>whichever is lower               | ITP   |  |  |  |  |  |
| Choke and kill line and BOP<br>side outlet valves below ram<br>preventers (both sides) | 250 to 350 (1.72 to 2.41)   | RWP of side outlet valve or<br>wellhead system,<br>whichever is lower           | ITP   |  |  |  |  |  |
| Choke manifold—upstream of<br>chokes*  | 250 to 350 (1.72 to 2.41)   | RWP of ram preventers or<br>wellhead system,<br>whichever is lower              | ЧΠ  |  |  |  |  |  |
| Choke manifold—downstream<br>of chokes*  | 250 to 350 (1.72 to 2.41)   | RWP of valve(s), line(s), or M<br>whichever is lower                            | ASP for the well program,                                   |  |  |  |  |  |
| Kelly, kelly valves, drill pipe<br>safety valves, IBOPs                                | 250 to 350 (1.72 to 2.41)   | MASP for the well program   |   |  |  |  |  |  |
|  | during the evaluation period. The p   | ressure shall not decrease below the<br>allest OD drill pipe to be used in well |   |  |  |  |  |  |
|  | from one wellhead to another within<br>when the integrity of a pressure sea | the 21 days, pressure testing is req  | ured for pressure-containing and                            |  |  |  |  |  |

The Bureau of Safety and Environmental Enforcement (BSEE), Department of Interior, has also utilized the API standards, specification and best practices in the development of its offshore oil and gas regulations and incorporates them by reference within its regulations.

Break testing has been approved by the BLM in the past with other operators based on the detailed information provided in this document.


XTO Energy feels break testing and our current procedures meet the intent of OOGO No. 2 and often exceed it. There has been no evidence that break testing results in more components failing than seen on full BOP tests. XTO Energy's internal standards requires complete BOPE tests more often than that of OOGO No. 2 (Every 21 days). In addition to function testing the annular, pipe rams and blind rams after each BOP nipple up, XTO Energy performs a choke drill with the rig crew prior to drilling out every casing shoe. This is additional training for the rig crew that exceeds the requirements of the OOGO No.2.

## Procedures

- 1. XTO Energy will use this document for our break testing plan for New Mexico Delaware basin. The summary below will be referenced in the APD or Sundry Notice and receive approval prior to implementing this variance.
- 2. XTO Energy will perform BOP break testing on multi-wells pads where multiple intermediate sections can be drilled and cased within the 21-day BOP test window.
  - a. A full BOP test will be conducted on the first well on the pad.
  - b. The first intermediate hole section drilled on the pad will be the deepest. All of the remaining hole sections will be the same depth or shallower.
    - i. Our Lower WC targets set the intermediate casing shoe no deeper than the Wolfcamp B.
    - ii. Our Upper WC targets set the intermediate casing shoe shallower than the Wolfcamp B.
  - c. A Full BOP test will be required if the intermediate hole section being drilled has a MASP over 5M.
  - d. A full BOP test will be required prior to drilling any production hole.
- 3. After performing a complete BOP test on the first well, the intermediate hole section will be drilled and cased, two breaks would be made on the BOP equipment.
  - a. Between the HCV valve and choke line connection
  - b. Between the BOP quick connect and the wellhead
- 4. The BOP is then lifted and removed from the wellhead by a hydraulic system.
- 5. After skidding to the next well, the BOP is moved to the wellhead by the same hydraulic system and installed.
- 6. The connections mentioned in 3a and 3b will then be reconnected.
- 7. Install test plug into the wellhead using test joint or drill pipe.
- 8. A shell test is performed against the upper pipe rams testing the two breaks.
- 9. The shell test will consist of a 250 psi low test and a high test to the value submitted in the APD or Sundry (e.g. 5,000 psi or 10,000psi).
- 10. Function test will be performed on the following components: lower pipe rams, blind rams, and annular.

- 11. For a multi-well pad the same two breaks on the BOP would be made and on the next wells and steps 4 through 10 would be repeated.
- 12. A second break test would only be done if the intermediate hole section being drilled could not be completed within the 21 day BOP test window.

Note: Picture below highlights BOP components that will be tested during batch operations

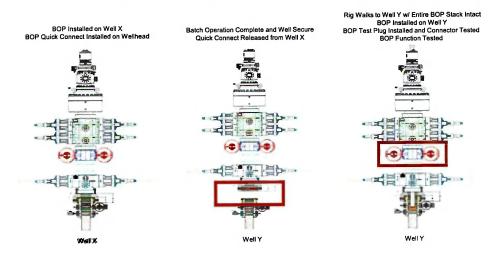

### Summary

A variance is requested to **ONLY** test broken pressure seals on the BOP equipment when moving from wellhead to wellhead which is in compliance with API Standard 53. API Standard 53 states, that for pad drilling operation, moving from one wellhead to another within 21 days, pressure testing is required for pressure-containing and pressure-controlling connections when the integrity of a pressure seal is broken.

The BOP will be secured by a hydraulic carrier or cradle. The BLM will be contacted if a Well Control event occurs prior to the commencement of a BOPE Break Testing operation.


Based on discussions with the BLM on February 27th 2020 and the supporting documentation submitted to the BLM, we will request permission to ONLY retest broken pressure seals if the following conditions are met:

1. After a full BOP test is conducted on the first well on the pad.

2. The first intermediate hole section drilled on the pad will be the deepest. All of the remaining hole sections will be the same depth or shallower.

3. Full BOP test will be required if the intermediate hole section being drilled has a MASP over 5M.

4. Full BOP test will be required prior to drilling the production hole.

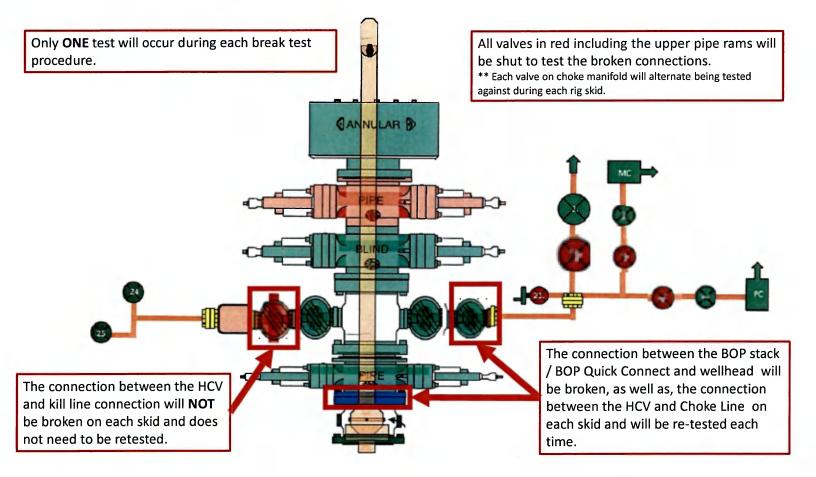



GATES E & S NORTH AMERICA, INC DU-TEX 134 44TH STREET CORPUS CHRISTI, TEXAS 78405

PHONE: 361-887-9807 FAX: 361-887-0812 EMAIL: crpe&s@gates.com WEB: www.gates.com

# GRADE D PRESSURE TEST CERTIFICATE

| Customer :           | AUSTIN DISTRIBUTING          | Test Date:               | 6/8/2014                                   |  |
|----------------------|------------------------------|--------------------------|--|--|
| Customer Ref. :      | PENDING                      | Hose Senal No.:          | D-060814-1                                 |  |
| Invoice No. :        | 201709                       | Created By:              | NORMA                                      |  |
|                      |                              |                          |  |  |
|                      |                              |                          |  |  |
| Product Description: |                              | FD3.042.0R41/16.5KFLGE/E | .E   |  |
|                      | 4 1/16 m.5K FLG              | FD3.042.0R41/16.5KFLGE/E |  |  |
| Product Description: | 4 1/16 m.SK FLG<br>4774-6001 |                          | 4 1/16 in.5K FLG<br>L33090011513D-060814-1 |  |


Gates E & S North America, Inc. certifies that the following hose assembly has been tested to the Gates Oilfield Roughneck Agreement/Specification requirements and passed the 15 minute hydrostatic test per API Spec 7K/Q1, Fifth Edition, June 2010, Test pressure 9.6.7 and per Table 9 to 7,500 psi in accordance with this product number. Hose burst pressure 9.6.7.2 exceeds the minimum of 2.5 times the working pressure per Table 9.

|                                | / |   |            |
|--------------------------------|---|---|------------|
| aality:<br>ara .<br>ignature : |   | Technical Supervisor :<br>Date :<br>Signature : | PRODUCTION |


Form PTC - 01 Rev.0 2


Received by OCD: 3/20/2023 5:51:02 AM

## Page 28 of 57

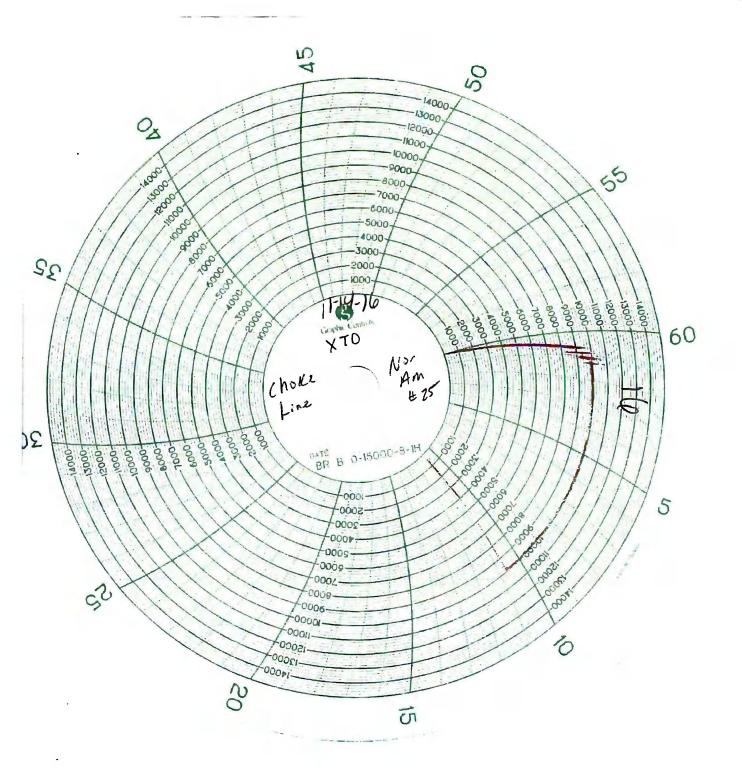

1

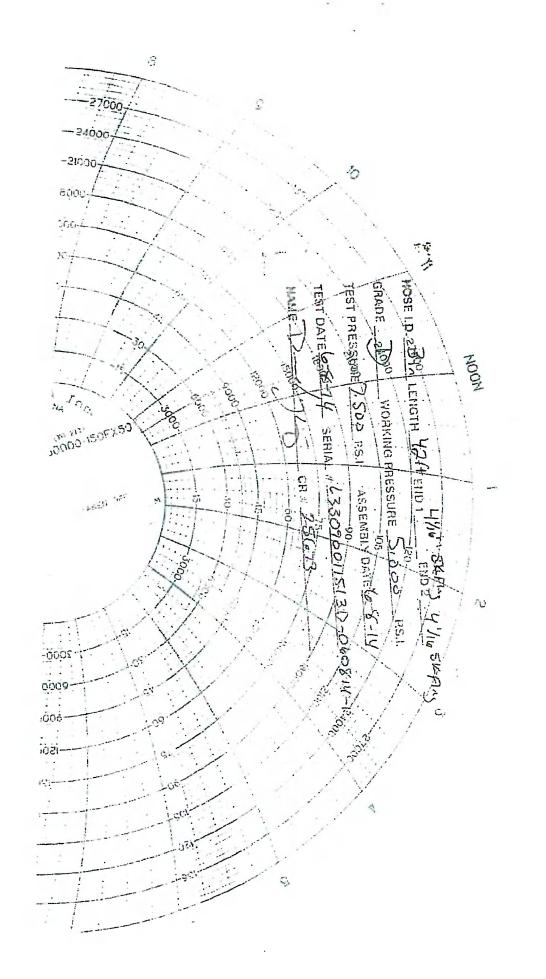

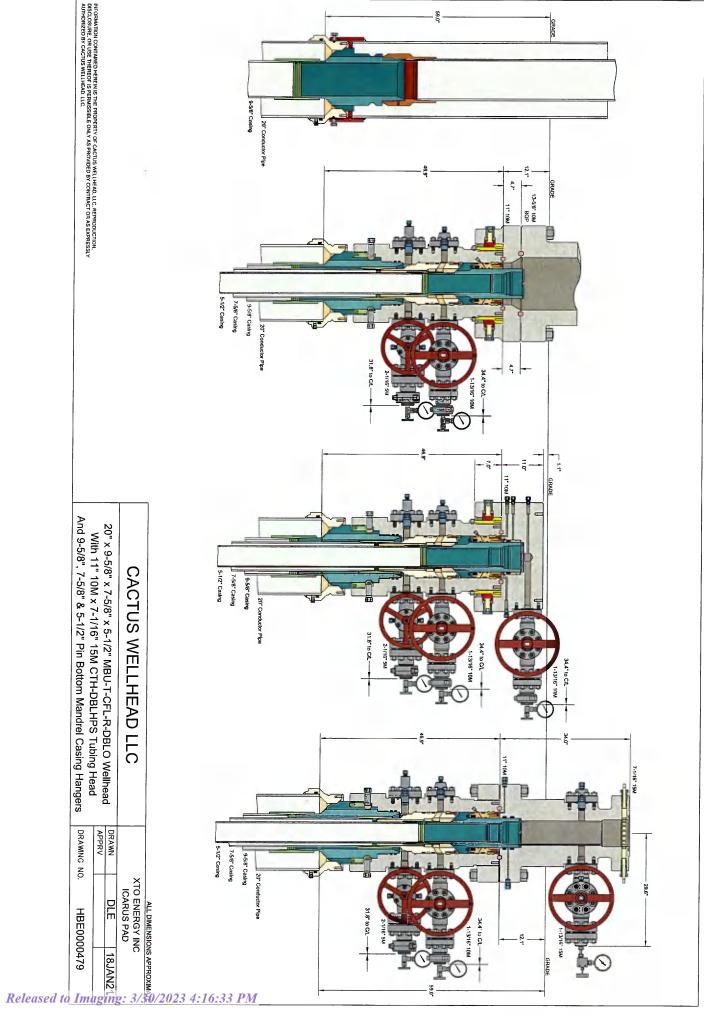

# XTO Permian Operating, LLC Offline Cementing Variance Request

XTO requests the option to cement the surface and intermediate casing strings offline as a prudent batch drilling efficiency of acreage development.

# 1. Cement Program

No changes to the cement program will take place for offline cementing.


# 2. Offline Cementing Procedure

The operational sequence will be as follows. If a well control event occurs, the BLM will be contacted for approval prior to conducting offline cementing operations.

- 1. Run casing as per normal operations. While running casing, conduct negative pressure test and confirm integrity of the float equipment (float collar and shoe)
- 2. Land casing with mandrel
- 3. Fill pipe with kill weight fluid, do not circulate through floats and confirm well is static
- 4. Set annular packoff shown below and pressure test to confirm integrity of the seal. Pressure ratings of wellhead components and valves is 5,000 psi.
- 5. After confirmation of both annular barriers and internal barriers, nipple down BOP and install cap flange.
  - a. If any barrier fails to test, the BOP stack will not be nippled down until after the cement job is completed with cement 500ft above the highest formation capable of flow with kill weight mud above or after it has achieved 50-psi compressive strength if kill weight fluid cannot be verified.




Annular packoff with both external and internal seals

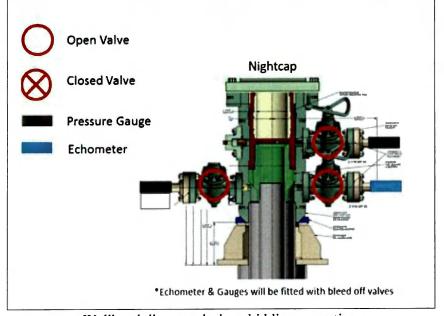

**XTO Permian Operating, LLC Offline Cementing Variance Request** 

Wellhead diagram during skidding operations

- 6. Skid rig to next well on pad.
- 7. Confirm well is static before removing cap flange, flange will not be removed and offline cementing operations will not commence until well is under control. If well is not static, casing outlet valves will provide access to both the casing ID and annulus. Rig or third party pump truck will kill well prior to cementing or nippling up for further remediation.
  - a. Well Control Plan
    - i. The Drillers Method will be the primary well control method to regain control of the wellbore prior to cementing, if wellbore conditions do not permit the drillers method other methods of well control may be used
    - ii. Rig pumps or a 3<sup>rd</sup> party pump will be tied into the upper casing valve to pump down the casing ID
    - iii. A high pressure return line will be rigged up to lower casing valve and run to choke manifold to control annular pressure
    - iv. Once influx is circulated out of the hole, kill weight mud will be circulated
    - v. Well will be confirmed static
    - vi. Once confirmed static, cap flange will be removed to allow for offline cementing operations to commence
- 8. Install offline cement tool
- 9. Rig up cement equipment

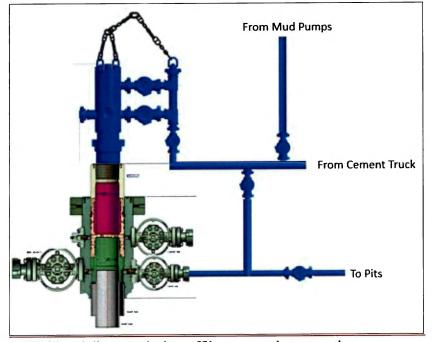

#### **XTO Permian Operating, LLC Offline Cementing Variance Request**

Wellhead diagram during offline cementing operations

- 10. Circulate bottoms up with cement truck
  - a. If gas is present on bottoms up, well will be shut in and returns rerouted through gas buster to handle entrained gas
  - b. Max anticipated time before circulating with cement truck is 6 hrs
- 11. Perform cement job taking returns from the annulus wellhead valve
- 12. Confirm well is static and floats are holding after cement job
- 13. Remove cement equipment, offline cement tools and install night cap with pressure gauge for monitoring.

XTO respectfully requests approval to utilize a spudder rig to pre-set surface casing.

Description of Operations:

- 1. Spudder rig will move in to drill the surface hole and pre-set surface casing on the well.
  - a. After drilling the surface hole section, the spudder rig will run casing and cement following all of the applicable rules and regulations (OnShore Order 2, all COAs and NMOCD regulations).
  - b. The spudder rig will utilize fresh water-based mud to drill the surface hole to TD. Solids control will be handled entirely on a closed loop basis. No earth pits will be used.
- 2. The wellhead will be installed and tested as soon as the surface casing is cut off and WOC time has been reached.
- 3. A blind flange at the same pressure rating as the wellhead will be installed to seal the wellbore. Pressure will be monitored with needle valves installed on two wing valves.
  - a. A means for intervention will be maintained while the drilling rig is not over the well.
- 4. Spudder rig operations are expected to take 2-3 days per well on the pad.
- 5. The BLM will be contacted and notified 24 hours prior to commencing spudder rig operations.
- 6. Drilling Operations will begin with a larger rig and a BOP stack equal to or greater than the pressure rating that was permitted will be nippled up and tested on the wellhead before drilling operations resume on each well.
  - a. The larger rig will move back onto the location within 180 days from the point at which the wells are secured and the spudder rig is moved off location.
  - b. The BLM will be notified 24 hours before the larger rig moves back on the pre-set locations
- 7. XTO will have supervision on the rig to ensure compliance with all BLM and NMOCD regulations and to oversee operations.
- 8. Once the rig is removed, XTO will secure the wellhead area by placing a guard rail around the cellar area.



XTO Energy Eddy County, NM (NAD-27) NASH UNIT 218H

OH


Plan: PERMIT

# **Standard Planning Report**

14 March, 2022

#### Received by OCD: 3/20/2023 5:51:02 AM

# Page 36 of 57

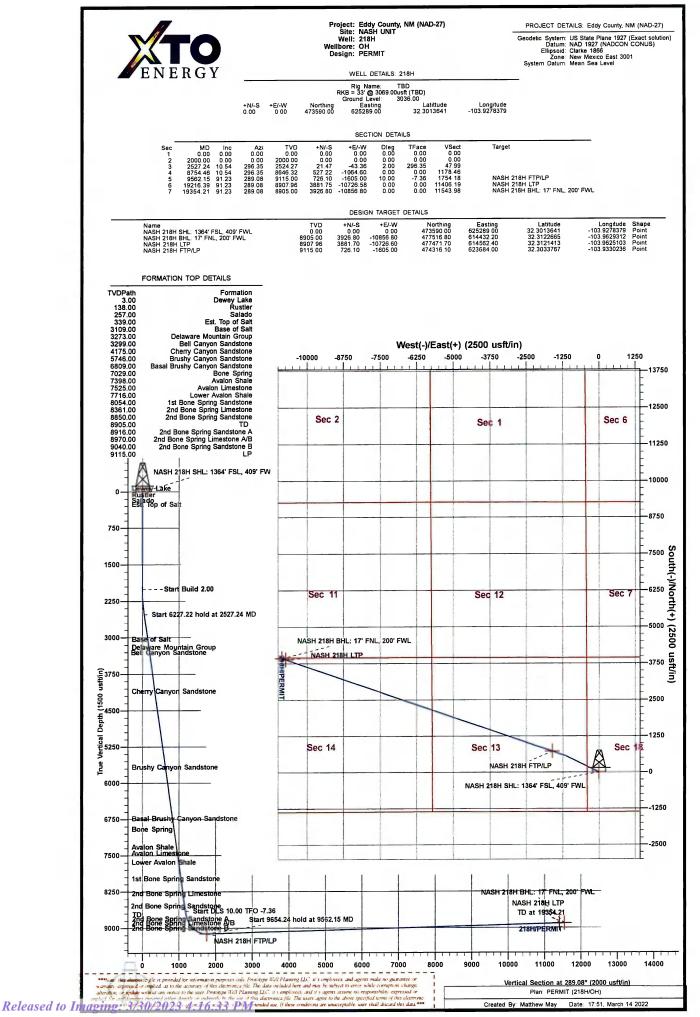

| ENERG   | Y   |   |  |  |  |   |  |  |   |   |
|---|---|---|--|--|--|---|--|--|---|---|
| Database:<br>Company:<br>Project:<br>Site:<br>Well:<br>Well:<br>Wellbore:<br>Design:  | XTO<br>Eddy   | Energy<br>County, NM<br>H UNIT                              | ngle User Db<br>(NAD-27)   |  | TVD Ref<br>MD Refe<br>North Re                             |   |  | Well 218H<br>RKB = 33' @ 3<br>RKB = 33' @ 3<br>Grid<br>Minimum Curv                | 069.00usft (TI                              |   |
| Project   | Eddy  | County, NM (  | NAD-27)  |  | a Adamson Brigan ay a caracteria                           |   |  |  |   |   |
| Map System:<br>Geo Datum:<br>Map Zone:  | NAD 19  | te Plane 192<br>927 (NADCOI<br>exico East 30                |  | ion)   | System D   | Datum:  | м  | ean Sea Level  |   |   |
| Site  | NASH  | IUNIT   |  |  |  |   |  |  |   |   |
| Site Position:<br>From:<br>Position Unco  | Ma  | •   | North<br>Easti<br>Ousft Slot F   | -  |  | 110.00 usft<br>291.40 usft<br>13-3/16 "   | Latitude:<br>Longitude:<br>Grid Conve  | rgence:  |   | 32.302793<br>-103.927823<br>0.22                    |
| Well  | 218H  |   |  |  |  |   |  |  |   |   |
| Well Position   | +N/-S   | 500 (   |  |  |  | 472 500 00  | unft Lot   | iter al a c  |   | 32.301364   |
|   | +E/-W   | -2.4  | 40 usft Ea   | orthing:<br>asting:<br>ellhead Elev                    | vation:  | 473,590.00<br>625,289.00<br>0.00  | usft Lo  | titude:<br>ngitude:<br>ound Level:   |   | -103.927837   |
| Position Unco<br>Wellbore   | +E/-W<br>ertainty<br>OH   | -2.4  | 40 usft Ea   | asting:<br>ellhead Elev                                | vation:<br>Declina   | 625,289.00<br>0.00  | usft Loi<br>usft Gro   | ngitude:   | Field Str                                   | -103.927837<br>3,036.00 us                          |
| Position Unco<br>Wellbore   | +E/-W<br>ertainty<br>OH   | -2.4<br>0.0   | 40 usft Ea<br>00 usft W  | asting:<br>ellhead Elev                                | n an Said Bailty and                                       | 625,289.00<br>0.00  | usft Lor<br>usft Gra<br>Dip A  | ngitude:<br>ound Level:  | Field Sti<br>(nT                            | -103.927837<br>3,036.00 us<br>rength                |
| Position Unco<br>Wellbore<br>Magnetics  | +E/-W<br>ertainty<br>OH   | -2.4<br>0.0<br>del Name<br>IGRF2020                         | 40 usft Ea<br>00 usft W  | asting:<br>ellhead Elev<br>e Date                      | Declina  | 625,289.00<br>0.00  | usft Lor<br>usft Gra<br>Dip A  | ngitude:<br>ound Level:<br>Angle<br>?)   |   | -103.927837<br>3,036.00 us<br>rength<br>)           |
| Position Unce<br>Wellbore<br>Magnetics<br>Design<br>Audit Notes:  | +E/-W<br>ertainty<br>OH<br>Mo   | -2.4<br>0.0<br>del Name<br>IGRF2020                         | 40 usft Ea<br>00 usft W  | asting:<br>ellhead Elev<br>e Date<br>03/14/22          | Declina  | 625,289.00<br>0.00<br>ation<br>6.63   | usft Lor<br>usft Gra<br>Dip A  | ngitude:<br>ound Level:<br>Angle<br>)<br>59.89                                     |   | -103.927837<br>3,036.00 us<br>rength<br>)           |
| Position Unc  | +E/-W<br>ertainty<br>OH<br>Mo<br>PERM   | -2.4<br>0.0<br>del Name<br>IGRF2020                         | 40 usft Ea<br>20 usft W<br>Sample<br>Phas<br>epth From (T<br>(usft)                              | asting:<br>ellhead Elev<br>e Date<br>03/14/22<br>se: F | Declina<br>(°)<br>PLAN<br>+N/-S<br>(usft)                  | 625,289.00<br>0.00<br>ation<br>6.63<br>Tie<br>+E<br>(u:                         | usft Lor<br>usft Gr<br>Dip /<br>(*<br>• On Depth:<br>/-W<br>sft)                         | ngitude:<br>ound Level:<br>Angle<br>?)<br>59.89<br>Dire                            | (nT<br>0.00<br>ection<br>(°)                | -103.927837<br>3,036.00 us<br>rength<br>)           |
| Position Unce<br>Wellbore<br>Magnetics<br>Design<br>Audit Notes:<br>Version:  | +E/-W<br>ertainty<br>OH<br>Mo<br>PERM   | -2.4<br>0.0<br>del Name<br>IGRF2020                         | 40 usft Ea<br>10 usft W<br>Sample<br>Phas<br>epth From (T  | asting:<br>ellhead Elev<br>e Date<br>03/14/22<br>se: F | Declina<br>(°)<br>PLAN<br>+N/-S                            | 625,289.00<br>0.00<br>ation<br>6.63<br>Tie<br>+E<br>(u:                         | usft Lor<br>usft Gr<br>Dip /<br>(*<br>• On Depth:<br>/-W                                 | ngitude:<br>ound Level:<br>Angle<br>?)<br>59.89<br>Dire                            | (nT<br>0.00<br>ection                       | -103.927837<br>3,036.00 us<br>rength<br>)           |
| Position Unce<br>Wellbore<br>Magnetics<br>Design<br>Audit Notes:<br>Version:<br>Vertical Secti  | +E/-W<br>ertainty<br>OH<br>Mo<br>PERM   | -2.4<br>0.0<br>del Name<br>IGRF2020                         | 40 usft Ea<br>20 usft W<br>Sample<br>Phas<br>epth From (T<br>(usft)                              | asting:<br>ellhead Elev<br>e Date<br>03/14/22<br>se: F | Declina<br>(°)<br>PLAN<br>+N/-S<br>(usft)                  | 625,289.00<br>0.00<br>ation<br>6.63<br>Tie<br>+E<br>(u:                         | usft Lor<br>usft Gr<br>Dip /<br>(*<br>• On Depth:<br>/-W<br>sft)                         | ngitude:<br>ound Level:<br>Angle<br>?)<br>59.89<br>Dire                            | (nT<br>0.00<br>ection<br>(°)                | -103.927837<br>3,036.00 us<br>rength<br>)           |
| Position Unce<br>Wellbore<br>Magnetics<br>Design<br>Audit Notes:<br>/ersion:<br>/ertical Secti<br>Plan Sections<br>Measured             | +E/-W<br>ertainty<br>OH<br>Mo<br>PERM   | -2.4<br>0.0<br>del Name<br>IGRF2020                         | 40 usft Ea<br>20 usft W<br>Sample<br>Phas<br>epth From (T<br>(usft)                              | asting:<br>ellhead Elev<br>e Date<br>03/14/22<br>se: F | Declina<br>(°)<br>PLAN<br>+N/-S<br>(usft)                  | 625,289.00<br>0.00<br>ation<br>6.63<br>Tie<br>+E<br>(u:                         | usft Lor<br>usft Gr<br>Dip /<br>(*<br>• On Depth:<br>/-W<br>sft)                         | ngitude:<br>ound Level:<br>Angle<br>?)<br>59.89<br>Dire                            | (nT<br>0.00<br>ection<br>(°)                | -103.927837<br>3,036.00 us<br>rength<br>)           |
| Position Unce<br>Wellbore<br>Magnetics<br>Design<br>Audit Notes:<br>Version:<br>Vertical Sections<br>Plan Sections<br>Measured<br>Depth | +E/-W<br>ertainty<br>OH<br>Mo<br>PERM<br>ion:<br>s<br>Inclination<br>(°)<br>0.00<br>0.00<br>10.54 | -2.4<br>0.0<br>del Name<br>IGRF2020<br>IIT<br>Da<br>Azimuth | 40 usft Ea<br>20 usft W<br>Sample<br>Phas<br>epth From (T<br>(usft)<br>0.00<br>Vertical<br>Depth | e Date<br>03/14/22<br>ee: F<br>VD)<br>+N/-S            | Declina<br>(°)<br>PLAN<br>+N/-S<br>(usft)<br>0.00<br>+E/-W | 625,289.00<br>0.00<br>ation<br>6.63<br>Tie<br>+E<br>(u:<br>0.<br>Dogleg<br>Rate | usft Lor<br>usft Gro<br>Dip A<br>(*<br>e On Depth:<br>/-W<br>sft)<br>00<br>Build<br>Rate | ngitude:<br>ound Level:<br>Angle<br>o)<br>59.89<br>Dire<br>(<br>28<br>Turn<br>Rate | (nT<br>0.00<br>ection<br>(°)<br>9.08<br>TFO | -103.927837<br>3,036.00 us<br>rength<br>)<br>47,428 |



| Database:<br>Company:<br>Project: | EDM 5000.1.13 Single User Db<br>XTO Energy<br>Eddy County, NM (NAD-27) | Local Co-ordinate Reference:<br>TVD Reference:<br>MD Reference:  | Well 218H<br>RKB = 33' @ 3069.00usft (TBD)<br>RKB = 33' @ 3069.00usft (TBD) |
|-----------------------------------|--|--|---|
| Site:                             | NASH UNIT  | North Reference:   | Grid  |
| Well:                             | 218H   | Survey Calculation Method:   | Minimum Curvature   |
| Wellbore:                         | ОН   |  |   |
| Design:                           | PERMIT   | all the second |   |

#### **Planned Survey**

| Measured<br>Depth<br>(usft) | Inclination<br>(°) | Azimuth<br>(°)   | Vertical<br>Depth<br>(usft) | +N/-S<br>(usft)  | +E/-W<br>(usft)    | Vertical<br>Section<br>(usft) | Dogleg<br>Rate<br>(°/100usft) | Build<br>Rate<br>(°/100usft) | Turn<br>Rate<br>(°/100usft) |
|-----------------------------|--------------------|------------------|-----------------------------|------------------|--------------------|-------------------------------|-------------------------------|------------------------------|-----------------------------|
| 0.00                        | 0.00               | 0.00             | 0.00                        | 0.00             | 0.00               | 0.00                          | 0.00                          | 0.00                         | 0.00                        |
| 3.00<br>Dewey Lak           | 0.00               | 0.00             | 3.00                        | 0.00             | 0.00               | 0.00                          | 0.00                          | 0.00                         | 0.00                        |
| 100.00                      | 0.00               | 0.00             | 100.00                      | 0.00             | 0.00               | 0.00                          | 0.00                          | 0.00                         | 0.00                        |
| 138.00<br>Rustler           | 0.00               | 0.00             | 138.00                      | 0.00             | 0.00               | 0.00                          | 0.00                          | 0.00                         | 0.00                        |
| 200.00                      | 0.00               | 0.00             | 200.00                      | 0.00             | 0.00               | 0.00                          | 0.00                          | 0.00                         | 0.0                         |
| 257.00                      | 0.00               | 0.00             | 257.00                      | 0.00             | 0.00               | 0.00                          | 0.00                          | 0.00                         | 0.00                        |
| Salado                      |                    |                  |                             |                  |                    |                               |                               |                              |                             |
| 300.00<br>339.00            | 0.00<br>0.00       | 0.00<br>0.00     | 300.00<br>339.00            | 0.00<br>0.00     | 0.00<br>0.00       | 0.00<br>0.00                  | 0.00<br>0.00                  | 0.00<br>0.00                 | 0.00<br>0.00                |
| Est. Top of                 |                    | 0.00             | 339.00                      | 0.00             | 0.00               | 0.00                          | 0.00                          | 0.00                         | 0.00                        |
| 400.00                      | 0.00               | 0.00             | 400.00                      | 0.00             | 0.00               | 0.00                          | 0.00                          | 0.00                         | 0.00                        |
| 500.00                      | 0.00               | 0.00             | 500.00                      | 0.00             | 0.00               | 0.00                          | 0.00                          | 0.00                         | 0.00                        |
| 600.00                      | 0.00               | 0.00             | 600.00                      | 0.00             | 0.00               | 0.00                          | 0.00                          | 0.00                         | 0.00                        |
| 700.00                      | 0.00               | 0.00             | 700.00                      | 0.00             | 0.00               | 0.00                          | 0.00                          | 0.00                         | 0.00                        |
| 800.00<br>900.00            | 0.00<br>0.00       | 0.00<br>0.00     | 800.00<br>900.00            | 0.00<br>0.00     | 0.00<br>0.00       | 0.00<br>0.00                  | 0.00<br>0.00                  | 0.00<br>0.00                 | 0.00<br>0.00                |
| 1,000.00                    | 0.00               | 0.00             | 1,000.00                    | 0.00             | 0.00               | 0.00                          | 0.00                          | 0.00                         | 0.00                        |
| 1,100.00                    | 0.00               | 0.00             | 1,100.00                    | 0.00             | 0.00               | 0.00                          | 0.00                          | 0.00                         | 0.00                        |
| 1,200.00                    | 0.00               | 0.00             | 1,200.00                    | 0.00             | 0.00               | 0.00                          | 0.00                          | 0.00                         | 0.00                        |
| 1,300.00                    | 0.00               | 0.00             | 1,300.00                    | 0.00             | 0.00               | 0.00                          | 0.00                          | 0.00                         | 0.00                        |
| 1,400.00<br>1,500.00        | 0.00<br>0.00       | 0.00<br>0.00     | 1,400.00<br>1,500.00        | 0.00<br>0.00     | 0.00<br>0.00       | 0.00<br>0.00                  | 0.00<br>0.00                  | 0.00<br>0.00                 | 0.00<br>0.00                |
|                             |                    |                  |                             |                  |                    |                               |                               |                              |                             |
| 1,600.00<br>1,700.00        | 0.00<br>0.00       | 0.00<br>0.00     | 1,600.00<br>1,700.00        | 0.00<br>0.00     | 0.00<br>0.00       | 0.00<br>0.00                  | 0.00<br>0.00                  | 0.00<br>0.00                 | 0.00<br>0.00                |
| 1,800.00                    | 0.00               | 0.00             | 1,800.00                    | 0.00             | 0.00               | 0.00                          | 0.00                          | 0.00                         | 0.00                        |
| 1,900.00                    | 0.00               | 0.00             | 1,900.00                    | 0.00             | 0.00               | 0.00                          | 0.00                          | 0.00                         | 0.00                        |
| 2,000.00                    | 0.00               | 0.00             | 2,000.00                    | 0.00             | 0.00               | 0.00                          | 0.00                          | 0.00                         | 0.00                        |
| 2,100.00                    | 2.00               | 296.35           | 2,099.98                    | 0.77             | -1.56              | 1.73                          | 2.00                          | 2.00                         | 0.00                        |
| 2,200.00<br>2,300.00        | 4.00<br>6.00       | 296.35<br>296.35 | 2,199.84<br>2,299.45        | 3.10<br>6.96     | -6.25<br>-14.06    | 6.92<br>15.57                 | 2.00<br>2.00                  | 2.00<br>2.00                 | 0.00<br>0.00                |
| 2,300.00                    | 8.00               | 296.35           | 2,299.45                    | 12.37            | -14.00             | 27.66                         | 2.00                          | 2.00                         | 0.00                        |
| 2,500.00                    | 10.00              | 296.35           | 2,497.47                    | 19.31            | -39.00             | 43.17                         | 2.00                          | 2.00                         | 0.00                        |
| 2,527.24                    | 10.54              | 296.35           | 2,524.27                    | 21.47            | -43.36             | 47.99                         | 2.00                          | 2.00                         | 0.00                        |
| 2,600.00                    | 10.54              | 296.35           | 2,595.80                    | 27.38            | -55.29             | 61.20                         | 0.00                          | 0.00                         | 0.00                        |
| 2,700.00<br>2,800.00        | 10.54<br>10.54     | 296.35<br>296.35 | 2,694.11<br>2,792.42        | 35.50<br>43.62   | -71.69<br>-88.09   | 79.35<br>97.51                | 0.00<br>0.00                  | 0.00<br>0.00                 | 0.00<br>0.00                |
| 2,900.00                    | 10.54              | 296.35           | 2,890.73                    | 51.74            | -104.49            | 115.66                        | 0.00                          | 0.00                         | 0.00                        |
| 3,000.00                    | 10.54              | 296.35           | 2,989.04                    | 59.87            | -120.89            | 133.81                        | 0.00                          | 0.00                         | 0.00                        |
| 3,100.00                    | 10.54              | 296.35           | 3,087.36                    | 67.99            | -137.29            | 151.97                        | 0.00                          | 0.00                         | 0.00                        |
| 3,122.02                    | 10.54              | 296.35           | 3,109.00                    | 69.78            | -140.90            | 155.97                        | 0.00                          | 0.00                         | 0.00                        |
| Base of Sal<br>3,200.00     | lt<br>10.54        | 296.35           | 3,185.67                    | 76.11            | -153.69            | 170.12                        | 0.00                          | 0.00                         | 0.00                        |
| 3,288.83                    | 10.54              | 296.35           | 3,273.00                    | 83.32            | -168.25            | 186.25                        | 0.00                          | 0.00                         | 0.00                        |
|                             | Iountain Grou      |                  | _,                          |                  |                    |                               |                               |                              |                             |
| 3,300.00                    | 10.54              | 296.35           | 3.283.98                    | 84.23            | -170.09            | 188.28                        | 0.00                          | 0.00                         | 0.00                        |
| 3,315.28                    | 10.54              | 296.35           | 3,299.00                    | 85.47            | -172.59            | 191.05                        | 0.00                          | 0.00                         | 0.00                        |
| -                           | n Sandstone        |                  |                             |                  |                    |                               |                               |                              |                             |
| 3,400.00<br>3,500.00        | 10.54<br>10.54     | 296.35           | 3,382.29<br>3,480.60        | 92.35            | -186.49            | 206.43<br>224.58              | 0.00                          | 0.00                         | 0.00                        |
| 3,500.00                    | 10.54              | 296.35<br>296.35 | 3,480.60                    | 100.47<br>108.60 | -202.89<br>-219.29 | 224.58<br>242.74              | 0.00<br>0.00                  | 0.00<br>0.00                 | 0.00<br>0.00                |
| 3,700.00                    | 10.54              | 296.35           | 3,677.22                    | 116.72           | -235.68            | 260.89                        | 0.00                          | 0.00                         | 0.00                        |

03/14/22 5:09:26PM

COMPASS 5000.1 Build 74



| Database:<br>Company:<br>Project:<br>Site:<br>Well:<br>Well:<br>Wellbore: | EDM 5000.1.13 Single User Db<br>XTO Energy<br>Eddy County, NM (NAD-27)<br>NASH UNIT<br>218H<br>OH | Local Co-ordinate Reference:<br>TVD Reference:<br>MD Reference:<br>North Reference:<br>Survey Calculation Method: | Well 218H<br>RKB = 33' @ 3069.00usft (TBD)<br>RKB = 33' @ 3069.00usft (TBD)<br>Grid<br>Minimum Curvature |
|---|---|---|--|
| Design:   | PERMIT  |   |  |

#### **Planned Survey**

| Measured<br>Depth<br>(usft) | Inclination<br>(°)     | Azimuth<br>(°)   | Vertical<br>Depth<br>(usft) | +N/-S<br>(usft)  | +E/-W<br>(usft)    | Vertical<br>Section<br>(usft) | Dogleg<br>Rate<br>(°/100usft) | Build<br>Rate<br>(°/100usft) | Turn<br>Rate<br>(°/100usft) |
|-----------------------------|------------------------|------------------|-----------------------------|------------------|--------------------|-------------------------------|-------------------------------|------------------------------|-----------------------------|
| 3,800.00                    | 10.54                  | 296.35           | 3,775.53                    | 124.84           | -252.08            | 279.04                        | 0.00                          | 0.00                         | 0.00                        |
| 3,900.00                    | 10.54                  | 296.35           | 3,873.85                    | 132.96           | -268.48            | 297.20                        | 0.00                          | 0.00                         | 0.00                        |
| 4,000.00                    | 10.54                  | 296.35           | 3.972.16                    | 141.08           | -284.88            | 315.35                        | 0.00                          | 0.00                         | 0.00                        |
| 4,100.00                    | 10.54                  | 296.35           | 4,070.47                    | 149.20           | -301.28            | 333.50                        | 0.00                          | 0.00                         | 0.00                        |
| 4,200.00                    | 10.54                  | 296.35           | 4,168.78                    | 157.32           | -317.68            | 351.66                        | 0.00                          | 0.00                         | 0.00                        |
| 4,206.33                    | 10.54                  | 296.35           | 4,175.00                    | 157.84           | -318.72            | 352.81                        | 0.00                          | 0.00                         | 0.00                        |
| Cherry Ca                   | nyon Sandsto           |                  |                             |                  |                    |                               |                               |                              |                             |
| 4,300.00                    | 10.54                  | 296.35           | 4,267.09                    | 165.45           | -334.08            | 369.81                        | 0.00                          | 0.00                         | 0.00                        |
| 4,400.00                    | 10.54                  | 296.35           | 4,365.40                    | 173.57           | -350.48            | 387.97                        | 0.00                          | 0.00                         | 0.00                        |
| 4,500.00                    | 10.54                  | 296.35           | 4,463.71                    | 181.69           | -366.88            | 406.12                        | 0.00                          | 0.00                         | 0.00                        |
| 4,600.00                    | 10.54                  | 296.35           | 4,562.02                    | 189.81           | -383.28            | 424.27                        | 0.00                          | 0.00                         | 0.00                        |
| 4,700.00                    | 10.54                  | 296.35           | 4,660.33                    | 197.93           | -399.68            | 442.43                        | 0.00                          | 0.00                         | 0.00                        |
| 4,800.00                    | 10.54                  | 296.35           | 4,758.65                    | 206.05           | -416.08            | 460.58                        | 0.00                          | 0.00                         | 0.00                        |
| 4,900.00                    | 10.54                  | 296.35           | 4,856.96                    | 214.18           | -432.48            | 478.73                        | 0.00                          | 0.00                         | 0.00                        |
| 5,000.00                    | 10.54                  | 296.35           | 4,955.27                    | 222.30           | -448.88            | 496.89                        | 0.00                          | 0.00                         | 0.00                        |
| 5,100.00                    | 10.54                  | 296.35           | 5,053.58                    | 230.42           | -465.28            | 515.04                        | 0.00                          | 0.00                         | 0.00                        |
| 5,200.00                    | 10.54                  | 296.35           | 5,151.89                    | 238.54           | -481.68            | 533.19                        | 0.00                          | 0.00                         | 0.00                        |
| 5,300.00                    | 10.54                  | 296.35           | 5,250.20                    | 246.66           | -498.08            | 551.35                        | 0.00                          | 0.00                         | 0.00                        |
| 5,400.00                    | 10.54                  | 296.35           | 5,348.51                    | 254.78           | -514.48            | 569.50                        | 0.00                          | 0.00                         | 0.00                        |
| 5,500.00                    | 10.54                  | 296.35           | 5,446.82                    | 262.90           | -530.88            | 587.66                        | 0.00                          | 0.00                         | 0.00                        |
| 5,600.00                    | 10.54                  | 296.35           | 5,545.14                    | 271.03           | -547.28            | 605.81                        | 0.00                          | 0.00                         | 0.00                        |
| 5,700.00                    | 10.54                  | 296.35           | 5,643.45                    | 279.15           | -563.68            | 623.96                        | 0.00                          | 0.00                         | 0.00                        |
| 5,800.00                    | 10.54                  | 296.35           | 5,741.76                    | 287.27           | -580.08            | 642.12                        | 0.00                          | 0.00                         | 0.00                        |
| 5,804.32                    | 10.54                  | 296.35           | 5,746.00                    | 287.62           | -580.79            | 642.90                        | 0.00                          | 0.00                         | 0.00                        |
|                             | anyon Sandsto          |                  | 0,7 10.00                   | 201.02           | 000.70             | 012.00                        | 0.00                          | 0.00                         | 0.00                        |
| 5,900.00                    | 10.54                  | 296.35           | 5,840.07                    | 295.39           | -596.48            | 660.27                        | 0.00                          | 0.00                         | 0.00                        |
| 6,000.00                    | 10.54                  | 296.35           | 5,938.38                    | 303.51           | -612.88            | 678.42                        | 0.00                          | 0.00                         | 0.00                        |
| 6,100.00                    | 10.54                  | 296.35           | 6,036.69                    | 311.63           | -629.28            | 696.58                        | 0.00                          | 0.00                         | 0.00                        |
| 6,200.00                    | 10.54                  | 296.35           | 6,135.00                    | 319.76           | -645.68            | 714.73                        | 0.00                          | 0.00                         | 0.00                        |
| 6,300.00                    | 10.54                  | 296.35           | 6,233.31                    | 327.88           | -662.08            | 732.88                        | 0.00                          | 0.00                         | 0.00                        |
| 6,400.00                    | 10.54                  | 296.35           | 6,331.62                    | 336.00           | -678.48            | 751.04                        | 0.00                          | 0.00                         | 0.00                        |
| 6,500.00                    | 10.54                  | 296.35           | 6,429.94                    | 344.12           | -694.88            | 769.19                        | 0.00                          | 0.00                         | 0.00                        |
| 6,600.00                    | 10.54                  | 296.35           | 6,528.25                    | 352.24           | -711.28            | 787.35                        | 0.00                          | 0.00                         | 0.00                        |
| 6,700.00                    | 10.54                  | 296.35           | 6,626.56                    | 360.36           | -727.68            | 805.50                        | 0.00                          | 0.00                         | 0.00                        |
|                             |                        |                  |                             |                  |                    |                               |                               |                              |                             |
| 6,800.00                    | 10.54                  | 296.35           | 6,724.87                    | 368.48           | -744.08            | 823.65                        | 0.00                          | 0.00                         | 0.00                        |
| 6,885.58<br>Basal Brus      | 10.54<br>shy Canyon Sa | 296.35           | 6,809.00                    | 375.43           | -758.11            | 839.19                        | 0.00                          | 0.00                         | 0.00                        |
|                             |                        |                  | 0.000.40                    | 070.04           | 700.40             | 044.04                        | 0.00                          |                              |                             |
| 6,900.00                    | 10.54                  | 296.35           | 6,823.18                    | 376.61           | -760.48            | 841.81                        | 0.00                          | 0.00                         | 0.00                        |
| 7,000.00                    | 10.54                  | 296.35           | 6,921.49                    | 384.73           | -776.88            | 859.96                        | 0.00                          | 0.00                         | 0.00                        |
| 7,100.00                    | 10.54                  | 296.35           | 7,019.80                    | 392.85           | -793.28            | 878.11                        | 0.00                          | 0.00                         | 0.00                        |
| 7,109.36                    | 10.54                  | 296.35           | 7,029.00                    | 393.61           | -794.81            | 879.81                        | 0.00                          | 0.00                         | 0.00                        |
| Bone Sprin<br>7,200.00      | <b>ng</b><br>10.54     | 296.35           | 7,118.11                    | 400.97           | -809.68            | 896.27                        | 0.00                          | 0.00                         | 0.00                        |
|                             |                        |                  |                             |                  |                    |                               |                               |                              |                             |
| 7,300.00<br>7,400.00        | 10.54<br>10.54         | 296.35<br>296.35 | 7,216.43<br>7,314.74        | 409.09<br>417.21 | -826.08<br>-842.48 | 914.42                        | 0.00                          | 0.00                         | 0.00                        |
|                             |                        |                  |                             |                  |                    | 932.57                        | 0.00                          | 0.00                         | 0.00                        |
| 7,484.69<br>Avalon Sh       | 10.54<br>alo           | 296.35           | 7,398.00                    | 424.09           | -856.37            | 947.95                        | 0.00                          | 0.00                         | 0.00                        |
|                             |                        | 206 25           | 7 412 05                    | 405.04           | 050 00             | 050 72                        | 0.00                          | 0.00                         | 0.00                        |
| 7,500.00<br>7,600.00        | 10.54<br>10.54         | 296.35<br>296.35 | 7,413.05<br>7,511.36        | 425.34<br>433.46 | -858.88<br>-875.28 | 950.73<br>968.88              | 0.00<br>0.00                  | 0.00<br>0.00                 | 0.00<br>0.00                |
|                             |                        |                  |                             |                  |                    |                               |                               |                              |                             |
| 7,613.88<br>Avaion Lin      | 10.54                  | 296.35           | 7,525.00                    | 434.58           | -877.55            | 971.40                        | 0.00                          | 0.00                         | 0.00                        |
|                             |                        | 206 25           | 7 600 67                    | 444 50           | 004 67             | 097.04                        | 0.00                          | 0.00                         | 0.00                        |
| 7,700.00<br>7,800.00        | 10.54                  | 296.35           | 7,609.67                    | 441.58           | -891.67            | 987.04                        | 0.00                          | 0.00                         | 0.00                        |
| 7 800 00                    | 10.54                  | 296.35           | 7,707.98                    | 449.70           | -908.07            | 1,005.19                      | 0.00                          | 0.00                         | 0.00                        |

03/14/22 5:09:26PM

COMPASS 5000.1 Build 74

.



| Database: | EDM 5000.1.13 Single User Db | Local Co-ordinate Reference: | Well 218H                     |
|-----------|------------------------------|------------------------------|-------------------------------|
| Company:  | XTO Energy                   | TVD Reference:               | RKB = 33' @ 3069.00usft (TBD) |
| Project:  | Eddy County, NM (NAD-27)     | MD Reference:                | RKB = 33' @ 3069.00usft (TBD) |
| Site:     | NASH UNIT                    | North Reference:             | Grid                          |
| Well:     | 218H                         | Survey Calculation Method:   | Minimum Curvature             |
| Wellbore: | OH                           |                              |                               |
| Design:   | PERMIT                       |                              |                               |

#### Planned Survey

| Measured<br>Depth<br>(usft) | Inclination<br>(°) | Azimuth<br>(°)   | Vertical<br>Depth<br>(usft) | +N/-S<br>(usft)  | +E/-W<br>(usft)        | Vertical<br>Section<br>(usft) | Dogleg<br>Rate<br>(°/100usft) | Build<br>Rate<br>(°/100usft) | Turn<br>Rate<br>(°/100usft) |
|-----------------------------|--------------------|------------------|-----------------------------|------------------|------------------------|-------------------------------|-------------------------------|------------------------------|-----------------------------|
| 7,808.16                    | 10.54              | 296.35           | 7,716.00                    | 450.36           | -909.41                | 1,006.67                      | 0.00                          | 0.00                         | 0.00                        |
| Lower Ava                   |                    |                  |                             |                  |                        |                               |                               |                              |                             |
| 7,900.00                    | 10.54              | 296.35           | 7,806.29                    | 457.82           | -924.47                | 1,023.34                      | 0.00                          | 0.00                         | 0.00                        |
|                             | 10.54              | 296.35           | 7,904.60                    | 465.94           | -940.87                | 1,041.50                      | 0.00                          | 0.00                         | 0.00                        |
| 8,000.00<br>8,100.00        | 10.54              | 296.35           | 8,002.92                    | 474.06           | -957.27                | 1,059.65                      | 0.00                          | 0.00                         | 0.00                        |
| 8,151.96                    | 10.54              | 296.35           | 8,054.00                    | 478.28           | -965.80                | 1,069.08                      | 0.00                          | 0.00                         | 0.00                        |
|                             | Spring Sandst      |                  | 0,004.00                    | 110.20           | 000100                 | .,                            |                               |                              |                             |
| 8,200.00                    | 10.54              | 296.35           | 8,101.23                    | 482.19           | -973.67                | 1.077.80                      | 0.00                          | 0.00                         | 0.00                        |
| 8,200.00                    | 10.54              | 296.35           | 8,199.54                    | 490.31           | -990.07                | 1,095.96                      | 0.00                          | 0.00                         | 0.00                        |
|                             |                    |                  |                             |                  |                        |                               | 0.00                          | 0.00                         | 0.00                        |
| 8,400.00                    | 10.54              | 296.35           | 8,297.85                    | 498.43           | -1,006.47<br>-1.017.01 | 1,114.11<br>1,125.77          | 0.00                          | 0.00                         | 0.00                        |
| 8,464.24                    | 10.54              | 296.35           | 8,361.00                    | 503.65           | -1,017.01              | 1,125.77                      | 0.00                          | 0.00                         | 0.00                        |
|                             | Spring Limest      |                  | 0 206 46                    | 506.55           | -1,022.87              | 1,132.26                      | 0.00                          | 0.00                         | 0.00                        |
| 8,500.00                    | 10.54              | 296.35           | 8,396.16<br>8,494.47        | 506.55<br>514.67 | -1,022.87              | 1,132.20                      | 0.00                          | 0.00                         | 0.00                        |
| 8,600.00                    | 10.54              | 296.35<br>296.35 | 8,494.47<br>8,592.78        | 522.79           | -1,055.67              | 1,168.57                      | 0.00                          | 0.00                         | 0.00                        |
| 8,700.00                    | 10.54              |                  |                             |                  |                        |                               |                               |                              |                             |
| 8,754.46                    | 10.54              | 296.35           | 8,646.32                    | 527.22           | -1,064.60              | 1,178.46                      | 0.00                          | 0.00<br>9.94                 | 0.00<br>-4.92               |
| 8,800.00                    | 15.07              | 294.11           | 8,690.72                    | 531.49           | -1,073.75              | 1,188.50                      | 10.00<br>10.00                | 9.94<br>9.97                 | -4.92<br>-2.62              |
| 8,850.00                    | 20.06              | 292.79           | 8,738.37                    | 537.47           | -1,087.59              | 1,203.54<br>1,222.68          | 10.00                         | 9.97                         | -2.02                       |
| 8,900.00                    | 25.05              | 291.99           | 8,784.53<br>8,828.85        | 544.76<br>553.30 | -1,105.32<br>-1,126.80 | 1,222.08                      | 10.00                         | 9.99                         | -1.10                       |
| 8,950.00                    | 30.04              | 291.43           |                             |                  |                        |                               |                               |                              |                             |
| 8,974.75                    | 32.51              | 291.22           | 8,850.00                    | 557.97           | -1,138.77              | 1,258.60                      | 10.00                         | 9.99                         | -0.87                       |
| 2nd Bone                    | Spring Sands       |                  |                             |                  |                        |                               |                               |                              | 0.70                        |
| 9,000.00                    | 35.04              | 291.03           | 8,870.99                    | 563.03           | -1,151.87              | 1,272.63                      | 10.00                         | 9.99                         | -0.76                       |
| 9,042.69                    | 39.30              | 290.75           | 8,905.00                    | 572.22           | -1,175.96              | 1,298.41                      | 10.00                         | 9.99                         | -0.64                       |
| TD                          | 40.02              | 290.71           | 8,910.63                    | 573.87           | -1,180.32              | 1,303.07                      | 10.00                         | 9.99                         | -0.58                       |
| 9,050.00<br>9,057.05        | 40.03<br>40.74     | 290.71           | 8,916.00                    | 575.49           | -1,184.60              | 1,307.64                      | 10.00                         | 9.99                         | -0.56                       |
|                             | Spring Sands       |                  | 0,510.00                    | 070.40           | 1,101.00               | .,                            |                               |                              |                             |
| 2nu Bone                    | Spring Sanus       |                  |                             |                  |                        |                               | 10.00                         |                              | 0.54                        |
| 9,100.00                    | 45.03              | 290.45           | 8,947.46                    | 585.75           | -1,211.95              | 1,336.85                      | 10.00                         | 9.99<br>9.99                 | -0.51<br>-0.44              |
| 9,132.85                    | 48.31              | 290.31           | 8,970.00                    | 594.07           | -1,234.35              | 1,360.73                      | 10.00                         | 9.99                         | -0.44                       |
|                             | Spring Limest      |                  |                             |                  | 4 0 40 50              | 4 070 74                      | 10.00                         | 10.00                        | -0.41                       |
| 9,150.00                    | 50.03              | 290.24           | 8,981.21                    | 598.56           | -1,246.52              | 1,373.71                      | 10.00<br>10.00                | 10.00<br>10.00               | -0.41                       |
| 9,200.00                    | 55.02              | 290.05           | 9,011.62                    | 612.22           | -1,283.77              | 1,413.37<br>1,455.53          | 10.00                         | 10.00                        | -0.33                       |
| 9,250.00                    | 60.02              | 289.89           | 9,038.46                    | 626.62           | -1,323.40              |                               |                               |                              |                             |
| 9,253.10                    | 60.33              | 289.88           | 9,040.00                    | 627.54           | -1,325.93              | 1,458.22                      | 10.00                         | 10.00                        | -0.31                       |
|                             | Spring Sands       | tone B           |                             |                  |                        |                               |                               |                              |                             |
| 9,300.00                    | 65.02              | 289.74           | 9,061.52                    | 641.65           | -1,365.12              | 1,499.87                      | 10.00                         | 10.00                        | -0.30                       |
| 9,350.00                    | 70.02              | 289.60           | 9,080.64                    | 657.20           | -1,408.61              | 1,546.06                      | 10.00                         | 10.00<br>10.00               | -0.27<br>-0.26              |
| 9,400.00                    | 75.02              | 289.47           | 9,095.65                    | 673.14           | -1,453.54<br>-1,499.57 | 1,593.73                      | 10.00<br>10.00                | 10.00                        | -0.26                       |
| 9,450.00                    | 80.02              | 289.35           | 9,106.45                    | 689.36           | ,                      | 1,642.53                      |                               |                              |                             |
| 9,500.00                    | 85.02              | 289.23           | 9,112.96                    | 705.73           | -1,546.35              | 1,692.09                      | 10.00                         | 10.00                        | -0.24                       |
| 9,537.57                    | 88.77              | 289.14           | 9,115.00                    | 718.05           | -1,581.77              | 1,729.60                      | 10.00                         | 10.00                        | -0.24                       |
| LP                          |                    |                  |                             |                  |                        |                               |                               |                              |                             |
| 9,550.00                    | 90.01              | 289.11           | 9,115.13                    | 722.12           | -1,593.52              | 1,742.03                      | 10.00                         | 10.00                        | -0.23                       |
| 9,562.15                    | 91.23              | 289.08           | 9,115.00                    | 726.10           | -1,605.00              | 1,754.18                      | 10.00                         | 10.00                        | -0.23                       |
| 9,600.00                    | 91.23              | 289.08           | 9,114.19                    | 738.47           | -1,640.76              | 1,792.02                      | 0.00                          | 0.00                         | 0.00                        |
| 9,700.00                    | 91.23              | 289.08           | 9,112.04                    | 771.16           | -1,735.24              | 1,892.00                      | 0.00                          | 0.00                         | 0.00                        |
| 9,800.00                    | 91.23              | 289.08           | 9,109.90                    | 803.84           | -1,829.72              | 1,991.97                      | 0.00                          | 0.00                         | 0.00                        |
| 9,900.00                    | 91.23              | 289.08           | 9,107.75                    | 836.53           | -1,924.21              | 2,091.95                      | 0.00                          | 0.00                         | 0.00                        |
| 10,000.00                   | 91.23              | 289.08           | 9,105.61                    | 869.22           | -2,018.69              | 2,191.93                      | 0.00                          | 0.00                         | 0.00<br>0.00                |
| 10,100.00                   | 91.23              | 289.08           | 9,103.47                    | 901.90           | -2,113.17              | 2,291.90                      | 0.00                          | 0.00                         |                             |
| 10,200.00                   | 91.23              | 289.08           | 9,101.32                    | 934.59           | -2,207.66              | 2,391.88                      | 0.00                          | 0.00                         | 0.00                        |
| 10,300.00                   | 91.23              | 289.08           | 9,099.18                    | 967.28           | -2,302.14              | 2,491.86                      | 0.00                          | 0.00                         | 0.00                        |

03/14/22 5:09:26PM



| Database:<br>Company: | EDM 5000.1.13 Single User Db<br>XTO Energy | Local Co-ordinate Reference:<br>TVD Reference: | Well 218H<br>RKB = 33' @ 3069.00usft (TBD)   |
|-----------------------|--|--|--|
| Project:              | Eddy County, NM (NAD-27)                   | MD Reference:                                  | RKB = 33' @ 3069.00usft (TBD)  |
| Site:                 | NASH UNIT                                  | North Reference:                               | Grid   |
| Well:                 | 218H                                       | Survey Calculation Method:                     | Minimum Curvature  |
| Wellbore:             | OH   |  | and the second sec |
| Design:               | PERMIT                                     |  |  |

#### **Planned Survey**

| Measured<br>Depth<br>(usft) | Inclination<br>(°) | Azimuth<br>(°) | Vertical<br>Depth<br>(usft) | +N/-S<br>(usft) | +E/-W<br>(usft) | Vertical<br>Section<br>(usft) | Dogleg<br>Rate<br>(°/100usft) | Build<br>Rate<br>(°/100usft) | Turn<br>Rate<br>(°/100usft) |
|-----------------------------|--------------------|----------------|-----------------------------|-----------------|-----------------|-------------------------------|-------------------------------|------------------------------|-----------------------------|
| 10,400.00                   | 91.23              | 289.08         | 9,097.03                    | 999.96          | -2,396.62       | 2,591.83                      | 0.00                          | 0.00                         | 0.00                        |
| 10,500.00                   | 91.23              | 289.08         | 9,094.89                    | 1,032.65        | -2,491.10       | 2,691.81                      | 0.00                          | 0.00                         | 0.00                        |
| 10,600.00                   | 91.23              | 289.08         | 9,092.74                    | 1,065.34        | -2,585.59       | 2,791.79                      | 0.00                          | 0.00                         | 0.00                        |
| 10,700.00                   | 91.23              | 289.08         | 9,090.60                    | 1,098.02        | -2,680.07       | 2.891.77                      | 0.00                          | 0.00                         | 0.00                        |
| 10,800.00                   | 91.23              | 289.08         | 9,088.45                    | 1,130.71        | -2,774.55       | 2,991.74                      | 0.00                          | 0.00                         | 0.00                        |
| 10,900.00                   | 91.23              | 289.08         | 9,086.31                    | 1,163.40        | -2,869.03       | 3,091.72                      | 0.00                          | 0.00                         | 0.00                        |
| 11,000.00                   | 91.23              | 289.08         | 9,084.16                    | 1,196.08        | -2,963.52       | 3,191.70                      | 0.00                          | 0.00                         | 0.00                        |
| 11,100.00                   | 91.23              | 289.08         | 9,082.02                    | 1,228.77        | -3,058.00       | 3,291.67                      | 0.00                          | 0.00                         | 0.00                        |
| 11,200.00                   | 91.23              | 289.08         | 9,079.87                    | 1,261.46        | -3,152.48       | 3,391.65                      | 0.00                          | 0.00                         | 0.00                        |
| 11,300.00                   | 91.23              | 289.08         | 9,077.73                    | 1,294.15        | -3,246.97       | 3,491.63                      | 0.00                          | 0.00                         | 0.00                        |
| 11,400.00                   | 91.23              | 289.08         | 9,075.59                    | 1,326.83        | -3,341.45       | 3,591.60                      | 0.00                          | 0.00                         | 0.00                        |
| 11,500.00                   | 91.23              | 289.08         | 9,073.44                    | 1,359.52        | -3,435.93       | 3,691.58                      | 0.00                          | 0.00                         | 0.00                        |
| 11,600.00                   | 91.23              | 289.08         | 9,071.30                    | 1,392.21        | -3,530.41       | 3,791.56                      | 0.00                          | 0.00                         | 0.00                        |
| 11,700.00                   | 91.23              | 289.08         | 9,069.15                    | 1,424.89        | -3,624.90       | 3,891.54                      | 0.00                          | 0.00                         | 0.00                        |
| 11,800.00                   | 91.23              | 289.08         | 9,067.01                    | 1,457.58        | -3,719.38       | 3,991.51                      | 0.00                          | 0.00                         | 0.00                        |
| 11,900.00                   | 91.23              | 289.08         | 9,064.86                    | 1,490.27        | -3,813.86       | 4,091.49                      | 0.00                          | 0.00                         | 0.00                        |
| 12,000.00                   | 91.23              | 289.08         | 9,062.72                    | 1,522.95        | -3,908.34       | 4,191.47                      | 0.00                          | 0.00                         | 0.00                        |
| 12,100.00                   | 91.23              | 289.08         | 9,060.57                    | 1,555.64        | -4,002.83       | 4,291.44                      | 0.00                          | 0.00                         | 0.00                        |
| 12,200.00                   | 91.23              | 289.08         | 9,058.43                    | 1,588.33        | -4,097.31       | 4,391.42                      | 0.00                          | 0.00                         | 0.00                        |
| 12,300.00                   | 91.23              | 289.08         | 9,056.28                    | 1,621.01        | -4,191.79       | 4,491.40                      | 0.00                          | 0.00                         | 0.00                        |
| 12,400.00                   | 91.23              | 289.08         | 9,054.14                    | 1,653.70        | -4,286.28       | 4,591.37                      | 0.00                          | 0.00                         | 0.00                        |
| 12,500.00                   | 91.23              | 289.08         | 9,052.00                    | 1,686.39        | -4,380.76       | 4,691.35                      | 0.00                          | 0.00                         | 0.00                        |
| 12,600.00                   | 91.23              | 289.08         | 9,049.85                    | 1,719.07        | -4,475.24       | 4,791.33                      | 0.00                          | 0.00                         | 0.00                        |
| 12,700.00                   | 91.23              | 289.08         | 9,047.71                    | 1,751.76        | -4,569.72       | 4,891.31                      | 0.00                          | 0.00                         | 0.00                        |
| 12,800.00                   | 91.23              | 289.08         | 9,045.56                    | 1,784.45        | -4,664.21       | 4,991.28                      | 0.00                          | 0.00                         | 0.00                        |
| 12,900.00                   | 91.23              | 289.08         | 9,043.42                    | 1,817.13        | -4,758.69       | 5,091.26                      | 0.00                          | 0.00                         | 0.00                        |
| 13,000.00                   | 91.23              | 289.08         | 9,041.27                    | 1,849.82        | -4,853.17       | 5,191.24                      | 0.00                          | 0.00                         | 0.00                        |
| 13,100.00                   | 91.23              | 289.08         | 9,039.13                    | 1,882.51        | -4,947.65       | 5,291.21                      | 0.00                          | 0.00                         | 0.00                        |
| 13,200.00                   | 91.23              | 289.08         | 9,036.98                    | 1,915.19        | -5,042.14       | 5,391.19                      | 0.00                          | 0.00                         | 0.00                        |
| 13,300.00                   | 91.23              | 289.08         | 9,034.84                    | 1,947.88        | -5,136.62       | 5,491.17                      | 0.00                          | 0.00                         | 0.00                        |
| 13,400.00                   | 91.23              | 289.08         | 9,032.69                    | 1,980.57        | -5,231.10       | 5,591. <b>14</b>              | 0.00                          | 0.00                         | 0.00                        |
| 13,500.00                   | 91.23              | 289.08         | 9,030.55                    | 2,013.25        | -5,325.58       | 5,691.12                      | 0.00                          | 0.00                         | 0.00                        |
| 13,600.00                   | 91.23              | 289.08         | 9,028.40                    | 2,045.94        | -5,420.07       | 5,791.10                      | 0.00                          | 0.00                         | 0.00                        |
| 13,700.00                   | 91.23              | 289.08         | 9,026.26                    | 2,078.63        | -5,514.55       | 5,891.08                      | 0.00                          | 0.00                         | 0.00                        |
| 13,800.00                   | 91.23              | 289.08         | 9,024.12                    | 2,111.31        | -5,609.03       | 5,991.05                      | 0.00                          | 0.00                         | 0.00                        |
| 13,900.00                   | 91.23              | 289.08         | 9,021.97                    | 2,144.00        | -5,703.52       | 6,091.03                      | 0.00                          | 0.00                         | 0.00                        |
| 14,000.00                   | 91.23              | 289.08         | 9,019.83                    | 2,176.69        | -5,798.00       | 6,191.01                      | 0.00                          | 0.00                         | 0.00                        |
| 14,100.00                   | 91.23              | 289.08         | 9,017.68                    | 2,209.37        | -5,892.48       | 6,290.98                      | 0.00                          | 0.00                         | 0.00                        |
| 14,200.00                   | 91.23              | 289.08         | 9,015.54                    | 2,242.06        | -5,986.96       | 6,390.96                      | 0.00                          | 0.00                         | 0.00                        |
| 14,300.00                   | 91.23              | 289.08         | 9,013.39                    | 2,274.75        | -6,081.45       | 6,490.94                      | 0.00                          | 0.00                         | 0.00                        |
| 14,400.00                   | 91.23              | 289.08         | 9,011.25                    | 2,307.43        | -6,175.93       | 6,590.91                      | 0.00                          | 0.00                         | 0.00                        |
| 14,500.00                   | 91.23              | 289.08         | 9,009.10                    | 2,340.12        | -6,270.41       | 6,690.89                      | 0.00                          | 0.00                         | 0.00                        |
| 14,600.00                   | 91.23              | 289.08         | 9,006.96                    | 2,372.81        | -6,364.89       | 6,790.87                      | 0.00                          | 0.00                         | 0.00                        |
| 14,700.00                   | 91.23              | 289.08         | 9,004.81                    | 2,405.49        | -6,459.38       | 6,890.85                      | 0.00                          | 0.00                         | 0.00                        |
| 14,800.00                   | 91.23              | 289.08         | 9,002.67                    | 2,438.18        | -6,553.86       | 6,990.82                      | 0.00                          | 0.00                         | 0.00                        |
| 14,900.00                   | 91.23              | 289.08         | 9,000.52                    | 2,470.87        | -6,648.34       | 7,090.80                      | 0.00                          | 0.00                         | 0.00                        |
| 15,000.00                   | 91.23              | 289.08         | 8,998.38                    | 2,503.55        | -6,742.83       | 7,190.78                      | 0.00                          | 0.00                         | 0.00                        |
| 15,100.00                   | 91.23              | 289.08         | 8,996.24                    | 2,536.24        | -6,837.31       | 7,290.75                      | 0.00                          | 0.00                         | 0.00                        |
| 15,200.00                   | 91.23              | 289.08         | 8,994.09                    | 2,568.93        | -6,931.79       | 7,390.73                      | 0.00                          | 0.00<br>0.00                 | 0.00<br>0.00                |
| 15,300.00                   | 91.23              | 289.08         | 8,991.95                    | 2,601.61        | -7,026.27       | 7,490.71                      | 0.00                          | 0.00                         | 0.00                        |
| 15,400.00                   | 91.23              | 289.08         | 8,989.80                    | 2,634.30        | -7,120.76       | 7,590.68                      | 0.00                          |                              |                             |
| 15,500.00                   | 91.23              | 289.08         | 8,987.66                    | 2,666.99        | -7,215.24       | 7,690.66                      | 0.00                          | 0.00                         | 0.00                        |
| 15,600.00                   | 91.23              | 289.08         | 8,985.51                    | 2,699.67        | -7,309.72       | 7,790.64                      | 0.00                          | 0.00                         | 0.00                        |
| 15,700.00                   | 91.23              | 289.08         | 8,983.37                    | 2,732.36        | -7,404.20       | 7,890.62                      | 0.00                          | 0.00                         | 0.00                        |

03/14/22 5:09:26PM



| Database:            | EDM 5000.1.13 Single User Db | Local Co-ordinate Reference: | Well 218H                     |
|----------------------|------------------------------|------------------------------|-------------------------------|
| Company:             | XTO Energy                   | TVD Reference:               | RKB = 33' @ 3069.00usft (TBD) |
| Project:             | Eddy County, NM (NAD-27)     | MD Reference:                | RKB = 33' @ 3069.00usft (TBD) |
| Site:                | NASH UNIT                    | North Reference:             | Grid                          |
| Well:                | 218H                         | Survey Calculation Method:   | Minimum Curvature             |
| Wellbore:<br>Design: | OH<br>PERMIT                 |                              |                               |

#### Planned Survey

| Measured<br>Depth<br>(usft)                                   | Inclination<br>(°)                                 | Azimuth<br>(°)   | Vertical<br>Depth<br>(usft)                              | +N/-S<br>(usft)  | +E/-W<br>(usft)  | Vertical<br>Section<br>(usft)                                 | Dogleg<br>Rate<br>(°/100usft)        | Build<br>Rate<br>(°/100usft)         | Turn<br>Rate<br>(°/100usft)                  |
|---|--|--|--|--|--|---|--------------------------------------|--------------------------------------|--|
| 15,800.00<br>15,900.00<br>16,000.00<br>16,100.00              | 91.23<br>91.23<br>91.23<br>91.23                   | 289.08<br>289.08<br>289.08<br>289.08                     | 8,981.22<br>8,979.08<br>8,976.93<br>8,974.79             | 2,765.05<br>2,797.73<br>2,830.42<br>2,863.11             | -7,498.69<br>-7,593.17<br>-7,687.65<br>-7,782.14                   | 7,990.59<br>8,090.57<br>8,190.55<br>8,290.52                  | 0.00<br>0.00<br>0.00<br>0.00         | 0.00<br>0.00<br>0.00<br>0.00         | 0.00<br>0.00<br>0.00<br>0.00                 |
| 16,200.00<br>16,300.00<br>16,400.00<br>16,500.00<br>16,600.00 | 91.23<br>91.23<br>91.23<br>91.23<br>91.23<br>91.23 | 289.08<br>289.08<br>289.08<br>289.08<br>289.08<br>289.08 | 8,972.65<br>8,970.50<br>8,968.36<br>8,966.21<br>8,964.07 | 2,895.79<br>2,928.48<br>2,961.17<br>2,993.85<br>3,026.54 | -7,876.62<br>-7,971.10<br>-8,065.58<br>-8,160.07<br>-8,254.55      | 8,390.50<br>8,490.48<br>8,590.45<br>8,690.43<br>8,790.41      | 0.00<br>0.00<br>0.00<br>0.00<br>0.00 | 0.00<br>0.00<br>0.00<br>0.00<br>0.00 | 0.00<br>0.00<br>0.00<br>0.00<br>0.00<br>0.00 |
| 16,700.00<br>16,800.00<br>16,900.00<br>17,000.00<br>17,100.00 | 91.23<br>91.23<br>91.23<br>91.23<br>91.23<br>91.23 | 289.08<br>289.08<br>289.08<br>289.08<br>289.08<br>289.08 | 8,961.92<br>8,959.78<br>8,957.63<br>8,955.49<br>8,953.34 | 3,059.23<br>3,091.91<br>3,124.60<br>3,157.29<br>3,189.97 | -8,349.03<br>-8,443.51<br>-8,538.00<br>-8,632.48<br>-8,726.96      | 8,890.39<br>8,990.36<br>9,090.34<br>9,190.32<br>9,290.29      | 0.00<br>0.00<br>0.00<br>0.00<br>0.00 | 0.00<br>0.00<br>0.00<br>0.00<br>0.00 | 0.00<br>0.00<br>0.00<br>0.00<br>0.00<br>0.00 |
| 17,200.00<br>17,300.00<br>17,400.00<br>17,500.00<br>17,600.00 | 91.23<br>91.23<br>91.23<br>91.23<br>91.23<br>91.23 | 289.08<br>289.08<br>289.08<br>289.08<br>289.08<br>289.08 | 8,951.20<br>8,949.05<br>8,946.91<br>8,944.77<br>8,942.62 | 3,222.66<br>3,255.35<br>3,288.03<br>3,320.72<br>3,353.41 | -8,821.44<br>-8,915.93<br>-9,010.41<br>-9,104.89<br>-9,199.38      | 9,390.27<br>9,490.25<br>9,590.22<br>9,690.20<br>9,790.18      | 0.00<br>0.00<br>0.00<br>0.00<br>0.00 | 0.00<br>0.00<br>0.00<br>0.00<br>0.00 | 0.00<br>0.00<br>0.00<br>0.00<br>0.00<br>0.00 |
| 17,700.00<br>17,800.00<br>17,900.00<br>18,000.00<br>18,100.00 | 91.23<br>91.23<br>91.23<br>91.23<br>91.23<br>91.23 | 289.08<br>289.08<br>289.08<br>289.08<br>289.08<br>289.08 | 8,940.48<br>8,938.33<br>8,936.19<br>8,934.04<br>8,931.90 | 3,386.09<br>3,418.78<br>3,451.47<br>3,484.15<br>3,516.84 | -9,293.86<br>-9,388.34<br>-9,482.82<br>-9,577.31<br>-9,671.79      | 9,890.16<br>9,990.13<br>10,090.11<br>10,190.09<br>10,290.06   | 0.00<br>0.00<br>0.00<br>0.00<br>0.00 | 0.00<br>0.00<br>0.00<br>0.00<br>0.00 | 0.00<br>0.00<br>0.00<br>0.00<br>0.00<br>0.00 |
| 18,200.00<br>18,300.00<br>18,400.00<br>18,500.00<br>18,600.00 | 91.23<br>91.23<br>91.23<br>91.23<br>91.23<br>91.23 | 289.08<br>289.08<br>289.08<br>289.08<br>289.08<br>289.08 | 8,929.75<br>8,927.61<br>8,925.46<br>8,923.32<br>8,921.17 | 3,549.53<br>3,582.21<br>3,614.90<br>3,647.59<br>3,680.27 | -9,766.27<br>-9,860.75<br>-9,955.24<br>-10,049.72<br>-10,144.20    | 10,390.04<br>10,490.02<br>10,589.99<br>10,689.97<br>10,789.95 | 0.00<br>0.00<br>0.00<br>0.00<br>0.00 | 0.00<br>0.00<br>0.00<br>0.00<br>0.00 | 0.00<br>0.00<br>0.00<br>0.00<br>0.00<br>0.00 |
| 18,700.00<br>18,800.00<br>18,900.00<br>19,000.00<br>19,100.00 | 91.23<br>91.23<br>91.23<br>91.23<br>91.23<br>91.23 | 289.08<br>289.08<br>289.08<br>289.08<br>289.08<br>289.08 | 8,919.03<br>8,916.89<br>8,914.74<br>8,912.60<br>8,910.45 | 3,712.96<br>3,745.65<br>3,778.33<br>3,811.02<br>3,843.71 | -10,238.69<br>-10,333.17<br>-10,427.65<br>-10,522.13<br>-10,616.62 | 10,889.93<br>10,989.90<br>11,089.88<br>11,189.86<br>11,289.83 | 0.00<br>0.00<br>0.00<br>0.00<br>0.00 | 0.00<br>0.00<br>0.00<br>0.00<br>0.00 | 0.00<br>0.00<br>0.00<br>0.00<br>0.00<br>0.00 |
| 19,200.00<br>19,216.39<br>19,300.00<br>19,354.21              | 91.23<br>91.23<br>91.23<br>91.23                   | 289.08<br>289.08<br>289.08<br>289.08                     | 8,908.31<br>8,907.96<br>8,906.16<br>8,905.00             | 3,876.39<br>3,881.75<br>3,909.08<br>3,926.80             | -10,711.10<br>-10,726.58<br>-10,805.58<br>-10,856.80               | 11,389.81<br>11,406.20<br>11,489.79<br>11,543.98              | 0.00<br>0.00<br>0.00<br>0.00         | 0.00<br>0.00<br>0.00<br>0.00         | 0.00<br>0.00<br>0.00<br>0.00                 |

.



Planning Report

| Database:            | EDM 5000.1.13 Single User Db | Local Co-ordinate Reference: | Well 218H                     |
|----------------------|------------------------------|------------------------------|-------------------------------|
| Company:             | XTO Energy                   | TVD Reference:               | RKB = 33' @ 3069.00usft (TBD) |
| Project:             | Eddy County, NM (NAD-27)     | MD Reference:                | RKB = 33' @ 3069.00usft (TBD) |
| Site:                | NASH UNIT                    | North Reference:             | Grid                          |
| Well:                | 218H                         | Survey Calculation Method:   | Minimum Curvature             |
| Wellbore:<br>Design: | OH<br>PERMIT                 | Survey calculation method.   |                               |

## Design Targets

| Target Name<br>- hit/miss target<br>- Shape            | Dip Angle<br>(°)     | Dip Dir.<br>(°) | TVD<br>(usft)         | +N/-S<br>(usft) | +E/-W<br>(usft)            | Northing<br>(usft)              | Easting<br>(usft)   | Latitude   | Longitude    |
|--|----------------------|-----------------|-----------------------|-----------------|----------------------------|---------------------------------|---------------------|------------|--------------|
| NASH 218H SHL: 136<br>- plan hits target co<br>- Point | 0.00<br>enter        | 0.00            | 0.00                  | 0.00            | 0.00                       | 473,590.00                      | 625,289.00          | 32.3013641 | -103.9278379 |
| NASH 218H BHL: 17'<br>- plan hits target ce<br>- Point | 0.00<br>enter        | 0.00            | 8,905.00              | 3,926.80        | -10,856.80                 | 477,516.80                      | 614,432.20          | 32.3122665 | -103.9629312 |
| NASH 218H LTP<br>- plan misses targe<br>- Point        | 0.00<br>et center by |                 | 8,907.96<br>19216.39u | -,              | -10,726.60<br>7.96 TVD, 38 | 477,471.70<br>81.75 N, -10726.8 | 614,562.40<br>58 E) | 32.3121413 | -103.9625103 |
| NASH 218H FTP/LP<br>- plan hits target ce<br>- Point   | 0.00<br>enter        | 0.00            | 9,115.00              | 726.10          | -1,605.00                  | 474,316.10                      | 623,684.00          | 32.3033767 | -103.9330236 |

#### Formations

| Measured<br>Depth<br>(usft) | Vertical<br>Depth<br>(usft) | Name                          | Lithology | Dip<br>(°) | Dip<br>Direction<br>(°) |
|-----------------------------|-----------------------------|-------------------------------|-----------|------------|-------------------------|
| 3.00                        | 3.00                        | Dewey Lake                    |           |            |                         |
| 138.00                      | 138.00                      | Rustler                       |           |            |                         |
| 257.00                      | 257.00                      | Salado                        |           |            |                         |
| 339.00                      | 339.00                      | Est. Top of Salt              |           |            |                         |
| 3,122.02                    | 3,109.00                    | Base of Salt                  |           |            |                         |
| 3,288.83                    | 3,273.00                    | Delaware Mountain Group       |           |            |                         |
| 3,315.28                    | 3,299.00                    | Bell Canyon Sandstone         |           |            |                         |
| 4,206.33                    | 4,175.00                    | Cherry Canyon Sandstone       |           |            |                         |
| 5,804.32                    | 5,746.00                    | Brushy Canyon Sandstone       |           |            |                         |
| 6,885.58                    | 6,809.00                    | Basal Brushy Canyon Sandstone |           |            |                         |
| 7,109.36                    | 7,029.00                    | Bone Spring                   |           |            |                         |
| 7,484.69                    | 7,398.00                    | Avalon Shale                  |           |            |                         |
| 7,613.88                    | 7,525.00                    | Avalon Limestone              |           |            |                         |
| 7,808.16                    | 7,716.00                    | Lower Avalon Shale            |           |            |                         |
| 8,151.96                    | 8,054.00                    | 1st Bone Spring Sandstone     |           |            |                         |
| 8,464.24                    | 8,361.00                    | 2nd Bone Spring Limestone     |           |            |                         |
| 8,974.75                    | 8,850.00                    | 2nd Bone Spring Sandstone     |           |            |                         |
| 9,042.69                    | 8,905.00                    | TD                            |           |            |                         |
| 9,057.05                    | 8,916.00                    | 2nd Bone Spring Sandstone A   |           |            |                         |
| 9,132.85                    | 8,970.00                    | 2nd Bone Spring Limestone A/B |           |            |                         |
| 9,253.10                    | 9,040.00                    | 2nd Bone Spring Sandstone B   |           |            |                         |
| 9,537.57                    | 9,115.00                    | LP                            |           |            |                         |

.

# **PECOS DISTRICT** DRILLING CONDITIONS OF APPROVAL

| <b>OPERATOR'S NAME:</b> | XTO Energy Incorporated |
|-------------------------|-------------------------|
| LEASE NO.:              | NMNM0556863             |
| WELL NAME & NO.:        | Nash Unit 218H          |
| LOCATION:               | Sec 18-23S-30E-NMP      |
| COUNTY:                 | Eddy County, New Mexico |

# COA

| H2S                  | • Yes                  | C No           |               |
|----------------------|------------------------|----------------|---------------|
| Potash               | C None                 | C Secretary    | • R-111-P     |
| Cave/Karst Potential | CLow                   | C Medium       | High          |
| Cave/Karst Potential | Critical               |                |               |
| Variance             | C None                 | • Flex Hose    | C Other       |
| Wellhead             | C Conventional         | Multibowl      | C Both        |
| Other                | <b>□</b> 4 String Area | Capitan Reef   | <b>□</b> WIPP |
| Other                | <b>F</b> Iuid Filled   | Cement Squeeze | Pilot Hole    |
| Special Requirements | ☐ Water Disposal       | Г СОМ          | 🔽 Unit        |
|                      |                        |                |               |
| Break Testing        | • Yes                  | C No           |               |

| Α. | HYDROGEN SULFIDE |
|----|------------------|

A Hydrogen Sulfide (H2S) Drilling Plan shall be activated 500 feet prior to drilling into the Cherry Canyon formation. As a result, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

# **B. CASING**

- 1. The 13-3/8 inch surface casing shall be set at approximately 314 feet (a minimum of 70 feet (Eddy County) into the Rustler Anhydrite and above the salt) and cemented to the surface.
  - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.

Page 1 of 8

- b. Wait on cement (WOC) time for a primary cement job will be a minimum of <u>24 hours in the Potash Area</u> or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
- d. If cement falls back, remedial cementing will be done prior to drilling out that string.
- 2. The minimum required fill of cement behind the 9-5/8 inch intermediate casing is:
  - Cement to surface. If cement does not circulate see B.1.a, c-d above. Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.
  - In <u>High Cave/Karst Areas</u> if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.
  - In <u>R111 Potash Areas</u> if cement does not circulate to surface on the first two salt protection casing strings, the cement on the 3rd casing string must come to surface.
- 3. The minimum required fill of cement behind the 7-5/8 inch intermediate casing is:
  - Cement to surface. If cement does not circulate see B.1.a, c-d above. Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.
- 4. The minimum required fill of cement behind the 5-1/2 inch production casing is:
  - Cement should tie-back at least **500 feet** into previous casing string. Operator shall provide method of verification.

# C. PRESSURE CONTROL

- 1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
- 2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **3000 (3M)** psi.

- a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
- b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
- c. Manufacturer representative shall install the test plug for the initial BOP test.
- d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

## **D. SPECIAL REQUIREMENT (S)**

## Unit Wells

The well sign for a unit well shall include the unit number in addition to the surface and bottom hole lease numbers. This also applies to participating area numbers. If a participating area has not been established, the operator can use the general unit designation, but will replace the unit number with the participating area number when the sign is replaced.

### **Commercial Well Determination**

A commercial well determination shall be submitted after production has been established for at least six months.

# BOPE Break Testing Variance (Note: For 5M BOPE or less)

- BOPE Break Testing is ONLY permitted for 5M BOPE or less.
- BOPE Break Testing is NOT permitted to drilling the production hole section.
- While in transfer between wells, the BOPE shall be secured by the hydraulic carrier or cradle.
- Any well control event while drilling require notification to the BLM Petroleum Engineer prior to the commencement of any BOPE Break Testing operations.
- A full BOPE test is required prior to drilling the first deep intermediate hole section. If any subsequent hole interval is deeper than the first, a full BOPE test will be required.
- The BLM is to be contacted Choose an item. 4 hours prior to BOPE tests.
- As a minimum, a full BOPE test shall be performed at 21-day intervals.
- In the event any repairs or replacement of the BOPE is required, the BOPE shall test as per Onshore Oil and Gas Order No. 2.

# GENERAL REQUIREMENTS

Page 3 of 8

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)
  - Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220, (575) 361-2822

- Lea County Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575) 689-5981
- 1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
  - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
  - b. When the operator proposes to set surface casing with Spudder Rig
    - Notify the BLM when moving in and removing the Spudder Rig.
    - Notify the BLM when moving in the 2<sup>nd</sup> Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
    - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
- 2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
- 3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.
- A. CASING

- 1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
- 2. <u>Wait on cement (WOC) for Potash Areas:</u> After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least <u>24 hours</u>. WOC time will be recorded in the driller's log. The casing intergrity test can be done (prior to the cement setting up) immediately after bumping the plug.
- 3. <u>Wait on cement (WOC) for Water Basin:</u> After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least <u>8 hours</u>. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing intergrity test can be done (prior to the cement setting up) immediately after bumping the plug.
- 4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
- 5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
- 6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
- 7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
- 8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.
- B. PRESSURE CONTROL

- 1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
- 2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
- 3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
- 4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
  - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
  - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
  - c. Manufacturer representative shall install the test plug for the initial BOP test.
  - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
  - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- 5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
  - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not

Page 6 of 8

hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.
- C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

### D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

Page 8 of 8



HYDROGEN SULFIDE (H2S) CONTINGENCY PLAN

# Assumed 100 ppm ROE = 3000'

100 ppm H2S concentration shall trigger activation of this plan.

#### **Emergency Procedures**

In the event of a release of gas containing H<sub>2</sub>S, the first responder(s) must

- Isolate the area and prevent entry by other persons into the 100 ppm ROE.
- Evacuate any public places encompassed by the 100 ppm ROE.
- Be equipped with  $H_2S$  monitors and air packs in order to control the release.
- Use the "buddy system" to ensure no injuries occur during the response
- Take precautions to avoid personal injury during this operation.
- Contact operator and/or local officials to aid in operation. See list of phone numbers attached.
- Have received training in the
  - o Detection of H<sub>2</sub>S, and
  - o Measures for protection against the gas,
  - o Equipment used for protection and emergency response.

#### Ignition of Gas source

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO<sub>2</sub>). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally, the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever this is an ignition of the gas.

## Characteristics of H<sub>2</sub>S and SO<sub>2</sub>

| Common Name      | Chemical<br>Formula | Specific Gravity | Threshold Limit | Hazardous Limit | Lethal Concentration |
|------------------|---------------------|------------------|-----------------|-----------------|----------------------|
| Hydrogen Sulfide | H <sub>2</sub> S    | 1.189 Air = I    | 10 ppm          | 100 ppm/hr      | 600 ppm              |
| Sulfur Dioxide   | SO <sub>2</sub>     | 2.21 Air = I     | 2 ppm           | N/A             | 1000 ppm             |

#### **Contacting Authorities**


All XTO location personnel must liaison with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available including directions to site. The following call list of essential and potential responders has been prepared for use during a release. (Operator Name)'s response must be in coordination with the State of New Mexico's "Hazardous Materials Emergency Response Plan" (HMER).

.

# **CARLSBAD OFFICE – EDDY & LEA COUNTIES**

| 3104 E. Greene St., Carlsbad, NM 88220             |                              |
|--|------------------------------|
| Carlsbad, NM                                       | 575-887-7329                 |
| VTO REDGONNER                                      |                              |
| XTO PERSONNEL:<br>Kendall Decker, Drilling Manager | 002 521 6422                 |
| Milton Turman, Drilling Superintendent             | 903-521-6477                 |
| Jeff Raines, Construction Foreman                  | 817-524-5107<br>432-557-3159 |
| Toady Sanders, EH & S Manager                      | 432-557-5159<br>903-520-1601 |
| Wes McSpadden, Production Foreman                  | 575-441-1147                 |
| SHERIFF DEPARTMENTS:                               |                              |
| Eddy County  | 575-887-7551                 |
| Lea County   | 575-396-3611                 |
| NEW MEXICO STATE POLICE:                           | 575-392-5588                 |
| FIRE DEPARTMENTS:                                  | 911                          |
| Carlsbad   | 575-885-2111                 |
| Eunice   | 575-394-2111                 |
| Hobbs  | 575-397-9308                 |
| Jal  | 575-395-2221                 |
| Lovington  | 575-396-2359                 |
| HOSPITALS:   | 911                          |
| Carlsbad Medical Emergency                         | 575-885-2111                 |
| Eunice Medical Emergency                           | 575-394-2112                 |
| Hobbs Medical Emergency                            | 575-397-9308                 |
| Jal Medical Emergency                              | 575-395-2221                 |
| Lovington Medical Emergency                        | 575-396-2359                 |
| AGENT NOTIFICATIONS:                               |                              |
| For Lea County:                                    |                              |
| Bureau of Land Management – Hobbs                  | 575-393-3612                 |
| New Mexico Oil Conservation Division – Hobbs       | 575-393-6161                 |
| For Eddy County:                                   |                              |
| Bureau of Land Management - Carlsbad               | 575-234-5972                 |
| New Mexico Oil Conservation Division - Artesia     | 575-748-1283                 |



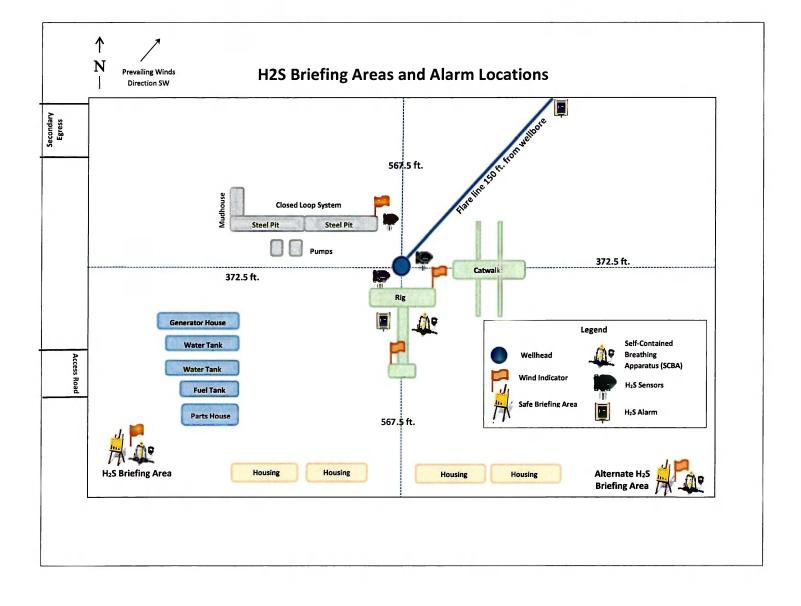

Well Number: 218H

**Safe containment description:** Portable, self-contained toilets will be provided for human waste disposal. Upon completion of drilling and completion activities, or as required, the toilet holding tanks will be pumped and the contents thereof disposed of in an approved sewage disposal facility. All state and local laws and regulations pertaining to the disposal of human and solid waste will be complied with. This equipment will be properly maintained during the drilling and completion operations and will be removed when all operations are complete.

#### Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL Disposal location ownership: COMMERCIAL FACILITY Disposal type description:

Disposal location description: A licensed 3rd party contractor to haul and dispose of human waste.

#### Waste type: GARBAGE

Waste content description: All garbage, junk and non-flammable waste materials will be contained in a self-contained, portable dumpster or trash cage, to prevent scattering and will be removed and deposited in an approve sanitary landfill. Immediately after drilling all debris and other waste materials on and around the well location not contained in the trash cage will be cleaned up and removed from the location. No potentially adverse materials or substances will be left on the location.

Amount of waste: 250 pounds

Waste disposal frequency : Weekly

**Safe containment description:** All garbage, junk and non-flammable waste materials will be contained in a self-contained, portable dumpster or trash cage, to prevent scattering and will be removed and deposited in an approve sanitary landfill. Immediately after drilling all debris and other waste materials on and around the well location not contained in the trash cage will be cleaned up and removed from the location. No potentially adverse materials or substances will be left on the location.

#### Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL Disposal location ownership: COMMERCIAL FACILITY Disposal type description:

Disposal location description: A licensed 3rd party contractor will be used to haul and dispose of garbage.

**Reserve Pit** 

Reserve Pit being used? NO

Temporary disposal of produced water into reserve pit? NO

Reserve pit length (ft.) Reserve pit width (ft.)

Reserve pit depth (ft.)

Reserve pit volume (cu. yd.)

Is at least 50% of the reserve pit in cut?

**Reserve pit liner** 

Reserve pit liner specifications and installation description

**Cuttings Area** 

#### **Operator Name: XTO ENERGY INCORPORATED**

Well Name: NASH UNIT

Well Number: 218H

#### Cuttings Area being used? NO

Are you storing cuttings on location? Y

**Description of cuttings location** Cuttings. The well will be drilled utilizing a closed-loop mud system. Drill cuttings will be held in roll-off style mud boxes and taken to a New Mexico Oil Conservation Division (NMOCD) approved disposal site. Drilling Fluids. These will be contained in steel mud pits and then taken to a NMOCD approved commercial disposal facility. Produced Fluids. Water produced from the well during completion will be held temporarily in steel tanks and then taken to a NMOCD approved commercial disposal facility. Oil produced during operations will be stored in tanks until sold.

Cuttings area length (ft.)

Cuttings area width (ft.)

Cuttings area depth (ft.)

Cuttings area volume (cu. yd.)

Is at least 50% of the cuttings area in cut?

WCuttings area liner

Cuttings area liner specifications and installation description

Section 8 - Ancillary

Are you requesting any Ancillary Facilities?: N

**Ancillary Facilities** 

Comments:

Section 9 - Well Site

Well Site Layout Diagram:

Nash\_Unit\_218H\_Well\_20220602091119.pdf Nash\_Unit\_218H\_RL\_20220602091121.pdf Comments: Multi-well pad.

#### Section 10 - Plans for Surface

Type of disturbance: New Surface Disturbance

Multiple Well Pad Name: NASH UNIT

Multiple Well Pad Number: F

#### Recontouring

**Drainage/Erosion control construction:** All compacted areas to be seeded will be ripped to a minimum depth of 18 inches with a minimum furrow spacing of 2 feet, followed by recontouring the surface and then evenly spreading the stockpiled topsoil. Prior to seeding, the seedbed will be scarified to a depth of no less than 4-6 inches.

**Drainage/Erosion control reclamation:** Erosion features are equal to or less than surrounding area and erosion control is sufficient so that water naturally infiltrates into the soil and gullying, headcutting, slumping, and deep or excessive rills (greater than 3 inches) are not observed

District I 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720 District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

# **State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division** 1220 S. St Francis Dr. Santa Fe, NM 87505

Action 198533

CONDITIONS

| Operator:              | OGRID:  |
|------------------------|---|
| XTO ENERGY, INC        | 5380  |
| 6401 Holiday Hill Road | Action Number:  |
| Midland, TX 79707      | 198533  |
|                        | Action Type:  |
|                        | [C-101] BLM - Federal/Indian Land Lease (Form 3160-3) |

#### CONDITIONS

| Created By | Condition  | Condition<br>Date |
|------------|--|-------------------|
| kpickford  | Notify OCD 24 hours prior to casing & cement   | 3/21/2023         |
| kpickford  | Will require a File As Drilled C-102 and a Directional Survey with the C-104   | 3/21/2023         |
| kpickford  | Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string | 3/21/2023         |
| kpickford  | Cement is required to circulate on both surface and intermediate1 strings of casing  | 3/21/2023         |
| kpickford  | Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system                  | 3/21/2023         |