	and
Pit, Closed-Loop System, Below-Grade Tank, or	
Proposed Alternative Method Permit or Closure Plan Application	
Type of action: Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Modification to an existing permit Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method	
Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request	
Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or or	e linance
Operator: Elm Ridge Exploration OGRID #: 149052_	
Address: P.O. Box 156; Bloomfield, NM 87413	
Facility or well name: <u>Ando Hixon 2</u>	
API Number: <u>3004526869</u> OCD Permit Number:	
U/L or Qtr/Qtr <u>F</u> Section <u>31</u> Township <u>25N</u> Range <u>11W</u> County: <u>San Juan</u>	
Center of Proposed Design: Latitude <u>36.359463</u> Longitude <u>-108.046195</u> NAD: □1927 ⊠ 1983	
Surface Owner: 🛛 Federal 🗌 State 🗌 Private 🗌 Tribal Trust or Indian Allotment	
Pit: Subsection F or G of 19.15.17.11 NMAC	
Temporary: Drilling Workover	
Permanent Emergency Cavitation P&A	
Lined Unlined Liner type: Thicknessmil LLDPE HDPE PVC Other	
String-Reinforced	
Liner Seams: Welded Factory Other Volume: bbl Dimensions: L x W x D	
Liner Seams: weided FactoryOther volume obiDimensions. L x w x D	
Closed-loop System: Subsection H of 19.15.17.11 NMAC	0
Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notion intent)	ce of
Drying Pad Above Ground Steel Tanks Haul-off Bins Other	
□ Lined □ Unlined Liner type: Thickness mil □ LLDPE □ HDPE □ PVC □ Other	
Liner Seams: Welded Factory Other	
Below-grade tank: Subsection I of 19.15.17.11 NMAC	
Volume: <u>100</u> bbl Type of fluid: <u>Produced water</u>	
Tank Construction material:	
Secondary containment with leak detection 🗌 Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off	
\Box Visible sidewalls and liner \boxtimes Visible sidewalls only \boxtimes Other single walled tank	
Liner type: Thicknessmil DPE PVC Other	
5.	
Alternative Method:	
Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of appro	l

·		
	Applies to permanent pits, temporary pits, and below-grade tanks) arbed wire at top (Required if located within 1000 feet of a permanent residence, scho evenly spaced between one and four feet	ol, hospital,
Alternate. Please specify <u>4' tall hogw</u>		
7. Netting: Subsection E of 19.15.17.11 NMAC (A) Screen Netting Other Monthly inspections (If netting or screening is	pplies to permanent pits and permanent open top tanks)	
 8. Signs: Subsection C of 19.15.17.11 NMAC ☐ 12"x 24", 2" lettering, providing Operator's n ☑ Signed in compliance with 19.15.3.103 NMA 	ame, site location, and emergency telephone numbers C	
Please check a box if one or more of the following Administrative approval(s): Requests must consideration of approval.	cy are required. Please refer to 19.15.17 NMAC for guidance. <i>ng is requested, if not leave blank:</i> st be submitted to the appropriate division district or the Santa Fe Environmental Bure d to the Santa Fe Environmental Bureau office for consideration of approval.	au office for
material are provided below. Requests regardin office or may be considered an exception which	ompliance for each siting criteria below in the application. Recommendations of ac g changes to certain siting criteria may require administrative approval from the ap must be submitted to the Santa Fe Environmental Bureau office for consideration of Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to c	propriate district of approval.
The iWATERS database search shows	m of the temporary pit, permanent pit, or below-grade tank. a water well approximately 5.65 miles to the north-east with a depth to ground vation approximately 99 feet lower than the well site, thus suggesting that om the bottom of the BGT.	🗌 Yes 🛛 No
lake (measured from the ordinary high-water mar	ourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa k).0. west per the attached topographic map. These findings are reflected by the	🗌 Yes 🛛 No
	ool, hospital, institution, or church in existence at the time of initial application. dicates that none of the above locations are within 1000 feet of the well site.	□ Yes⊠ No □ NA
Within 1000 feet from a permanent residence, sch (Applies to permanent pits)	nool, hospital, institution, or church in existence at the time of initial application.	☐ Yes ☐ No ⊠ NA
watering purposes, or within 1000 horizontal feet iWATERS database search indicates n	fresh water well or spring that less than five households use for domestic or stock of any other fresh water well or spring, in existence at the time of initial application. o well is within 1000 feet of the well site. A visual inspection was also performed. ction reflect that no water wells were visible within 1000 feet.	🗌 Yes 🛛 No
adopted pursuant to NMSA 1978, Section 3-27-3	hin a defined municipal fresh water well field covered under a municipal ordinance , as amended. nicipal boundaries, indicated by the attached topographic map and visual	🗌 Yes 🛛 No
Within 500 feet of a wetland. The USFWS data file, WetlandsData.kr available. Wetland-type vegetation was not	nz, dated July 2, 2008, was opened using Google Earth. Electronic data was not noted during the site visit.	🗌 Yes 🛛 No
Within the area overlying a subsurface mine. The NM EMNRD web map was review	ved and attached, the well is not in an area overlying a subsurface mine.	🗌 Yes 🛛 No
Within an unstable area. Attached topographical map and visua	l inspection indicates that the site is not in an unstable area.	🗌 Yes 🛛 No
Within a 100-year floodplain. Attached topographical map and visua	al inspection indicates that the site is not in an unstable area.	🗌 Yes 🛛 No
Form C-144	Oil Conservation Division Page 2 c	of 5

-

Τ

 attached. Hydrogeologic Report (Below-grade Tanks) - t Hydrogeologic Data (Temporary and Emergene Siting Criteria Compliance Demonstrations - ba Design Plan - based upon the appropriate requi Operating and Maintenance Plan - based upon 	ttached to the application. Please indications based upon the requirements of Paragraph cy Pits) - based upon the requirements of ased upon the appropriate requirements of rements of 19.15.17.11 NMAC the appropriate requirements of 19.15.17. the appropriate requirements of 19.15.17.	ate, by a check mark in the box, that the documents are (4) of Subsection B of 19.15.17.9 NMAC Paragraph (2) of Subsection B of 19.15.17.9 NMAC f 19.15.17.10 NMAC
 attached. Geologic and Hydrogeologic Data (only for on Siting Criteria Compliance Demonstrations (on Design Plan - based upon the appropriate required Operating and Maintenance Plan - based upon 	ttached to the application. Please indication. ttached to the application. Please indication. the application. the appropriate requirements of 19.15.17 gh 18, if applicable) - based upon the applicable. gn) API Number:	ate, by a check mark in the box, that the documents are ints of Paragraph (3) of Subsection B of 19.15.17.9 ppropriate requirements of 19.15.17.10 NMAC .12 NMAC ropriate requirements of Subsection C of 19.15.17.9 NMAC
13.		
attached. Hydrogeologic Report - based upon the required Siting Criteria Compliance Demonstrations - b Climatological Factors Assessment Certified Engineering Design Plans - based up Dike Protection and Structural Integrity Design Leak Detection Design - based upon the appro Liner Specifications and Compatibility Assess Quality Control/Quality Assurance Construction Operating and Maintenance Plan - based upon Freeboard and Overtopping Prevention Plan - I Nuisance or Hazardous Odors, including H ₂ S, Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate required	ttached to the application. Please indica- ements of Paragraph (1) of Subsection B of ased upon the appropriate requirements of on the appropriate requirements of 19.15. n - based upon the appropriate requirement priate requirements of 19.15.17.11 NMA0 ment - based upon the appropriate require on and Installation Plan the appropriate requirements of 19.15.17 based upon the appropriate requirements of Prevention Plan	of 19.15.17.10 NMAC 17.11 NMAC nts of 19.15.17.11 NMAC C ements of 19.15.17.11 NMAC .12 NMAC of 19.15.17.11 NMAC
14.		
On-site Closure Met	Cavitation P&A Permanent Pit d Removal osed-loop systems only) nod (Only for temporary pits and closed-l Burial On-site Trench Burial	Below-grade Tank 🗌 Closed-loop System
15.		
	the box, that the documents are attached. The propriate requirements of 19.15.17.13 NM pased upon the appropriate requirements of or liquids, drilling fluids and drill cuttings - based upon the appropriate requirement te requirements of Subsection I of 19.15.	of Subsection F of 19.15.17.13 NMAC s) ts of Subsection H of 19.15.17.13 NMAC 17.13 NMAC

.

^{16.} Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13. Instructions: Please indentify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if facilities are required.	D NMAC) more than two
Disposal Facility Name: Disposal Facility Permit Number:	
Disposal Facility Name: Disposal Facility Permit Number:	· · ·
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that <i>will not</i> be used for future ser Yes (If yes, please provide the information below) No	vice and operations?
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specifications based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	с
^{17.} Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable sou provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate disc considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Just demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.	trict office or may be
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	□ Yes □ No □ NA
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	□ Yes □ No □ NA
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	□ Yes □ No □ NA
 Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No
 Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 	🗌 Yes 🗌 No
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	🗌 Yes 🗌 No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	🗌 Yes 🗌 No
 Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site 	🗌 Yes 🗌 No
 Within the area overlying a subsurface mine. Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division 	🗌 Yes 🗌 No
 Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	Yes No
Within a 100-year floodplain. - FEMA map	🗌 Yes 🗌 No
 18. On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure play a check mark in the box, that the documents are attached. Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Confirmation Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cantare Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC 	.15.17.11 NMAC

Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC
 Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

19. Operator Application Certification:						
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.						
Name (Print): Ms. Amy Mackey Title: Administrative Manager						
Signature: My Acter Date: 1-23-09						
E-mail address: Telephone: 505-632-3476 Ext. 201						
20. OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment)						
OCD Representative Signature: Approval Date:						
Title: OCD Permit Number:						
21. <u>Closure Report (required within 60 days of closure completion)</u> : Subsection K of 19.15.17.13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed. Closure Completion Date:						
22.						
Closure Method: Waste Excavation and Removal On-Site Closure Method Alternative Closure Method Waste Removal (Closed-loop systems only) If different from approved plan, please explain.						
^{23.} <u>Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only:</u> Instructions: Please indentify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities were utilized.						
Disposal Facility Name: Disposal Facility Permit Number:						
Disposal Facility Name: Disposal Facility Permit Number:						
Were the closed-loop system operations and associated activities performed on or in areas that <i>will not</i> be used for future service and operations? Yes (If yes, please demonstrate compliance to the items below) No						
Required for impacted areas which will not be used for future service and operations: Site Reclamation (Photo Documentation) Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique						
 24. Closure Report Attachment Checklist: Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the box, that the documents are attached. Proof of Closure Notice (surface owner and division) Proof of Deed Notice (required for on-site closure) Plot Plan (for on-site closures and temporary pits) Confirmation Sampling Analytical Results (if applicable) Waste Material Sampling Analytical Results (required for on-site closure) Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation) On-site Closure Location: Latitude Longitude NAD: [1927] 1983 						
25.						
Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.						
Name (Print): Title:						
Signature: Date:						
E-mail address: Telephone:						

r

New Mexico Office of the State Engineer

۲

6

New Mexico Office of the State Engineer POD Reports and Downloads								
Township: 25N	Range: 11W	Sections:						
NAD27 X:	Y:	Zone:	Search Radius:					
County:	Basin:		Number:	Suffix:				
Owner Name: (First)	(La	st) All	○Non-Domestic	ODomestic				
POD / Surface Data Report Avg Depth to Water Report Water Column Report								
	Clear Form	iWATERS M	enu Help					

AVERAGE	DEPTH	OF	WATER	REPORT	10/16/2008	3
---------	-------	----	-------	--------	------------	---

								(Depth	Water in	Feet)
Bsn	Tws	Rng	Sec	Zone	x	¥	Wells	Min	Max	Avg
SJ	25N	11W	04				1	135	135	135


Record Count: 1

http://iwaters.ose.state.nm.us:7001/iWATERS/WellAndSurfaceDispatcher

-


.


New Mexico Office of the State Engineer POD Reports and Downloads									
	Township: 25N	Range: 11W	Sections: 31						
	NAD27 X:	Y :	Zone:	Search Radius:					
County	r: Bas	in:	Num	ber: Su	ffix:				
Owner N	ame: (First)	(Last))	• Non-Domestic	Domestic	• All			
	POD / Surface D	ata Report Avg	Depth to Water Repo	rt Water Column	Report				
		Clear Form	WATERS Menu	Help					
POD / SURFACE DATA S (acre ft per annum) DB File Nbr Use Diversion Owner	EPORT 09/08/2008 POD Number	(quarters are	1=NW 2=NE 3=SW 4=SE biggest to smallest Tws Rng Sec q q q			re in Meters) ne Easting Northin	Start ng Date	Finish Date	Depth Well 1
No Records found, try again									

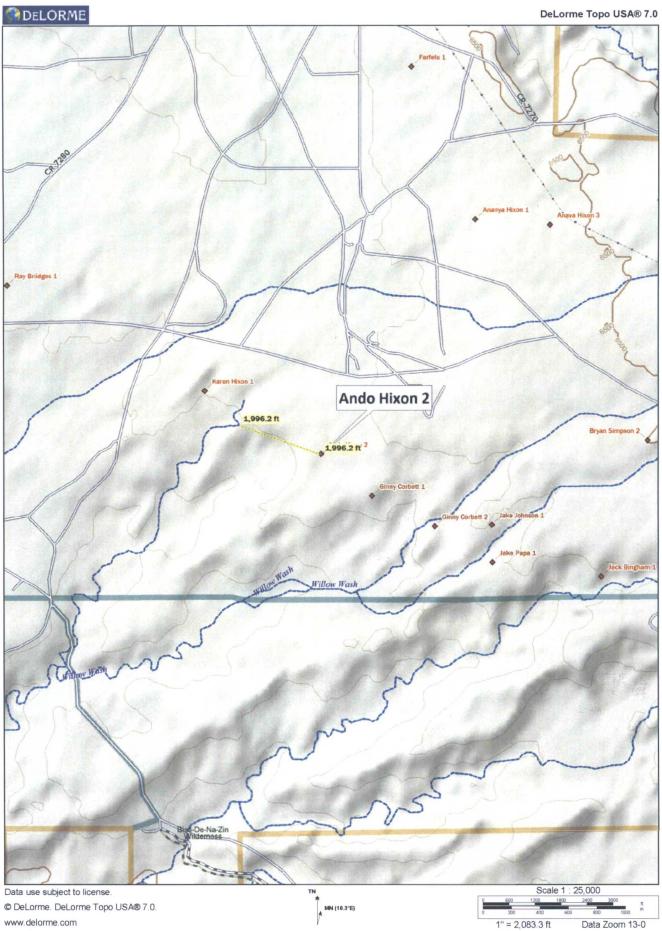

ĩ

4

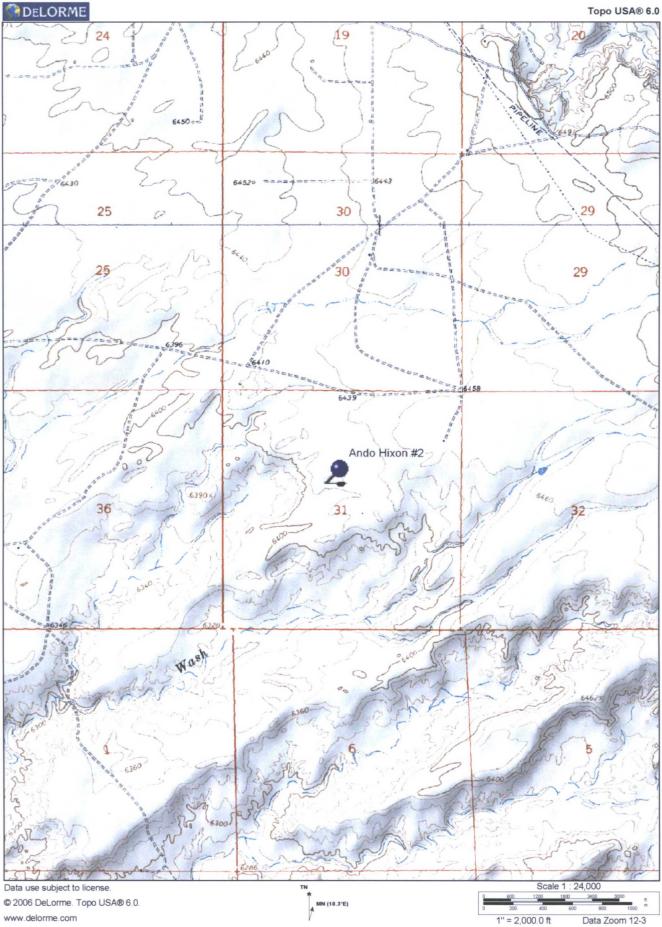

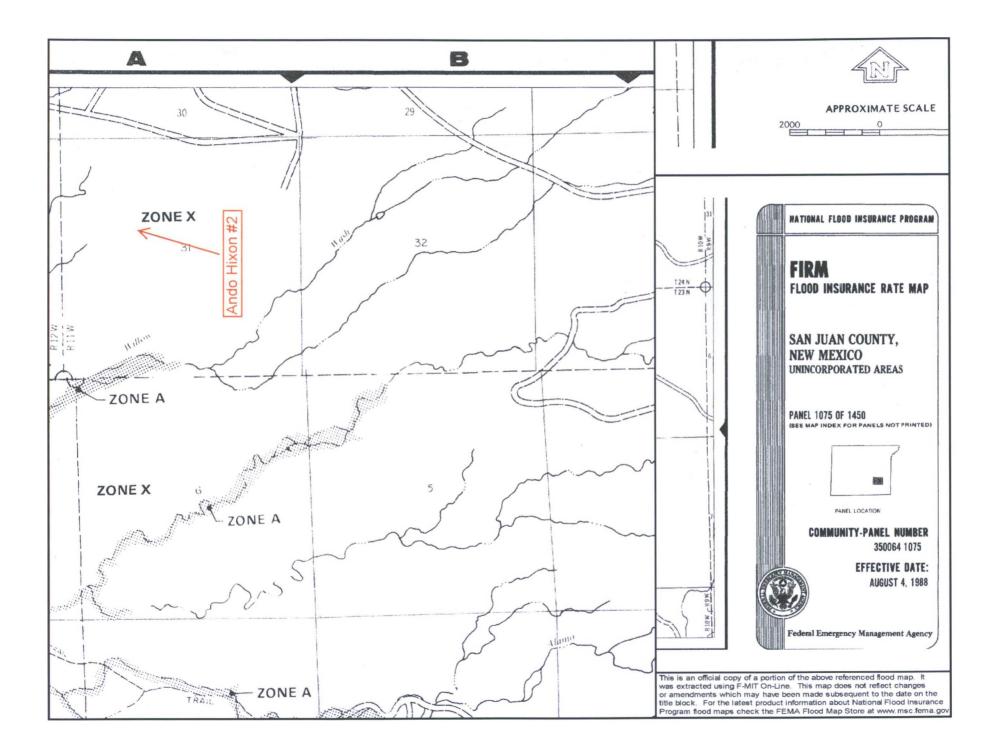


MMQonline Public Version

Mines, Mills & Quarries Commodity Groups

- △ Aggregate & Stone Mines
- Coal Mines
- Industrial Minerals Mines
- Industrial Minerals Mills
- Metal Mines and Mill Concentrate
- Potash Mines & Refineries
- Smelters & Refinery Ops.
- * Uranium Mines
- Oranium Mills

Mines, Mills & Quarries Status

A stire Minime





· · ·	Elm Ridge Site Inventory Sheet
[Date: 7-30-08 Initials: 59 Time: Started: 9:55 Ended: 10-13
•	Date: $7-30-08$ Initials: 57 Time: Started: 7.33 Ended: $10-15$
1	Well Name & Number: ANdo Hiron #2
•	API#: 3004526869
	Lease #: <u>NM 79005</u>
	Quarter/Quarter: F Section: 31 Township: $25N$ Range: 11ω
•	Lat: N 36.359463° Long: W 105.046195° GPS Point ID: Awdo H 2.
•	Pit Tank #1: Manufacturer: NA
•	Serial #:NA DOM:NASize_NAbbl
	• If N/A Dimensions: Dlameter 12' Height 5'
	Material: Steel Galvanized Fiberglass_X
A.M. N.L.	Tank Configuration: Double Wall Single Wall K(Buried or Exposed K)
	Visible Walls: Y_X N Leak Detection: Y N_X
	Contents: Produced Water NA Condensate NA Recycled Oil NA
	Tank Top Covering: Solid/Cone-top Netting χ (Solid Fiber χ)
	Secondary Containment: Yes X No
	Fencing around berm: Yes <u>X</u> No o Fence Type: Cattle Panel Field Fence_X Barbwire
•	Pit Tank #2: Manufacturer:
	Serial #: DOM: Sizebbl
	o If N/A – Dimensions: Diameter Height
	Material: Steel Galvanized Fiberglass
	Tank Configuration: Double Wall and a single Wall (General Configuration: Double Wall) (General Configuration: Double Wall) (General Configuration: Double Wall) (General Configuration: Configuration: Double Wall) (General Configuration: Configura
	Visible Walls: Y N Leak Detection: Y N
	Contents: Produced Water Condensate Recycled Oil
	Tank Top Covering: Solid/Cone-top Netting (SolidFiber)
	Secondary Containment: Yes No
	Fencing around berm: Yes No
	• Fence Type: Cattle Panel Field Fence Barbwire
	Above-Ground Tank #1: Manufacturer: Perminan Tank
•	Serial #: <u>Z3309</u> DOM: <u>July 80</u> Size <u>300</u> bbi
	 If N/A – Dimensions: Dlameter
•	Material: Steel X Galvanized Fiberglass
9.	
	Secondary Containment: Yes_XNo

.

,

	222
	Elm Ridge Site Inventory Sheet
•	Date: Initials: Time: Started: Ended:
•	Well Name & Number: <u>Ando Hixon</u> #2
•	API#:
•	Lease #:
•	Quarter/Quarter: Section: Township: Range:
•	Lat: GPS Point ID:
•	Pit Tank #1: Manufacturer:
	Serial #: DOM: Sizebbl
	 If N/A - Dimensions: Diameter Height
	Material: Steel Galvanized Fiberglass
	Tank Configuration: Double Wall Single Wall(Buried or Exposed)
	Visible Walls: N Leak Detection: Y N
	Contents: Produced Water Condensate Recycled Oil
	Tank Top Covering: Solid/Cone-top Netting (Solid Fiber)
	Secondary Containment: Yes No
	Fencing around berm: Yes No
	o Fence Type: Cattle Panel Field Fence Barbwire
	Pit: Tank #2: Manufacturer:
	o if N/A – Dimensions: Diameter Height
•	Material: Steel Galvanized Fiberglass
	Tank Configuration: Double Wall
	Visible Walls: Y N Leak Detection: Y N
•	Contents: Produced Water Condensate Recycled Oil
	Tank Top Covering: Solid/Cone-top Netting (Solid Fiber)
•	Secondary Containment: Yes No
•	Fencing around berm: Yes No
	• Fence Type: Cattle Panel Field Fence Barbwire
•	Above-Ground Tank #1: Manufacturer: Perminal Tank
	Serial #: 23294 DOM: July 84 Size 300 bbl
	o If N/A – Dimensions: Diameter 12 ′ Height 15
•	Material: Steel Galvanized Fiberglass
	Contents: Produced Water <u>NA</u> Condensate <u>NA</u> (State # <u>61-3300</u>) Recycled Oll <u>N-A</u>
•	Secondary Containment: Yes No No
Ĺ	

•

r

NORTH		Well Schema	tic	• • •
MR 2 IZ SUC X X X X X X X X X X X X X X X X X X X		25@2 40° P J 25@2 40° 10' @ 22203 10' @ 22203 10' @ 2103 10' @ 2103		
Schematic Key: Separator	SEP	Artificial Lift AL	Condensate Tank	COND
Compressor	COM	Meter Run Meter	RUN	
Dehydrator	DEH	Well Head O	Water Tank	WATER
		t or less of the following: ntinuous flowing or signifi	cant water course. <u>NA</u>	
 From below- 	grade tanks t	o any permanent residence NA	ce, school, church, hospite	II, etc

1.000

BELOW GRADE TANK (BGT) CLOSURE PLAN

SITE NAME:

ANDO HIXON 2 UNIT LETTER F, SECTION 31, TOWNSHIP 25N, RANGE 11W SAN JUAN COUNTY, NEW MEXICO LATITUDE 36.359463 LONGITUDE -108.046195

SUBMITTED TO:

MR. WAYNE PRICE New Mexico Oil Conservation Division 1220 South St. Francis Drive Santa Fe, New Mexico 87505 (505) 476-3490

SUBMITTED BY:

MS. AMY MACKEY ELM RIDGE EXPLORATION P.O. BOX 156 BLOOMFIELD, NEW MEXICO 87413 (505) 632-3476 EXT. 201

JANUARY 2009

BELOW GRADE TANK (BGT) CLOSURE PLAN ELM RIDGE EXPLORATION ANDO HIXON 2 SAN JUAN COUNTY, NEW MEXICO

TABLE OF CONTENTS

INTRODUCTION	1
SCOPE OF CLOSURE ACTIVITIES	1
<u>REPORTING</u>	

Below Grade Tank (BGT) Closure Plan Elm Ridge Exploration Ando Hixon 2 Page 1

INTRODUCTION

Elm Ridge Exploration would like to submit a closure plan for the below grade tank (BGT) at the Ando Hixon 2 well site located in the SE ¹/₄ NW ¹/₄ of Section 31, Township 25N, Range 11W, San Juan County, New Mexico. This closure plan has been prepared in conformance with the closure requirements of 19.15.17.13 NMAC.

SCOPE OF CLOSURE ACTIVITIES

The purpose of this closure plan is to provide the details of activities involved in the closure of the BGT at the Ando Hixon 2 well site. The following scope of closure activities has been designed to meet this objective:

- Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will close all of the BGTs currently in service within the five (5) years allotted. Elm Ridge Exploration does not operate any BGTs which would qualify to be upgraded or retrofitted; as such they will be closing all their current BGTs and replacing them with above ground storage tanks.
- 2) Elm Ridge Exploration will close BGTs deemed to be an imminent danger to fresh water, public health, or the environment by an earlier date that the division requires as specified in Subsection A of 19.15.17.13 NMAC.
- 3) Elm Ridge Exploration will close any BGT which demonstrates a compromise of integrity before the five (5) years allotted by the division per Paragraph (6) of Subsection I of 19.15.17.11 NMAC.
- 4) Elm Ridge Exploration will close any BGT within 60 days of cessation of the BGTs operation per Subsection A of 19.15.17.13 NMAC.
- 5) No less than 72 hours and no greater than one (1) week prior to BGT removal Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will provide written notification to the appropriate division district office as well as a schedule of on-site activities, as in accordance with 19.15.17.13 Subsection J Paragraph (2) NMAC. Written notification will include the name of the well operator, the well's API number, the well's name and number, and the well's unit letter, section, township, and range.
- 6) No less than 24 hours and no greater than one (1) week prior to beginning BGT closure activities Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will provide written notification to the appropriate surface owner, as in accordance with 19.15.17.13 Subsection J Paragraph (1) NMAC. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will notify the surface owner by certified mail, return receipt requested, that the operator plans to close a below-grade tank. The return receipt will be used to ensure that the surface owner has received written notification no less than 24 hours and no greater than one (1) week prior to the beginning of BGT closure activities. Evidence of mailing of the notice to the address of the surface owner shown in the county tax records is sufficient to demonstrate compliance with this requirement. Closure activities that will take place on tribal land will have notifications sent by certified mail, return

Below Grade Tank (BGT) Closure Plan Elm Ridge Exploration Ando Hixon 2 Page 2

receipt requested, to the appropriate tribal office. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will notify the Bureau of Land Management (BLM) of closure activities for wells located on federal land per a Sundry Notice, as in accordance with 19.15.17.13 Subsection J Paragraph (1) NMAC. All notices will be sent in such a way that the surface owner received notice at least 24 hours prior to the beginning of closure activities.

- 7) Elm Ridge Exploration or a contractor acting on behalf of Elm Ridge Exploration will remove all liquids, and/or sludge, if applicable, prior to closure. Material will be disposed of at Envirotech's Landfarm #2, Permit # NM-01-0011, TNT Environmental Inc. Landfarm, Permit # NM-01-0008, Industrial Ecosystems Inc. (IEI) Landfarm, Permit # NM-01-0010B or Basin Disposal, Permit # NM-01-0005, depending on the consistence of the material removed, as in accordance with 19.15.17.13 Subsection E Paragraph (1) NMAC.
- 8) Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will remove all on-site equipment associated with this BGT that is no longer required for some other purpose, as in accordance with 19.15.17.13 Subsection E Paragraphs (3) NMAC.
- 9) If applicable, any liners or leak detection systems removed from a BGT closure will be cleaned off and disposed of at San Juan County Regional Landfill in accordance with Subparagraph (m) of Paragraph (1) of Subsection D of 19.15.9.712 NMAC.
- 10) Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will obtain prior approval from the OCD to dispose, recycle, reuse, or reclaim the BGT. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will provide the OCD with documentation concerning the final disposition of the BGT with the closure report.
- 11) Once the BGT is removed a five (5)-point composite sample will be collected from directly below the tank or below the leak detection system if present. Grab samples will be collected from any area that are wet, discolored, or showing other evidence of a release. All samples being collected will be analyzed for benzene and total BTEX via USEPA Method 8021B, TPH via USEPA Method 418.1, and chlorides via USEPA 300.1, as in accordance with 19.15.17.13 Subsection E Paragraph (4) NMAC.
- 12) Depending on soil sample results the area will be either backfilled or the area will be excavated.
 - a. If soil samples do not exceed the regulatory standards of 0.2 mg/kg benzene, 50 mg/kg BTEX, 100 mg/kg TPH, and 250 mg/kg or background concentration of chlorides, as in accordance with 19.15.17.13 Subsection E Paragraph (4) NMAC.
 - i. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, shall submit a Form C-141 with the laboratory results so that the division may review the results to determine if additional delineation is required in accordance with Paragraph (5) of Subsection E of 19.15.17.13 NMAC.
 - ii. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will backfill the excavation or impacted area with non-waste containing, earthen material, in accordance with 19.15.17.13

Subsection E Paragraph (6) NMAC. A soil cover shall be installed for all backfilled excavations consisting of the background thickness of topsoil or one foot of suitable material to establish vegetation at the site, whichever is greater in accordance with Subsections H of 19.15.17.13 NMAC. The operator shall construct the soil cover to the site's existing grade and prevent ponding of water and erosion of the cover material.

- iii. All areas of the well site that are no longer utilized on a day to day basis for the production of oil and/or gas, Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will substantially restore, recontour and re-vegetate the areas, in accordance with 19.15.17.13 Subsections G and I NMAC. The operator shall notify the division when it has re-seed and when it has achieved successful re-vegetation. For re-vegetation methods, please see attached re-vegetation plan.
- b. If soil samples exceed the regulatory standards stated above.
 - i. Elm Ridge Exploration will submit a Release Notification by Form C-141 with the appropriate analytical laboratory results to the appropriate division district office, in accordance with 19.15.17.13 Subsection E Paragraph (4) NMAC.
 - ii. In accordance with Paragraph (5) of Subsection E of 19.15.17.13 NMAC, once the operator or the OCD has determined that a release has occurred, Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will comply with rule 19.15.3.116 NMAC and 19.15.1.19 NMAC as appropriate.

REPORTING

Elm Ridge Exploration will submit a closure report within 60 days following the BGT closure. The closure report will consist of a form C-144 with all supporting data and a form C-141 with all supporting data. The supporting data will include proof of closure notice to the surface owner and the OCD, confirmation sampling analytical results, a site diagram, soil backfilling and cover installation, re-vegetation rates, re-seeding techniques and site reclamation photo documentation if applicable, along with all other information related to the onsite activities.

We appreciate the opportunity to be of service. If you have any questions or require further information, please do not hesitate to contact our office at (505) 632-3476 Ext. 201.

Respectfully Submitted: Elm Ridge Exploration Any Mackey Elin Ridge Exploration

Elm Ridge Exploration

Re-Seeding Techniques and Seed Mixture Ratios

These applied practices by Elm Ridge Exploration will at a minimum comply with the New Mexico Oil Conservation Divisions rule 19.15.17.13, Subsection I NMAC Elm Ridge Exploration has adopted these re-seeding application techniques, ratios and mixtures as their standard operating procedures.

- 1. The first growing season after closure of a below grade tank or pit, all areas of the well site not utilized for the production of oil and/or gas on a daily basis will be re-seeded with the specified seed mixture.
- 2. The seed mixture used will be certified with no primary or secondary noxious weeds in seed mixtures. The seed labels from each bag shall be available for inspection while seed is being sown.
- 3. The operator shall accomplish seeding by drilling on the contour whenever practical or by other division-approved methods. The operator shall obtain vegetative cover that equals 70% of the native perennial vegetative cover (un-impacted by overgrazing, fire or other intrusion damaging to native vegetation) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. During the two growing seasons that prove viability, there shall be no artificial irrigation of the vegetation.
- 4. Hand seeding with hydro-mulch, excelsior netting or mulch with netting is required on the cut/fill slopes. Mulch will be spread at a rate of 2,000-3,000 pounds per acre.
- 5. Compacted areas determined by visual inspection will be ripped to a depth of twelve (12) inches below ground surface and disked to a depth of six (6) inches before seeding. Seeding shall be done with a disk type drill with two (2) boxes for various seed sizes. The drill rows shall be eight (8) to ten (10) inches apart. Seed shall be planted at no less than one-half (1/2) inch deep or more than one (1) inch deep. The seeder shall be followed with a drag, packer, or roller to ensure uniform coverage of the seed and adequate compaction. Drilling shall be done on the contour where possible, but not up and down the slope.
- 6. Where slopes are too steep for contour drilling a hand seeder shall be used. Seed shall be covered to the depth stated above by whatever means is practical. If the seed is unable to be covered by the means listed above, the prescribed seed mixture amount will be doubled.

- 7. Elm Ridge Exploration shall repeat seeding or planting until it successfully achieves the required vegetative cover of 70% of the native perennial vegetation cover.
- 8. Upon abandonment of a well site, if the retention of the access road is not considered necessary for the management and multiple uses of the natural resources, or by the surface owner, it will be ripped a minimum of twelve (12) inches in depth. After ripping, water bars will be installed. All ripped surfaces are to be protected from vehicular travel by construction of a dead end ditch and earthen barricade at the entrance to these ripped areas. Re-seeding of areas affected by the ditch and barriers will be re-seeded if necessary.
- 9. Elm Ridge Exploration, or a contractor acting on behalf of Elm Ridge Exploration, will inform the division once successful re-vegetation has occurred.

Elm Ridge Exploration

San Juan Basin

Below Grade Tank Maintenance and Operating Plan

In accordance with Rule 19.15.17 the following information describes the operation and maintenance of a Below Grade Tank (BGT) on Elm Ridge Exploration locations. This particular location does not meet the siting criteria to operate a BGT, and thus will be closing the BGT within five (5) years, or upon failure of integrity, and replacing it with an above ground storage tank.


GENERAL PLAN:

- 1. Elm Ridge Exploration, or a contractor representing Elm Ridge Exploration, will operate and maintain a BGT to contain liquids and solids to prevent contamination of fresh water and to protect public health and environment. This will be accomplished by performing monthly inspections of the BGT, any liners or leak detection if applicable, netting, secondary containment, fencing and maintaining adequate freeboard.
- 2. Elm Ridge Exploration, or a contractor representing Elm Ridge Exploration, shall not allow a BGT to overflow or allow surface water run-on to enter the BGT. This will be accomplished by a secondary containment consisting of a soil berm around the BGT that will be monitored by monthly inspections. Overflowing will be prevented by maintaining an adequate freeboard of eight (8) inches, maintained by monthly inspections. This process will be performed on the current BGT located at this well site.
- 3. Elm Ridge Exploration, or a contractor representing Elm Ridge Exploration, shall continuously remove any visible or measurable layer of oil from the fluid surface of a BGT in an effort to prevent the accumulation of oil over time.
- 4. Elm Ridge Exploration, or a contractor representing Elm Ridge Exploration, shall inspect the BGT at least once monthly and maintain a written record of each inspection for at least five (5) years. The monthly inspection form to be used by Elm Ridge Exploration is attached to this document.
- 5. Elm Ridge Exploration, or a contractor representing Elm Ridge Exploration, shall maintain adequate freeboard to prevent overtopping of the BGT. The standard freeboard to be maintained by Elm Ridge Exploration is eight (8) inches.
- 6. Elm Ridge Exploration, or a contractor representing Elm Ridge Exploration, shall maintain an expanded metal covering on the BGT.

- 7. Elm Ridge Exploration will not discharge into or store any hazardous wastes into the BGT.
- 8. If Elm Ridge Exploration, or a contractor representing Elm Ridge Exploration, determines that a BGT has developed a leak below the liquid's surface, then Elm Ridge Exploration, or a contractor representing Elm Ridge Exploration, will notify the appropriate division office within 48 hours of discovering the leak. Elm Ridge Exploration, or a contractor representing Elm Ridge Exploration, shall remove all liquids above the damage or leak line within 48 hours in accordance with Subsection A of 19.15.17.12 NMAC. The damaged tank will then be removed, and closure activities will begin in accordance with the submitted closure plan.
- 9. Elm Ridge Exploration will close any BGT within 60 days of cessation of the BGTs operation per Subsection A of 19.15.17.13 NMAC.
- 10. Elm Ridge Exploration, or a contractor representing Elm Ridge Exploration, will close the BGT within the NMOCD allotted five (5) years, within 60 days of cessation of operation of the BGT or upon failure of integrity, and put into service an above ground storage tank to meet the needs previously fulfilled by the BGT.

Figure A, Site Map

Attachment 1, Monthly BGT Inspection Form

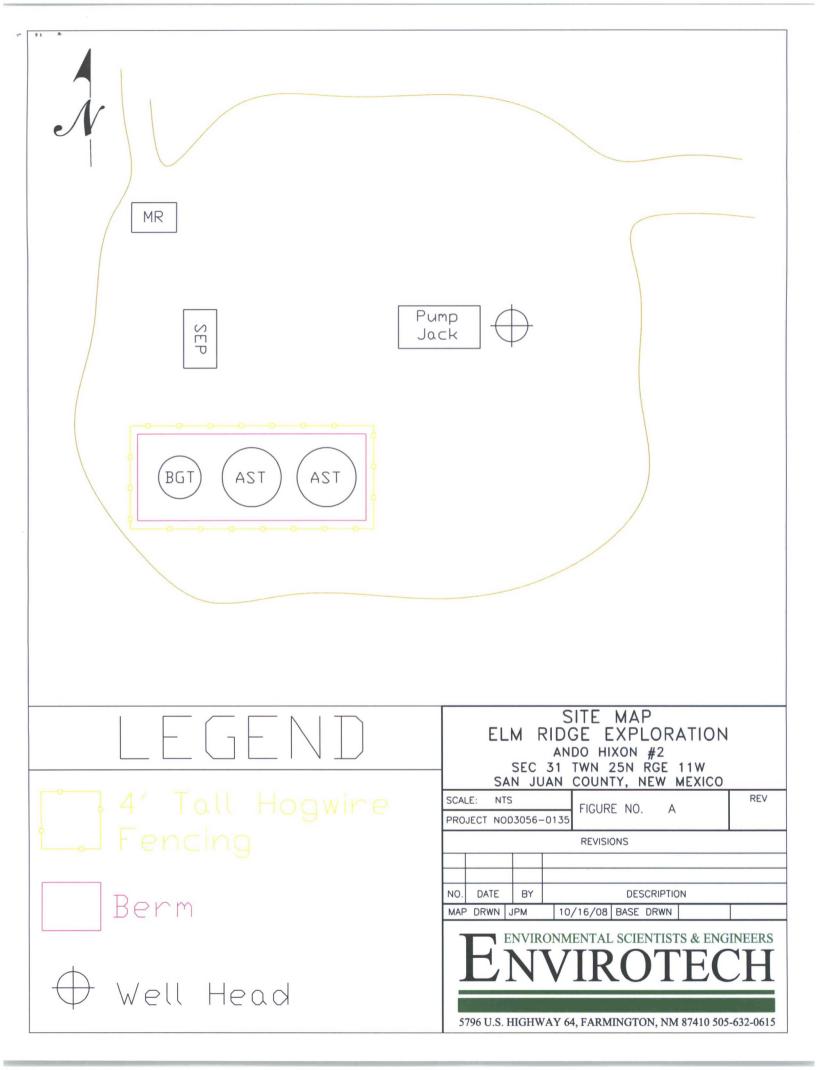

Elm	Ridge	Expl	oration,	LLC
-----	-------	------	----------	-----

.

-m a:ž

Monthly Below Grade Tank Inspection Form
Inspection Performed By: Date:
Well Site Name:
Unit: Section: Township: Range: County:
Quarter Footage:
Latitude: Longitude:
Below Grade Tank
Construction Material of BGT (circle one): Steel Fiberglass Galvanized Other:
Tank Capacity (BBLS):
Status of Tank (circle one): NA poor fair good excellent
Leaks Detected (circle one): Yes No Unknown
Liquid level in tank from the top:
Recent overflow detected (circle one): Yes No Unknown
BGT Cover present: Yes No NA
Cover Type (circle one): wire mesh steel mesh fibrous netting other:
Berm Present (circle one): Yes No
Secondary Containment
Type of secondary containment:
Status of secondary containment (circle one): NA poor fair good excellent
Fencing
Fencing Present (circle one): Yes No
Describe Fencing:
Status of Fencing (circle one): NA poor fair good excellent

*Maintain this document on record for a minimum of five (5) years from the date performed.

OCD Aztec District III ELM RIDGE Checklist Below Grade Tank Closure Plans

19.15.17.9 Permit application

Signed C-144 (Page 5 of C-144)

Site Specific Hydrogeology (Iwaters)

19.15.17.10 Siting requirements

Proximity to watercourses (Topo map)

Proximity to Permanent Structure (Aerial Map)

Proximity to Flood Plain Map (Aerial Map)

Proximity to Subsurface Mines Map (Aerial Map)

19.15.17.13 Closure Plan

Below Grade Tank Closure Plan

19.15.17.12 Operating and Maintenance Plan

Below Grade Tank Operating and Maintenance Plan

Requirements: (Application Marked Closure Plan Only

Registration Date: VF CS