CD

District I (575) 393-6161 1625 N. French Dr., Hobbs, NM 88240 <u>District II (575)</u> 748-1283 811 S. First St., Artesia, NM 88210 District III (505) 334-6178 1000 Rio Brazos Road, Aztec, NM 87410 <u>District IV</u> (505) 827-8198 1220 S. St. Francis Dr., Santa Fe, NM 87505 Energy Minerals and Natural Resources JUN 2 2 2018

Form C-106 Revised August 1, 2011

ACT Permit No.

1220 South St. Francis Dr. Santa Fe, NM 87505

Oil Conservation Division DISTRICT III

NOTICE OF INTENTION TO UTILIZE AUTOMATIC CUSTODY TRANSFER EQUIPMENT

Township 23N Range 08W lease is to be served by this system. Date Dool is to be served by this system Date Dote Dote Dote Date Dote Date Dote Date Dote Date Dote Date Date Date Date Date Date Date Da
Date Dool is to be served by this system Date Date Day y overflow will be averted by: Providing adequate available capacity to receive production during maximum unattended time of lease operation 19.15.18.15.C(9) NMAC anifold or at the wellhead?
Date Dool is to be served by this system Date Date Day y overflow will be averted by: Providing adequate available capacity to receive production during maximum unattended time of lease operation 19.15.18.15.C(9) NMAC anifold or at the wellhead?
Date Dool is to be served by this system Date Date Day y overflow will be averted by: Providing adequate available capacity to receive production during maximum unattended time of lease operation 19.15.18.15.C(9) NMAC anifold or at the wellhead?
Date Day y overflow will be averted by: Providing adequate available capacity to receive production during maximum unattended time of lease operation 19.15.18.15.C(9) NMAC anifold or at the wellhead?
Day y overflow will be averted by: Providing adequate available capacity to receive production during maximum unattended time of lease operation 19.15.18.15.C(9) NMAC anifold or at the wellhead?
y overflow will be averted by: Providing adequate available capacity to receive production during maximum unattended time of lease operation 19.15.18.15.C(9) NMAC anifold or at the wellhead?
y overflow will be averted by: Providing adequate available capacity to receive production during maximum unattended time of lease operation 19.15.18.15.C(9) NMAC anifold or at the wellhead?
y overflow will be averted by: Providing adequate available capacity to receive production during maximum unattended time of lease operation 19.15.18.15.C(9) NMAC anifold or at the wellhead?
y overflow will be averted by: Providing adequate available capacity to receive production during maximum unattended time of lease operation 19.15.18.15.C(9) NMAC anifold or at the wellhead?
Maximum well-head shut-in pressure N/A
e the normal high working level of the
Sixteen (16) Hours.
☐ Weir-type measuring vessel☑ Other; describeCoriolis Meter
OIL CONSERVATION DIVISION Approved by: Sund Sulfamous S

INSTRUCTIONS: Submit one copy of Form C-106 with following attachments to appropriate district office.

- 1) Lease plat showing all wells which will be produced in ACT system.
- 2) Schematic diagram of battery and ACT equipment showing all major components and means employed to prove accuracy of measuring device.
- 3) Letter from transporter agreeing to utilization of ACT system as shown on schematic diagram.

NOTICE OF INTENTION TO UTILIZE CUSTORY TRANSFER EQUIPMENT HEROS 2308 09L COM PIPELINE LACT UNIT

WELLS TO BE SERVED BY PIPELINE LACT UNIT:

HEROS 2308 09L COM 1H / API 30-045-35688 / UNIT L (NW/SW), SEC 9, T23N-R8W, NMPM HEROS 2308 09L COM 2H / API 30-045-35687 / UNIT L (NW/SW), SEC 9, T23N-R8W, NMPM HEROS 2308 09L COM 3H / API 30-045-35848 / UNIT L (NW/SW), SEC 9, T23N-R8W, NMPM HEROS 2308 09L COM 4H / API 30-045-35847 / UNIT L (NW/SW), SEC 9, T23N-R8W, NMPM HEROS 2308 09L COM 5H / API 30-045-35877 / UNIT L (NW/SW), SEC 9, T23N-R8W, NMPM

19.15.18.15 AUTOMATIC CUSTODY TRANSFER EQUIPMENT:


- A. Oil shall be received and measured in facilities of an approved design. The facilities shall permit the testing of each well at reasonable intervals and may be comprised of manually gauged, closed stock tanks for which the operator of the ACT system has prepared proper strapping tables, or of ACT equipment. The division shall permit ACT equipment's use only after the operator complies with the following. The operator shall file with the division form C-106 and receive approval for use of the ACT equipment prior to transferring oil through the ACT system. The carrier shall not accept delivery of oil through the ACT system until the division has approved form C-106.
 - See flow process diagram attached.
- **B.** The operator of the ACT system shall submit form C-106 to the appropriate division district office, which is accompanied by the following:
 - (1) plat of the lease showing all wells that the any well operator will produce into the ACT system;
 - Attached as part of Form C-106 Notice of Intent.
 - (2) schematic diagram of the ACT equipment, showing on the diagram all major components such as surge tanks and their capacity, extra storage tanks and their capacity, transfer pumps, monitors, reroute valves, treaters, samplers, strainers, air and gas eliminators, back pressure valves and metering devices (indicating type and capacity, i.e. whether automatic measuring tank, positive volume metering chamber, weir-type measuring vessel or positive displacement meter); the schematic diagram shall also show means employed to prove the measuring device's accuracy; and
 - Attached as part of Form C-106 Notice of Intent.
 - (3) letter from transporter agreeing to utilization of ACT system as shown on schematic diagram.
 - Attached as part of Form C-106 Notice of Intent.
- C. The division shall not approve form C-106 unless the operator of the ACT system will install and operate the ACT system in compliance with the following requirements.
 - (1) Provision is made for accurate determination and recording of uncorrected volume and applicable temperature, or of temperature corrected volume. The system's overall accuracy shall equal or surpass manual methods.
 - The LACT system is more accurate when compared to manual tank. It is proved per BLM Onshore Order #4 Measurement of Oil and API MPMS Chapter 4 Proving Systems; with a volumetric prover that meets the requirements set forth in Onshore Order #4. The LACT also has a temperature RTD which will be calibrated semi-annually, unless more frequent verification is requested by the division.
 - (2) Provision is made for representative sampling of the oil transferred for determination of API gravity and BS&W content.
 - The LACT is equipped with a flow proportional sampler (sample probe and actuated valve). The sampled fluid is stored in a sealed cylinder that is used for API gravity and S&W determination.
 - (3) Provision is made if required by either the oil's producer or the transporter to give adequate assurance that the ACT system runs only merchantable oil.
 - The LACT is equipped with a water cut analyzer that communicated with the flow computer. When the S&W set point is reached the divert valve will engage sending non-merchantable oil to a divert tank. The set point can be adjusted in the flow computer but only if agreed upon by both shipper and producer.
 - (4) Provision is made for set-stop counters to stop the flow of oil through the ACT system at or prior to the time the allowable has been run. Counters shall provide non-reset totalizers that are visible for inspection at all times.
 - The Coriolis meter has a non-resettable totalizer which is always visibly available on the LCD display.

- (5) Necessary controls and equipment are enclosed and sealed, or otherwise arranged to provide assurance against, or evidence of, accidental or purposeful mismeasurement resulting from tampering.
 - Required ports are sealed and tracked in the seal log.
- (6) The ACT system's components are properly sized to ensure operation within the range of their established ratings. All system components that require periodic calibration or inspection for proof of continued accuracy are readily accessible; the frequency and methods of the calibration or inspection shall be as set forth in Paragraph (12) of Subsection C of 19.15.18.15 NMAC.
 - The Coriolis is proved per BLM Onshore Order #4 Measurement of Oil and API MPMS Chapter 4 Proving Systems; with a volumetric prover that meets the requirements set forth in Onshore Order #4. The prover is NIST traceable and water drawn on a bi-annual basis. Proving will be consistent with Onshore Order #4, unless a variance is granted by the Division. NMOCD representatives are sent the schedule to witness if desired. The temperature transmitter is verified on a semi-annual basis, unless more frequent verification is requested by the Division. The water cut analyzer is calibrated as needed.
- (7) The control and recording system includes adequate fail-safe features that provide assurance against mismeasurement in the event of power failure, or the failure of the ACT system's component parts.
 - In the event of power failure, the divert valve mechanically goes to "failed state" and no longer sales oil but only sends it to the divert tank.
 - All of the historized volume data is stored in the flow computer memory with battery backup and is also transmitted by SCADA, multiple times a day, to an office server. So even during a power failure no oil volume is lost.
 - In the event of a malfunction, the LACT unit is programmed to shut off and the divert valve is forced to close and no longer sales oil but only sends it to the divert tank. The malfunction is also logged by the flow computer.
- (8) The ACT system and allied facilities include fail-safe equipment as may be necessary, including high level switches in the surge tank or overflow storage tank that, in the event of power failure or malfunction of the ACT or other equipment, will shut down artificially lifted wells connected to the ACT system and will shut in flowing wells at the well-head or at the header manifold, in which latter case the operator of the ACT system shall pressure test all flowlines to at least 1½ times the maximum well-head shut-in pressure prior to the ACT system's initial use and every two years thereafter.
 - Hi level switches are in place and will shut the well in at the inlet to the production unit in the event of a full tank. Flow lines were tested to 1 ½ times shut in pressure at initial construction. Testing will commence every two years to ensure piping integrity.
- (9) As an alternative to the requirements of Paragraph (8) of Subsection C of 19.15.18.15 NMAC the producer shall provide and at all times maintain a minimum of available storage capacity above the normal high working level of the surge tank to receive and hold the amount of oil that may be produced during maximum unattended time of lease operation.
 - N/A
- (10) In all ACT systems employing automatic measuring tanks, weir-type measuring vessels, positive volume metering chambers or any other volume measuring container, the container and allied components shall be properly calibrated prior to initial use and shall be operated, maintained and inspected as necessary to ensure against incrustation, changes in clingage factors, valve leakage or other leakage and improper action of floats, level detectors, etc.
 - N/A (Coriolis Meter)
- (11) In ACT systems employing positive displacement meters, the meter and allied components shall be properly calibrated prior to initial use and shall be operated, maintained and inspected as necessary to ensure against oil mismeasurement.
 - The Coriolis is proved per BLM Onshore Order #4 Measurement of Oil and API MPMS Chapter 4 Proving Systems; with a volumetric prover that meets the requirements set forth in Onshore Order #4. The prover is NIST traceable and water drawn on a bi-annual basis. Monthly proving will continue per the rule, unless a variance is granted by the Division. NMOCD representatives are sent the schedule to witness if desired. The temperature transmitter is verified on a semi-annual basis, unless more frequent verification is requested by the Division.

- (12) The operator of the ACT system shall check the measuring and recording devices of ACT systems for accuracy at least once each month unless it has obtained an exception to such determination from the division. Where applicable, the operator of the ACT system shall use API standard 1101, Measurement of Petroleum Hydrocarbons by Positive Displacement Meter. Meters may be proved against master meters, portable prover tanks or prover tanks permanently installed on the lease. If the operator of the ACT system uses permanently installed prover tanks, the distance between the opening and closing levels and the provision for determining the opening and closing readings shall be sufficient to detect variations of 5/100 of one percent. The operator of the ACT system shall file reports of determination on the division form entitled "meter test report" or on another acceptable form in duplicate with the appropriate division district office.
 - The Coriolis is proved per BLM Onshore Order #4 Measurement of Oil and API MPMS Chapter 4 Proving Systems; with a volumetric prover that meets the requirements set forth in Onshore Order #4. The prover is NIST traceable and water drawn on a bi-annual basis. Monthly proving will continue per the rule, unless a variance is granted by the Division. NMOCD representatives are sent the schedule to witness if desired. The temperature transmitter is verified on a semi-annual basis, unless more frequent verification is requested by the Division.
- (13) To obtain an exception to the requirement in Paragraph (12) of Subsection C of 19.15.18.15 NMAC that all measuring and recording devices be checked for accuracy once each month, either the producer or transporter may file a request with the director setting forth facts pertinent to the exception. The application shall include a history of the average factors previously obtained, both tabulated and plotted on a graph of factors versus time, showing that the particular installation has experienced no erratic drift. The applicant shall also furnish evidence that the other interested party has agreed to the exception. The director may then set the frequency for determination of the system's accuracy at the interval which the director deems prudent.
 - N/A

D. The division may revoke its approval of an ACT system's form C-106 if the system's operator fails to operate it in compliance with 19.15.18.15 NMAC.

[19.15.18.15 NMAC - Rp, 19.15.5.309 NMAC, 12/1/08]

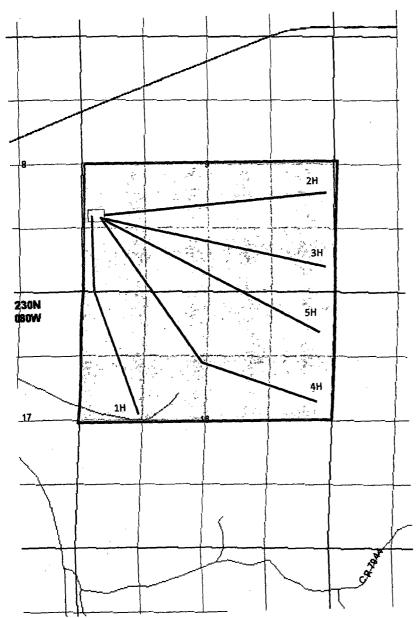


LOGOS OPERATING, LLC HEROS 2308 9L PAD Lease Plat Map


San Juan County, NM

Well Pad w/LACT Equip

Lateral

Approved CA

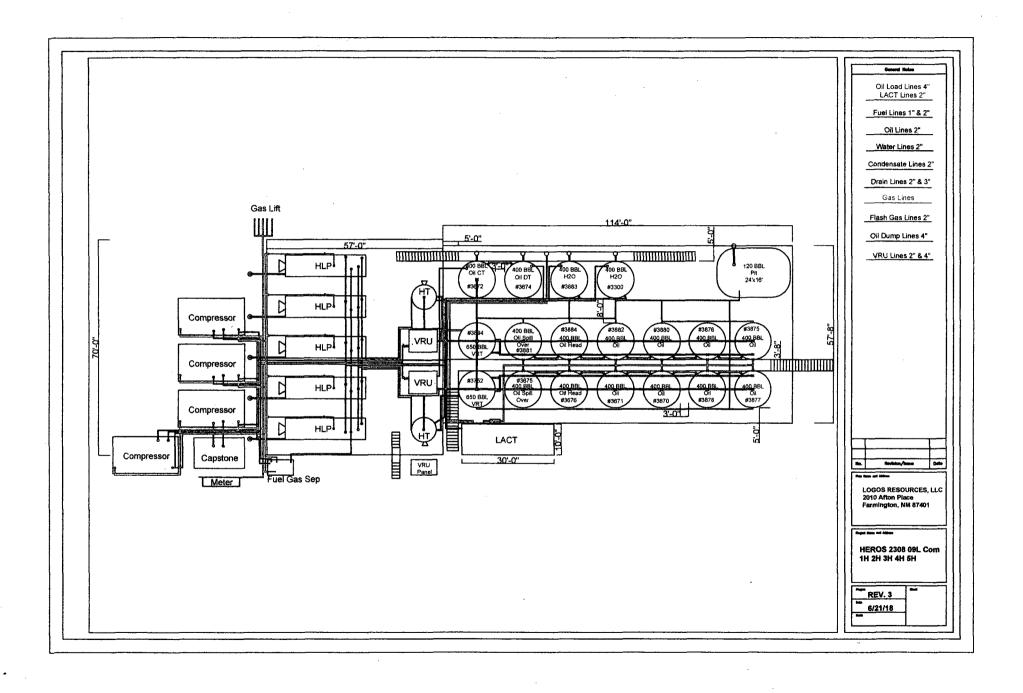

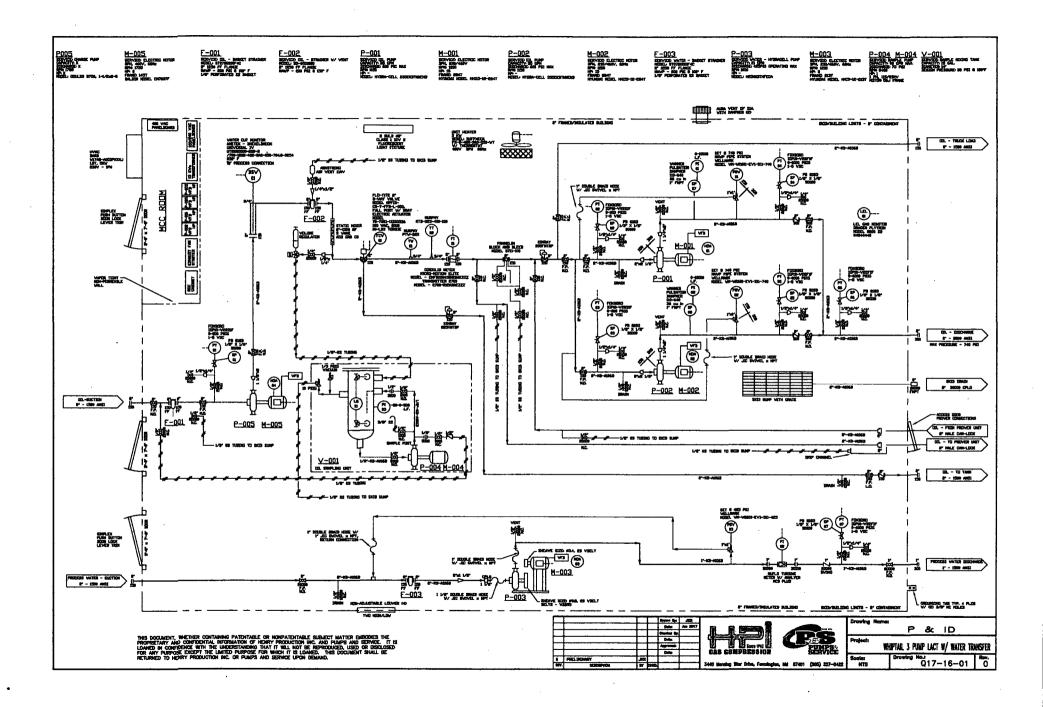

Tamra Sessions

From:

Michael Bullock <michael.bullock@whiptailmidstream.com>

Sent:

Thursday, June 21, 2018 10:07 AM

To:

Tamra Sessions

Cc:

Kelly Maxwell; Andy Pickle; Ernie Johnson

Subject:

RE: C-106 Letter from Transporter: LOGOS - Heros 2308 09L Pad Revised

Tamra,

We approve the use of the Pipeline Transfer LACT equipment on the Heros 2308 09L Com 1H well pad to transfer product from the wells below to Whiptail Midstream, LLC's pipeline system.

- Heros 2308 09L Com 1H / API #30-045-35688 / UNIT L (NW/SW) Sec. 9, T23N, R8W, NMPM
- Heros 2308 09L Com 2H / API #30-045-35687 / UNIT L (NW/SW) Sec. 9, T23N, R8W, NMPM
- Heros 2308 09L Com 3H / API #30-045-35848 / UNIT L (NW/SW) Sec. 9, T23N, R8W, NMPM
- Heros 2308 09L Com 4H / API #30-045-35847 / UNIT L (NW/SW) Sec. 9, T23N, R8W, NMPM
- Heros 2308 09L Com 5H / API #30-045-35877 / UNIT L (NW/SW) Sec. 9, T23N, R8W, NMPM

Michael Bullock Office: 918.900.2603 Cell: 405.818.8618

From: Tamra Sessions [mailto:tsessions@logosresourcesllc.com]

Sent: Thursday, June 21, 2018 10:16 AM

To: Michael Bullock <michael.bullock@whiptailmidstream.com>

Cc: Kelly Maxwell kmaxwell@logosresourceslc.com

Subject: C-106 Letter from Transporter: LOGOS - Heros 2308 09L Pad Revised

Good morning Michael,

LOGOS is working on the C-106 Letter from Transporter submittal to NMOCD for updating the Heros 2308 o9L Com 1H well pad to *add four new wells*. Please reply back to this email with your approval.

LOGOS Operating, LLC is requesting approval from the transporter to utilize Pipeline Transfer LACT equipment on the Heros 2308 09L Com well pad. Product from the below listed well would be produced through the LACT equipment, gathered through LOGOS pipeline, and transferred into Whiptail Midstream, LLC's (transporter) pipeline system through a check meter. Whiptail Midstream, LLC will be responsible for transporting LOGOS Operating, LLC's product to sales.

Heros 2308 09L PIPELINE LACT UNIT WELLS TO BE SERVED BY PIPELINE LACT UNIT:

- Heros 2308 09L Com 1H / API #30-045-35688 / UNIT L (NW/SW) Sec. 9, T23N, R8W, NMPM
- Heros 2308 o9L Com 2H / API #30-045-35687 / UNIT L (NW/SW) Sec. 9, T23N, R8W, NMPM
- Heros 2308 o9L Com 3H / API #30-045-35848 / UNIT L (NW/SW) Sec. 9, T23N, R8W, NMPM
- Heros 2308 09L Com 4H / API #30-045-35847 / UNIT L (NW/SW) Sec. 9, T23N, R8W, NMPM
- Heros 2308 o9L Com 5H / API #30-045-35877 / UNIT L (NW/SW) Sec. 9, T23N, R8W, NMPM

Tamra Sessions
Regulatory Specialist
Office 505-324-4145
tsessions@logosresourcesllc.com

DISTRICT I
1825 N. French Dr., Hobbs, N.M. 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
DISTRICT II
811 S. First St., Artesia, N.M. 88210
Phone: (575) 748-1263 Fax: (575) 748-9720
DISTRICT III
1000 Rio Brazos Rd., Aztec, N.M. 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
DISTRICT IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico Energy, Minerals & Natural Resources Department

Santa Fe. NM 87505

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.

Form C-102 Revised August 1, 2011 Submit one copy to appropriate District Office

X AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

As Drilled Plat

¹ API Number 30-045-35688	*Pool Code 47540	Pool Name NAGEEZI GALLUP					
⁴ Property Code	⁶ Property Name	• Well Number					
317282	317282 HEROS 2308 09L COM						
OGRID No.	Operator Name	^e Elevation					
289408	LOGOS OPERATING, LLC						


¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
L	9	23-N	8-W		1476	SOUTH	210	WEST	SAN JUAN

11 Rottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County			
Ε	16	23-N	8-W		2380	NORTH	1310	WEST	SAN JUAN			
¹⁸ Dedicated Acre		18 Joint or	Infill	16 Consolidation C	ode	¹⁶ Order No.						
160ACRE=	W/2SW/4 W/2NW/				CA - NMNM13	6868						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED

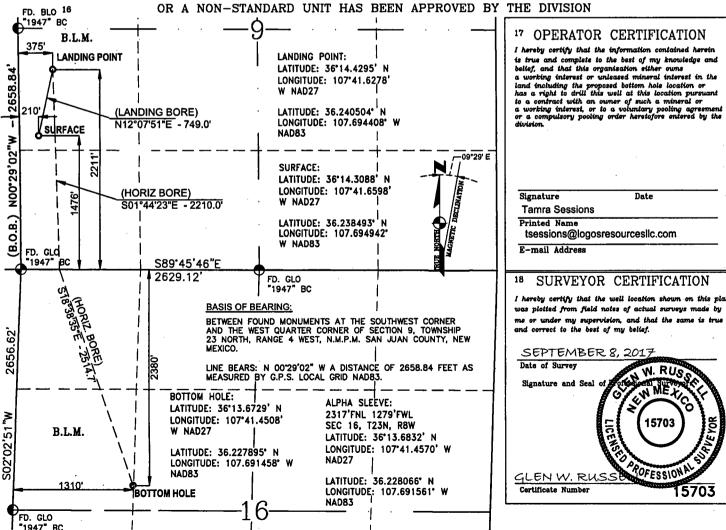

DISTRICT I N. French Dr., Hobbs, N.M. 88840 s: (575) 393-6161 Fax: (575) 393-0720 DISTRICT II 811 S. First St., Artesia, N.M. 88210 Phone: (575) 748-1283 Fax: (575) 748-9720 DISTRICT III 1000 Rio Brasos Ed., Astec, N.M. 87410 Phone: (505) 334-6178 Fax: (505) 334-6170 DISTRICT IV

State of New Mexico Energy, Minerals & Natural Resources Department

> OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-102 Revised August 1, 2011 Submit one copy to appropriate District Office

☐ AMENDED REPORT

	Number	7		Pool Code			Pool Nam	=	
	45-3568			47540			NAGEEZI G		Tell Number
*Property C	ode	•			⁸ Property 1	Name		''	
31946	3				HEROS 2308	09L			#2H
OGRID No).				Operator 1	Name	·		⁹ Elevation
289408	3			L		6913			
					10 Surface	Location			
UL or lot no.	Section	Township	Range	Lot Idn	ot Idn Feet from the North/South line Fee		Feet from the	East/West line	County
L	9	. 23-N	8-W		1476	SOUTH	240 ,	WEST	SAN JUAN
			11 Bott	om Hole	Location I	Different Fro	om Surface		
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
1	9	23-N	8-W		1634	SOUTH	26	EAST	SAN JUAN
Dedicated Acre	9		15 Joint or	Infill	14 Consolidation C	ode	¹⁵ Order No.		
SEC. 9=N2/	S2 160.	00 ACRES							

OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION FD. BLO 16 1947 BC POINT OF ENTRY FD. BLO 17 OPERATOR CERTIFICATION 1079 "1947" BC LAST PERFORATION I hereby certify that the information contained here 931

is true and complete to the best of my knowledge and belief, and that this organization either owns cetter, and that this organization enter owns as unrising interest or unlessed ministral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a confract with an owner of such a ministral or a working interest, or to a voluntary pooling agreement HORIZONTAL BORE B.L.M. 2658. S81°37'12"E - 4356.44' 105 240 26' SURFACE (POINT OF ENTRY BORE) (B.O.B.) NO0*29'02"W N41°30'25"E - 1032.62' TFIRST PERFORATION B.L.M. **BOTTOM HOLE** 1645 Signature Date Printed Name 3,5 5.55 25.75 8.75 8.75 5.5 3.1 E-mail Address S89'45'46"E N89'46'44"W 2629.12 2625.26 18 SURVEYOR CERTIFICATION 1476'FSL 240'FWL SEC. 9 LAST PERFORATION: I hereby certify that the well loo FIRST PERFORATION: BOTTOM HOLE: 2231'FSL 1079'FWL SEC. 9 LATITUDE: 36'14.4327' N LATITUDE: 36"14.3088' N was plotted from field notes of actual surveys made by 1645'FSL 105'FEL SEC. 9 LATITUDE: 36'14.3333' N 1634'FSL 26'FEL SEC. 9 LONGITUDE: 107°41.6537' W me or under my supervision, and that the same is true LATITUDE: 36'14.3315' N LONGITUDE: 107'41.4844' W and correct to the best of my belief. LONGITUDE: 107°40.6541' W LONGITUDE: 107"40.6380' W NAD27 LATITUDE: 36.238493° N NAD27 LONGITUDE: 107.694840° W LATITUDE: 36.240558" N LONGITUDE: 107.692018" W MAY 9, 2018 LATITUDE: 36.238901" N NAD83 LATITUDE: 36.238871° N LONGITUDE: 107.677911° W Date of Survey LONGITUDE: 107.678179 W NAD83 NAD83 POINT OF ENTRY: 15703 2252'FSL 931'FWL SEC. 9 S02'02'51"W BASIS OF BEARING: LATITUDE: 36°14.4362' N LONGITUDE: 107'41.5145' W BETWEEN FOUND MONUMENTS AT THE SOUTHWEST CORNER AND THE WEST QUARTER CORNER OF SECTION 9, TOWNSHIP 23 NORTH, RANGE 8 WEST, N.M.P.M. SAN JUAN COUNTY, NEW NAD27 POFESSIONAL LATITUDE: 36.240617" N LONGITUDE: 107.692520" NAD83 GLEN W. RUSSEL LINE BEARS: N 00'29'02" W A DISTANCE OF 2658.84 FEET AS MEASURED BY G.P.S. LOCAL GRID NAP83. Certificate Number 15703

6

FD. GLO "1947" RC DISTRICT I 1625 M. French Dr., Hobbs, M.M. 88840 Phone: (676) 393-6161 Fax: (676) 393-0720 DISTRICT II

DISTRICT II 811 S. First St., Artesia, M.M. 88210 Phome: (875) 748-1283 Fax: (875) 748-9720 DISTRICT III 1000 Eto Brancs Rd., Astec, H.M. 87410 Phome: (805) 334-6178 Fax: (805) 334-6170

DISTRICT IV 1220 S. St. Francis Dr., Santa Fe, IM 87605 Phons: (505) 476-3480 Fax: (505) 476-3482

¹API Number

FD. GLO "1947" BC

State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505

*Pool Code

Form C-102 Revised August 1, 2011 Submit one copy to appropriate District Office

Pool Name

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

30-0	45-3584	8		47540		NAGEEZI GALLUP							
⁴ Property C	ode				⁸ Property	7.0	Well Number						
31946	19463			HEROS 2308 09L									
OGRID No. Operator Name Elevat									⁹ Elevation				
289408	3			L	OGOS OPERATI	NG, LLC			6913				
	¹⁰ Surface Location												
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County				
L	9	23-N	8-W		1476	SOUTH	270	WEST	SAN JUAN				
			11 Botte	om Hole	Location I	f Different Fro	om Surface						
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County				
Р	9	23-N	8-W		599	SOUTH	26	EAST	SAN JUAN				
13 Dedicated Acre	Dedicated Acres			Infill	¹⁴ Consolidation (Code	¹⁵ Order No.						
SEC.9=N/2SW, SESW, S/2SE 200.00 ACRES													

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION FD. BLO 16 1947" BC 17 OPERATOR CERTIFICATION FD. BLO "1947" BC B.L.M. I hereby certify that the information contained h is true and complete to the best of my knowledge and belief, and that this organisation either owns (POINT OF ENTRY BORE) 4 occup, and this was tryansactors were Turns to a working interest or unlessed mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or a working interest, or to a voluntary pooling agreemen or a compulsory pooling order heretofree netword by the N84°08'12"E - 636.72' 1050 904 LAST 270'5 PERFORATION ₹ NO0*29*02"W — — S77°29'09"E - 4439.99' SURFA N00'13 8 FIRST PERFORATION 511 Signature Date (B.O.B.) Printed Name B.L.M. **BOTTOM HOLE** 599 .e. 617 19. G. E-mail Address S89'45'46"E N89'46'44"W 2625.26 2629.12 SURVEYOR CERTIFICATION 8 LAST PERFORATION: 1476'FSL 270'FWL SEC. 9 FIRST PERFORATION: 1511'FSL 1050'FWL SEC. 9 BOTTOM HOLE: Ę, LATITUDE: 36°14.3088' N 817'FSL 104'FEL SEC. 9 was plotted from field notes of actual surveys made by 599'FSL 26'FEL SEC. 9 LATITUDE: 36"14.3141" N LONGITUDE: 107'41.6476' W LATITUDE: 36"14.1638" N LONGITUDE: 107'41.4891' LATITUDE: 36'14.1609' N LONGITUDE: 107'40.6532' W LONGITUDE: 107'40.6373' W NAD27 and correct to the best of my belief. LATITUDE: 36.238493° N LONGITUDE: 107.694738" W NAD83 LATITUDE: 36.238580° N W. RUSS MAY 9, 2018 LATITUDE: 36.236077 N LONGITUDE: 107.592096" W NADB3 LATITUDE: 36.236027 N LONGITUDE: 107.677899 W GLÉ LONGITUDE: 107.678164° W MET NADB3 POINT OF ENTRY: BASIS OF BEARING: 1544'FSL 904'FWL SEC. 9 5 LATITUDE: 36"14.3195" N BETWEEN FOUND MONUMENTS AT THE SOUTHWEST CORNER AND THE WEST QUARTER CORNER OF SECTION 9, TOWNSHIP 23 NORTH, RANGE 8 WEST, N.M.P.M. SAN JUAN COUNTY, NEW ROFESSIONA S02'02' LONGITUDE: 107-41.5188' W NAD27 LATITUDE: 36.238672* N LONGITUDE: 107.692591* W GLEN W. RUSSELL LINE BEARS: N 00'29'02" W A DISTANCE OF 2658.84 FEET AS MEASURED BY G.P.S. LOCAL GRID NAP83. NADB3 Certificate Number 15703

DISTRICT I 1625 N. French Dr., Hobbs, N.M. 88240 Phone: (575) 393-6161 Fax: (575) 393-0720 DISTRICT II

DISTRICT II
811 S. First St., Artesia, N.M. 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
DISTRICT III
1000 Rio Braxos Rd., Astec, N.M. 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
DISTRICT IV

State of New Mexico Energy, Minerals & Natural Resources Department

DIVISION

Form C-102 Revised August 1, 2011 Submit one copy to appropriate District Office

☐ AMENDED REPORT

OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe. NM 87505

DISTRICT IV 1220 S. St. Francis Dr., Santa Fe, NM 87505 Phone: (505) 476-3460 Fax: (505) 476-3462

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-045-35847	*Pool Code 47540	Pool Name NAGEEZI GALLUP						
⁴ Property Code	Property Code ⁶ Property Name							
317282	HEROS 2308 09L	COM #4H						
OGRID No.	Operator Name	* Elevation						
289408	LOGOS OPERATING	LLC 6913						


10 Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
L	9	23-N	8-W		1476	SOUTH	300	WEST	SAN JUAN

11 Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
н	16	23-N	8-W		2113	NORTH	267	EAST	SAN JUAN
Dedicated Acres SEC 9=W/2/SW, 80 ACRES			18 Joint or	Infill	14 Consolidation C	ode	15 Order No.		
SEC 16-N/2/NW, N	EC 16-N/2/NW, NW/NE, S/2/NE 200 ACRES								

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED

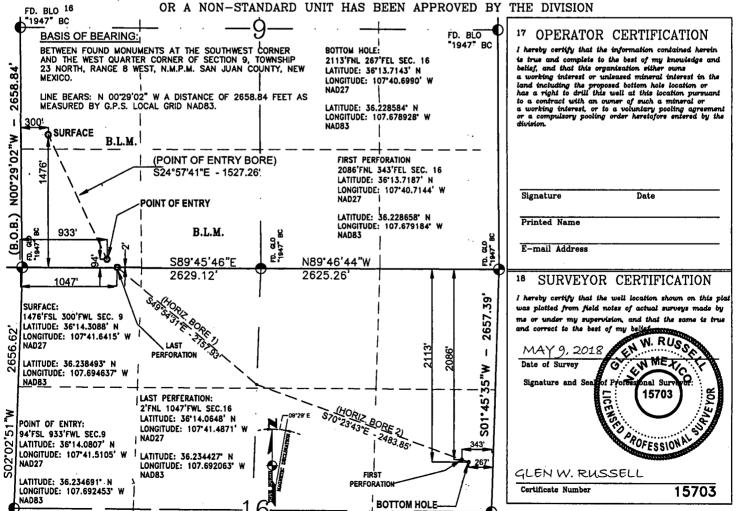

FD. GLO "1947" BC DISTRICT I 1625 N. French Dr., Hobbs, N.M. 88240 Phone: (575) 393-6161 Fax: (575) 393-0720

DISTRICT II
811 S. First St., Artesie, N.M. 88210
Phone: (575) 748-1283 Fax: (576) 748-9720
DISTRICT III
1000 Rio Braxos Rd., Axtec, N.M. 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
DISTRICT IV
1220 S. St. Francis Dr., Santa Fe, NM 87605
Phone: (505) 476-3460 Fax: (506) 476-3482

State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

		Number -045-3	5877		Pool Code 47540			*Pool Name IAGEEZI GALLUP						
F	*Property C					⁶ Property Name						• W	ell Number	
	317282	2			HEROS 2308 09L COM						#5H			
	OGRID No	э.				^e Oper	rator N	lame		° Eleva			Elevation	
	289408	3			LOGOS OPERATING, LLC								6913	
						10 Surfa	ace	Location						
Ū	L or lot no.	Section	Township	Range	Lot Idn	Feet from	the	North/South line	Feet	t from the East/West line County				
L	<u> </u>	9	23-N	8-W		1476		SOUTH		330	WES	T	SAN JUAN	
	11 Bottom Hole Location If Different From Surface													
Ţ	L or lot no.	Section	Township	Range	Lot Idn	Feet from	the	North/South line	Fee	t from the	East/Wes		County	
	<u> </u>	16	23-N	8-W		844		NORTH		257	EAS	<u> </u>	SAN JUAN	
s		/2/sw, sw/s N/2/NE, 8	O ACRES	18 Joint or		¹⁴ Consolida				der No.				
		ABLE W						N UNTIL ALL EN APPROVE				EEN C	ONSOLIDATED	
FD. 人"19	BLO ¹⁶ 47" BC	1	OR A N	ON-SIA	MDAKD (JNII HAS	DE.	EN APPROVE	ום ט ו	INE DIV	VISION			
,	BASIS OF BE	ARING:			9—			FD. B		17 OPI	ERATOR	CERT	TIFICATION	
ļ	BETWEEN FOUN	NO MONUME	ENTS AT THE	SOUTHWEST	CORNER	BOTTOM H 844'FNL		"1947	BC				ion contained herein of my knowledge and	
·I	23 NORTH, RA					LATITUDE:	36°13.	9234' N		belief, and	that this org	anisation		
						NAD27	E: 107°.	40.6891' W		land includ	ting the prope	ozed bottor	n hole location or his location pursuant	
	LINE BEARS: N MEASURED BY	G.P.S. LOC	CAL GRID NAD	CE OF 2658 33.	I.84 FEET AS	LATITUDE:) 36.232	2069° N		to a contro	ict with an o interest, or t	wner of s o a voluni	uch a mineral or lary pooling agreement	
330	SURFACE					LONGITUDI NAD83	E: 107.	678763° W		or a compr division.	ulsory pooling	order her	retofore entered by the	
:	- Acoust vor	B.L.M.			i		į į		.					
			(POINT OF E		+ RE)		PERFOR		- 1					
.	9 054	1	S47°35'24"E	- 851.46'				FEL SEC. 16 13.9287' N	İ					
	1090'	POINT O	_	.AST		LONGIT	UDE: 1	07'40.7040' W		Signatur	е	מ	ate	
-		T 17		ORATION	•	NAD27				biguature Date				
_ <u>s</u>		S 98	``\		LATITUDE: 36.232157* N LONGITUDE: 107.679011* W					Printed Name				
6. 8. 9.7.	1	" "	D. 7. 1/	`-\		NAD83					E-mail Address			
e.		1	B.L.M.		<u> </u>	89'46'44"		2625.26'	1947 B					
SUI	S89"4 RFACE:	5'46"E	2629.12	3,5		HORIZO \$66° 19'50°	 DE	FIRSTRFORATION		18 SU	RVEYOR	CER'	TIFICATION	
	'6'FSL 330'FWL 'ITUDE: 36*14.30			. 6. 7.	<u>i</u> l	19:50	VTAL B	28E / 18	44' 57.39'	_			ition shown on this plat	
LO	IGITUDE: 107°41						739	2RE 1.73"	844 2657			-	tual surveys made by that the same is true	
1	TTUDE: 36.23849				1		1			and correct	to the best	of my belt	of.	
LOP	IGITUDE: 107.69				1		1	257	9 F	# MAY	9, 2018	SEEDEN V	V. RUSSAN	
l "A	083	1			I				1 1	Date of S	urvey	GV W	ME Y COT	
<u> </u>					. — — —		_ _		7 4	Signature	and Seafor		1	
POIN	T OF ENTRY:		IST PERFERATION 16'FSL 1090'FW				1 .	BOTTOM HOLE—	_,≥		710E	1	15703	
	FSL 954'FWL SE 'UDE: 36*14.214	C.9	TITUDE: 36'14.	2044' N	•	N / 109'29'	E .		35,		M.	5		
LONG	SITUDE: 107'41.5		NGITUDE: 1074 AD27	11.4/9/ W	i	Th	!		S01*45'35		A	SO POST	- S	
	NAD27 LATITUDE: 36.236753' N									ESSION				
LONG	UDE: 36.236916 SITUDE: 107.692)NGITUDE: 107.6 AD83	591940° W		? /[ĺ		Ŋ	GLEN	W. RUS	SSELI		
NAD	55	· }					ŀ	•	- 1	Certificate			15703	
) 				1	6	Ħ	i		<u> </u>	L				
		1		+1	~		í	FD. GL "1947"	BCT					