

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form C-101
August 1, 2011

Permit 362334

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

1. Operator Name and Address MATADOR PRODUCTION COMPANY One Lincoln Centre Dallas, TX 75240		2. OGRID Number 228937
		3. API Number 30-025-52687
4. Property Code 335625	5. Property Name PAUL FLOWERS STATE COM	6. Well No. 112H

7. Surface Location

UL - Lot M	Section 6	Township 22S	Range 33E	Lot Idn 7	Feet From 442	N/S Line S	Feet From 909	E/W Line W	County Lea
---------------	--------------	-----------------	--------------	--------------	------------------	---------------	------------------	---------------	---------------

8. Proposed Bottom Hole Location

UL - Lot K	Section 30	Township 21S	Range 33E	Lot Idn K	Feet From 2690	N/S Line N	Feet From 1649	E/W Line W	County Lea
---------------	---------------	-----------------	--------------	--------------	-------------------	---------------	-------------------	---------------	---------------

9. Pool Information

WC-025 G-07 S213330F;BONE SPRING	97927
LEGG;BONE SPRING	37870

Additional Well Information

11. Work Type New Well	12. Well Type OIL	13. Cable/Rotary	14. Lease Type State	15. Ground Level Elevation 3614
16. Multiple Y	17. Proposed Depth 22849	18. Formation Bone Spring	19. Contractor	20. Spud Date 4/24/2024
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☐ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	17.5	13.375	54.5	1075	685	0
Int1	9.875	7.625	29.7	9326	915	0
Prod	6.75	5.5	20	22849	922	9126

Casing/Cement Program: Additional Comments

--

22. Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Annular	5000	3000	Cameron
Double Ram	10000	5000	Cameron
Pipe	10000	5000	Cameron

23. I hereby certify that the information given above is true and complete to the best of my knowledge and belief. I further certify I have complied with 19.15.14.9 (A) NMAC ☐ and/or 19.15.14.9 (B) NMAC ☒ if applicable. Signature: Printed Name: Electronically filed by Brett A Jennings Title: Regulatory Analyst Email Address: brett.jennings@matadorresources.com Date: 3/26/2024 Phone: 972-629-2160	OIL CONSERVATION DIVISION Approved By: Paul F Kautz Title: Geologist Approved Date: 3/27/2024 Expiration Date: 3/27/2026 Conditions of Approval Attached
---	--

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources
Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

FORM C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

1 API Number		2 Pool Code		3 Pool Name	
		97927		WC-025 F-07 Sd13330F; Bone	
4 Property Code		5 Property Name			6 Well Number
		PAUL FLOWERS STATE COM			112H
7 OGRID No.		8 Operator Name			9 Elevation
228937		MATADOR PRODUCTION COMPANY			3614'

¹⁰Surface Location

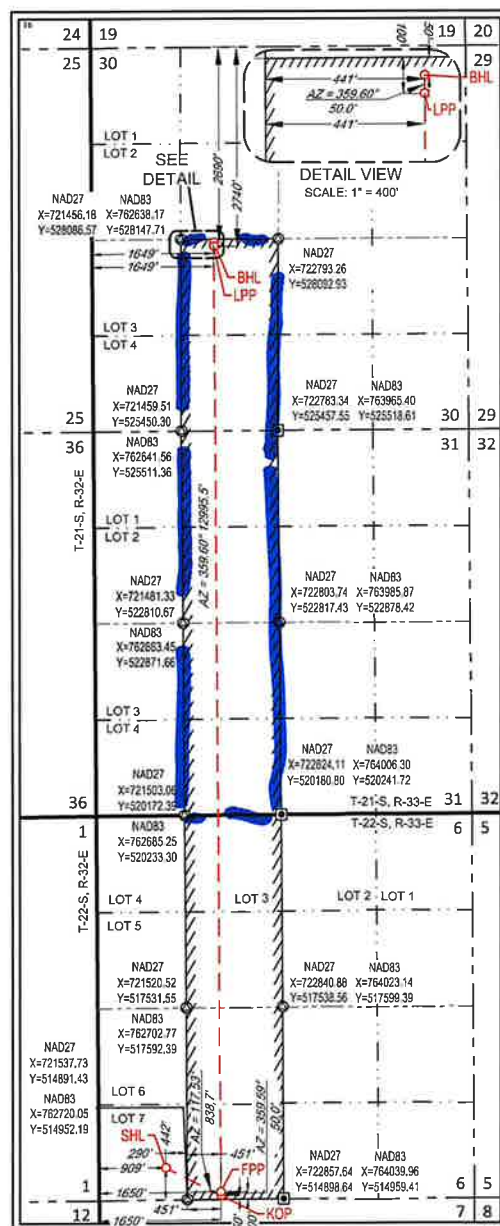
DL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
7	6	22-S	33-E	-	442'	SOUTH	909'	WEST	LEA

¹¹Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
K	30	21-S	33-E	-	2690'	NORTH	1649'	WEST	LEA

¹² Dedicated Acres 400.01	¹³ Joint or In/Fill	¹⁴ Consolidation Code	¹⁵ Order No.
--	--------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

NEW MEXICO EAST
NAD 1983

SURFACE LOCATION (SHL)

442' FSL - SEC. 6
909' FWL - SEC. 6
X=762427 Y=515392
LAT.: N 32.4148434
LONG.: W 103.6168759

KICK OFF POINT (KOP)

50' FSL - SEC. 6
1650' FWL - SEC. 6
X=763171 Y=515005
LAT.: N 32.4137643
LONG.: W 103.6144744

FIRST PERFORATION POINT (FPP)

100' FSL - SEC. 6
1650' FWL - SEC. 6
X=763171 Y=515055
LAT.: N 32.4139017
LONG.: W 103.6144744

LAST PERFORATION POINT (LPP)

2740' FNL - SEC. 30
1649' FWL - SEC. 30
X=763079 Y=528050
LAT.: N 32.4496220
LONG.: W 103.6144882

BOTTOM HOLE LOCATION (BHL)

2690' FNL - SEC. 30
1649' FWL - SEC. 30
X=763079 Y=528100
LAT.: N 32.4497595
LONG.: W 103.6144882

T-21-S, R-33-E
SECTION 30
OT 1 - 36.14 ACRES
OT 2 - 36.14 ACRES
OT 3 - 36.14 ACRES
OT 4 - 36.14 ACRES
SECTION 31
OT 1 - 36.17 ACRES
OT 2 - 36.24 ACRES
OT 3 - 36.30 ACRES
OT 4 - 36.37 ACRES
T-22-S, R-33-E
SECTION 6
OT 1 - 40.03 ACRES
OT 2 - 40.03 ACRES
OT 3 - 40.01 ACRES
OT 4 - 36.39 ACRES
OT 5 - 36.37 ACRES
OT 6 - 36.35 ACRES
OT 7 - 36.33 ACRES

¹⁷OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land underlying the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest or is a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

D.W.J. ~~04/23/24~~

Signature David W. Johns

Printed Name _____
E-mail Address djohns@matadorresources.com

¹⁸SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true to the best of my belief.

11/27/2023

Date of Survey _____
Signature and Seal of Professional Surveyor _____



Certificate Number

NEW MEXICO EAST
NAD 1927

SURFACE LOCATION (SHL)
X=721245 Y=515332
LAT - N 32.4147203
LONG - W 103.6163864

KICK OFF POINT (KOP)
X=721989 Y=514944
LAT N 32.413612
LONG W 103.613980

FIRST PERFORATION POINT (FPF)
X=721989 Y=514994
LAT N 32.4137786
LONG W 103.6139880

EAST PERFORATION POINT
 X=721897 Y=527989
 LAT N 32 4484990
 LONG W 103 6140005

BOTTOM HOLE LOCATION (RM)
X=721897 Y=526030
LAT N 32.4498365
LONG W 103.8141006

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources
Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

FORM C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number		² Pool Code 37870		³ Pool Name Legs; Bone Springs	
⁴ Property Code		⁵ Property Name PAUL FLOWERS STATE COM			⁶ Well Number 112H
⁷ OGRID No. 228937		⁸ Operator Name MATADOR PRODUCTION COMPANY			⁹ Elevation 3614'
¹⁰ Surface Location					
UL or lot no. 7	Section 6	Township 22-S	Range 33-E	Lot Idn -	Feet from the 442'
				North/South line SOUTH	Feet from the 909'
				East/West line WEST	County LEA
¹¹ Bottom Hole Location If Different From Surface					
UL or lot no. K	Section 30	Township 21-S	Range 33-E	Lot Idn -	Feet from the 2690'
				North/South line NORTH	Feet from the 1649'
				East/West line WEST	County LEA
¹² Dedicated Acres 400.01		¹³ Joint or Infill		¹⁴ Consolidation Code	
				¹⁵ Order No.	

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

	NEW MEXICO EAST NAD 1983 SURFACE LOCATION (SHL) 442' FSL - SEC. 6 909' FWL - SEC. 6 X=762427 Y=515392 LAT.: N 32.4148434 LONG.: W 103.6168759 KICK OFF POINT (KOP) 50' FSL - SEC. 6 1650' FWL - SEC. 6 X=763171 Y=515005 LAT.: N 32.4137643 LONG.: W 103.6144744 FIRST PERFORATION POINT (FPP) 100' FSL - SEC. 6 1650' FWL - SEC. 6 X=763171 Y=515055 LAT.: N 32.4139017 LONG.: W 103.6144744 LAST PERFORATION POINT (LPP) 2740' FNL - SEC. 30 1649' FWL - SEC. 30 X=763079 Y=528050 LAT.: N 32.4496220 LONG.: W 103.6144882 BOTTOM HOLE LOCATION (BHL) 2690' FNL - SEC. 30 1649' FWL - SEC. 30 X=763079 Y=528100 LAT.: N 32.4497595 LONG.: W 103.6144882	17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or undivided mineral interest in the land including the proposed bottom hole location or has a right to drill that well on this location pursuant to a contract with an owner of such a mineral or working interest or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. <i>David W. Johns</i> Signature Date 02/23/24 David W. Johns Printed Name E-Mail Address djohns@matadorresources.com
	18 SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true to the best of my belief. 11/27/2023 Date of Survey Signature and Seal of Professional Surveyor ANGEL M. BAEZA NEW MEXICO PROFESSIONAL SURVEYOR 25116 Certificate Number	NEW MEXICO EAST NAD 1927 SURFACE LOCATION (SHL) X=721245 Y=515332 LAT.: N 32.4147003 LONG.: W 103.6133964 KICK OFF POINT (KOP) X=721989 Y=514944 LAT.: N 32.4156412 LONG.: W 103.6139480 FIRST PERFORATION POINT (FPP) X=721897 Y=527089 LAT.: N 32.4137780 LONG.: W 103.6139480 LAST PERFORATION POINT (LPP) X=721897 Y=527089 LAT.: N 32.4137780 LONG.: W 103.6140000 BOTTOM HOLE LOCATION (BHL) X=721897 Y=526039 LAT.: N 32.4498155 LONG.: W 103.6140000
	T-21-S, R-33-E SECTION 30 LOT 1 - 36.14 ACRES LOT 2 - 36.14 ACRES LOT 3 - 36.14 ACRES LOT 4 - 36.14 ACRES SECTION 31 LOT 1 - 36.17 ACRES LOT 2 - 36.24 ACRES LOT 3 - 36.30 ACRES LOT 4 - 36.37 ACRES T-22-S, R-33-E SECTION 6 LOT 1 - 40.03 ACRES LOT 2 - 40.03 ACRES LOT 3 - 40.01 ACRES LOT 4 - 36.39 ACRES LOT 5 - 36.37 ACRES LOT 6 - 36.35 ACRES LOT 7 - 36.33 ACRES	

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources
Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

FORM C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

1API Number		2Pool Code		3Pool Name	
		97927		WC-025 F-07 Sd13330F; Bone	
4Property Code		5Property Name			6Well Number
		PAUL FLOWERS STATE COM			112H
7OGRIID No.		8Operator Name			9Elevation
228937		MATADOR PRODUCTION COMPANY			3614'

¹⁰Surface Location

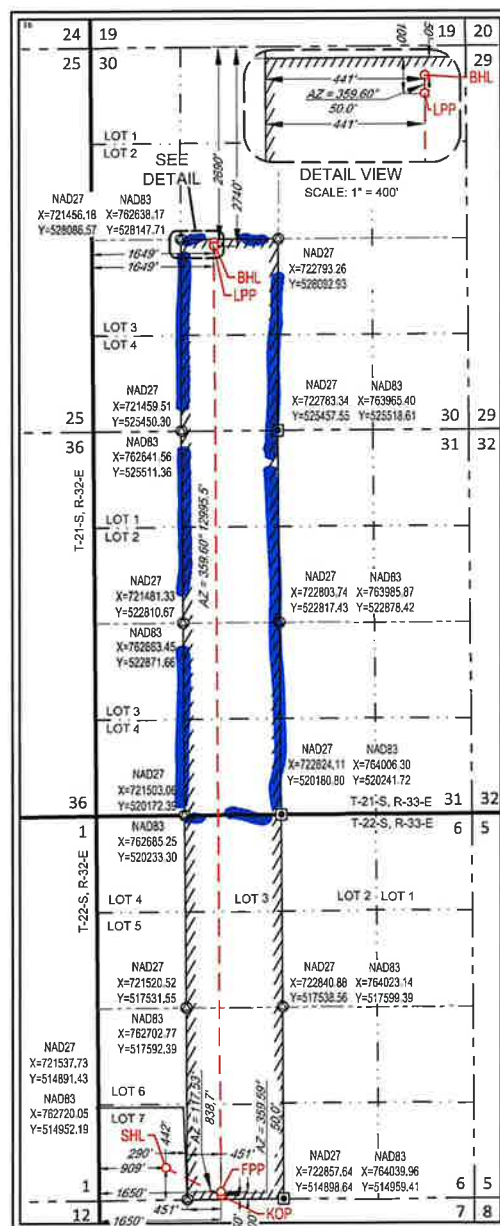
DL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
7	6	22-S	33-E	-	442'	SOUTH	909'	WEST	LEA

¹¹Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
K	30	21-S	33-E	-	2690'	NORTH	1649'	WEST	LEA

¹² Dedicated Acres 400.01	¹³ Joint or In/Fill	¹⁴ Consolidation Code	¹⁵ Order No.
--	--------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

NEW MEXICO EAST
NAD 1983

SURFACE LOCATION (SHL)

442' FSL - SEC. 6
909' FWL - SEC. 6
X=762427 Y=515392
LAT.: N 32.4148434
LONG.: W 103.6168759

KICK OFF POINT (KOP)

50' FSL - SEC. 6
1650' FWL - SEC. 6
X=763171 Y=515005
LAT.: N 32.4137643
LONG.: W 103.6144744

FIRST PERFORATION POINT (FPP)

100' FSL - SEC. 6
1650' FWL - SEC. 6
X=763171 Y=515055
LAT.: N 32.4139017
LONG.: W 103.6144744

LAST PERFORATION POINT (LPP)

2740' FNL - SEC. 30
1649' FWL - SEC. 30
X=763079 Y=528050
LAT.: N 32.4496220
LONG.: W 103.6144882

BOTTOM HOLE LOCATION (BHL)

2690' FNL - SEC. 30
1649' FWL - SEC. 30
X=763079 Y=528100
LAT.: N 32.4497595
LONG.: W 103.6144882

T-21-S, R-33-E

SECTION 30
LOT 1 - 36.14 ACRES
LOT 2 - 36.14 ACRES
LOT 3 - 36.14 ACRES
LOT 4 - 36.14 ACRES
SECTION 31
LOT 1 - 36.17 ACRES
LOT 2 - 36.24 ACRES
LOT 3 - 36.30 ACRES
LOT 4 - 36.37 ACRES
T-22-S, R-33-E
SECTION 6
LOT 1 - 40.03 ACRES
LOT 2 - 40.03 ACRES
LOT 3 - 40.01 ACRES
LOT 4 - 36.39 ACRES
LOT 5 - 36.37 ACRES
LOT 6 - 36.35 ACRES
LOT 7 - 36.33 ACRES

¹⁷OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land underlying the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest or is a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Signature: David W. Johns Date: 04/21/21
Printed Name: David W. Johns
E-mail Address: djohns@matadorresou

¹⁸SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true to the best of my belief.

11/27/2023

Date of Survey _____
Signature and Seal of Professional Surveyor _____



Certificate Number

NEW MEXICO EAST
NAD 1927

SURFACE LOCATION (SHL)
X=721245 Y=515332
LAT - N 32.4147203
LONG - W 103.8163894

FIRST PERFORATION POINT (F)
X=721989 Y=514994
LAT N 32.4137786
LONG W 103.6138880

BOTTOM HOLE LOCATION (M)
X=721897 Y=528038
LAT N 32 4496365
LONG W 103 8140096

KICK OFF POINT (KOP)
X=721980 Y=514844
LAT N 32.4136412
LONG W 103.6139880

X=721897 Y=527989
LAT N 32 4464990
LONG W 103 6140005

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources
Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

FORM C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number		² Pool Code 37870		³ Pool Name Legs; Bone Springs	
⁴ Property Code		⁵ Property Name PAUL FLOWERS STATE COM			⁶ Well Number 112H
⁷ OGRID No. 228937		⁸ Operator Name MATADOR PRODUCTION COMPANY			⁹ Elevation 3614'
¹⁰ Surface Location					
UL or lot no. 7	Section 6	Township 22-S	Range 33-E	Lot Idn -	Feet from the 442'
				North/South line SOUTH	Feet from the 909'
				East/West line WEST	County LEA
¹¹ Bottom Hole Location If Different From Surface					
UL or lot no. K	Section 30	Township 21-S	Range 33-E	Lot Idn -	Feet from the 2690'
				North/South line NORTH	Feet from the 1649'
				East/West line WEST	County LEA
¹² Dedicated Acres 400.01		¹³ Joint or Infill		¹⁴ Consolidation Code	
				¹⁵ Order No.	

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

	NEW MEXICO EAST NAD 1983 SURFACE LOCATION (SHL) 442' FSL - SEC. 6 909' FWL - SEC. 6 X=762427 Y=515392 LAT.: N 32.4148434 LONG.: W 103.6168759 KICK OFF POINT (KOP) 50' FSL - SEC. 6 1650' FWL - SEC. 6 X=763171 Y=515005 LAT.: N 32.4137643 LONG.: W 103.6144744 FIRST PERFORATION POINT (FPP) 100' FSL - SEC. 6 1650' FWL - SEC. 6 X=763171 Y=515055 LAT.: N 32.4139017 LONG.: W 103.6144744 LAST PERFORATION POINT (LPP) 2740' FNL - SEC. 30 1649' FWL - SEC. 30 X=763079 Y=528050 LAT.: N 32.4496220 LONG.: W 103.6144882 BOTTOM HOLE LOCATION (BHL) 2690' FNL - SEC. 30 1649' FWL - SEC. 30 X=763079 Y=528100 LAT.: N 32.4497595 LONG.: W 103.6144882	17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or undivided mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. <i>David W. Johns</i> Signature Date 02/23/24 Printed Name E-Mail Address djohns@matadorresources.com
	18 SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true to the best of my belief. 11/27/2023 Date of Survey Signature and Seal of Professional Surveyor Certificate Number	NEW MEXICO EAST NAD 1927 SURFACE LOCATION (SHL) X=721245 Y=515332 LAT.: N 32.4147003 LONG.: W 103.6133964 KICK OFF POINT (KOP) X=721989 Y=514944 LAT.: N 32.4156412 LONG.: W 103.6139480 FIRST PERFORATION POINT (FPP) X=721897 Y=527989 LAT.: N 32.4137785 LONG.: W 103.6139480 LAST PERFORATION POINT (LPP) X=721897 Y=527989 LAT.: N 32.4137785 LONG.: W 103.6139480 BOTTOM HOLE LOCATION (BHL) X=721897 Y=527989 LAT.: N 32.4137785 LONG.: W 103.6139480
	T-21-S, R-33-E SECTION 30 LOT 1 - 36.14 ACRES LOT 2 - 36.14 ACRES LOT 3 - 36.14 ACRES LOT 4 - 36.14 ACRES SECTION 31 LOT 1 - 36.17 ACRES LOT 2 - 36.24 ACRES LOT 3 - 36.30 ACRES LOT 4 - 36.37 ACRES T-22-S, R-33-E SECTION 6 LOT 1 - 40.03 ACRES LOT 2 - 40.03 ACRES LOT 3 - 40.01 ACRES LOT 4 - 36.39 ACRES LOT 5 - 36.37 ACRES LOT 6 - 36.35 ACRES LOT 7 - 36.33 ACRES	NEW MEXICO EAST NAD 1927 SURFACE LOCATION (SHL) X=721245 Y=515332 LAT.: N 32.4147003 LONG.: W 103.6133964 KICK OFF POINT (KOP) X=721989 Y=514944 LAT.: N 32.4156412 LONG.: W 103.6139480 FIRST PERFORATION POINT (FPP) X=721897 Y=527989 LAT.: N 32.4137785 LONG.: W 103.6139480 LAST PERFORATION POINT (LPP) X=721897 Y=527989 LAT.: N 32.4137785 LONG.: W 103.6139480 BOTTOM HOLE LOCATION (BHL) X=721897 Y=527989 LAT.: N 32.4137785 LONG.: W 103.6139480
	T-22-S, R-33-E SECTION 30 LOT 1 - 36.14 ACRES LOT 2 - 36.14 ACRES LOT 3 - 36.14 ACRES LOT 4 - 36.14 ACRES SECTION 31 LOT 1 - 36.17 ACRES LOT 2 - 36.24 ACRES LOT 3 - 36.30 ACRES LOT 4 - 36.37 ACRES T-22-S, R-33-E SECTION 6 LOT 1 - 40.03 ACRES LOT 2 - 40.03 ACRES LOT 3 - 40.01 ACRES LOT 4 - 36.39 ACRES LOT 5 - 36.37 ACRES LOT 6 - 36.35 ACRES LOT 7 - 36.33 ACRES	NEW MEXICO EAST NAD 1927 SURFACE LOCATION (SHL) X=721245 Y=515332 LAT.: N 32.4147003 LONG.: W 103.6133964 KICK OFF POINT (KOP) X=721989 Y=514944 LAT.: N 32.4156412 LONG.: W 103.6139480 FIRST PERFORATION POINT (FPP) X=721897 Y=527989 LAT.: N 32.4137785 LONG.: W 103.6139480 LAST PERFORATION POINT (LPP) X=721897 Y=527989 LAT.: N 32.4137785 LONG.: W 103.6139480 BOTTOM HOLE LOCATION (BHL) X=721897 Y=527989 LAT.: N 32.4137785 LONG.: W 103.6139480

S:\SURVEY\MATADOR_RESOURCES\PAUL_FLOWERS\FINAL_PRODUCTS\ILO_PAUL_FLOWERS_112H.DWG 12/7/2023 11:50:48 AM occasion

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

Form APD Conditions
Permit 362334

PERMIT CONDITIONS OF APPROVAL

Operator Name and Address: MATADOR PRODUCTION COMPANY [228937] One Lincoln Centre Dallas, TX 75240	API Number: 30-025-52687
	Well: PAUL FLOWERS STATE COM #112H

OCD Reviewer	Condition
pkautz	Notify OCD 24 hours prior to casing & cement
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
pkautz	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system
pkautz	Cement is required to circulate on both surface and intermediate1 strings of casing
pkautz	If cement does not circulate on any string, a CBL is required for that string of casing
pkautz	The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of the well being spud
pkautz	Pit construction and closure must satisfy all requirements of your approved plan
pkautz	If using a pit for drilling and completion operations, must have an approved pit from prior to spudding the well

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description Effective May 25, 2021

I. Operator: Matador Production Company **OGRID:** 228937 **Date:** 03/20/2024

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
Paul Flowers #112H	TBD	Lot 7-6-22S-33E	442' FSL, 909' FWL	900	1,400	2,500
Paul Flowers #111H	TBD	Lot 7-6-22S-33E	472' FSL, 909' FWL	900	1,400	2,500
Paul Flowers #158H	TBD	P-6-22S-33E	598' FSL, 756' FEL	800	1,000	2,000
Paul Flowers #154H	TBD	P-6-22S-33E	626' FSL, 766' FEL	800	1,000	2,000
Paul Flowers #153H	TBD	O-6-22S-33E	442' FSL, 2,068' FEL	800	1,000	2,000
Paul Flowers #152H	TBD	O-6-22S-33E	472' FSL, 2,068' FEL	800	1,000	2,000
Paul Flowers #151H	TBD	Lot 7-6-22S-33E	472' FSL, 989' FWL	800	1,000	2,000
Paul Flowers #134H	TBD	P-6-22S-33E	607' FSL, 728' FEL	800	1,000	2,000
Paul Flowers #132H	TBD	O-6-22S-33E	442' FSL, 2,038' FEL	800	1,000	2,000
Paul Flowers #131H	TBD	Lot 7-6-22S-33E	442' FSL, 1,019' FWL	800	1,000	2,000
Paul Flowers #114H	TBD	P-6-22S-33E	573' FSL, 833' FEL	900	1,400	2,500
Paul Flowers #208H	TBD	P-6-22S-33E	635' FSL, 737' FEL	1,000	1,500	2,600
Paul Flowers #203H	TBD	O-6-22S-33E	472' FSL, 2,038' FEL	1,000	1,500	2,600
Paul Flowers #155H	TBD	Lot 7-6-22S-33E	442' FSL, 989' FWL	800	1,000	2,000
Paul Flowers #113H	TBD	O-6-22S-33E	472' FSL, 2,148' FEL	900	1,400	2,500
Paul Flowers #205H	TBD	Lot 7-6-22S-33E	472' FSL, 1,019' FWL	1,000	1,500	2,600

IV. Central Delivery Point Name: Paul Flowers TB [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
Paul Flowers #112H	TBD	06/19/2025	07/18/2025	11/04/2025	12/08/2025	12/08/2025
Paul Flowers #111H	TBD	05/19/2025	06/18/2025	10/01/2025	11/12/2025	11/12/2025
Paul Flowers #158H	TBD	09/20/2024	10/16/2024	02/17/2025	04/20/2025	04/20/2025
Paul Flowers #154H	TBD	07/23/2024	08/20/2024	01/12/2025	02/15/2025	02/15/2025
Paul Flowers #153H	TBD	08/21/2024	09/16/2024	01/03/2025	02/19/2025	02/19/2025
Paul Flowers #152H	TBD	08/22/2024	09/19/2024	02/26/2025	04/16/2025	04/16/2025
Paul Flowers #151H	TBD	08/05/2024	09/02/2024	01/20/2025	03/10/2025	03/10/2025
Paul Flowers #134H	TBD	09/17/2024	10/15/2024	12/25/2024	02/22/2025	02/22/2025
Paul Flowers #132H	TBD	10/17/2024	11/14/2024	02/08/2025	04/23/2025	04/23/2025
Paul Flowers #131H	TBD	09/30/2024	10/28/2024	01/02/2025	03/17/2025	03/17/2025
Paul Flowers #114H	TBD	07/19/2025	08/18/2025	12/07/2025	01/07/2026	01/07/2026
Paul Flowers #208H	TBD	11/15/2024	12/15/2024	01/30/2025	04/27/2025	04/27/2025
Paul Flowers #203H	TBD	10/16/2024	11/15/2024	12/16/2024	02/26/2025	02/26/2025
Paul Flowers #155H	TBD	09/03/2024	09/29/2024	01/11/2025	03/24/2025	03/24/2025
Paul Flowers #113H	TBD	04/19/2025	05/18/2025	09/04/2025	10/11/2025	10/11/2025
Paul Flowers #205H	TBD	10/29/2024	11/28/2024	12/24/2024	03/21/2025	03/21/2025

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan
EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications**Effective May 25, 2021**

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: 
Printed Name: Oscar Gonzalez
Title: Production Engineer
E-mail Address: ogonzalez@matadorresources.com
Date: 03/07/2024
Phone: 972 – 629 – 2147
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)
Approved By:
Title:
Approval Date:
Conditions of Approval:

Addendum to Natural Gas Management Plan for Matador's

Paul Flowers #112H, Paul Flowers #111H, Paul Flowers #158H, Paul Flowers #154H, Paul Flowers #153H, Paul Flowers #152H, Paul Flowers #151H, Paul Flowers #134H, Paul Flowers #132H, Paul Flowers #131H, Paul Flowers #114H, Paul Flowers #208H, Paul Flowers #203H, Paul Flowers #155H, Paul Flowers #113H, Paul Flowers #205H

VI. Separation Equipment

Flow from the wells will be routed via a flowline to a 48"x15' three phase separator dedicated to the well. The first stage separators are sized with input from BRE ProMax and API 12J. Anticipated production rates can be seen in the below table. Liquid retention times at expected maximum rates will be >3 minutes. Gas will be routed from the first stage separator to sales. Hydrocarbon liquids are dumped from the first stage separator and commingled to one or more heater treaters. The flash gas from the heater treater(s) could either be sent to sales or routed to a compressor if the sales line pressure is higher than the MAWP of the heater treater (125 psi). From the heater treaters, hydrocarbon liquid will be routed to the tanks where vapor is compressed by a VRU if technically feasible to either sales or a compressor if the sales line pressure is higher than the VRU's maximum discharge pressure (~150 psi). Therefore, Matador has sized our separation equipment to optimize gas capture and our separation equipment is of sufficient size to handle the expected volumes of gas.

Well Name	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
Paul Flowers #112H	900	1,400	2,500
Paul Flowers #111H	900	1,400	2,500
Paul Flowers #158H	800	1,000	2,000
Paul Flowers #154H	800	1,000	2,000
Paul Flowers #153H	800	1,000	2,000
Paul Flowers #152H	800	1,000	2,000
Paul Flowers #151H	800	1,000	2,000
Paul Flowers #134H	800	1,000	2,000
Paul Flowers #132H	800	1,000	2,000
Paul Flowers #131H	800	1,000	2,000
Paul Flowers #114H	900	1,400	2,500
Paul Flowers #208H	1,000	1,500	2,600
Paul Flowers #203H	1,000	1,500	2,600
Paul Flowers #155H	800	1,000	2,000
Paul Flowers #113H	900	1,400	2,500
Paul Flowers #205H	1,000	1,500	2,600

VII. Operation Practices

Although not a complete recitation of all our efforts to comply with a subsection A through F of 19.15.27.8 NMAC, a summary is as follows. During drilling, Matador will have a properly sized flare stack at least 100 feet from the nearest surface hole. During initial flowback we will route the flowback fluids into completion or storage tanks and, to the extent possible, flare rather than vent any gas. We will commence operation of a separator as soon as technically feasible, and

have instructed our team that we want to connect the gas to sales as soon as possible but not later than 30 days after initial flowback.

Regarding production operations, we have designed our production facilities to be compliant with the requirements of Part E of 19.15.27.8 NMAC. We will instruct our team to perform the AVOs on the frequency required under the rules. While the well is producing, we will take steps to minimize flaring during maintenance, as set forth below, and we have a process in place for the measuring of any flared gas and the reporting of any reportable flaring events.

VII. Best Management Practices

Steps are taken to minimize venting during active or planned maintenance when technically feasible including:

- Isolating the affected component and reducing pressure through process piping
- Blowing down the equipment being maintained to a control device
- Performing preventative maintenance and minimizing the duration of maintenance activities
- Shutting in sources of supply as possible
- Other steps that are available depending on the maintenance being performed

Well Name: Paul Flowers State Com #112H

STRING	FLUID TYPE	HOLE SZ	CSG SZ	CSG GRADE	CSG WT	DEPTH SET	TOP CSG	TTL SX CEMENT	EST TOC	ADDITIONAL INFO FOR CSG/CMT PROGRAM (Optional)
SURF	FRESH WTR	17.5	13.375	J-55	54.50	1075	0	685	0	Option to drill surface hole with surface setting rig
INT 1	Diesel Brine Emulsion	9.875	7.625	P-110	29.70	9326	0	915	0	Option to run DV tool and Packer.
PROD	OBM	6.75	5.5	P-110	20.00	22849	0	922	9126	

Matador Production Company

Antelope Ridge

Paul Flowers

Paul Flowers #112H

Wellbore #1

Plan: State Plan #1

Standard Planning Report

12 March, 2024

Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well Paul Flowers #112H
Company:	Matador Production Company	TVD Reference:	KB @ 3642.5usft
Project:	Antelope Ridge	MD Reference:	KB @ 3642.5usft
Site:	Paul Flowers	North Reference:	Grid
Well:	Paul Flowers #112H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	State Plan #1		

Project	Antelope Ridge		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		Using geodetic scale factor

Site	Paul Flowers				
Site Position:		Northing:	515,361.55 usft	Latitude:	32° 24' 53.290 N
From:	Lat/Long	Easting:	721,245.00 usft	Longitude:	103° 36' 59.001 W
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.38 °

Well	Paul Flowers #112H					
Well Position	+N/-S	-30.1 usft	Northing:	515,331.50 usft	Latitude:	32° 24' 52.993 N
	+E/-W	0.2 usft	Easting:	721,245.20 usft	Longitude:	103° 36' 59.001 W
Position Uncertainty		0.0 usft	Wellhead Elevation:		Ground Level:	3,614.0 usft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2015	3/9/2024	6.25	60.14	47,352.11360857

Design		State Plan #1			
Audit Notes:					
Version:	1	Phase:	PLAN	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)		+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.0		0.0	0.0	359.60

Plan Survey Tool Program		Date	3/12/2024		
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.0	22,848.9	State Plan #1 (Wellbore #1)	MWD	
			OWSG MWD - Standard		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,600.0	8.00	117.53	1,598.7	-12.9	24.7	2.00	2.00	0.00	117.53	
7,159.0	8.00	117.53	7,103.6	-370.5	710.8	0.00	0.00	0.00	0.00	
7,692.3	0.00	0.00	7,635.2	-387.6	743.8	1.50	-1.50	0.00	180.00	
9,426.6	0.00	0.00	9,369.5	-387.6	743.8	0.00	0.00	0.00	0.00	KOP - Paul Flowers #
10,326.6	90.00	359.60	9,942.5	185.3	739.7	10.00	10.00	0.00	359.60	BHL - Paul Flowers #
22,848.9	90.00	359.60	9,942.5	12,707.3	651.6	0.00	0.00	0.00	0.00	BHL - Paul Flowers #

Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well Paul Flowers #112H
Company:	Matador Production Company	TVD Reference:	KB @ 3642.5usft
Project:	Antelope Ridge	MD Reference:	KB @ 3642.5usft
Site:	Paul Flowers	North Reference:	Grid
Well:	Paul Flowers #112H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	State Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
999.9	0.00	0.00	999.9	0.0	0.0	0.0	0.00	0.00	0.00
Z (Rustler)									
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
Start Build 2.00									
1,300.0	2.00	117.53	1,300.0	-0.8	1.5	-0.8	2.00	2.00	0.00
1,311.3	2.23	117.53	1,311.3	-1.0	1.9	-1.0	2.00	2.00	0.00
Z (Salado)									
1,400.0	4.00	117.53	1,399.8	-3.2	6.2	-3.3	2.00	2.00	0.00
1,500.0	6.00	117.53	1,499.5	-7.3	13.9	-7.4	2.00	2.00	0.00
1,600.0	8.00	117.53	1,598.7	-12.9	24.7	-13.1	2.00	2.00	0.00
Start 5559.0 hold at 1600.0 MD									
1,700.0	8.00	117.53	1,697.7	-19.3	37.1	-19.6	0.00	0.00	0.00
1,800.0	8.00	117.53	1,796.8	-25.8	49.4	-26.1	0.00	0.00	0.00
1,900.0	8.00	117.53	1,895.8	-32.2	61.7	-32.6	0.00	0.00	0.00
2,000.0	8.00	117.53	1,994.8	-38.6	74.1	-39.1	0.00	0.00	0.00
2,100.0	8.00	117.53	2,093.8	-45.0	86.4	-45.6	0.00	0.00	0.00
2,200.0	8.00	117.53	2,192.9	-51.5	98.8	-52.2	0.00	0.00	0.00
2,300.0	8.00	117.53	2,291.9	-57.9	111.1	-58.7	0.00	0.00	0.00
2,400.0	8.00	117.53	2,390.9	-64.3	123.5	-65.2	0.00	0.00	0.00
2,500.0	8.00	117.53	2,489.9	-70.8	135.8	-71.7	0.00	0.00	0.00
2,600.0	8.00	117.53	2,589.0	-77.2	148.1	-78.2	0.00	0.00	0.00
2,700.0	8.00	117.53	2,688.0	-83.6	160.5	-84.8	0.00	0.00	0.00
2,800.0	8.00	117.53	2,787.0	-90.1	172.8	-91.3	0.00	0.00	0.00
2,900.0	8.00	117.53	2,886.1	-96.5	185.2	-97.8	0.00	0.00	0.00
3,000.0	8.00	117.53	2,985.1	-102.9	197.5	-104.3	0.00	0.00	0.00
3,100.0	8.00	117.53	3,084.1	-109.4	209.8	-110.8	0.00	0.00	0.00
3,200.0	8.00	117.53	3,183.1	-115.8	222.2	-117.4	0.00	0.00	0.00
3,300.0	8.00	117.53	3,282.2	-122.2	234.5	-123.9	0.00	0.00	0.00
3,400.0	8.00	117.53	3,381.2	-128.7	246.9	-130.4	0.00	0.00	0.00
3,500.0	8.00	117.53	3,480.2	-135.1	259.2	-136.9	0.00	0.00	0.00
3,600.0	8.00	117.53	3,579.2	-141.5	271.6	-143.4	0.00	0.00	0.00
3,700.0	8.00	117.53	3,678.3	-148.0	283.9	-149.9	0.00	0.00	0.00
3,800.0	8.00	117.53	3,777.3	-154.4	296.2	-156.5	0.00	0.00	0.00
3,900.0	8.00	117.53	3,876.3	-160.8	308.6	-163.0	0.00	0.00	0.00
4,000.0	8.00	117.53	3,975.3	-167.3	320.9	-169.5	0.00	0.00	0.00
4,100.0	8.00	117.53	4,074.4	-173.7	333.3	-176.0	0.00	0.00	0.00
4,200.0	8.00	117.53	4,173.4	-180.1	345.6	-182.5	0.00	0.00	0.00
4,300.0	8.00	117.53	4,272.4	-186.6	357.9	-189.1	0.00	0.00	0.00
4,400.0	8.00	117.53	4,371.5	-193.0	370.3	-195.6	0.00	0.00	0.00
4,500.0	8.00	117.53	4,470.5	-199.4	382.6	-202.1	0.00	0.00	0.00
4,585.3	8.00	117.53	4,555.0	-204.9	393.2	-207.7	0.00	0.00	0.00

Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well Paul Flowers #112H
Company:	Matador Production Company	TVD Reference:	KB @ 3642.5usft
Project:	Antelope Ridge	MD Reference:	KB @ 3642.5usft
Site:	Paul Flowers	North Reference:	Grid
Well:	Paul Flowers #112H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	State Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
Z (G30:CS14-CSB)									
4,600.0	8.00	117.53	4,569.5	-205.9	395.0	-208.6	0.00	0.00	0.00
4,700.0	8.00	117.53	4,668.5	-212.3	407.3	-215.1	0.00	0.00	0.00
4,800.0	8.00	117.53	4,767.6	-218.7	419.7	-221.6	0.00	0.00	0.00
4,854.8	8.00	117.53	4,821.8	-222.2	426.4	-225.2	0.00	0.00	0.00
Z (G26: Bell Cyn.)									
4,900.0	8.00	117.53	4,866.6	-225.2	432.0	-228.2	0.00	0.00	0.00
5,000.0	8.00	117.53	4,965.6	-231.6	444.3	-234.7	0.00	0.00	0.00
5,100.0	8.00	117.53	5,064.6	-238.0	456.7	-241.2	0.00	0.00	0.00
5,200.0	8.00	117.53	5,163.7	-244.5	469.0	-247.7	0.00	0.00	0.00
5,300.0	8.00	117.53	5,262.7	-250.9	481.4	-254.2	0.00	0.00	0.00
5,400.0	8.00	117.53	5,361.7	-257.3	493.7	-260.8	0.00	0.00	0.00
5,500.0	8.00	117.53	5,460.7	-263.7	506.0	-267.3	0.00	0.00	0.00
5,600.0	8.00	117.53	5,559.8	-270.2	518.4	-273.8	0.00	0.00	0.00
5,700.0	8.00	117.53	5,658.8	-276.6	530.7	-280.3	0.00	0.00	0.00
5,800.0	8.00	117.53	5,757.8	-283.0	543.1	-286.8	0.00	0.00	0.00
5,900.0	8.00	117.53	5,856.9	-289.5	555.4	-293.3	0.00	0.00	0.00
6,000.0	8.00	117.53	5,955.9	-295.9	567.8	-299.9	0.00	0.00	0.00
6,050.2	8.00	117.53	6,005.5	-299.1	573.9	-303.1	0.00	0.00	0.00
Z (G13: Cherry Cyn.)									
6,100.0	8.00	117.53	6,054.9	-302.3	580.1	-306.4	0.00	0.00	0.00
6,200.0	8.00	117.53	6,153.9	-308.8	592.4	-312.9	0.00	0.00	0.00
6,300.0	8.00	117.53	6,253.0	-315.2	604.8	-319.4	0.00	0.00	0.00
6,400.0	8.00	117.53	6,352.0	-321.6	617.1	-325.9	0.00	0.00	0.00
6,500.0	8.00	117.53	6,451.0	-328.1	629.5	-332.5	0.00	0.00	0.00
6,600.0	8.00	117.53	6,550.0	-334.5	641.8	-339.0	0.00	0.00	0.00
6,700.0	8.00	117.53	6,649.1	-340.9	654.1	-345.5	0.00	0.00	0.00
6,800.0	8.00	117.53	6,748.1	-347.4	666.5	-352.0	0.00	0.00	0.00
6,900.0	8.00	117.53	6,847.1	-353.8	678.8	-358.5	0.00	0.00	0.00
7,000.0	8.00	117.53	6,946.1	-360.2	691.2	-365.1	0.00	0.00	0.00
7,100.0	8.00	117.53	7,045.2	-366.7	703.5	-371.6	0.00	0.00	0.00
7,100.3	8.00	117.53	7,045.4	-366.7	703.5	-371.6	0.00	0.00	0.00
Z (G7: Brushy Cyn.) Antelope Ridge									
7,159.0	8.00	117.53	7,103.6	-370.5	710.8	-375.4	0.00	0.00	0.00
Start Drop -1.50									
7,200.0	7.38	117.53	7,144.2	-373.0	715.7	-378.0	1.50	-1.50	0.00
7,300.0	5.88	117.53	7,243.6	-378.3	725.9	-383.4	1.50	-1.50	0.00
7,400.0	4.38	117.53	7,343.2	-382.5	733.8	-387.6	1.50	-1.50	0.00
7,500.0	2.88	117.53	7,443.0	-385.4	739.5	-390.6	1.50	-1.50	0.00
7,600.0	1.38	117.53	7,542.9	-387.1	742.8	-392.3	1.50	-1.50	0.00
7,692.3	0.00	0.00	7,635.2	-387.6	743.8	-392.8	1.50	-1.50	0.00
Start 1734.3 hold at 7692.3 MD									
7,700.0	0.00	0.00	7,642.9	-387.6	743.8	-392.8	0.00	0.00	0.00
7,800.0	0.00	0.00	7,742.9	-387.6	743.8	-392.8	0.00	0.00	0.00
7,900.0	0.00	0.00	7,842.9	-387.6	743.8	-392.8	0.00	0.00	0.00
8,000.0	0.00	0.00	7,942.9	-387.6	743.8	-392.8	0.00	0.00	0.00
8,100.0	0.00	0.00	8,042.9	-387.6	743.8	-392.8	0.00	0.00	0.00
8,200.0	0.00	0.00	8,142.9	-387.6	743.8	-392.8	0.00	0.00	0.00
8,300.0	0.00	0.00	8,242.9	-387.6	743.8	-392.8	0.00	0.00	0.00
8,400.0	0.00	0.00	8,342.9	-387.6	743.8	-392.8	0.00	0.00	0.00
8,476.0	0.00	0.00	8,418.9	-387.6	743.8	-392.8	0.00	0.00	0.00
G5: L. Brushy Cyn.									
8,500.0	0.00	0.00	8,442.9	-387.6	743.8	-392.8	0.00	0.00	0.00

Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well Paul Flowers #112H
Company:	Matador Production Company	TVD Reference:	KB @ 3642.5usft
Project:	Antelope Ridge	MD Reference:	KB @ 3642.5usft
Site:	Paul Flowers	North Reference:	Grid
Well:	Paul Flowers #112H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	State Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,600.0	0.00	0.00	8,542.9	-387.6	743.8	-392.8	0.00	0.00	0.00
8,700.0	0.00	0.00	8,642.9	-387.6	743.8	-392.8	0.00	0.00	0.00
8,722.4	0.00	0.00	8,665.3	-387.6	743.8	-392.8	0.00	0.00	0.00
Z (G4: BSGI (CS9))									
8,800.0	0.00	0.00	8,742.9	-387.6	743.8	-392.8	0.00	0.00	0.00
8,900.0	0.00	0.00	8,842.9	-387.6	743.8	-392.8	0.00	0.00	0.00
9,000.0	0.00	0.00	8,942.9	-387.6	743.8	-392.8	0.00	0.00	0.00
9,100.0	0.00	0.00	9,042.9	-387.6	743.8	-392.8	0.00	0.00	0.00
9,200.0	0.00	0.00	9,142.9	-387.6	743.8	-392.8	0.00	0.00	0.00
9,300.0	0.00	0.00	9,242.9	-387.6	743.8	-392.8	0.00	0.00	0.00
9,360.7	0.00	0.00	9,303.6	-387.6	743.8	-392.8	0.00	0.00	0.00
L8.2: U. Avalon Shale									
9,400.0	0.00	0.00	9,342.9	-387.6	743.8	-392.8	0.00	0.00	0.00
9,426.6	0.00	0.00	9,369.5	-387.6	743.8	-392.8	0.00	0.00	0.00
Start Build 10.00 - KOP - Paul Flowers #112H									
9,500.0	7.34	359.60	9,442.7	-383.0	743.7	-388.1	10.00	10.00	0.00
9,587.9	16.13	359.60	9,528.7	-365.1	743.6	-370.3	10.00	10.00	0.00
L6.3: Avalon Carb									
9,600.0	17.34	359.60	9,540.2	-361.6	743.6	-366.8	10.00	10.00	0.00
9,700.0	27.34	359.60	9,632.6	-323.7	743.3	-328.8	10.00	10.00	0.00
9,788.0	36.13	359.60	9,707.4	-277.4	743.0	-282.6	10.00	10.00	0.00
Z (L5.3: FBSC)									
9,800.0	37.34	359.60	9,717.0	-270.2	742.9	-275.4	10.00	10.00	0.00
9,900.0	47.34	359.60	9,790.8	-203.0	742.5	-208.2	10.00	10.00	0.00
FTP - Paul Flowers #112H									
10,000.0	57.34	359.60	9,851.9	-123.9	741.9	-129.1	10.00	10.00	0.00
10,100.0	67.34	359.60	9,898.2	-35.5	741.3	-40.6	10.00	10.00	0.00
10,113.7	68.70	359.60	9,903.3	-22.8	741.2	-28.0	10.00	10.00	0.00
Z (L5.1: FBSC)									
10,200.0	77.34	359.60	9,928.5	59.7	740.6	54.5	10.00	10.00	0.00
10,300.0	87.34	359.60	9,941.8	158.7	739.9	153.5	10.00	10.00	0.00
10,326.6	90.00	359.60	9,942.5	185.3	739.7	180.1	10.00	10.00	0.00
Start 12522.3 hold at 10326.6 MD									
10,400.0	90.00	359.60	9,942.5	258.7	739.2	253.5	0.00	0.00	0.00
10,500.0	90.00	359.60	9,942.5	358.7	738.5	353.5	0.00	0.00	0.00
10,600.0	90.00	359.60	9,942.5	458.7	737.8	453.5	0.00	0.00	0.00
10,700.0	90.00	359.60	9,942.5	558.7	737.1	553.5	0.00	0.00	0.00
10,800.0	90.00	359.60	9,942.5	658.7	736.4	653.5	0.00	0.00	0.00
10,900.0	90.00	359.60	9,942.5	758.7	735.7	753.5	0.00	0.00	0.00
11,000.0	90.00	359.60	9,942.5	858.7	735.0	853.5	0.00	0.00	0.00
11,100.0	90.00	359.60	9,942.5	958.7	734.3	953.5	0.00	0.00	0.00
11,200.0	90.00	359.60	9,942.5	1,058.7	733.6	1,053.5	0.00	0.00	0.00
11,300.0	90.00	359.60	9,942.5	1,158.6	732.9	1,153.5	0.00	0.00	0.00
11,400.0	90.00	359.60	9,942.5	1,258.6	732.2	1,253.5	0.00	0.00	0.00
11,500.0	90.00	359.60	9,942.5	1,358.6	731.5	1,353.5	0.00	0.00	0.00
11,600.0	90.00	359.60	9,942.5	1,458.6	730.8	1,453.5	0.00	0.00	0.00
11,700.0	90.00	359.60	9,942.5	1,558.6	730.1	1,553.5	0.00	0.00	0.00
11,800.0	90.00	359.60	9,942.5	1,658.6	729.4	1,653.5	0.00	0.00	0.00
11,900.0	90.00	359.60	9,942.5	1,758.6	728.7	1,753.5	0.00	0.00	0.00
12,000.0	90.00	359.60	9,942.5	1,858.6	727.9	1,853.5	0.00	0.00	0.00
12,100.0	90.00	359.60	9,942.5	1,958.6	727.2	1,953.5	0.00	0.00	0.00
12,200.0	90.00	359.60	9,942.5	2,058.6	726.5	2,053.5	0.00	0.00	0.00
12,300.0	90.00	359.60	9,942.5	2,158.6	725.8	2,153.5	0.00	0.00	0.00

Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well Paul Flowers #112H
Company:	Matador Production Company	TVD Reference:	KB @ 3642.5usft
Project:	Antelope Ridge	MD Reference:	KB @ 3642.5usft
Site:	Paul Flowers	North Reference:	Grid
Well:	Paul Flowers #112H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	State Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
12,400.0	90.00	359.60	9,942.5	2,258.6	725.1	2,253.5	0.00	0.00	0.00
12,500.0	90.00	359.60	9,942.5	2,358.6	724.4	2,353.5	0.00	0.00	0.00
12,600.0	90.00	359.60	9,942.5	2,458.6	723.7	2,453.5	0.00	0.00	0.00
12,700.0	90.00	359.60	9,942.5	2,558.6	723.0	2,553.5	0.00	0.00	0.00
12,800.0	90.00	359.60	9,942.5	2,658.6	722.3	2,653.5	0.00	0.00	0.00
12,900.0	90.00	359.60	9,942.5	2,758.6	721.6	2,753.5	0.00	0.00	0.00
13,000.0	90.00	359.60	9,942.5	2,858.6	720.9	2,853.5	0.00	0.00	0.00
13,100.0	90.00	359.60	9,942.5	2,958.6	720.2	2,953.5	0.00	0.00	0.00
13,200.0	90.00	359.60	9,942.5	3,058.6	719.5	3,053.5	0.00	0.00	0.00
13,300.0	90.00	359.60	9,942.5	3,158.6	718.8	3,153.5	0.00	0.00	0.00
13,400.0	90.00	359.60	9,942.5	3,258.6	718.1	3,253.5	0.00	0.00	0.00
13,500.0	90.00	359.60	9,942.5	3,358.6	717.4	3,353.5	0.00	0.00	0.00
13,600.0	90.00	359.60	9,942.5	3,458.6	716.7	3,453.5	0.00	0.00	0.00
13,700.0	90.00	359.60	9,942.5	3,558.6	716.0	3,553.5	0.00	0.00	0.00
13,800.0	90.00	359.60	9,942.5	3,658.6	715.3	3,653.5	0.00	0.00	0.00
13,900.0	90.00	359.60	9,942.5	3,758.6	714.6	3,753.5	0.00	0.00	0.00
14,000.0	90.00	359.60	9,942.5	3,858.6	713.9	3,853.5	0.00	0.00	0.00
14,100.0	90.00	359.60	9,942.5	3,958.6	713.2	3,953.5	0.00	0.00	0.00
14,200.0	90.00	359.60	9,942.5	4,058.6	712.5	4,053.5	0.00	0.00	0.00
14,300.0	90.00	359.60	9,942.5	4,158.6	711.8	4,153.5	0.00	0.00	0.00
14,400.0	90.00	359.60	9,942.5	4,258.6	711.1	4,253.5	0.00	0.00	0.00
14,500.0	90.00	359.60	9,942.5	4,358.6	710.4	4,353.5	0.00	0.00	0.00
14,600.0	90.00	359.60	9,942.5	4,458.6	709.7	4,453.5	0.00	0.00	0.00
14,700.0	90.00	359.60	9,942.5	4,558.6	708.9	4,553.5	0.00	0.00	0.00
14,800.0	90.00	359.60	9,942.5	4,658.6	708.2	4,653.5	0.00	0.00	0.00
14,900.0	90.00	359.60	9,942.5	4,758.6	707.5	4,753.5	0.00	0.00	0.00
15,000.0	90.00	359.60	9,942.5	4,858.6	706.8	4,853.5	0.00	0.00	0.00
15,100.0	90.00	359.60	9,942.5	4,958.6	706.1	4,953.5	0.00	0.00	0.00
15,200.0	90.00	359.60	9,942.5	5,058.6	705.4	5,053.5	0.00	0.00	0.00
15,300.0	90.00	359.60	9,942.5	5,158.5	704.7	5,153.5	0.00	0.00	0.00
15,400.0	90.00	359.60	9,942.5	5,258.5	704.0	5,253.5	0.00	0.00	0.00
15,500.0	90.00	359.60	9,942.5	5,358.5	703.3	5,353.5	0.00	0.00	0.00
15,600.0	90.00	359.60	9,942.5	5,458.5	702.6	5,453.5	0.00	0.00	0.00
15,700.0	90.00	359.60	9,942.5	5,558.5	701.9	5,553.5	0.00	0.00	0.00
15,800.0	90.00	359.60	9,942.5	5,658.5	701.2	5,653.5	0.00	0.00	0.00
15,900.0	90.00	359.60	9,942.5	5,758.5	700.5	5,753.5	0.00	0.00	0.00
16,000.0	90.00	359.60	9,942.5	5,858.5	699.8	5,853.5	0.00	0.00	0.00
16,100.0	90.00	359.60	9,942.5	5,958.5	699.1	5,953.5	0.00	0.00	0.00
16,200.0	90.00	359.60	9,942.5	6,058.5	698.4	6,053.5	0.00	0.00	0.00
16,300.0	90.00	359.60	9,942.5	6,158.5	697.7	6,153.5	0.00	0.00	0.00
16,400.0	90.00	359.60	9,942.5	6,258.5	697.0	6,253.5	0.00	0.00	0.00
16,500.0	90.00	359.60	9,942.5	6,358.5	696.3	6,353.5	0.00	0.00	0.00
16,600.0	90.00	359.60	9,942.5	6,458.5	695.6	6,453.5	0.00	0.00	0.00
16,700.0	90.00	359.60	9,942.5	6,558.5	694.9	6,553.5	0.00	0.00	0.00
16,800.0	90.00	359.60	9,942.5	6,658.5	694.2	6,653.5	0.00	0.00	0.00
16,900.0	90.00	359.60	9,942.5	6,758.5	693.5	6,753.5	0.00	0.00	0.00
17,000.0	90.00	359.60	9,942.5	6,858.5	692.8	6,853.5	0.00	0.00	0.00
17,100.0	90.00	359.60	9,942.5	6,958.5	692.1	6,953.5	0.00	0.00	0.00
17,200.0	90.00	359.60	9,942.5	7,058.5	691.4	7,053.5	0.00	0.00	0.00
17,300.0	90.00	359.60	9,942.5	7,158.5	690.6	7,153.5	0.00	0.00	0.00
17,400.0	90.00	359.60	9,942.5	7,258.5	689.9	7,253.5	0.00	0.00	0.00
17,500.0	90.00	359.60	9,942.5	7,358.5	689.2	7,353.5	0.00	0.00	0.00
17,600.0	90.00	359.60	9,942.5	7,458.5	688.5	7,453.5	0.00	0.00	0.00
17,700.0	90.00	359.60	9,942.5	7,558.5	687.8	7,553.5	0.00	0.00	0.00

Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well Paul Flowers #112H
Company:	Matador Production Company	TVD Reference:	KB @ 3642.5usft
Project:	Antelope Ridge	MD Reference:	KB @ 3642.5usft
Site:	Paul Flowers	North Reference:	Grid
Well:	Paul Flowers #112H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	State Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
17,800.0	90.00	359.60	9,942.5	7,658.5	687.1	7,653.5	0.00	0.00	0.00
17,900.0	90.00	359.60	9,942.5	7,758.5	686.4	7,753.5	0.00	0.00	0.00
18,000.0	90.00	359.60	9,942.5	7,858.5	685.7	7,853.5	0.00	0.00	0.00
18,100.0	90.00	359.60	9,942.5	7,958.5	685.0	7,953.5	0.00	0.00	0.00
18,200.0	90.00	359.60	9,942.5	8,058.5	684.3	8,053.5	0.00	0.00	0.00
18,300.0	90.00	359.60	9,942.5	8,158.5	683.6	8,153.5	0.00	0.00	0.00
18,400.0	90.00	359.60	9,942.5	8,258.5	682.9	8,253.5	0.00	0.00	0.00
18,500.0	90.00	359.60	9,942.5	8,358.5	682.2	8,353.5	0.00	0.00	0.00
18,600.0	90.00	359.60	9,942.5	8,458.5	681.5	8,453.5	0.00	0.00	0.00
18,700.0	90.00	359.60	9,942.5	8,558.5	680.8	8,553.5	0.00	0.00	0.00
18,800.0	90.00	359.60	9,942.5	8,658.5	680.1	8,653.5	0.00	0.00	0.00
18,900.0	90.00	359.60	9,942.5	8,758.5	679.4	8,753.5	0.00	0.00	0.00
19,000.0	90.00	359.60	9,942.5	8,858.5	678.7	8,853.5	0.00	0.00	0.00
19,100.0	90.00	359.60	9,942.5	8,958.5	678.0	8,953.5	0.00	0.00	0.00
19,200.0	90.00	359.60	9,942.5	9,058.5	677.3	9,053.5	0.00	0.00	0.00
19,300.0	90.00	359.60	9,942.5	9,158.5	676.6	9,153.5	0.00	0.00	0.00
19,400.0	90.00	359.60	9,942.5	9,258.4	675.9	9,253.5	0.00	0.00	0.00
19,500.0	90.00	359.60	9,942.5	9,358.4	675.2	9,353.5	0.00	0.00	0.00
19,600.0	90.00	359.60	9,942.5	9,458.4	674.5	9,453.5	0.00	0.00	0.00
19,700.0	90.00	359.60	9,942.5	9,558.4	673.8	9,553.5	0.00	0.00	0.00
19,800.0	90.00	359.60	9,942.5	9,658.4	673.1	9,653.5	0.00	0.00	0.00
19,900.0	90.00	359.60	9,942.5	9,758.4	672.4	9,753.5	0.00	0.00	0.00
20,000.0	90.00	359.60	9,942.5	9,858.4	671.6	9,853.5	0.00	0.00	0.00
20,100.0	90.00	359.60	9,942.5	9,958.4	670.9	9,953.5	0.00	0.00	0.00
20,200.0	90.00	359.60	9,942.5	10,058.4	670.2	10,053.5	0.00	0.00	0.00
20,300.0	90.00	359.60	9,942.5	10,158.4	669.5	10,153.5	0.00	0.00	0.00
20,400.0	90.00	359.60	9,942.5	10,258.4	668.8	10,253.5	0.00	0.00	0.00
20,500.0	90.00	359.60	9,942.5	10,358.4	668.1	10,353.5	0.00	0.00	0.00
20,600.0	90.00	359.60	9,942.5	10,458.4	667.4	10,453.5	0.00	0.00	0.00
20,700.0	90.00	359.60	9,942.5	10,558.4	666.7	10,553.5	0.00	0.00	0.00
20,800.0	90.00	359.60	9,942.5	10,658.4	666.0	10,653.5	0.00	0.00	0.00
20,900.0	90.00	359.60	9,942.5	10,758.4	665.3	10,753.5	0.00	0.00	0.00
21,000.0	90.00	359.60	9,942.5	10,858.4	664.6	10,853.5	0.00	0.00	0.00
21,100.0	90.00	359.60	9,942.5	10,958.4	663.9	10,953.5	0.00	0.00	0.00
21,200.0	90.00	359.60	9,942.5	11,058.4	663.2	11,053.5	0.00	0.00	0.00
21,300.0	90.00	359.60	9,942.5	11,158.4	662.5	11,153.5	0.00	0.00	0.00
21,400.0	90.00	359.60	9,942.5	11,258.4	661.8	11,253.5	0.00	0.00	0.00
21,500.0	90.00	359.60	9,942.5	11,358.4	661.1	11,353.5	0.00	0.00	0.00
21,600.0	90.00	359.60	9,942.5	11,458.4	660.4	11,453.5	0.00	0.00	0.00
21,700.0	90.00	359.60	9,942.5	11,558.4	659.7	11,553.5	0.00	0.00	0.00
21,800.0	90.00	359.60	9,942.5	11,658.4	659.0	11,653.5	0.00	0.00	0.00
21,900.0	90.00	359.60	9,942.5	11,758.4	658.3	11,753.5	0.00	0.00	0.00
22,000.0	90.00	359.60	9,942.5	11,858.4	657.6	11,853.5	0.00	0.00	0.00
22,100.0	90.00	359.60	9,942.5	11,958.4	656.9	11,953.5	0.00	0.00	0.00
22,200.0	90.00	359.60	9,942.5	12,058.4	656.2	12,053.5	0.00	0.00	0.00
22,300.0	90.00	359.60	9,942.5	12,158.4	655.5	12,153.5	0.00	0.00	0.00
22,400.0	90.00	359.60	9,942.5	12,258.4	654.8	12,253.5	0.00	0.00	0.00
22,500.0	90.00	359.60	9,942.5	12,358.4	654.1	12,353.5	0.00	0.00	0.00
22,600.0	90.00	359.60	9,942.5	12,458.4	653.4	12,453.5	0.00	0.00	0.00
22,700.0	90.00	359.60	9,942.5	12,558.4	652.6	12,553.5	0.00	0.00	0.00
22,800.0	90.00	359.60	9,942.5	12,658.4	651.9	12,653.5	0.00	0.00	0.00
22,848.9	90.00	359.60	9,942.5	12,707.3	651.6	12,702.5	0.00	0.00	0.00
TD at 22848.9 - BHL - Paul Flowers #112H									

Planning Report

Database:	EDM 5000.14 Single User Db	Local Co-ordinate Reference:	Well Paul Flowers #112H
Company:	Matador Production Company	TVD Reference:	KB @ 3642.5usft
Project:	Antelope Ridge	MD Reference:	KB @ 3642.5usft
Site:	Paul Flowers	North Reference:	Grid
Well:	Paul Flowers #112H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	State Plan #1		

Design Targets									
Target Name									
- hit/miss target	Dip Angle	Dip Dir.	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
- Shape	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(usft)		
KOP - Paul Flowers #111: - plan hits target center - Point	0.00	0.00	9,369.5	-387.6	743.8	514,943.91	721,988.86	32° 24' 49.108 N	103° 36' 50.357 W
FTP - Paul Flowers #112 - plan misses target center by 202.8usft at 9900.0usft MD (9790.8 TVD, -203.0 N, 742.5 E) - Point	0.00	0.00	9,942.5	-337.6	743.4	514,993.89	721,988.52	32° 24' 49.603 N	103° 36' 50.357 W
BHL - Paul Flowers #112 - plan hits target center - Point	0.00	0.00	9,942.5	12,707.3	651.6	528,038.74	721,896.80	32° 26' 58.691 N	103° 36' 50.402 W

Formations					
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
999.9	999.9	Z (Rustler)		0.00	359.60
1,311.3	1,311.3	Z (Salado)		0.00	359.60
4,585.3	4,555.0	Z (G30:CS14-CSB)		0.00	359.60
4,854.8	4,821.8	Z (G26: Bell Cyn.)		0.00	359.60
6,050.2	6,005.5	Z (G13: Cherry Cyn.)		0.00	359.60
7,100.3	7,045.4	Z (G7: Brushy Cyn.)	Antelope Ridge	0.00	359.60
8,476.0	8,418.9	G5: L. Brushy Cyn.		0.00	359.60
8,722.4	8,665.3	Z (G4: BSG L (CS9))		0.00	359.60
9,360.7	9,303.6	L8.2: U. Avalon Shale		0.00	359.60
9,587.9	9,528.7	L6.3: Avalon Carb		0.00	359.60
9,788.0	9,707.4	Z (L5.3: FBSC)		0.00	359.60
10,113.7	9,903.3	Z (L5.1: FBSC)		0.00	359.60

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
1,200.0	1,200.0	0.0	0.0	Start Build 2.00
1,600.0	1,598.7	-12.9	24.7	Start 5559.0 hold at 1600.0 MD
7,159.0	7,103.6	-370.5	710.8	Start Drop -1.50
7,692.3	7,635.2	-387.6	743.8	Start 1734.3 hold at 7692.3 MD
9,426.6	9,369.5	-387.6	743.8	Start Build 10.00
10,326.6	9,942.5	185.3	739.7	Start 12522.3 hold at 10326.6 MD
22,848.9	9,942.5	12,707.3	651.6	TD at 22848.9