

Form 3160-3
(June 2015)FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER 1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other 1c. Type of Completion: <input type="checkbox"/> Hydraulic Fracturing <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone		5. Lease Serial No. NMNM77063 6. If Indian, Allottee or Tribe Name 7. If Unit or CA Agreement, Name and No. 8. Lease Name and Well No. FRODERICK 33 FED 709H
2. Name of Operator EOG RESOURCES INCORPORATED		9. API Well No. 30-025-53082
3a. Address 1111 BAGBY SKY LOBBY 2, HOUSTON, TX 77002	3b. Phone No. (include area code) (713) 651-7000	10. Field and Pool, or Exploratory WC-025 G-08 S243217P/UPR WOLFCAMP
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface TR E / 2256 FNL / 509 FWL / LAT 32.2620823 / LONG -103.6864934 At proposed prod. zone TR D / 100 FNL / 830 FWL / LAT 32.282545 / LONG -103.6854698		11. Sec., T. R. M. or Blk. and Survey or Area SEC 33/T23S/R32E/NMP
14. Distance in miles and direction from nearest town or post office*		12. County or Parish LEA
13. State NM		
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 100 feet	16. No of acres in lease	17. Spacing Unit dedicated to this well 480.0
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 15 feet	19. Proposed Depth 12265 feet / 19858 feet	20. BLM/BIA Bond No. in file FED:
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3674 feet	22. Approximate date work will start* 06/24/2023	23. Estimated duration 25 days
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|---|---|
| 1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification.
6. Such other site specific information and/or plans as may be requested by the BLM. |
|---|---|

25. Signature (Electronic Submission)	Name (Printed/Typed) CRAIG RICHARDSON / Ph: (713) 651-7000	Date 12/08/2022
Title Regulatory Specialist		
Approved by (Signature) (Electronic Submission)	Name (Printed/Typed) CODY LAYTON / Ph: (575) 234-5959	Date 06/14/2024
Title Assistant Field Manager Lands & Minerals		
Office Carlsbad Field Office		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)



Approval Date: 06/14/2024

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources
Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

FORM C-102

Revised August 1, 2011

Submit one copy to appropriate

District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-025-30-025-53082	² Pool Code 98248	³ Pool Name WC-025 G-08 S243217P; Upper Wolfcamp
⁴ Property Code 334816	⁵ Property Name FRODERICK 33 FED	⁶ Well Number 709H
⁷ OGRID No. 7377	⁸ Operator Name EOG RESOURCES, INC.	⁹ Elevation 3674'

¹⁰Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
E	33	23-S	32-E	-	2256'	NORTH	509'	WEST	LEA

¹¹Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
D	28	23-S	32-E	-	100'	NORTH	830'	WEST	LEA

¹² Dedicated Acres 480.00	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
--	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

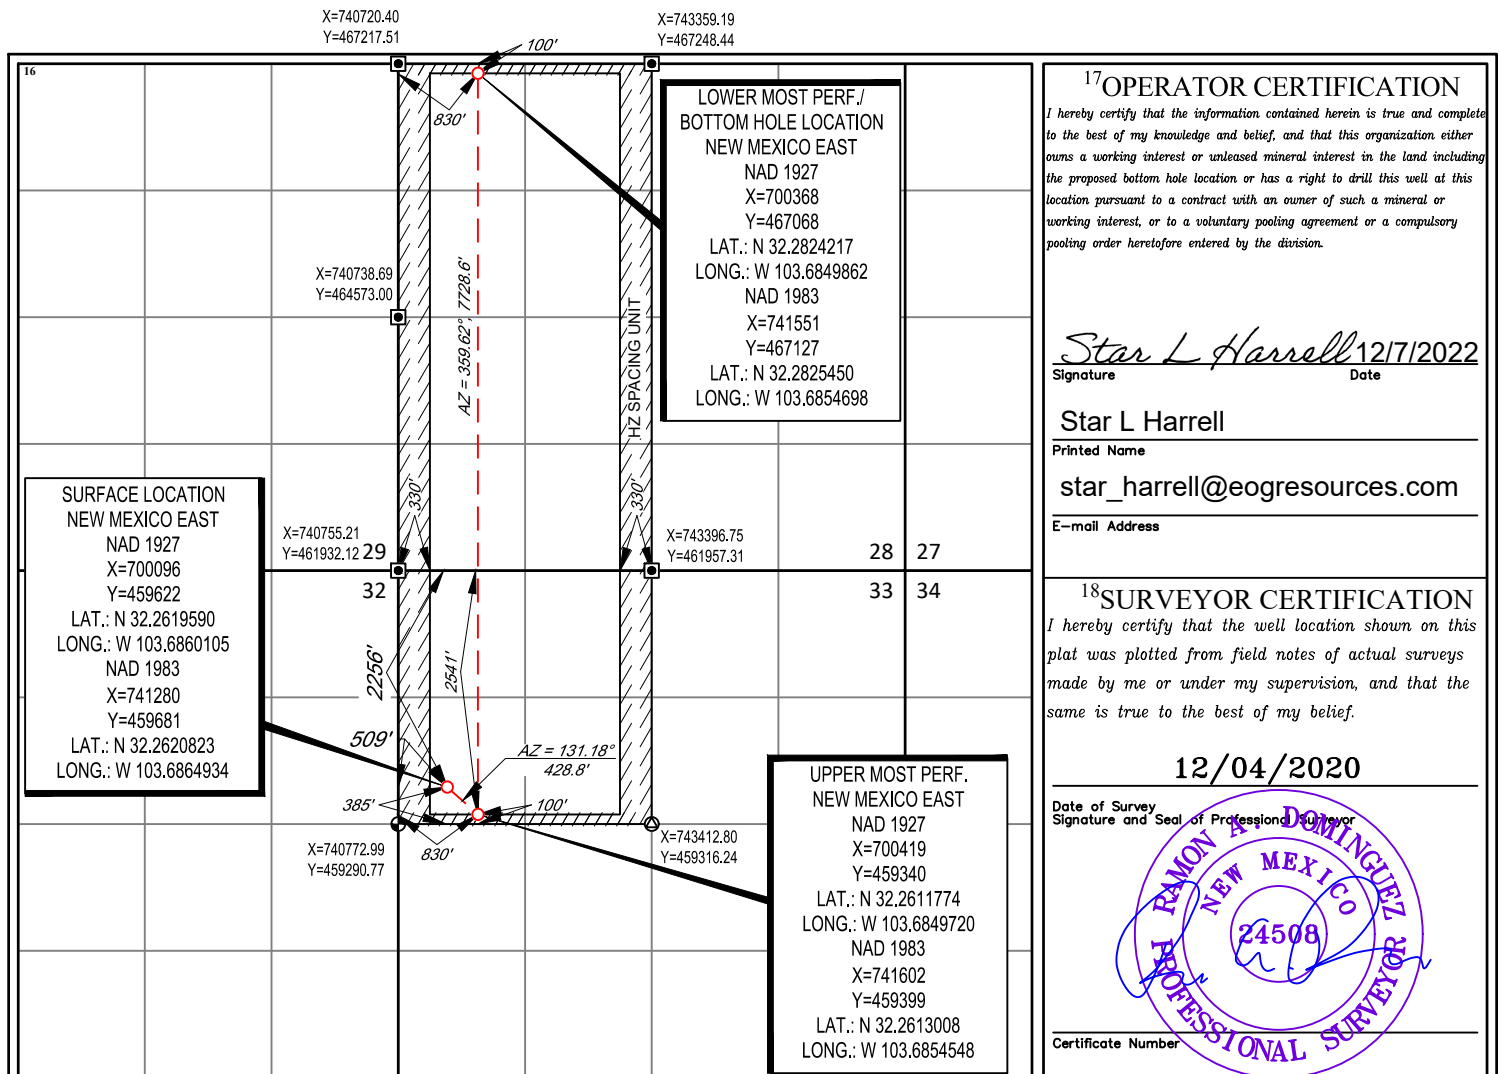

State of New Mexico
Energy, Minerals and Natural Resources DepartmentSubmit Electronically
Via E-permittingOil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505**NATURAL GAS MANAGEMENT PLAN**

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description
Effective May 25, 2021**I. Operator:** EOG Resources, Inc. **OGRID:** 7377 **Date:** 6/19/2024**II. Type:** ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
FRODERICK 33 FED 709H		E-33-23S-32E	2256' FNL & 509' FWL	+/- 1000	+/- 3500	+/- 3000

IV. Central Delivery Point Name: Froderick 33 Fed CTB [See 19.15.27.9(D)(1) NMAC]**V. Anticipated Schedule:** Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
FRODERICK 33 FED 709H		7/1/24	7/16/24	9/01/24	10/01/24	11/01/24

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.**VII. Operational Practices:** ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.**VIII. Best Management Practices:** ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan

EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications**Effective May 25, 2021**

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: *Star L Harrell*

Printed Name: Star L Harrell

Title: Sr Regulatory Specialist

E-mail Address: Star_Harrell@eogresources.com

Date: 6/19/2024

Phone: (432) 848-9161

OIL CONSERVATION DIVISION
(Only applicable when submitted as a standalone form)

Approved By:

Title:

Approval Date:

Conditions of Approval:

Natural Gas Management Plan**Items VI-VIII****VI. Separation Equipment: Attach a complete description of how Operator will size separation equipment to optimize gas capture.**

- Separation equipment will be sized to provide adequate separation for anticipated rates.
- Adequate separation relates to retention time for Liquid – Liquid separation and velocity for Gas-Liquid separation.
- Collection systems are appropriately sized to handle facility production rates on all (3) phases.
- Ancillary equipment and metering is selected to be serviced without flow interruptions or the need to release gas from the well.

VII. Operational Practices: Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F 19.15.27.8 NMAC.**Drilling Operations**

- All flare stacks will be properly sized. The flare stacks will be located at a minimum 100' from the nearest surface hole location on the pad.
- All natural gas produced during drilling operations will be flared, unless there is an equipment malfunction and/or to avoid risk of an immediate and substantial adverse impact on safety and the environment, at which point the gas will be vented.

Completions/Recompletions Operations

- New wells will not be flowed back until they are connected to a properly sized gathering system.
- The facility will be built/sized for maximum anticipated flowrates and pressures to minimize waste.
- For flowback operations, multiple stages of separation will be used as well as excess VRU and blowers to make sure waste is minimized off the storage tanks and facility.
- During initial flowback, the well stream will be routed to separation equipment.
- At an existing facility, when necessary, post separation natural gas will be flared until it meets pipeline specifications, at which point it will be turned into a collection system.
- At a new facility, post separation natural gas will be vented until storage tanks can safely function, at which point it will be flared until it meets pipeline spec.

Production Operations

- Weekly AVOs will be performed on all facilities.
- All flares will be equipped with auto-ignition systems and continuous pilot operations.
- After a well is stabilized from liquid unloading, the well will be turned back into the collection system.
- All plunger lift systems will be optimized to limit the amount of waste.
- All tanks will have automatic gauging equipment installed.
- Leaking thief hatches found during AVOs will be cleaned and properly re-sealed.

Performance Standards

- Production equipment will be designed to handle maximum anticipated rates and pressure.
- All flared gas will be combusted in a flare stack that is properly sized and designed to ensure proper combustion.
- Weekly AVOs will be performed on all wells and facilities that produce more than 60 Mcfd.

Measurement & Estimation

- All volume that is flared and vented that is not measured will be estimated.
- All measurement equipment for flared volumes will conform to API 14.10.
- No meter bypasses will be installed.

- When metering is not practical due to low pressure/low rate, the vented or flared volume will be estimated.

VIII. Best Management Practices: Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

- During downhole well maintenance, EOG will use best management practices to vent as minimally as possible.
- Prior to the commencement of any maintenance, the tank or vessel will be isolated from the rest of the facilities.
- All valves upstream of the equipment will be closed and isolated.
- After equipment has been isolated, the equipment will be blown down to as low a pressure as possible into the collection system.
- If the equipment being maintained cannot be relieved into the collection system, it shall be released to a tank where the vapor can either be captured or combusted if possible.
- After downhole well maintenance, natural gas will be flared until it reaches pipeline specification.



Froderick 33 Fed 709H

1. GEOLOGIC NAME OF SURFACE FORMATION:

Permian

2. ESTIMATED TOPS OF IMPORTANT GEOLOGICAL MARKERS:

Rustler	1,190'
Tamarisk Anhydrite	1,265'
Top of Salt	1,516'
Base of Salt	4,612'
Lamar	4,830'
Bell Canyon	4,865'
Cherry Canyon	5,717'
Brushy Canyon	7,007'
Bone Spring Lime	8,672'
Leonard Shale	8,843'
1 st Bone Spring Sand	9,841'
2 nd Bone Spring Shale	10,135'
2 nd Bone Spring Sand	10,405'
3 rd Bone Spring Carb	11,081'
3 rd Bone Spring Sand	11,741'
Wolfcamp	12,121'
TD	12,265'

3. ESTIMATED DEPTHS OF ANTICIPATED FRESH WATER, OIL OR GAS:

Upper Permian Sands	0- 400'	Fresh Water
Bell Canyon	4,865'	Oil
Cherry Canyon	5,717'	Oil
Brushy Canyon	7,007'	Oil
Leonard (Avalon) Shale	8,843'	Oil
1 st Bone Spring Sand	9,841'	Oil
2 nd Bone Spring Shale	10,135'	Oil
2 nd Bone Spring Sand	10,405'	Oil
3 rd Bone Spring Carb	11,081'	Oil
3 rd Bone Spring Sand	11,741'	Oil
Wolfcamp	12,121'	Oil

No other Formations are expected to give up oil, gas or fresh water in measurable quantities. Surface fresh water sands will be protected by setting 9-5/8" or 10-3/4" casing at 1,290' and circulating cement back to surface.



Froderick 33 Fed 709H

4. CASING PROGRAM - Design A

Hole Size	Interval MD From (ft) To (ft)		Interval TVD From (ft) To (ft)		Csg OD	Weight	Grade	Conn
12-1/4"	0	1,290	0	1,290	9-5/8"	36#	J-55	LTC
8-3/4"	0	11,199	0	11,180	7-5/8"	29.7#	HCP-110	FXL
6-3/4"	0	10,699	0	10,680	5-1/2"	20#	P110-EC	DWC/C IS MS
6-3/4"	10,700	11,199	10,680	11,180	5-1/2"	20#	P110-EC	Vam Sprint SF
6-3/4"	11,199	19,858	11,180	12,265	5-1/2"	20#	P110-EC	DWC/C IS MS

Variance is requested to waive the centralizer requirements for the 7-5/8" casing in the 8-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 8-3/4 hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive any centralizer requirements for the 5-1/2" casing in the 6-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 6-3/4" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive the annular clearance requirements for the 5-1/2" casing by 7-5/8" casing annulus to the proposed top of cement.

EOG requests permission to allow deviation from the 0.422" annulus clearance requirement from Onshore Order #2 under the following conditions:

- Annular clearance to meet or exceed 0.422" between intermediate casing ID and production casing coupling only on the first 500' overlap between both casing strings.
- Annular clearance less than 0.422" is acceptable for the production open hole section.

Cementing Program:

Depth	No. Sacks	Wt. ppg	Yld Ft ³ /sk	Slurry Description
1,290' 9-5/8"	350	13.5	1.73	Lead: Class C + 4.0% Bentonite Gel + 0.5% CaCl ₂ + 0.25 lb/sk Cello-Flake (TOC @ Surface)
	80	14.8	1.34	Tail: Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate (TOC @ 1,090')
11,180' 7-5/8"	510	14.2	1.11	1st Stage (Tail): Class C + 0.6% Halad-9 + 0.45% HR-601 + 3% Microbond (TOC @ 6,810')
	1170	14.8	1.5	2nd Stage (Bradenhead squeeze): Class C + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (TOC @ surface)
19,858' 5-1/2"	800	14.2	1.31	Lead: Class H + 0.4% Halad-344 + 0.35% HR-601 + 3% Microbond (TOC @ 10,680')

**Froderick 33 Fed 709H**

Additive	Purpose
Bentonite Gel	Lightweight/Lost circulation prevention
Calcium Chloride	Accelerator
Cello-flake	Lost circulation prevention
Sodium Metasilicate	Accelerator
MagOx	Expansive agent
Pre-Mag-M	Expansive agent
Sodium Chloride	Accelerator
FL-62	Fluid loss control
Halad-344	Fluid loss control
Halad-9	Fluid loss control
HR-601	Retarder
Microbond	Expansive Agent

EOG requests variance from minimum standards to pump a two stage cement job on the 7-5/8" intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Brushy Canyon (7,007') and the second stage performed as a 1000 sack bradenhead squeeze with planned cement from the Brushy Canyon to surface. If necessary, a top out consisting of 170 sacks of Class C cement + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (2.30 yld, 12.91 ppg) will be executed as a contingency. Top will be verified by Echo-meter.

EOG will include the Echo-meter verified fluid top and the volume of displacement fluid above the cement slurry in the annulus in all post-drill sundries on wells utilizing this cement program.

EOG will report to the BLM the volume of fluid (limited to 5 bbls) used to flush intermediate casing valves following backside cementing procedures.

Cement integrity tests will be performed immediately following plug bump.

Note: Cement volumes based on bit size plus at least 25% excess in the open hole plus 10% excess in the cased-hole overlap section.

5. MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:

Variance is requested to use a co-flex line between the BOP and choke manifold (instead of using a 4" OD steel line).

The minimum blowout preventer equipment (BOPE) shown in Exhibit #1 will consist of a single ram, mud cross and double ram-type (10,000 psi WP) preventer and an annular preventer (5,000 psi WP). Both units will be hydraulically operated and the ram-type will be equipped with blind rams on bottom and drill pipe rams on top.



Froderick 33 Fed 709H

EOG will utilize wing unions on BOPE connections that can be isolated from wellbore pressure through means of a choke. All wing unions will be rated to a pressure that meets or exceeds the pressure rating of the BOPE system.

Variance is requested to use a 5,000 psi annular BOP with the 10,000 psi BOP stack.

Pipe rams and blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

A hydraulically operated choke will be installed prior to drilling out of the intermediate casing shoe.

6. TYPES AND CHARACTERISTICS OF THE PROPOSED MUD SYSTEM:

During this procedure we plan to use a Closed-Loop System and haul contents to the required disposal.

The applicable depths and properties of the drilling fluid systems are as follows:

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 – 1,290'	Fresh - Gel	8.6-8.8	28-34	N/c
1,290' – 11,180'	Brine	10.0-10.2	28-34	N/c
11,180' – 11,808'	Oil Base	8.7-9.4	58-68	N/c - 6
11,808' – 19,858' Lateral	Oil Base	10.0-14.0	58-68	4 - 6

The highest mud weight needed to balance formation is expected to be 11.5 ppg. In order to maintain hole stability, mud weights up to 14.0 ppg may be utilized.

An electronic pit volume totalizer (PVT) will be utilized on the circulating system, to monitor pit volume, flow rate, pump pressure and stroke rate.

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept at the wellsite at all times.

7. AUXILIARY WELL CONTROL AND MONITORING EQUIPMENT:

- (A) A kelly cock will be kept in the drill string at all times.
- (B) A full opening drill pipe-stabbing valve (inside BOP) with proper drill pipe connections will be on the rig floor at all times.
- (C) H₂S monitoring and detection equipment will be utilized from surface casing point to TD.

**Froderick 33 Fed 709H****8. LOGGING, TESTING AND CORING PROGRAM:**

Open-hole logs are not planned for this well.

GR-CCL Will be run in cased hole during completions phase of operations.

9. ABNORMAL CONDITIONS, PRESSURES, TEMPERATURES AND POTENTIAL HAZARDS:

The estimated bottom-hole temperature (BHT) at TD is 193 degrees F with an estimated maximum bottom-hole pressure (BHP) at TD of 8,929 psig and a maximum anticipated surface pressure of 6,231 psig (based on 14.0 ppg MW). No hydrogen sulfide or other hazardous gases or fluids have been encountered, reported or are known to exist at this depth in this area. Severe loss circulation is expected from 7,007' to intermediate casing point.

10. ANTICIPATED STARTING DATE AND DURATION OF OPERATIONS:

The drilling operation should be finished in approximately one month. If the well is productive, an additional 60-90 days will be required for completion and testing before a decision is made to install permanent facilities.

EOG Resources requests the option to contract a Surface Rig to drill, set surface casing, and Cement on the subject well. After WOC 8 hours or 500 psi compressive strength (whichever is greater), the Surface Rig will move off so the wellhead can be installed. A welder will cut the casing to the proper height and weld on the wellhead (both "A" and "B" sections). The weld will be tested to 1,500 psi. All valves will be closed and a wellhead cap will be installed (diagram attached). If the timing between rigs is such that EOG Resources would not be able to preset the surface, the Primary Rig will MIRU and drill the well in its entirety per the APD.

11. WELLHEAD:

A multi-bowl wellhead system will be utilized.

After running the 9-5/8" surface casing, a 9-5/8" BOP/BOPE system with a minimum working pressure of 10,000 psi will be installed on the wellhead system and will be pressure tested to 250 psi low followed by a 10,000 psi pressure test. This pressure test will be repeated at least every 30 days, as per Onshore Order No. 2.

The minimum working pressure of the BOP and related BOPE required for drilling below the surface casing shoe shall be 10,000 psi.

The multi-bowl wellhead will be installed by vendor's representative(s). A copy of the installation instructions for the Cactus Multi-Bowl WH system has been sent to the NM BLM office in Carlsbad, NM.

**Froderick 33 Fed 709H**

The wellhead will be installed by a third party welder while being monitored by WH vendor's representative.

All BOP equipment will be tested utilizing a conventional test plug. Not a cup or J-packer type. EOG Resources reserves the option to conduct BOPE testing during wait on cement periods provided a test plug is utilized.

A solid steel body pack-off will be utilized after running and cementing the intermediate casing. After installation the pack-off and lower flange will be pressure tested to 5,000 psi.

Casing strings will be tested as per Onshore Order No. 2 to at least 0.22 psi/ft or 1,500 psi, whichever is greater.

EOG Resources Inc. (EOG) respectfully requests a variance from the minimum standards for well control equipment testing of Onshore Order No. 2 (item III.A.2.a.i) to allow a testing schedule of the blow out preventer (BOP) and blow out prevention equipment (BOPE) along with Batch Drilling & Offline cement operations to include the following:

- Full BOPE test at first installation on the pad.
- Full BOPE test every 21 days per Onshore Order No. 2.
- Function test BOP elements per Onshore Order No. 2.
- Break testing BOP and BOPE coupled with batch drilling operations and option to offline cement and/or remediate (if needed) any surface or intermediate sections, according to attached offline cementing support documentation.
- After the well section is secured, the BOP will be disconnected from the wellhead and walked with the rig to another well on the pad.
- TA cap will also be installed per Wellhead vendor procedure and pressure inside the casing will be monitored via the valve on the TA cap as per standard batch drilling ops.
- See attached "EOG BLM Variance 3a -Offline Cement Intermediate Operational Procedure"



Froderick 33 Fed 709H

2256' FNL
509' FWL
Section 33
T-23-S, R-32-E

Proposed Wellbore

API: 30-025-*****


KB: 3699'
GL: 3674'

Bit Size: 12-1/4"
9-5/8", 36#, J-55, LTC, 0' - 1,290'

Bit Size: 8-3/4"
7-5/8", 29.7#, HCP-110, FXL, 0' - 11,180'

Bit Size: 6-3/4"
5-1/2", 20.#, P110-EC, DWC/C IS MS
@ 0' - 10,680'
5-1/2", 20.#, P110-EC, Vam Sprint SF
@ 10,680' - 11,180'
5-1/2", 20.#, P110-EC, DWC/C IS MS
@ 11,180' - 19,858'

KOP: 11,808' MD, 11,788' TVD
EOC: 12,558' MD, 12,265' TVD

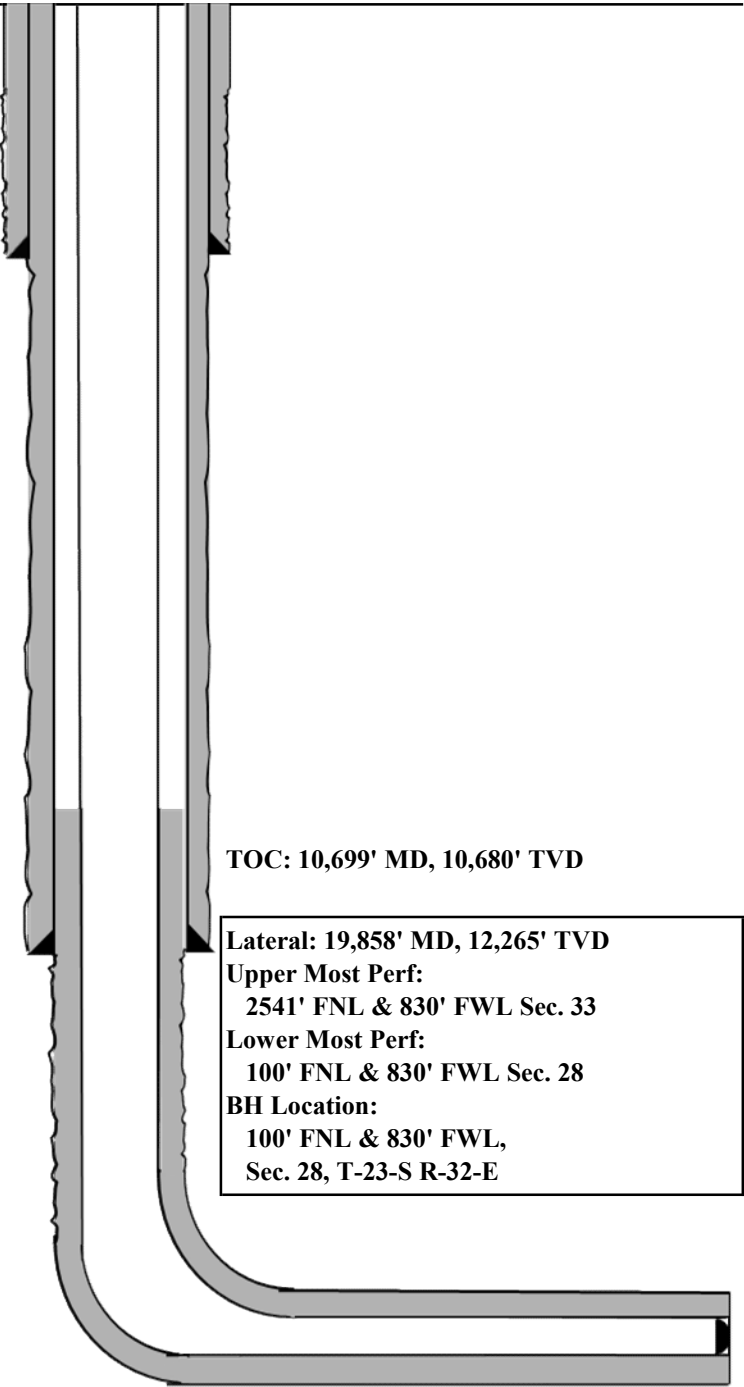

TOC: 10,699' MD, 10,680' TVD

Lateral: 19,858' MD, 12,265' TVD
Upper Most Perf:
2541' FNL & 830' FWL Sec. 33
Lower Most Perf:
100' FNL & 830' FWL Sec. 28
BH Location:
100' FNL & 830' FWL,
Sec. 28, T-23-S R-32-E



Froderick 33 Fed 709H

Design B

4. CASING PROGRAM

Hole Size	Interval MD		Interval TVD		Csg OD	Weight	Grade	Conn
	From (ft)	To (ft)	From (ft)	To (ft)				
13"	0	1,290	0	1,290	10-3/4"	40.5#	J-55	STC
9-7/8"	0	11,199	0	11,180	8-3/4"	38.5#	P110-EC	Vam Sprint-SF
7-7/8"	0	19,858	0	12,265	6"	24#	P110-HP	Eagle SFH SC

Variance is requested to waive the centralizer requirements for the 8-3/4" casing in the 9-7/8" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 9-7/8" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive any centralizer requirements for the 6" casing in the 7-7/8" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 7-7/8" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive the annular clearance requirements for the 6" casing by 8-3/4" casing annulus to the proposed top of cement.

EOG requests permission to allow deviation from the 0.422" annulus clearance requirement from Onshore Order #2 under the following conditions:

- Annular clearance to meet or exceed 0.422" between intermediate casing ID and production casing coupling only on the first 500' overlap between both casing strings.
- Annular clearance less than 0.422" is acceptable for the production open hole section.

Cementing Program:

Depth	No. Sacks	Wt. ppg	Yld Ft3/sk	Slurry Description
1,290' 10-3/4"	330	13.5	1.73	Lead: Class C + 4.0% Bentonite Gel + 0.5% CaCl ₂ + 0.25 lb/sk Cello-Flake (TOC @ Surface)
	70	14.8	1.34	Tail: Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate (TOC @ 1,090')
11,180' 8-3/4"	580	14.2	1.11	1st Stage (Tail): Class C + 0.6% Halad-9 + 0.45% HR-601 + 3% Microbond (TOC @ 6,810')
	1320	14.8	1.5	2nd Stage (Bradenhead squeeze): Class C + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (TOC @ surface)
19,858' 6"	1290	14.2	1.31	Lead: Class H + 0.4% Halad-344 + 0.35% HR-601 + 3% Microbond (TOC @ 10,680')

**Froderick 33 Fed 709H**

EOG requests variance from minimum standards to pump a two stage cement job on the 7-5/8" intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Brushy Canyon (7,007') and the second stage performed as a 1000 sack bradenhead squeeze with planned cement from the Brushy Canyon to surface. If necessary, a top out consisting of 320 sacks of Class C cement + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (2.30 yld, 12.91 ppg) will be executed as a contingency. Top will be verified by Echo-meter.

EOG will include the Echo-meter verified fluid top and the volume of displacement fluid above the cement slurry in the annulus in all post-drill sundries on wells utilizing this cement program.

EOG will report to the BLM the volume of fluid (limited to 5 bbls) used to flush intermediate casing valves following backside cementing procedures.

Cement integrity tests will be performed immediately following plug bump.

Note: Cement volumes based on bit size plus at least 25% excess in the open hole plus 10% excess in the cased-hole overlap section.

Wellhead:

EOG Resources Inc. (EOG) respectfully requests a variance from the minimum standards for well control equipment testing of Onshore Order No. 2 (item III.A.2.a.i) to allow a testing schedule of the blow out preventer (BOP) and blow out prevention equipment (BOPE) along with Batch Drilling & Offline cement operations to include the following:

- Full BOPE test at first installation on the pad.
- Full BOPE test every 20 days per Onshore Order No. 2.
- Function test BOP elements per Onshore Order No. 2.
- Break testing BOP and BOPE coupled with batch drilling operations and option to offline cement and/or remediate (if needed) any surface or intermediate sections, according to attached offline cementing support documentation.
- After the well section is secured, the BOP will be disconnected from the wellhead and walked with the rig to another well on the pad.
- TA cap will also be installed per Wellhead vendor procedure and pressure inside the casing will be monitored via the valve on the TA cap as per standard batch drilling ops.
- See attached "EOG BLM Variance 3a -Offline Cement Intermediate Operational Procedure"



Froderick 33 Fed 709H

2256' FNL
509' FWL
Section 33
T-23-S, R-32-E

Proposed Wellbore

API: 30-025-*****

KB: 3699'
GL: 3674'

Bit Size: 13"
10-3/4", 40.5#, J-55, STC,
0' - 1,290'

Bit Size: 9-7/8"
7-5/8", 29.7#, HCP-110, FXL
@ 0' - 11,180'

Bit Size: 7-7/8"
6", 24#, P110-HP, Eagle SFH SC,
@ 0' - 19,858'

KOP: 11,808' MD, 11,788' TVD
EOC: 12,558' MD, 12,265' TVD

TOC: 10,699' MD, 10,680' TVD

Lateral: 19,858' MD, 12,265' TVD
Upper Most Perf:
2541' FNL & 830' FWL Sec. 33
Lower Most Perf:
100' FNL & 830' FWL Sec. 28
BH Location:
100' FNL & 830' FWL,
Sec. 28, T-23-S R-32-E



Midland

Lea County, NM (NAD 83 NME)
Fröderick 33 Fed
#709H

OH

Plan: Plan #0.1 RT

Standard Planning Report

13 September, 2022



Planning Report

Database:	PEDM	Local Co-ordinate Reference:	Well #709H
Company:	Midland	TVD Reference:	kb = 26' @ 3700.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	kb = 26' @ 3700.0usft
Site:	Frderick 33 Fed	North Reference:	Grid
Well:	#709H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #0.1 RT		

Project	Lea County, NM (NAD 83 NME)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site		Frderick 33 Fed			
Site Position:		Northing:	459,631.00 usft	Latitude:	32° 15' 42.942 N
From:	Map	Easting:	742,250.00 usft	Longitude:	103° 41' 0.078 W
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "		

Well	#709H					
Well Position	+N/-S	0.0 usft	Northing:	459,681.00 usft	Latitude:	32° 15' 43.495 N
	+E/-W	0.0 usft	Easting:	741,280.00 usft	Longitude:	103° 41' 11.371 W
Position Uncertainty		0.0 usft	Wellhead Elevation:	usft	Ground Level:	3,674.0 usft
Grid Convergence:	0.35 °					

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	7/1/2022	6.48	59.88	47,394.34695422

Design	Plan #0.1 RT				
Audit Notes:					
Version:		Phase:	PLAN	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.0	0.0	0.0	2.08	

Plan Survey Tool Program	Date	9/13/2022			
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks	
1	0.0	19,858.2	Plan #0.1 RT (OH)	EOG MWD+IFR1	
				MWD + IFR1	



Planning Report

Database:	PEDM	Local Co-ordinate Reference:	Well #709H
Company:	Midland	TVD Reference:	kb = 26' @ 3700.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	kb = 26' @ 3700.0usft
Site:	Froderick 33 Fed	North Reference:	Grid
Well:	#709H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #0.1 RT		

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,751.5	5.03	135.88	1,751.1	-7.9	7.7	2.00	2.00	0.00	135.88	
6,775.5	5.03	135.88	6,755.9	-324.1	314.3	0.00	0.00	0.00	0.00	
7,027.0	0.00	0.00	7,007.0	-332.0	322.0	2.00	-2.00	0.00	180.00	
11,807.5	0.00	0.00	11,787.5	-332.0	322.0	0.00	0.00	0.00	0.00	KOP(Froderick 33 Fed)
12,027.9	26.46	0.00	12,000.2	-282.0	322.0	12.00	12.00	0.00	0.00	FTP(Froderick 33 Fed)
12,557.5	90.00	359.62	12,264.9	145.5	320.0	12.00	12.00	-0.07	-0.43	
19,858.2	90.00	359.62	12,265.0	7,446.0	271.0	0.00	0.00	0.00	0.00	PBHL(Froderick 33 Fed)



Planning Report

Database:	PEDM	Local Co-ordinate Reference:	Well #709H
Company:	Midland	TVD Reference:	kb = 26' @ 3700.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	kb = 26' @ 3700.0usft
Site:	Frderick 33 Fed	North Reference:	Grid
Well:	#709H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #0.1 RT		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
1,600.0	2.00	135.88	1,600.0	-1.3	1.2	-1.2	2.00	2.00	0.00
1,700.0	4.00	135.88	1,699.8	-5.0	4.9	-4.8	2.00	2.00	0.00
1,751.5	5.03	135.88	1,751.1	-7.9	7.7	-7.6	2.00	2.00	0.00
1,800.0	5.03	135.88	1,799.5	-11.0	10.6	-10.6	0.00	0.00	0.00
1,900.0	5.03	135.88	1,899.1	-17.3	16.7	-16.6	0.00	0.00	0.00
2,000.0	5.03	135.88	1,998.7	-23.6	22.8	-22.7	0.00	0.00	0.00
2,100.0	5.03	135.88	2,098.3	-29.9	29.0	-28.8	0.00	0.00	0.00
2,200.0	5.03	135.88	2,198.0	-36.1	35.1	-34.8	0.00	0.00	0.00
2,300.0	5.03	135.88	2,297.6	-42.4	41.2	-40.9	0.00	0.00	0.00
2,400.0	5.03	135.88	2,397.2	-48.7	47.3	-47.0	0.00	0.00	0.00
2,500.0	5.03	135.88	2,496.8	-55.0	53.4	-53.0	0.00	0.00	0.00
2,600.0	5.03	135.88	2,596.4	-61.3	59.5	-59.1	0.00	0.00	0.00
2,700.0	5.03	135.88	2,696.0	-67.6	65.6	-65.2	0.00	0.00	0.00
2,800.0	5.03	135.88	2,795.6	-73.9	71.7	-71.2	0.00	0.00	0.00
2,900.0	5.03	135.88	2,895.3	-80.2	77.8	-77.3	0.00	0.00	0.00
3,000.0	5.03	135.88	2,994.9	-86.5	83.9	-83.4	0.00	0.00	0.00
3,100.0	5.03	135.88	3,094.5	-92.8	90.0	-89.4	0.00	0.00	0.00
3,200.0	5.03	135.88	3,194.1	-99.1	96.1	-95.5	0.00	0.00	0.00
3,300.0	5.03	135.88	3,293.7	-105.4	102.2	-101.6	0.00	0.00	0.00
3,400.0	5.03	135.88	3,393.3	-111.7	108.3	-107.6	0.00	0.00	0.00
3,500.0	5.03	135.88	3,492.9	-118.0	114.4	-113.7	0.00	0.00	0.00
3,600.0	5.03	135.88	3,592.6	-124.2	120.5	-119.8	0.00	0.00	0.00
3,700.0	5.03	135.88	3,692.2	-130.5	126.6	-125.8	0.00	0.00	0.00
3,800.0	5.03	135.88	3,791.8	-136.8	132.7	-131.9	0.00	0.00	0.00
3,900.0	5.03	135.88	3,891.4	-143.1	138.8	-138.0	0.00	0.00	0.00
4,000.0	5.03	135.88	3,991.0	-149.4	144.9	-144.0	0.00	0.00	0.00
4,100.0	5.03	135.88	4,090.6	-155.7	151.0	-150.1	0.00	0.00	0.00
4,200.0	5.03	135.88	4,190.2	-162.0	157.1	-156.2	0.00	0.00	0.00
4,300.0	5.03	135.88	4,289.9	-168.3	163.2	-162.2	0.00	0.00	0.00
4,400.0	5.03	135.88	4,389.5	-174.6	169.3	-168.3	0.00	0.00	0.00
4,500.0	5.03	135.88	4,489.1	-180.9	175.4	-174.4	0.00	0.00	0.00
4,600.0	5.03	135.88	4,588.7	-187.2	181.5	-180.4	0.00	0.00	0.00
4,700.0	5.03	135.88	4,688.3	-193.5	187.6	-186.5	0.00	0.00	0.00
4,800.0	5.03	135.88	4,787.9	-199.8	193.7	-192.6	0.00	0.00	0.00
4,900.0	5.03	135.88	4,887.6	-206.1	199.8	-198.7	0.00	0.00	0.00
5,000.0	5.03	135.88	4,987.2	-212.3	206.0	-204.7	0.00	0.00	0.00
5,100.0	5.03	135.88	5,086.8	-218.6	212.1	-210.8	0.00	0.00	0.00
5,200.0	5.03	135.88	5,186.4	-224.9	218.2	-216.9	0.00	0.00	0.00



Planning Report

Database:	PEDM	Local Co-ordinate Reference:	Well #709H
Company:	Midland	TVD Reference:	kb = 26' @ 3700.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	kb = 26' @ 3700.0usft
Site:	Friderick 33 Fed	North Reference:	Grid
Well:	#709H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #0.1 RT		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,300.0	5.03	135.88	5,286.0	-231.2	224.3	-222.9	0.00	0.00	0.00
5,400.0	5.03	135.88	5,385.6	-237.5	230.4	-229.0	0.00	0.00	0.00
5,500.0	5.03	135.88	5,485.2	-243.8	236.5	-235.1	0.00	0.00	0.00
5,600.0	5.03	135.88	5,584.9	-250.1	242.6	-241.1	0.00	0.00	0.00
5,700.0	5.03	135.88	5,684.5	-256.4	248.7	-247.2	0.00	0.00	0.00
5,800.0	5.03	135.88	5,784.1	-262.7	254.8	-253.3	0.00	0.00	0.00
5,900.0	5.03	135.88	5,883.7	-269.0	260.9	-259.3	0.00	0.00	0.00
6,000.0	5.03	135.88	5,983.3	-275.3	267.0	-265.4	0.00	0.00	0.00
6,100.0	5.03	135.88	6,082.9	-281.6	273.1	-271.5	0.00	0.00	0.00
6,200.0	5.03	135.88	6,182.5	-287.9	279.2	-277.5	0.00	0.00	0.00
6,300.0	5.03	135.88	6,282.2	-294.2	285.3	-283.6	0.00	0.00	0.00
6,400.0	5.03	135.88	6,381.8	-300.5	291.4	-289.7	0.00	0.00	0.00
6,500.0	5.03	135.88	6,481.4	-306.7	297.5	-295.7	0.00	0.00	0.00
6,600.0	5.03	135.88	6,581.0	-313.0	303.6	-301.8	0.00	0.00	0.00
6,700.0	5.03	135.88	6,680.6	-319.3	309.7	-307.9	0.00	0.00	0.00
6,775.5	5.03	135.88	6,755.9	-324.1	314.3	-312.4	0.00	0.00	0.00
6,800.0	4.54	135.88	6,780.2	-325.5	315.7	-313.8	2.00	-2.00	0.00
6,900.0	2.54	135.88	6,880.1	-330.0	320.0	-318.1	2.00	-2.00	0.00
7,000.0	0.54	135.88	6,980.0	-331.9	321.9	-320.0	2.00	-2.00	0.00
7,027.0	0.00	0.00	7,007.0	-332.0	322.0	-320.1	2.00	-2.00	0.00
7,100.0	0.00	0.00	7,080.0	-332.0	322.0	-320.1	0.00	0.00	0.00
7,200.0	0.00	0.00	7,180.0	-332.0	322.0	-320.1	0.00	0.00	0.00
7,300.0	0.00	0.00	7,280.0	-332.0	322.0	-320.1	0.00	0.00	0.00
7,400.0	0.00	0.00	7,380.0	-332.0	322.0	-320.1	0.00	0.00	0.00
7,500.0	0.00	0.00	7,480.0	-332.0	322.0	-320.1	0.00	0.00	0.00
7,600.0	0.00	0.00	7,580.0	-332.0	322.0	-320.1	0.00	0.00	0.00
7,700.0	0.00	0.00	7,680.0	-332.0	322.0	-320.1	0.00	0.00	0.00
7,800.0	0.00	0.00	7,780.0	-332.0	322.0	-320.1	0.00	0.00	0.00
7,900.0	0.00	0.00	7,880.0	-332.0	322.0	-320.1	0.00	0.00	0.00
8,000.0	0.00	0.00	7,980.0	-332.0	322.0	-320.1	0.00	0.00	0.00
8,100.0	0.00	0.00	8,080.0	-332.0	322.0	-320.1	0.00	0.00	0.00
8,200.0	0.00	0.00	8,180.0	-332.0	322.0	-320.1	0.00	0.00	0.00
8,300.0	0.00	0.00	8,280.0	-332.0	322.0	-320.1	0.00	0.00	0.00
8,400.0	0.00	0.00	8,380.0	-332.0	322.0	-320.1	0.00	0.00	0.00
8,500.0	0.00	0.00	8,480.0	-332.0	322.0	-320.1	0.00	0.00	0.00
8,600.0	0.00	0.00	8,580.0	-332.0	322.0	-320.1	0.00	0.00	0.00
8,700.0	0.00	0.00	8,680.0	-332.0	322.0	-320.1	0.00	0.00	0.00
8,800.0	0.00	0.00	8,780.0	-332.0	322.0	-320.1	0.00	0.00	0.00
8,900.0	0.00	0.00	8,880.0	-332.0	322.0	-320.1	0.00	0.00	0.00
9,000.0	0.00	0.00	8,980.0	-332.0	322.0	-320.1	0.00	0.00	0.00
9,100.0	0.00	0.00	9,080.0	-332.0	322.0	-320.1	0.00	0.00	0.00
9,200.0	0.00	0.00	9,180.0	-332.0	322.0	-320.1	0.00	0.00	0.00
9,300.0	0.00	0.00	9,280.0	-332.0	322.0	-320.1	0.00	0.00	0.00
9,400.0	0.00	0.00	9,380.0	-332.0	322.0	-320.1	0.00	0.00	0.00
9,500.0	0.00	0.00	9,480.0	-332.0	322.0	-320.1	0.00	0.00	0.00
9,600.0	0.00	0.00	9,580.0	-332.0	322.0	-320.1	0.00	0.00	0.00
9,700.0	0.00	0.00	9,680.0	-332.0	322.0	-320.1	0.00	0.00	0.00
9,800.0	0.00	0.00	9,780.0	-332.0	322.0	-320.1	0.00	0.00	0.00
9,900.0	0.00	0.00	9,880.0	-332.0	322.0	-320.1	0.00	0.00	0.00
10,000.0	0.00	0.00	9,980.0	-332.0	322.0	-320.1	0.00	0.00	0.00
10,100.0	0.00	0.00	10,080.0	-332.0	322.0	-320.1	0.00	0.00	0.00
10,200.0	0.00	0.00	10,180.0	-332.0	322.0	-320.1	0.00	0.00	0.00
10,300.0	0.00	0.00	10,280.0	-332.0	322.0	-320.1	0.00	0.00	0.00
10,400.0	0.00	0.00	10,380.0	-332.0	322.0	-320.1	0.00	0.00	0.00



Planning Report

Database:	PEDM	Local Co-ordinate Reference:	Well #709H
Company:	Midland	TVD Reference:	kb = 26' @ 3700.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	kb = 26' @ 3700.0usft
Site:	Frderick 33 Fed	North Reference:	Grid
Well:	#709H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #0.1 RT		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
10,500.0	0.00	0.00	10,480.0	-332.0	322.0	-320.1	0.00	0.00	0.00
10,600.0	0.00	0.00	10,580.0	-332.0	322.0	-320.1	0.00	0.00	0.00
10,700.0	0.00	0.00	10,680.0	-332.0	322.0	-320.1	0.00	0.00	0.00
10,800.0	0.00	0.00	10,780.0	-332.0	322.0	-320.1	0.00	0.00	0.00
10,900.0	0.00	0.00	10,880.0	-332.0	322.0	-320.1	0.00	0.00	0.00
11,000.0	0.00	0.00	10,980.0	-332.0	322.0	-320.1	0.00	0.00	0.00
11,100.0	0.00	0.00	11,080.0	-332.0	322.0	-320.1	0.00	0.00	0.00
11,200.0	0.00	0.00	11,180.0	-332.0	322.0	-320.1	0.00	0.00	0.00
11,300.0	0.00	0.00	11,280.0	-332.0	322.0	-320.1	0.00	0.00	0.00
11,400.0	0.00	0.00	11,380.0	-332.0	322.0	-320.1	0.00	0.00	0.00
11,500.0	0.00	0.00	11,480.0	-332.0	322.0	-320.1	0.00	0.00	0.00
11,600.0	0.00	0.00	11,580.0	-332.0	322.0	-320.1	0.00	0.00	0.00
11,700.0	0.00	0.00	11,680.0	-332.0	322.0	-320.1	0.00	0.00	0.00
11,807.5	0.00	0.00	11,787.5	-332.0	322.0	-320.1	0.00	0.00	0.00
11,825.0	2.10	0.00	11,805.0	-331.7	322.0	-319.7	12.00	12.00	0.00
11,850.0	5.10	0.00	11,830.0	-330.1	322.0	-318.2	12.00	12.00	0.00
11,875.0	8.10	0.00	11,854.8	-327.2	322.0	-315.3	12.00	12.00	0.00
11,900.0	11.10	0.00	11,879.4	-323.1	322.0	-311.1	12.00	12.00	0.00
11,925.0	14.10	0.00	11,903.8	-317.6	322.0	-305.7	12.00	12.00	0.00
11,950.0	17.10	0.00	11,927.9	-310.9	322.0	-299.0	12.00	12.00	0.00
11,975.0	20.10	0.00	11,951.6	-302.9	322.0	-291.0	12.00	12.00	0.00
12,000.0	23.10	0.00	11,974.8	-293.7	322.0	-281.8	12.00	12.00	0.00
12,025.0	26.10	0.00	11,997.6	-283.3	322.0	-271.4	12.00	12.00	0.00
12,027.9	26.46	0.00	12,000.2	-282.0	322.0	-270.1	12.00	12.00	0.00
12,050.0	29.10	359.96	12,019.7	-271.7	322.0	-259.8	12.00	12.00	-0.18
12,075.0	32.10	359.92	12,041.2	-259.0	322.0	-247.1	12.00	12.00	-0.16
12,100.0	35.10	359.89	12,062.1	-245.2	322.0	-233.3	12.00	12.00	-0.13
12,125.0	38.10	359.86	12,082.1	-230.3	321.9	-218.4	12.00	12.00	-0.11
12,150.0	41.10	359.83	12,101.4	-214.3	321.9	-202.5	12.00	12.00	-0.10
12,175.0	44.10	359.81	12,119.8	-197.4	321.8	-185.6	12.00	12.00	-0.09
12,200.0	47.10	359.79	12,137.3	-179.5	321.8	-167.7	12.00	12.00	-0.08
12,225.0	50.10	359.78	12,153.8	-160.8	321.7	-149.0	12.00	12.00	-0.07
12,250.0	53.10	359.76	12,169.3	-141.2	321.6	-129.4	12.00	12.00	-0.07
12,275.0	56.10	359.74	12,183.8	-120.8	321.5	-109.0	12.00	12.00	-0.06
12,300.0	59.10	359.73	12,197.2	-99.7	321.4	-88.0	12.00	12.00	-0.06
12,325.0	62.10	359.72	12,209.5	-77.9	321.3	-66.2	12.00	12.00	-0.05
12,350.0	65.10	359.70	12,220.6	-55.5	321.2	-43.8	12.00	12.00	-0.05
12,375.0	68.10	359.69	12,230.5	-32.6	321.1	-20.9	12.00	12.00	-0.05
12,400.0	71.10	359.68	12,239.2	-9.2	321.0	2.5	12.00	12.00	-0.05
12,425.0	74.10	359.67	12,246.7	14.7	320.8	26.3	12.00	12.00	-0.04
12,450.0	77.10	359.66	12,252.9	38.9	320.7	50.5	12.00	12.00	-0.04
12,475.0	80.10	359.65	12,257.8	63.4	320.5	75.0	12.00	12.00	-0.04
12,500.0	83.10	359.64	12,261.5	88.1	320.4	99.7	12.00	12.00	-0.04
12,525.0	86.10	359.63	12,263.8	113.0	320.2	124.6	12.00	12.00	-0.04
12,550.0	89.10	359.62	12,264.9	138.0	320.1	149.5	12.00	12.00	-0.04
12,557.5	90.00	359.62	12,264.9	145.5	320.0	157.0	12.00	12.00	-0.04
12,600.0	90.00	359.62	12,264.9	188.0	319.7	199.5	0.00	0.00	0.00
12,700.0	90.00	359.62	12,264.9	288.0	319.1	299.4	0.00	0.00	0.00
12,800.0	90.00	359.62	12,264.9	388.0	318.4	399.3	0.00	0.00	0.00
12,900.0	90.00	359.62	12,264.9	488.0	317.7	499.2	0.00	0.00	0.00
13,000.0	90.00	359.62	12,264.9	588.0	317.0	599.1	0.00	0.00	0.00
13,100.0	90.00	359.62	12,264.9	688.0	316.4	699.0	0.00	0.00	0.00
13,200.0	90.00	359.62	12,264.9	788.0	315.7	798.9	0.00	0.00	0.00
13,300.0	90.00	359.62	12,265.0	888.0	315.0	898.8	0.00	0.00	0.00



Planning Report

Database:	PEDM	Local Co-ordinate Reference:	Well #709H
Company:	Midland	TVD Reference:	kb = 26' @ 3700.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	kb = 26' @ 3700.0usft
Site:	Frderick 33 Fed	North Reference:	Grid
Well:	#709H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #0.1 RT		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
13,400.0	90.00	359.62	12,265.0	988.0	314.4	998.7	0.00	0.00	0.00
13,500.0	90.00	359.62	12,265.0	1,088.0	313.7	1,098.7	0.00	0.00	0.00
13,600.0	90.00	359.62	12,265.0	1,188.0	313.0	1,198.6	0.00	0.00	0.00
13,700.0	90.00	359.62	12,265.0	1,288.0	312.3	1,298.5	0.00	0.00	0.00
13,800.0	90.00	359.62	12,265.0	1,388.0	311.7	1,398.4	0.00	0.00	0.00
13,900.0	90.00	359.62	12,265.0	1,488.0	311.0	1,498.3	0.00	0.00	0.00
14,000.0	90.00	359.62	12,265.0	1,588.0	310.3	1,598.2	0.00	0.00	0.00
14,100.0	90.00	359.62	12,265.0	1,688.0	309.7	1,698.1	0.00	0.00	0.00
14,200.0	90.00	359.62	12,265.0	1,788.0	309.0	1,798.0	0.00	0.00	0.00
14,300.0	90.00	359.62	12,265.0	1,887.9	308.3	1,897.9	0.00	0.00	0.00
14,400.0	90.00	359.62	12,265.0	1,987.9	307.6	1,997.8	0.00	0.00	0.00
14,500.0	90.00	359.62	12,265.0	2,087.9	307.0	2,097.7	0.00	0.00	0.00
14,600.0	90.00	359.62	12,265.0	2,187.9	306.3	2,197.6	0.00	0.00	0.00
14,700.0	90.00	359.62	12,265.0	2,287.9	305.6	2,297.5	0.00	0.00	0.00
14,800.0	90.00	359.62	12,265.0	2,387.9	305.0	2,397.4	0.00	0.00	0.00
14,900.0	90.00	359.62	12,265.0	2,487.9	304.3	2,497.4	0.00	0.00	0.00
15,000.0	90.00	359.62	12,265.0	2,587.9	303.6	2,597.3	0.00	0.00	0.00
15,100.0	90.00	359.62	12,265.0	2,687.9	302.9	2,697.2	0.00	0.00	0.00
15,200.0	90.00	359.62	12,265.0	2,787.9	302.3	2,797.1	0.00	0.00	0.00
15,300.0	90.00	359.62	12,265.0	2,887.9	301.6	2,897.0	0.00	0.00	0.00
15,400.0	90.00	359.62	12,265.0	2,987.9	300.9	2,996.9	0.00	0.00	0.00
15,500.0	90.00	359.62	12,265.0	3,087.9	300.3	3,096.8	0.00	0.00	0.00
15,600.0	90.00	359.62	12,265.0	3,187.9	299.6	3,196.7	0.00	0.00	0.00
15,700.0	90.00	359.62	12,265.0	3,287.9	298.9	3,296.6	0.00	0.00	0.00
15,800.0	90.00	359.62	12,265.0	3,387.9	298.2	3,396.5	0.00	0.00	0.00
15,900.0	90.00	359.62	12,265.0	3,487.9	297.6	3,496.4	0.00	0.00	0.00
16,000.0	90.00	359.62	12,265.0	3,587.9	296.9	3,596.3	0.00	0.00	0.00
16,100.0	90.00	359.62	12,265.0	3,687.9	296.2	3,696.2	0.00	0.00	0.00
16,200.0	90.00	359.62	12,265.0	3,787.9	295.6	3,796.1	0.00	0.00	0.00
16,300.0	90.00	359.62	12,265.0	3,887.9	294.9	3,896.1	0.00	0.00	0.00
16,400.0	90.00	359.62	12,265.0	3,987.9	294.2	3,996.0	0.00	0.00	0.00
16,500.0	90.00	359.62	12,265.0	4,087.9	293.5	4,095.9	0.00	0.00	0.00
16,600.0	90.00	359.62	12,265.0	4,187.9	292.9	4,195.8	0.00	0.00	0.00
16,700.0	90.00	359.62	12,265.0	4,287.9	292.2	4,295.7	0.00	0.00	0.00
16,800.0	90.00	359.62	12,265.0	4,387.9	291.5	4,395.6	0.00	0.00	0.00
16,900.0	90.00	359.62	12,265.0	4,487.9	290.9	4,495.5	0.00	0.00	0.00
17,000.0	90.00	359.62	12,265.0	4,587.9	290.2	4,595.4	0.00	0.00	0.00
17,100.0	90.00	359.62	12,265.0	4,687.9	289.5	4,695.3	0.00	0.00	0.00
17,200.0	90.00	359.62	12,265.0	4,787.9	288.8	4,795.2	0.00	0.00	0.00
17,300.0	90.00	359.62	12,265.0	4,887.9	288.2	4,895.1	0.00	0.00	0.00
17,400.0	90.00	359.62	12,265.0	4,987.9	287.5	4,995.0	0.00	0.00	0.00
17,500.0	90.00	359.62	12,265.0	5,087.9	286.8	5,094.9	0.00	0.00	0.00
17,600.0	90.00	359.62	12,265.0	5,187.9	286.2	5,194.8	0.00	0.00	0.00
17,700.0	90.00	359.62	12,265.0	5,287.9	285.5	5,294.8	0.00	0.00	0.00
17,800.0	90.00	359.62	12,265.0	5,387.9	284.8	5,394.7	0.00	0.00	0.00
17,900.0	90.00	359.62	12,265.0	5,487.9	284.1	5,494.6	0.00	0.00	0.00
18,000.0	90.00	359.62	12,265.0	5,587.9	283.5	5,594.5	0.00	0.00	0.00
18,100.0	90.00	359.62	12,265.0	5,687.9	282.8	5,694.4	0.00	0.00	0.00
18,200.0	90.00	359.62	12,265.0	5,787.9	282.1	5,794.3	0.00	0.00	0.00
18,300.0	90.00	359.62	12,265.0	5,887.9	281.5	5,894.2	0.00	0.00	0.00
18,400.0	90.00	359.62	12,265.0	5,987.9	280.8	5,994.1	0.00	0.00	0.00
18,500.0	90.00	359.62	12,265.0	6,087.9	280.1	6,094.0	0.00	0.00	0.00
18,600.0	90.00	359.62	12,265.0	6,187.9	279.4	6,193.9	0.00	0.00	0.00
18,700.0	90.00	359.62	12,265.0	6,287.8	278.8	6,293.8	0.00	0.00	0.00



Planning Report

Database:	PEDM	Local Co-ordinate Reference:	Well #709H
Company:	Midland	TVD Reference:	kb = 26' @ 3700.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	kb = 26' @ 3700.0usft
Site:	Froderick 33 Fed	North Reference:	Grid
Well:	#709H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #0.1 RT		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
18,800.0	90.00	359.62	12,265.0	6,387.8	278.1	6,393.7	0.00	0.00	0.00	
18,900.0	90.00	359.62	12,265.0	6,487.8	277.4	6,493.6	0.00	0.00	0.00	
19,000.0	90.00	359.62	12,265.0	6,587.8	276.8	6,593.5	0.00	0.00	0.00	
19,100.0	90.00	359.62	12,265.0	6,687.8	276.1	6,693.5	0.00	0.00	0.00	
19,200.0	90.00	359.62	12,265.0	6,787.8	275.4	6,793.4	0.00	0.00	0.00	
19,300.0	90.00	359.62	12,265.0	6,887.8	274.7	6,893.3	0.00	0.00	0.00	
19,400.0	90.00	359.62	12,265.0	6,987.8	274.1	6,993.2	0.00	0.00	0.00	
19,500.0	90.00	359.62	12,265.0	7,087.8	273.4	7,093.1	0.00	0.00	0.00	
19,600.0	90.00	359.62	12,265.0	7,187.8	272.7	7,193.0	0.00	0.00	0.00	
19,700.0	90.00	359.62	12,265.0	7,287.8	272.1	7,292.9	0.00	0.00	0.00	
19,800.0	90.00	359.62	12,265.0	7,387.8	271.4	7,392.8	0.00	0.00	0.00	
19,858.2	90.00	359.62	12,265.0	7,446.0	271.0	7,450.9	0.00	0.00	0.00	

Design Targets										
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
KOP(Froderick 33 Fed # - plan hits target center - Point	0.00	0.00	11,787.5	-332.0	322.0	459,349.00	741,602.00	32° 15' 40.190 N	103° 41' 7.644 W	
FTP(Froderick 33 Fed # - plan hits target center - Point	0.00	0.00	12,000.2	-282.0	322.0	459,399.00	741,602.00	32° 15' 40.685 N	103° 41' 7.641 W	
PBHL(Froderick 33 Fed - plan hits target center - Point	0.00	0.00	12,265.0	7,446.0	271.0	467,127.00	741,551.00	32° 16' 57.159 N	103° 41' 7.691 W	

Lea County, NM (NAD 83 NME)

Froderick 33 Fed #709H

Plan #0.1 RT



To convert a Magnetic Direction to a Grid Direction, Add 6.13°
To convert a Magnetic Direction to a True Direction, Add 6.48° East
To convert a True Direction to a Grid Direction, Subtract 0.35°

PROJECT DETAILS: Lea County, NM (NAD 83 NME)

Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Eastern Zone
System Datum: Mean Sea Level

WELL DETAILS: #709H

kb = 26' @ 3700.0usft 3674.0

Northing	Easting	Latitude	Longitude
459681.00	741280.00	32° 15' 43.495 N	103° 41' 11.371 W

SECTION DETAILS


Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	1500.0	0.00	0.00	1500.0	0.0	0.0	0.00	0.00	0.0	
3	1751.5	5.03	135.88	1751.1	-7.9	7.7	2.00	135.88	-7.6	
4	6775.5	5.03	135.88	6755.9	-324.1	314.3	0.00	0.00	-312.4	
5	7027.0	0.00	0.00	7007.0	-332.0	322.0	2.00	180.00	-320.1	
6	11807.5	0.00	0.00	11787.5	-332.0	322.0	0.00	0.00	-320.1	KOP(Froderick 33 Fed #709H)
7	12027.9	26.46	0.00	12000.2	-282.0	322.0	12.00	0.00	-270.1	FTP(Froderick 33 Fed #709H)
8	12557.5	90.00	359.62	12264.9	145.5	320.0	12.00	-0.43	157.0	
9	19858.2	90.00	359.62	12265.0	7446.0	271.0	0.00	0.00	7450.9	PBHL(Froderick 33 Fed #709H)

CASING DETAILS

No casing data is available

WELLBORE TARGET DETAILS (MAP CO-ORDINATES)

Name	TVD	+N/-S	+E/-W	Northing	Easting
KOP(Froderick 33 Fed #709H)	11787.5	-332.0	322.0	459349.00	741602.00
FTP(Froderick 33 Fed #709H)	12000.2	-282.0	322.0	459399.00	741602.00
PBHL(Froderick 33 Fed #709H)	12265.0	7446.0	271.0	467127.00	741551.00

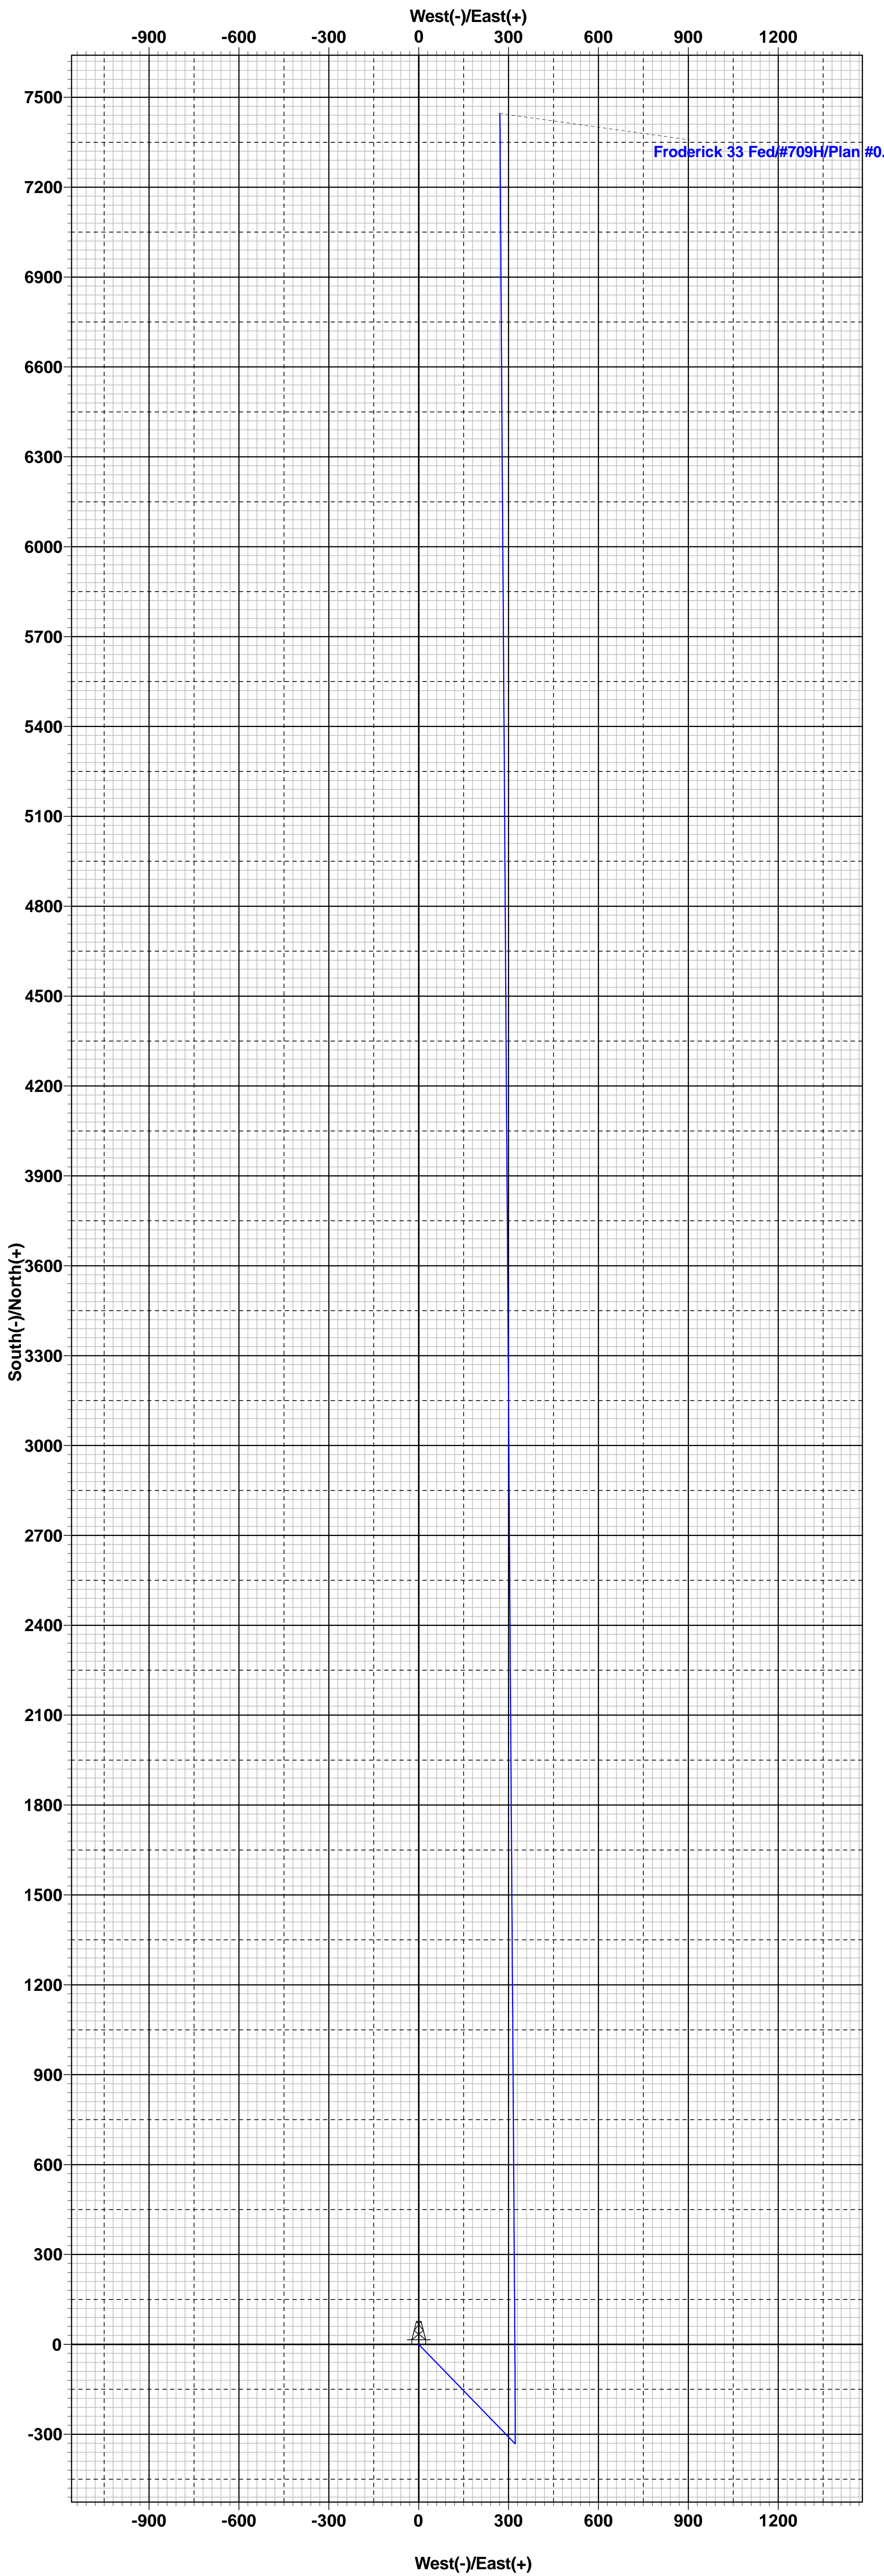

Froderick 33 Fed #709H/Plan #0.1 RT

Vertical Section at 2.08°

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	EOG Resources Inc
WELL NAME & NO.:	FRODERICK 33 FED 709H
SURFACE HOLE FOOTAGE:	2256'/N & 509'/W
BOTTOM HOLE FOOTAGE:	100'/N & 830'/W
LOCATION:	Section 33, T.23S., R.32E.
COUNTY:	Lea County, New Mexico

COA

H2S	<input checked="" type="radio"/> Yes	<input type="radio"/> No	
Potash	<input checked="" type="radio"/> None	<input type="radio"/> Secretary	<input type="radio"/> R-111-P
Cave/Karst Potential	<input checked="" type="radio"/> Low	<input type="radio"/> Medium	<input type="radio"/> High
Cave/Karst Potential	<input type="radio"/> Critical		
Variance	<input type="radio"/> None	<input checked="" type="radio"/> Flex Hose	<input type="radio"/> Other
Wellhead	<input type="radio"/> Conventional	<input checked="" type="radio"/> Multibowl	<input type="radio"/> Both
Wellhead Variance	<input type="radio"/> Diverter		
Other	<input type="checkbox"/> 4 String	<input type="checkbox"/> Capitan Reef	<input type="checkbox"/> WIPP
Other	<input checked="" type="checkbox"/> Fluid Filled	<input type="checkbox"/> Pilot Hole	<input type="checkbox"/> Open Annulus
Cementing	<input type="checkbox"/> Contingency Cement Squeeze	<input checked="" type="checkbox"/> EchoMeter	<input checked="" type="checkbox"/> Primary Cement Squeeze
Special Requirements	<input type="checkbox"/> Water Disposal	<input type="checkbox"/> COM	<input type="checkbox"/> Unit
Special Requirements	<input type="checkbox"/> Batch Sundry		
Special Requirements Variance	<input checked="" type="checkbox"/> Break Testing	<input checked="" type="checkbox"/> Offline Cementing	<input checked="" type="checkbox"/> Casing Clearance

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H2S) Drilling Plan shall be activated AT SPUD. As a result, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING

Primary Casing Design:

- The 9-5/8 inch surface casing shall be set at approximately **1,260** feet (a minimum of 25 feet (Lea County) into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.

- a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The **7-5/8** inch intermediate casing shall be set at approximately **11,180 feet TVD**. The minimum required fill of cement behind the **7-5/8** inch intermediate casing is:

Option 1 (Single Stage):

- Cement to surface. If cement does not circulate see B.1.a, c-d above.

Option 2:

Operator has proposed to cement in two stages by conventionally cementing the first stage and performing a bradenhead squeeze on the second stage, contingent upon no returns to surface.

- a. First stage: Operator will cement with intent to reach the top of the **Brushy Canyon**
- b. Second stage:
 - Operator will perform bradenhead squeeze and top-out. Cement to surface. If cement does not reach surface, the appropriate BLM office shall be notified.

Operator has proposed to pump down 7-5/8" X 9-5/8" annulus. Operator must top out cement after the bradenhead squeeze and verify cement to surface. Operator can also check TOC with Echo-meter. CBL must be run from TD of the 7-5/8" casing to surface if confidence is lacking on the quality of the bradenhead squeeze cement job. Submit results to BLM.

If cement does not tie-back into the previous casing shoe, a third stage remediation BH may be performed. The appropriate BLM office shall be notified.

Bradenhead squeeze in the production interval is only as an edge case remediation measure and is NOT approved in this COA. If production cement job experiences losses and a bradenhead squeeze is needed for tie-back, BLM Engineering should be notified prior to job with volumes and planned wellbore schematic. CBL will be needed when this occurs.

If cement does not reach surface, the next casing string must come to surface.

Operator must use a limited flush fluid volume of 1 bbl following backside cementing procedures.

3. The 5-1/2 inch production casing shall be set at approximately **19,858** feet. The minimum required fill of cement behind the 5-1/2 inch production casing is:

Option 1 (Single Stage):

- Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

Alternate Casing Design:

1. The 10-3/4 inch surface casing shall be set at approximately **1,260** feet (a minimum of 25 feet (Lea County) into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.
 - e. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - f. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - g. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - h. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The 8-3/4 inch intermediate casing shall be set at approximately **11,180 feet TVD**. The minimum required fill of cement behind the 8-3/4 inch intermediate casing is:

Option 1 (Single Stage):

- Cement to surface. If cement does not circulate see B.1.a, c-d above.

Option 2:

Operator has proposed to cement in two stages by conventionally cementing the first stage and performing a bradenhead squeeze on the second stage, contingent upon no returns to surface.

- c. First stage: Operator will cement with intent to reach the top of the **Brushy Canyon**
- d. Second stage:
 - Operator will perform bradenhead squeeze and top-out. Cement to surface. If cement does not reach surface, the appropriate BLM office shall be notified.

Operator has proposed to pump down 7-5/8" X 9-5/8" annulus. Operator must top out cement after the bradenhead squeeze and verify cement to surface. Operator can also check TOC with Echo-meter. CBL must be run from TD of the 7-5/8" casing to surface if confidence is lacking on the quality of the bradenhead squeeze cement job. Submit results to BLM.

If cement does not tie-back into the previous casing shoe, a third stage remediation BH may be performed. The appropriate BLM office shall be notified.

Bradenhead squeeze in the production interval is only as an edge case remediation measure and is NOT approved in this COA. If production cement job experiences losses and a bradenhead squeeze is needed for tie-back, BLM Engineering should be notified prior to job with volumes and planned wellbore schematic. CBL will be needed when this occurs.

If cement does not reach surface, the next casing string must come to surface.

Operator must use a limited flush fluid volume of 1 bbl following backside cementing procedures.

Intermediate casing must be kept fluid filled to meet BLM minimum collapse requirement.

- 3. The 6 inch production casing shall be set at approximately **19,858** feet. The minimum required fill of cement behind the 6 inch production casing is:

Option 1 (Single Stage):

- Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

Production casing must be kept fluid filled to meet BLM minimum collapse

requirement.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **10,000 (10M) psi. Variance is approved to use a 5000 (5M) Annular which shall be tested to 3500 (70% Working Pressure) psi.**
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)

(Note: For a minimum 5M BOPE or less (Utilizing a 10M BOPE system)

BOPE Break Testing Variance

- BOPE Break Testing is ONLY permitted for 5M BOPE or less. (**Annular preventer must be tested to a minimum of 70% of BOPE working pressure and shall be higher than the MASP**)
- BOPE Break Testing is NOT permitted to drilling the production hole section.
- Variance only pertains to the intermediate hole-sections and no deeper than the Bone Springs formation.
- While in transfer between wells, the BOPE shall be secured by the hydraulic carrier or cradle.
- Any well control event while drilling require notification to the BLM Petroleum Engineer (**575-706-2779**) prior to the commencement of any BOPE Break Testing operations.
- A full BOPE test is required prior to drilling the first deep intermediate hole section. If any subsequent hole interval is deeper than the first, a full BOPE test will be required. (200' TVD tolerance between intermediate shoes is allowable).
- The BLM is to be contacted (575-689-5981 Lea County) 4 hours prior to BOPE tests.
- As a minimum, a full BOPE test shall be performed at 21-day intervals.

- In the event any repairs or replacement of the BOPE is required, the BOPE shall test as per 43 CFR part 3170 Subpart 3172.
- If in the event break testing is not utilized, then a full BOPE test would be conducted.

Offline Cementing

Offline cementing approved for surface and intermediate intervals. Contact the BLM PETs prior to the commencement of any offline cementing procedure.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

EMAIL or call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,

BLM_NM_CFO_DrillingNotifications@BLM.GOV

(575) 361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240,

(575) 689-5981

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per **43 CFR part 3170 Subpart 3172** as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area

immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.

3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the

formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.

7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR part 3170 Subpart 3172** and **API STD 53 Sec. 5.3**.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in **43 CFR part 3170 Subpart 3172** must be followed.

- e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
- a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (only applies to single stage cement jobs, prior to the cement setting up.)
 - c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR part 3170 Subpart 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
 - d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
 - e. The results of the test shall be reported to the appropriate BLM office.
 - f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.

- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per **43 CFR part 3170 Subpart 3172**.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

KPI 6/10/2024



Fröderick 33 Fed #709H

Hydrogen Sulfide Plan Summary

- A. All personnel shall receive proper H₂S training in accordance with Onshore Order III.C.3.a.
- B. Briefing Area: two perpendicular areas will be designated by signs and readily accessible.
- C. Required Emergency Equipment:
 - Well control equipment
 - a. Flare line 150' from wellhead to be ignited by flare gun.
 - b. Choke manifold with a remotely operated choke.
 - c. Mud/gas separator
 - Protective equipment for essential personnel:
 - a. Breathing Apparatus:
 - i. Rescue Packs (SCBA) — 1 unit shall be placed at each breathing area, 2 shall be stored in the safety trailer.
 - ii. Work/Escape packs — 4 packs shall be stored on the rig floor with sufficient air hose not to restrict work activity.
 - iii. Emergency Escape Packs — 4 packs shall be stored in the doghouse for emergency evacuation.
 - b. Auxiliary Rescue Equipment:
 - i. Stretcher
 - ii. Two OSHA full body harness
 - iii. 100 ft 5/8 inch OSHA approved rope
 - iv. 1-20# class ABC fire extinguisher
 - H₂S Detection and Monitoring Equipment:

The stationary detector with three sensors will be placed in the upper dog house if equipped, set to visually alarm @ 10 ppm and audible @ 14 ppm. Calibrate a minimum of every 30 days or as needed. The sensors will be placed in the following places: Rig floor / Bell nipple / End of flow line or where well bore fluid is being discharged. (Gas sample tubes will be stored in the safety trailer)
 - Visual Warning System:
 - a. One color code condition sign will be placed at the entrance to the site reflecting the possible conditions at the site.
 - b. A colored condition flag will be on display, reflecting the current condition at the site at the time.
 - c. Two wind socks will be placed in strategic locations, visible from all angles.



Froderick 33 Fed #709H

■ **Mud Program:**

The mud program has been designed to minimize the volume of H₂S circulated to surface. The operator will have the necessary mud products to minimize hazards while drilling in H₂S bearing zones.

■ **Metallurgy:**

All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H₂S service.

■ **Communication:**

Communication will be via cell phones and land lines where available.



Froderick 33 Fed #709H

Emergency Assistance Telephone List

PUBLIC SAFETY:	911 or
Lea County Sheriff's Department	(575) 396-3611
Corey Helton	
Fire Department	
Carlsbad	(575) 885-3125
Artesia	(575) 746-5050
Hospitals	
Carlsbad	(575) 887-4121
Artesia	(575) 748-3333
Hobbs	(575) 392-1979
Dept. of Public Safety/Carlsbad	(575) 748-9718
Highway Department	(575) 885-3281
U.S. Department of Labor	(575) 887-1174
Bureau of Land Management - Hobbs (Lea Co)	(575) 393-3612
PET On Call - Hobbs	(575) 706-2779
Bureau of Land Management - Carlsbad (Eddy Co)	(575) 234-5972
PET On Call - Carlsbad	(575) 706-2779
New Mexico Oil Conservation Division - Artesia	(575) 748-1283
Inspection Group South - Gilbert Gordero	(575) 626-0830
EOG Resources, Inc.	
EOG Midland	(432) 686-3600
Company Drilling Consultants:	
Jett Dueitt	(432) 230-4840
Blake Burney	
Drilling Engineers	
Daniel Moose	(432) 312-2803
Esteban Del Valle	(432) 269-7063
Stephen Davis	(432) 235-9789
Drilling Managers	
AJ Dach	(817) 480-1167
Branden Keener	(210) 294-3729
Drilling Superintendents	
Chris Hale	(432) 215-5531
Lance Hardy	(432) 215-8152
Ryan Reynolds	(432) 215-5978
Steve Kelly	(210) 416-7894
H&P Drilling	
H&P Drilling	(432) 563-5757
Nabors Drilling	
Nabors Drilling	(432) 363-8180
Patterson UTI	
Patterson UTI	(432) 561-9382
EOG Safety	
Brian Chandler (HSE Manager)	(817) 239-0251

10,000 PSI BOP Annular Variance Request

EOG Resources request a variance to use a 5000 psi annular BOP with a 10,000 psi BOP stack. The component and compatibility tables along with the general well control plans demonstrate how the 5000 psi annular BOP will be protected from pressures that exceed its rated working pressure (RWP). The pressure at which the control of the wellbore is transferred from the annular preventer to another available preventer will not exceed 3500 psi (70% of the RWP of the 5000 psi annular BOP).

1. Component and Preventer Compatibility Tables


The tables below outlines the tubulars and the compatible preventers in use. This table, combined with the drilling fluid, documents that two barriers to flow will be maintained at all times.

9-7/8" & 8-3/4" Intermediate Hole Section 10M psi requirement					
Component	OD	Primary Preventer	RWP	Alternate Preventer(s)	RWP
Drillpipe	4.500"	Annular	5M	Upper 3.5 - 5.5" VBR Lower 3.5 - 5.5" VBR	10M 10M
HWDP	4.500"	Annular	5M	Upper 3.5 - 5.5" VBR Lower 3.5 - 5.5" VBR	10M 10M
Jars	4.500"	Annular	5M	Upper 3.5 - 5.5" VBR Lower 3.5 - 5.5" VBR	10M 10M
DCs and MWD tools	6.500 – 8.000"	Annular	5M	-	-
Mud Motor	6.750 – 8.000"	Annular	5M	-	-
Intermediate casing	7.625"	Annular	5M	-	-
Open-hole	-	Blind Rams	10M	-	-

6-3/4" Production Hole Section 10M psi requirement					
Component	OD	Primary Preventer	RWP	Alternate Preventer(s)	RWP
Drillpipe	4.500"	Annular	5M	Upper 3.5 - 5.5" VBR Lower 3.5 - 5.5" VBR	10M 10M
HWDP	4.500"	Annular	5M	Upper 3.5 - 5.5" VBR Lower 3.5 - 5.5" VBR	10M 10M
DCs and MWD tools	4.750 – 5.500"	Annular	5M	Upper 3.5 - 5.5" VBR Lower 3.5 - 5.5" VBR	10M 10M
Mud Motor	4.750 – 5.500"	Annular	5M	Upper 3.5 - 5.5" VBR Lower 3.5 - 5.5" VBR	10M 10M
Mud Motor	5.500 – 5.750"	Annular	5M	-	-
Production casing	5.500"	Annular	5M	Upper 3.5 - 5.5" VBR Lower 3.5 - 5.5" VBR	10M 10M
Open-hole	-	Blind Rams	10M	-	-

VBR = Variable Bore Ram

EOG Resources 11" 10M PSI BOP Stack

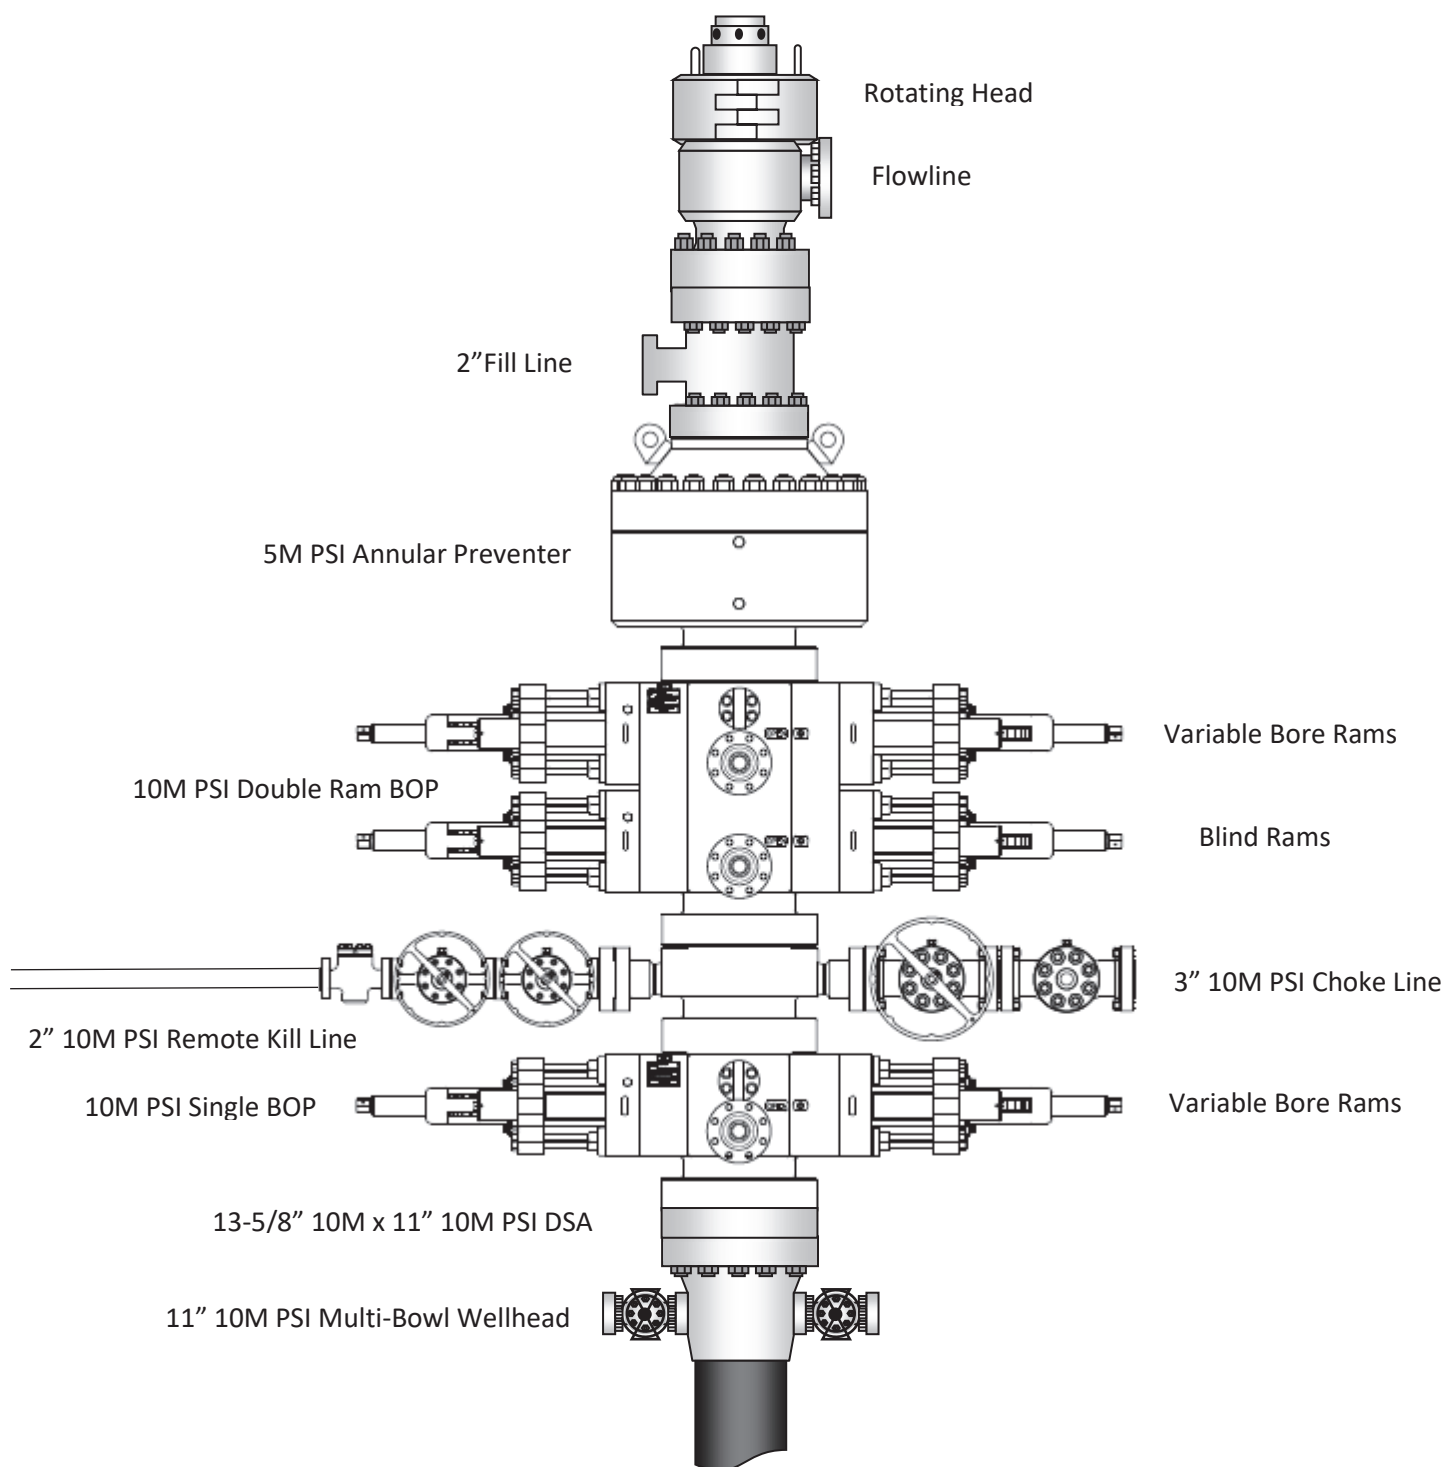

2. Well Control Procedures

Below are the minimal high-level tasks prescribed to assure a proper shut-in while drilling, tripping, running casing, pipe out of the hole (open hole), and moving the BHA through the BOPs. At least one well control drill will be performed weekly per crew to demonstrate compliance with the procedure and well control plan. The well control drill will be recorded in the daily drilling log. The type of drill will be determined by the ongoing operations, but reasonable attempts will be made to vary the type of drill conducted (pit, trip, open hole, choke, etc.). This well control plan will be available for review by rig personnel in the EOG Resources drilling supervisor's office on location, and on the rig floor. All BOP equipment will be tested as per Onshore O&G Order No. 2 with the exception of the 5000 psi annular which will be tested to 100% of its RWP.

General Procedure While Drilling

1. Sound alarm (alert crew)
2. Space out drill string
3. Shut down pumps (stop pumps and rotary)
4. Shut-in Well (uppermost applicable BOP, typically annular preventer first. HCR and choke will already be in the closed position.)
5. Confirm shut-in
6. Notify toolpusher/company representative
7. Read and record the following:
 - a. SIDPP and SICP
 - b. Pit gain
 - c. Time
8. Regroup and identify forward plan
9. If pressure has built or is anticipated during the kill to reach 70% or greater of the RWP of the annular preventer, confirm spacing and close the upper variable bore rams.

General Procedure While Tripping

1. Sound alarm (alert crew)
2. Stab full opening safety valve and close
3. Space out drill string
4. Shut-in (uppermost applicable BOP, typically annular preventer first. HCR and choke will already be in the closed position.)
5. Confirm shut-in
6. Notify toolpusher/company representative
7. Read and record the following:
 - a. SIDPP and SICP
 - b. Pit gain
 - c. Time
8. Regroup and identify forward plan
9. If pressure has built or is anticipated during the kill to reach 70% or greater of the RWP of the annular preventer, confirm spacing and close the upper variable bore rams.

General Procedure While Running Production Casing

1. Sound alarm (alert crew)
2. Stab crossover and full opening safety valve and close
3. Space out string

4. Shut-in (uppermost applicable BOP, typically annular preventer first. HCR and choke will already be in the closed position.)
5. Confirm shut-in
6. Notify toolpusher/company representative
7. Read and record the following:
 - a. SIDPP and SICP
 - b. Pit gain
 - c. Time
8. Regroup and identify forward plan
9. If pressure has built or is anticipated during the kill to reach 70% or greater of the RWP of the annular preventer, confirm spacing and close the upper variable bore rams.

General Procedure With No Pipe In Hole (Open Hole)

1. Sound alarm (alert crew)
2. Shut-in with blind rams. (HCR and choke will already be in the closed position.)
3. Confirm shut-in
4. Notify toolpusher/company representative
5. Read and record the following:
 - a. SICP
 - b. Pit gain
 - c. Time
6. Regroup and identify forward plan

General Procedures While Pulling BHA thru Stack

1. PRIOR to pulling last joint of drillpipe thru the stack.
 - a. Perform flowcheck, if flowing:
 - b. Sound alarm (alert crew)
 - c. Stab full opening safety valve and close
 - d. Space out drill string with tool joint just beneath the upper variable bore rams.
 - e. Shut-in using upper variable bore rams. (HCR and choke will already be in the closed position.)
 - f. Confirm shut-in
 - g. Notify toolpusher/company representative
 - h. Read and record the following:
 - i. SIDPP and SICP
 - ii. Pit gain
 - iii. Time
 - i. Regroup and identify forward plan
2. With BHA in the stack and compatible ram preventer and pipe combo immediately available.
 - a. Sound alarm (alert crew)
 - b. Stab crossover and full opening safety valve and close
 - c. Space out drill string with upset just beneath the upper variable bore rams.
 - d. Shut-in using upper variable bore rams. (HCR and choke will already be in the closed position.)
 - e. Confirm shut-in
 - f. Notify toolpusher/company representative
 - g. Read and record the following:
 - i. SIDPP and SICP

- ii. Pit gain
 - iii. Time
 - h. Regroup and identify forward plan
- 3. With BHA in the stack and NO compatible ram preventer and pipe combo immediately available.
 - a. Sound alarm (alert crew)
 - b. If possible to pick up high enough, pull string clear of the stack and follow “Open Hole” scenario.
 - c. If impossible to pick up high enough to pull the string clear of the stack:
 - d. Stab crossover, make up one joint/stand of drillpipe, and full opening safety valve and close
 - e. Space out drill string with tooljoint just beneath the upper variable bore ram.
 - f. Shut-in using upper variable bore ram. (HCR and choke will already be in the closed position.)
 - g. Confirm shut-in
 - h. Notify toolpusher/company representative
 - i. Read and record the following:
 - i. SIDPP and SICP
 - ii. Pit gain
 - iii. Time
 - j. Regroup and identify forward plan

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 356011

CONDITIONS

Operator: EOG RESOURCES INC 5509 Champions Drive Midland, TX 79706	OGRID:
	7377
	Action Number: 356011
	Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

CONDITIONS

Created By	Condition	Condition Date
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104	6/24/2024
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string	6/24/2024
pkautz	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system	6/24/2024
pkautz	Cement is required to circulate on both surface and intermediate1 strings of casing	6/24/2024
pkautz	If cement does not circulate on any string, a CBL is required for that string of casing	6/24/2024