

Form 3160-3
(June 2015)FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

| | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|-----------------------------------------------|
| 1a. Type of work: <input type="checkbox"/> DRILL <input type="checkbox"/> REENTER | | 5. Lease Serial No. |
| 1b. Type of Well: <input type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other | | 6. If Indian, Allottee or Tribe Name |
| 1c. Type of Completion: <input type="checkbox"/> Hydraulic Fracturing <input type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone | | 7. If Unit or CA Agreement, Name and No. |
| 2. Name of Operator | | 8. Lease Name and Well No. |
| 3a. Address | | 9. API Well No. 30-025-53391 |
| 3b. Phone No. (include area code) | | 10. Field and Pool, or Exploratory |
| 4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface At proposed prod. zone | | 11. Sec., T. R. M. or Blk. and Survey or Area |
| 14. Distance in miles and direction from nearest town or post office* | | 12. County or Parish |
| | | 13. State |
| 15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) | 16. No of acres in lease | 17. Spacing Unit dedicated to this well |
| 18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. | 19. Proposed Depth | 20. BLM/BIA Bond No. in file |
| 21. Elevations (Show whether DF, KDB, RT, GL, etc.) | 22. Approximate date work will start* | 23. Estimated duration |
| 24. Attachments | | |

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be requested by the BLM. |

| | | |
|-------------------------|----------------------|------|
| 25. Signature | Name (Printed/Typed) | Date |
| Title | | |
| Approved by (Signature) | Name (Printed/Typed) | Date |
| Title | | |
| Office | | |

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)



Approval Date: 07/23/2024

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

| | | |
|-------------------------------------|-------------------------------------------|------------------------------------|
| 1 API Number 30-025-53391 | 2 Pool Code 98081 | 3 Pool Name Zia Hills; Wolfcamp |
| 4 Property Code 334843 | 5 Property Name ZIA HILLS UNIT 2032 WC | 6 Well Number 702H |
| 7 OGRID No. 217817 | 8 Operator Name CONOCOPHILLIPS COMPANY | 9 Elevation 3173.24' |

¹⁰ Surface Location

| UL or lot no. | Section | Township | Range | Lot Idn | Feet from the | North/South line | Feet from the | East/West line | County |
|---------------|---------|----------|-------|---------|---------------|------------------|---------------|----------------|--------|
| E | 20 | 26-S | 32-E | | 2547' | NORTH | 912' | WEST | LEA |

¹¹ Bottom Hole Location If Different From Surface

| UL or lot no. | Section | Township | Range | Lot Idn | Feet from the | North/South line | Feet from the | East/West line | County |
|---------------|---------|----------|-------|---------|---------------|------------------|---------------|----------------|--------|
| D | 17 | 26-S | 32-E | | 50' | NORTH | 430' | WEST | LEA |

| | | | |
|---------------------------|--------------------|-------------------------------|-------------------------|
| 12 Dedicated Acres 480 | 13 Joint or Infill | 14 Consolidation Code Unit | 15 Order No. R-20080 |
|---------------------------|--------------------|-------------------------------|-------------------------|

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

| |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>16</p> <p>17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</p> <p><i>Stan Wagner</i> 2/20/2023 Signature Date</p> <p>Stan Wagner Printed Name</p> <p>E-mail Address</p> <p>18 SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</p> <p>11/10/2022 Date of Survey</p> <p>Signature and Seal of Professional Surveyor: <i>Charles L. Jurica</i> 25490 Professional Surveyor</p> <p>Certificate Number</p> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

ConocoPhillips Company - Zia Hills Unit 2032 WC 702H

1. Geologic Formations

| | | | |
|---------------|-------------|-------------------------------|------|
| TVD of target | 11,912' EOL | Pilot hole depth | NA |
| MD at TD: | 19,652' | Deepest expected fresh water: | 314' |

| Formation | Depth (TVD) from KB | Water/Mineral Bearing/ Target Zone? | Hazards* |
|----------------------|------------------------|----------------------------------------|----------|
| Quaternary Fill | Surface | Water | |
| Rustler | 1265 | Water | |
| Top of Salt | 1558 | Salt | |
| Base of Salt | 4096 | Salt | |
| Lamar | 4310 | Salt Water | |
| Bell Canyon | 4346 | Salt Water | |
| Cherry Canyon | 5229 | Oil/Gas | |
| Brushy Canyon | 6722 | Oil/Gas | |
| Bone Spring Shale | 8321 | Oil/Gas | |
| 1st Bone Spring Sand | 9303 | Oil/Gas | |
| 2nd Bone Spring Sand | 9984 | Oil/Gas | |
| 3rd Bone Spring Sand | 11133 | Oil/Gas | |
| Wolfcamp | 11550 | Oil/Gas | |
| Wolfcamp A | 11757 | Target | |
| Wolfcamp B | 12062 | Not Penetrated | |

2. Casing Program

| Hole Size | Casing Interval | | Csg. Size | Weight (lbs) | Grade | Conn. | SF Collapse | SF Burst | SF Body | SF Joint |
|---------------------------|-----------------|--------|-----------|-----------------|----------|-------|----------------|----------|--------------------|--------------------|
| | From | To | | | | | | | | |
| 14.75" | 0 | 1350 | 10.75" | 45.5 | J55 | BTC | 3.38 | 1.11 | 11.64 | 12.96 |
| 9.875" | 0 | 8500 | 7.625" | 29.7 | L80-ICY | BTC | 1.45 | 1.12 | 2.88 | 2.90 |
| 8.750" | 8500 | 11132 | 7.625" | 29.7 | P110-ICY | W513 | 1.38 | 1.69 | 3.23 | 1.94 |
| 6.75" | 0 | 10632 | 5.5" | 23 | P110-CY | BTC | 2.10 | 2.48 | 2.98 | 2.98 |
| 6.75" | 10632 | 19,652 | 5.5" | 23 | P110-CY | W441 | 1.88 | 2.22 | 2.66 | 2.42 |
| BLM Minimum Safety Factor | | | | | | | 1.125 | 1 | 1.6 Dry 1.8 Wet | 1.6 Dry 1.8 Wet |

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse. Surface burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface and
All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

The 5 1/2" W441 casing will be run back 200' into the intermediate casing to ensure the coupling OD clearance is greater than .422" for the cement bond tie in.

ConocoPhillips Company - Zia Hills Unit 2032 WC 702H

| | Y or N |
|--------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| Is casing new? If used, attach certification as required in Onshore Order #1 | Y |
| Does casing meet API specifications? If no, attach casing specification sheet. | Y |
| Is premium or uncommon casing planned? If yes attach casing specification sheet. | Y |
| Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria). | Y |
| Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing? | Y |
| | |
| Is well located within Capitan Reef? | N |
| If yes, does production casing cement tie back a minimum of 50' above the Reef? | |
| Is well within the designated 4 string boundary? | |
| | |
| Is well located in SOPA but not in R-111-P? | N |
| If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing? | |
| | |
| Is well located in R-111-P and SOPA? | N |
| If yes, are the first three strings cemented to surface? | |
| Is 2 nd string set 100' to 600' below the base of salt? | |
| | |
| Is well located in high Cave/Karst? | N |
| If yes, are there two strings cemented to surface? | |
| (For 2 string wells) If yes, is there a contingency casing if lost circulation occurs? | |
| | |
| Is well located in critical Cave/Karst? | N |
| If yes, are there three strings cemented to surface? | |

ConocoPhillips Company - Zia Hills Unit 2032 WC 702H

3. Cementing Program

| Casing | # Sk | Wt. lb/ gal | Yld ft3/ sack | H ₂ O gal/sk | 500# Comp. Strength (hours) | Slurry Description |
|-------------------|------|----------------|------------------|-------------------------|-----------------------------------|-----------------------------------------------|
| Surf. | 644 | 12.8 | 1.75 | 9 | 12 | Lead: Class C + 4% Gel + 1% CaCl ₂ |
| | 250 | 14.8 | 1.34 | 6.34 | 8 | Tail: Class C + 2% CaCl ₂ |
| Inter. Stage 1 | 810 | 10.3 | 3.3 | 22 | 24 | Halliburton tunded light |
| | 250 | 14.8 | 1.35 | 6.6 | 8 | Tail: Class H |
| Prod | 667 | 12.5 | 1.48 | 10.7 | 72 | Lead: 50:50:10 H Blend |
| | 759 | 13.2 | 1.34 | 5.7 | 19 | Tail: 50:50:2 Class H Blend |

If losses are encountered in the intermediate section a DV/ECP tool will be run ~50' above the Lamar Lime top, cement will be adjusted accordingly if this contingency is necessary.

Volumes Subject to Observed Hole Conditions and/or Fluid Caliper Results

Lab reports with the 500 psi compressive strength time for the cement will be onsite for review.

| Casing String | TOC | % Excess |
|------------------------------|---------|--------------------------------|
| Surface | 0' | 50% |
| 1 st Intermediate | 0' | 50% |
| Production | 10,632' | 35% OH in Lateral (KOP to EOL) |

ConocoPhillips Company - Zia Hills Unit 2032 WC 702H

4. Pressure Control Equipment

| | |
|---|---------------------------------------------------------------------------------------------------------|
| N | A variance is requested for the use of a diverter on the surface casing. See attached for schematic. |
|---|---------------------------------------------------------------------------------------------------------|

| BOP installed and tested before drilling which hole? | Size? | Min. Required WP | Type | x | Tested to: |
|------------------------------------------------------|---------|------------------|------------|---|------------|
| 9-7/8" | 13-5/8" | 5M | Annular | x | 2500psi |
| | | | Blind Ram | x | 5000psi |
| | | | Pipe Ram | x | |
| | | | Double Ram | x | |
| | | | Other* | | |
| 6-3/4" | 13-5/8" | 10M | 5M Annular | x | 5000psi |
| | | | Blind Ram | x | 10000psi |
| | | | Pipe Ram | x | |
| | | | Double Ram | x | |
| | | | Other* | | |

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.

| | |
|---|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Y | Formation integrity test will be performed per Onshore Order #2. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i. |
| Y | A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart. |
| N | Are anchors required by manufacturer? |
| Y | A multibowl wellhead is being used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested. |

ConocoPhillips Company - Zia Hills Unit 2032 WC 702H

5. Mud Program

| Depth | | Type | Weight (ppg) | Viscosity | Water Loss |
|-----------------|-----------------|-----------------------|--------------|-----------|------------|
| From | To | | | | |
| 0 | Surf. Shoe | FW Gel | 8.6 - 8.8 | 28-34 | N/C |
| Surf csg | 7-5/8" Int shoe | Brine Diesel Emulsion | 8.4 - 9.2 | 28-34 | N/C |
| 7-5/8" Int shoe | Lateral TD | OBM | 9.6 - 12.5 | 35-45 | <20 |

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

| | |
|---------------------------------------------------------|-----------------------------|
| What will be used to monitor the loss or gain of fluid? | PVT/Pason/Visual Monitoring |
|---------------------------------------------------------|-----------------------------|

6. Logging and Testing Procedures

| Logging, Coring and Testing. | |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Y | Will run GR/CNL from TD to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM. |
| Y | No Logs are planned based on well control or offset log information. |
| N | Drill stem test? If yes, explain. |
| N | Coring? If yes, explain. |

| Additional logs planned | | Interval |
|-------------------------|-------------|------------------------------------------------------------|
| N | Resistivity | Pilot Hole TD to ICP |
| N | Density | Pilot Hole TD to ICP |
| Y | CBL | Production casing (If cement not circulated to surface) |
| Y | Mud log | Intermediate shoe to TD |
| N | PEX | |

ConocoPhillips Company - Zia Hills Unit 2032 WC 702H**7. Drilling Conditions**

| Condition | Specify what type and where? |
|----------------------------|------------------------------|
| BH Pressure at deepest TVD | 7745 psi at 11912' TVD |
| Abnormal Temperature | NO 175 Deg. F. |

No abnormal pressure or temperature conditions are anticipated. Sufficient mud materials to maintain mud properties and weight increase requirements will be kept on location at all times.

Sufficient supplies of Paper/LCM for periodic sweeps to control seepage and losses will be maintained on location.

Hydrogen Sulfide (H₂S) monitors will be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.

N H₂S is present

Y H₂S Plan attached

8. Other Facets of Operation

| | |
|---|----------------------------|
| Y | Is it a walking operation? |
| Y | Is casing pre-set? |

| | |
|---|-------------------------|
| x | H ₂ S Plan. |
| x | BOP & Choke Schematics. |
| x | Directional Plan |

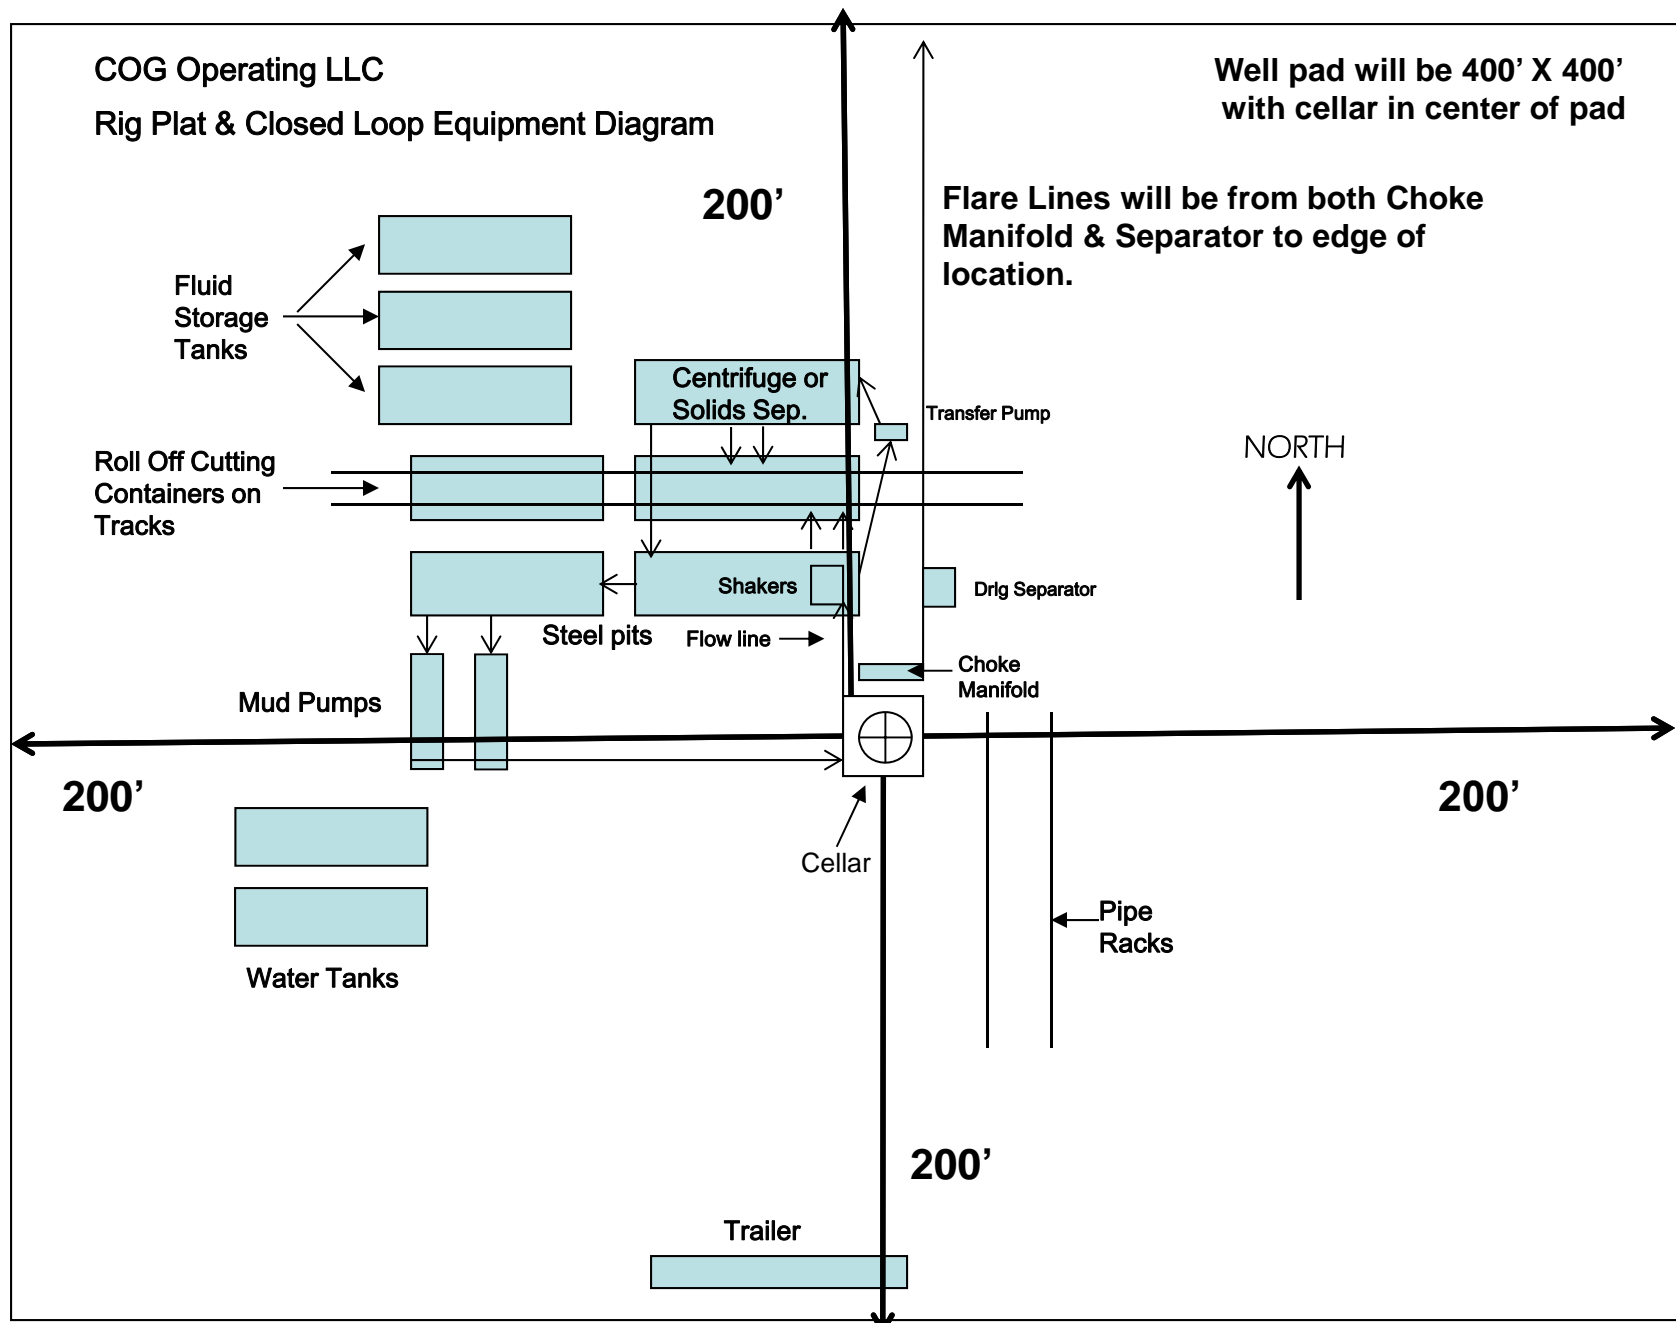


Exhibit 1

"I further certify that COG will comply with Rule 19.15.17 NMAC by using a Closed Loop System."

DELAWARE BASIN EAST

LEA PROSPECT (NM-E)

ZIA HILLS UNIT 2032 PROJECT

ZIA HILLS UNIT 2032 WC #702H

OWB

Plan: PWP0

Standard Planning Report

24 January, 2023

ConocoPhillips
Planning Report

| | | | |
|-----------|------------------------------|------------------------------|-----------------------------------|
| Database: | EDT 17 Central Planning Prod | Local Co-ordinate Reference: | Well ZIA HILLS UNIT 2032 WC #702H |
| Company: | DELAWARE BASIN EAST | TVD Reference: | GL @ 3173.0usft |
| Project: | LEA PROSPECT (NM-E) | MD Reference: | GL @ 3173.0usft |
| Site: | ZIA HILLS UNIT 2032 PROJECT | North Reference: | Grid |
| Well: | ZIA HILLS UNIT 2032 WC #702H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | OWB | | |
| Design: | PWP0 | | |

| | | | |
|-------------|--------------------------------------|---------------|----------------|
| Project | LEA PROSPECT (NM-E) | | |
| Map System: | US State Plane 1927 (Exact solution) | System Datum: | Mean Sea Level |
| Geo Datum: | NAD 1927 (NADCON CONUS) | | |
| Map Zone: | New Mexico East 3001 | | |

| | | | |
|-----------------------|-----------------------------|--------------|-------------------|
| Site | ZIA HILLS UNIT 2032 PROJECT | | |
| Site Position: | | Northing: | 374,625.63 usft |
| From: | Map | Easting: | 698,628.10 usft |
| Position Uncertainty: | 0.0 usft | Slot Radius: | 13-3/16 " |
| | | Latitude: | 32° 1' 42.026 N |
| | | Longitude: | 103° 41' 32.623 W |

| | | | |
|----------------------|------------------------------|---------------------|------------------|
| Well | ZIA HILLS UNIT 2032 WC #702H | | |
| Well Position | +N/-S | 0.0 usft | Northing: |
| | +E/-W | 0.0 usft | Easting: |
| Position Uncertainty | 3.0 usft | Wellhead Elevation: | |
| Grid Convergence: | 0.33 ° | | |
| | | Latitude: | 32° 1' 42.230 N |
| | | Longitude: | 103° 42' 8.462 W |
| | | Ground Level: | 3,173.0 usft |

| | | | | | |
|-----------|------------|-------------|-----------------|---------------|---------------------|
| Wellbore | OWB | | | | |
| Magnetics | Model Name | Sample Date | Declination (°) | Dip Angle (°) | Field Strength (nT) |
| | BGGM2022 | 12/31/2023 | 6.33 | 59.54 | 47,265.35828136 |

| | | | | | |
|-------------------|-------------------------|--------------|---------------|---------------|--|
| Design | PWP0 | | | | |
| Audit Notes: | | | | | |
| Version: | Phase: | PLAN | Tie On Depth: | 0.0 | |
| Vertical Section: | Depth From (TVD) (usft) | +N/-S (usft) | +E/-W (usft) | Direction (°) | |
| | 0.0 | 0.0 | 0.0 | 355.96 | |

| | | | | | |
|--------------------------|-----------------|---------------------|------------------------------------------------------|---------|--|
| Plan Survey Tool Program | | Date | 1/24/2023 | | |
| Depth From (usft) | Depth To (usft) | Survey (Wellbore) | Tool Name | Remarks | |
| 1 | 0.0 | 1,500.0 PWP0 (OWB) | r.5 SDI_KPR_WL_NS-CT SDI Keeper Wireline Gyrocomp | | |
| 2 | 1,500.0 | 11,473.2 PWP0 (OWB) | r.5 MWD+IFR1 OWSG MWD + IFR1 rev.5 | | |
| 3 | 11,473.2 | 19,652.1 PWP0 (OWB) | r.5 MWD+IFR1+MS OWSG MWD + IFR1 + Multi-St | | |

ConocoPhillips

Planning Report

| | | | |
|-----------|------------------------------|------------------------------|-----------------------------------|
| Database: | EDT 17 Central Planning Prod | Local Co-ordinate Reference: | Well ZIA HILLS UNIT 2032 WC #702H |
| Company: | DELAWARE BASIN EAST | TVD Reference: | GL @ 3173.0usft |
| Project: | LEA PROSPECT (NM-E) | MD Reference: | GL @ 3173.0usft |
| Site: | ZIA HILLS UNIT 2032 PROJECT | North Reference: | Grid |
| Well: | ZIA HILLS UNIT 2032 WC #702H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | OWB | | |
| Design: | PWP0 | | |

| Plan Sections | | | | | | | | | | |
|-----------------------|-----------------|-------------|-----------------------|--------------|--------------|-------------------------|------------------------|-----------------------|---------|--------|
| Measured Depth (usft) | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Dogleg Rate (°/100usft) | Build Rate (°/100usft) | Turn Rate (°/100usft) | TFO (°) | Target |
| 0.0 | 0.00 | 0.00 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 1,500.0 | 0.00 | 0.00 | 1,500.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 2,000.0 | 10.00 | 262.00 | 1,997.5 | -6.1 | -43.1 | 2.00 | 2.00 | 0.00 | 262.00 | |
| 4,047.6 | 10.00 | 262.00 | 4,014.0 | -55.5 | -395.2 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 5,047.6 | 0.00 | 0.00 | 5,008.9 | -67.7 | -481.4 | 1.00 | -1.00 | 0.00 | 180.00 | |
| 11,473.2 | 0.00 | 0.00 | 11,434.5 | -67.7 | -481.4 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 12,223.2 | 90.00 | 359.48 | 11,912.0 | 409.8 | -485.8 | 12.00 | 12.00 | -0.07 | 359.48 | |
| 19,602.0 | 90.00 | 359.48 | 11,912.0 | 7,788.3 | -553.3 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 19,652.1 | 90.00 | 359.48 | 11,912.0 | 7,838.3 | -553.7 | 0.00 | 0.00 | 0.00 | 0.00 | |

ConocoPhillips

Planning Report

| | | | |
|------------------|------------------------------|-------------------------------------|-----------------------------------|
| Database: | EDT 17 Central Planning Prod | Local Co-ordinate Reference: | Well ZIA HILLS UNIT 2032 WC #702H |
| Company: | DELAWARE BASIN EAST | TVD Reference: | GL @ 3173.0usft |
| Project: | LEA PROSPECT (NM-E) | MD Reference: | GL @ 3173.0usft |
| Site: | ZIA HILLS UNIT 2032 PROJECT | North Reference: | Grid |
| Well: | ZIA HILLS UNIT 2032 WC #702H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | OWB | | |
| Design: | PWP0 | | |

| Planned Survey | | | | | | | | | |
|--------------------------------|-----------------|-------------|-----------------------|--------------|--------------|-------------------------|-------------------------|------------------------|-----------------------|
| Measured Depth (usft) | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Vertical Section (usft) | Dogleg Rate (°/100usft) | Build Rate (°/100usft) | Turn Rate (°/100usft) |
| 0.0 | 0.00 | 0.00 | 0.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 100.0 | 0.00 | 0.00 | 100.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 200.0 | 0.00 | 0.00 | 200.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 300.0 | 0.00 | 0.00 | 300.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 400.0 | 0.00 | 0.00 | 400.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 500.0 | 0.00 | 0.00 | 500.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 600.0 | 0.00 | 0.00 | 600.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 700.0 | 0.00 | 0.00 | 700.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 800.0 | 0.00 | 0.00 | 800.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 900.0 | 0.00 | 0.00 | 900.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 1,000.0 | 0.00 | 0.00 | 1,000.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 1,100.0 | 0.00 | 0.00 | 1,100.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 1,200.0 | 0.00 | 0.00 | 1,200.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 1,300.0 | 0.00 | 0.00 | 1,300.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 1,400.0 | 0.00 | 0.00 | 1,400.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 1,500.0 | 0.00 | 0.00 | 1,500.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| Start Build 2.00 | | | | | | | | | |
| 1,600.0 | 2.00 | 262.00 | 1,600.0 | -0.2 | -1.7 | -0.1 | 2.00 | 2.00 | 0.00 |
| 1,700.0 | 4.00 | 262.00 | 1,699.8 | -1.0 | -6.9 | -0.5 | 2.00 | 2.00 | 0.00 |
| 1,800.0 | 6.00 | 262.00 | 1,799.5 | -2.2 | -15.5 | -1.1 | 2.00 | 2.00 | 0.00 |
| 1,900.0 | 8.00 | 262.00 | 1,898.7 | -3.9 | -27.6 | -1.9 | 2.00 | 2.00 | 0.00 |
| 2,000.0 | 10.00 | 262.00 | 1,997.5 | -6.1 | -43.1 | -3.0 | 2.00 | 2.00 | 0.00 |
| Start 2047.6 hold at 2000.0 MD | | | | | | | | | |
| 2,100.0 | 10.00 | 262.00 | 2,095.9 | -8.5 | -60.3 | -4.2 | 0.00 | 0.00 | 0.00 |
| 2,200.0 | 10.00 | 262.00 | 2,194.4 | -10.9 | -77.5 | -5.4 | 0.00 | 0.00 | 0.00 |
| 2,300.0 | 10.00 | 262.00 | 2,292.9 | -13.3 | -94.7 | -6.6 | 0.00 | 0.00 | 0.00 |
| 2,400.0 | 10.00 | 262.00 | 2,391.4 | -15.7 | -111.9 | -7.8 | 0.00 | 0.00 | 0.00 |
| 2,500.0 | 10.00 | 262.00 | 2,489.9 | -18.1 | -129.1 | -9.0 | 0.00 | 0.00 | 0.00 |
| 2,600.0 | 10.00 | 262.00 | 2,588.3 | -20.6 | -146.3 | -10.2 | 0.00 | 0.00 | 0.00 |
| 2,700.0 | 10.00 | 262.00 | 2,686.8 | -23.0 | -163.5 | -11.4 | 0.00 | 0.00 | 0.00 |
| 2,800.0 | 10.00 | 262.00 | 2,785.3 | -25.4 | -180.7 | -12.6 | 0.00 | 0.00 | 0.00 |
| 2,900.0 | 10.00 | 262.00 | 2,883.8 | -27.8 | -197.9 | -13.8 | 0.00 | 0.00 | 0.00 |
| 3,000.0 | 10.00 | 262.00 | 2,982.3 | -30.2 | -215.1 | -15.0 | 0.00 | 0.00 | 0.00 |
| 3,100.0 | 10.00 | 262.00 | 3,080.8 | -32.6 | -232.3 | -16.2 | 0.00 | 0.00 | 0.00 |
| 3,200.0 | 10.00 | 262.00 | 3,179.2 | -35.1 | -249.4 | -17.4 | 0.00 | 0.00 | 0.00 |
| 3,300.0 | 10.00 | 262.00 | 3,277.7 | -37.5 | -266.6 | -18.6 | 0.00 | 0.00 | 0.00 |
| 3,400.0 | 10.00 | 262.00 | 3,376.2 | -39.9 | -283.8 | -19.8 | 0.00 | 0.00 | 0.00 |
| 3,500.0 | 10.00 | 262.00 | 3,474.7 | -42.3 | -301.0 | -21.0 | 0.00 | 0.00 | 0.00 |
| 3,600.0 | 10.00 | 262.00 | 3,573.2 | -44.7 | -318.2 | -22.2 | 0.00 | 0.00 | 0.00 |
| 3,700.0 | 10.00 | 262.00 | 3,671.6 | -47.1 | -335.4 | -23.4 | 0.00 | 0.00 | 0.00 |
| 3,800.0 | 10.00 | 262.00 | 3,770.1 | -49.6 | -352.6 | -24.6 | 0.00 | 0.00 | 0.00 |
| 3,900.0 | 10.00 | 262.00 | 3,868.6 | -52.0 | -369.8 | -25.8 | 0.00 | 0.00 | 0.00 |
| 4,000.0 | 10.00 | 262.00 | 3,967.1 | -54.4 | -387.0 | -27.0 | 0.00 | 0.00 | 0.00 |
| 4,047.6 | 10.00 | 262.00 | 4,014.0 | -55.5 | -395.2 | -27.5 | 0.00 | 0.00 | 0.00 |
| Start Drop -1.00 | | | | | | | | | |
| 4,100.0 | 9.48 | 262.00 | 4,065.6 | -56.8 | -404.0 | -28.2 | 1.00 | -1.00 | 0.00 |
| 4,200.0 | 8.48 | 262.00 | 4,164.4 | -58.9 | -419.4 | -29.2 | 1.00 | -1.00 | 0.00 |
| 4,300.0 | 7.48 | 262.00 | 4,263.4 | -60.9 | -433.2 | -30.2 | 1.00 | -1.00 | 0.00 |
| 4,400.0 | 6.48 | 262.00 | 4,362.7 | -62.6 | -445.2 | -31.0 | 1.00 | -1.00 | 0.00 |
| 4,500.0 | 5.48 | 262.00 | 4,462.1 | -64.0 | -455.5 | -31.7 | 1.00 | -1.00 | 0.00 |
| 4,600.0 | 4.48 | 262.00 | 4,561.7 | -65.2 | -464.1 | -32.3 | 1.00 | -1.00 | 0.00 |
| 4,700.0 | 3.48 | 262.00 | 4,661.5 | -66.2 | -471.0 | -32.8 | 1.00 | -1.00 | 0.00 |
| 4,800.0 | 2.48 | 262.00 | 4,761.4 | -66.9 | -476.1 | -33.2 | 1.00 | -1.00 | 0.00 |

ConocoPhillips

Planning Report

| | | | |
|------------------|------------------------------|-------------------------------------|-----------------------------------|
| Database: | EDT 17 Central Planning Prod | Local Co-ordinate Reference: | Well ZIA HILLS UNIT 2032 WC #702H |
| Company: | DELAWARE BASIN EAST | TVD Reference: | GL @ 3173.0usft |
| Project: | LEA PROSPECT (NM-E) | MD Reference: | GL @ 3173.0usft |
| Site: | ZIA HILLS UNIT 2032 PROJECT | North Reference: | Grid |
| Well: | ZIA HILLS UNIT 2032 WC #702H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | OWB | | |
| Design: | PWP0 | | |

| Planned Survey | | | | | | | | | |
|--------------------------------|-----------------|-------------|-----------------------|--------------|--------------|-------------------------|-------------------------|------------------------|-----------------------|
| Measured Depth (usft) | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Vertical Section (usft) | Dogleg Rate (°/100usft) | Build Rate (°/100usft) | Turn Rate (°/100usft) |
| 4,900.0 | 1.48 | 262.00 | 4,861.3 | -67.4 | -479.5 | -33.4 | 1.00 | -1.00 | 0.00 |
| 5,000.0 | 0.48 | 262.00 | 4,961.3 | -67.6 | -481.2 | -33.5 | 1.00 | -1.00 | 0.00 |
| 5,047.6 | 0.00 | 0.00 | 5,008.9 | -67.7 | -481.4 | -33.6 | 1.00 | -1.00 | 0.00 |
| Start 6425.6 hold at 5047.6 MD | | | | | | | | | |
| 5,100.0 | 0.00 | 0.00 | 5,061.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 5,200.0 | 0.00 | 0.00 | 5,161.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 5,300.0 | 0.00 | 0.00 | 5,261.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 5,400.0 | 0.00 | 0.00 | 5,361.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 5,500.0 | 0.00 | 0.00 | 5,461.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 5,600.0 | 0.00 | 0.00 | 5,561.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 5,700.0 | 0.00 | 0.00 | 5,661.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 5,800.0 | 0.00 | 0.00 | 5,761.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 5,900.0 | 0.00 | 0.00 | 5,861.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 6,000.0 | 0.00 | 0.00 | 5,961.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 6,100.0 | 0.00 | 0.00 | 6,061.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 6,200.0 | 0.00 | 0.00 | 6,161.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 6,300.0 | 0.00 | 0.00 | 6,261.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 6,400.0 | 0.00 | 0.00 | 6,361.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 6,500.0 | 0.00 | 0.00 | 6,461.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 6,600.0 | 0.00 | 0.00 | 6,561.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 6,700.0 | 0.00 | 0.00 | 6,661.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 6,800.0 | 0.00 | 0.00 | 6,761.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 6,900.0 | 0.00 | 0.00 | 6,861.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 7,000.0 | 0.00 | 0.00 | 6,961.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 7,100.0 | 0.00 | 0.00 | 7,061.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 7,200.0 | 0.00 | 0.00 | 7,161.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 7,300.0 | 0.00 | 0.00 | 7,261.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 7,400.0 | 0.00 | 0.00 | 7,361.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 7,500.0 | 0.00 | 0.00 | 7,461.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 7,600.0 | 0.00 | 0.00 | 7,561.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 7,700.0 | 0.00 | 0.00 | 7,661.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 7,800.0 | 0.00 | 0.00 | 7,761.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 7,900.0 | 0.00 | 0.00 | 7,861.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 8,000.0 | 0.00 | 0.00 | 7,961.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 8,100.0 | 0.00 | 0.00 | 8,061.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 8,200.0 | 0.00 | 0.00 | 8,161.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 8,300.0 | 0.00 | 0.00 | 8,261.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 8,400.0 | 0.00 | 0.00 | 8,361.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 8,500.0 | 0.00 | 0.00 | 8,461.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 8,600.0 | 0.00 | 0.00 | 8,561.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 8,700.0 | 0.00 | 0.00 | 8,661.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 8,800.0 | 0.00 | 0.00 | 8,761.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 8,900.0 | 0.00 | 0.00 | 8,861.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 9,000.0 | 0.00 | 0.00 | 8,961.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 9,100.0 | 0.00 | 0.00 | 9,061.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 9,200.0 | 0.00 | 0.00 | 9,161.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 9,300.0 | 0.00 | 0.00 | 9,261.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 9,400.0 | 0.00 | 0.00 | 9,361.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 9,500.0 | 0.00 | 0.00 | 9,461.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 9,600.0 | 0.00 | 0.00 | 9,561.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 9,700.0 | 0.00 | 0.00 | 9,661.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 9,800.0 | 0.00 | 0.00 | 9,761.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 9,900.0 | 0.00 | 0.00 | 9,861.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 10,000.0 | 0.00 | 0.00 | 9,961.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |

ConocoPhillips

Planning Report

| | | | |
|------------------|------------------------------|-------------------------------------|-----------------------------------|
| Database: | EDT 17 Central Planning Prod | Local Co-ordinate Reference: | Well ZIA HILLS UNIT 2032 WC #702H |
| Company: | DELAWARE BASIN EAST | TVD Reference: | GL @ 3173.0usft |
| Project: | LEA PROSPECT (NM-E) | MD Reference: | GL @ 3173.0usft |
| Site: | ZIA HILLS UNIT 2032 PROJECT | North Reference: | Grid |
| Well: | ZIA HILLS UNIT 2032 WC #702H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | OWB | | |
| Design: | PWP0 | | |

| Planned Survey | | | | | | | | | |
|---------------------------------|-----------------|-------------|-----------------------|--------------|--------------|-------------------------|-------------------------|------------------------|-----------------------|
| Measured Depth (usft) | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Vertical Section (usft) | Dogleg Rate (°/100usft) | Build Rate (°/100usft) | Turn Rate (°/100usft) |
| 10,100.0 | 0.00 | 0.00 | 10,061.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 10,200.0 | 0.00 | 0.00 | 10,161.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 10,300.0 | 0.00 | 0.00 | 10,261.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 10,400.0 | 0.00 | 0.00 | 10,361.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 10,500.0 | 0.00 | 0.00 | 10,461.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 10,600.0 | 0.00 | 0.00 | 10,561.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 10,700.0 | 0.00 | 0.00 | 10,661.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 10,800.0 | 0.00 | 0.00 | 10,761.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 10,900.0 | 0.00 | 0.00 | 10,861.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 11,000.0 | 0.00 | 0.00 | 10,961.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 11,100.0 | 0.00 | 0.00 | 11,061.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 11,200.0 | 0.00 | 0.00 | 11,161.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 11,300.0 | 0.00 | 0.00 | 11,261.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 11,400.0 | 0.00 | 0.00 | 11,361.3 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| 11,473.2 | 0.00 | 0.00 | 11,434.5 | -67.7 | -481.4 | -33.6 | 0.00 | 0.00 | 0.00 |
| Start DLS 12.00 TFO 359.48 | | | | | | | | | |
| 11,475.0 | 0.21 | 359.48 | 11,436.3 | -67.7 | -481.4 | -33.6 | 12.00 | 12.00 | 0.00 |
| 11,500.0 | 3.21 | 359.48 | 11,461.3 | -66.9 | -481.4 | -32.8 | 12.00 | 12.00 | 0.00 |
| 11,525.0 | 6.21 | 359.48 | 11,486.2 | -64.9 | -481.4 | -30.8 | 12.00 | 12.00 | 0.00 |
| 11,550.0 | 9.21 | 359.48 | 11,511.0 | -61.5 | -481.5 | -27.4 | 12.00 | 12.00 | 0.00 |
| 11,575.0 | 12.21 | 359.48 | 11,535.5 | -56.9 | -481.5 | -22.8 | 12.00 | 12.00 | 0.00 |
| 11,600.0 | 15.21 | 359.48 | 11,559.8 | -50.9 | -481.6 | -16.9 | 12.00 | 12.00 | 0.00 |
| 11,625.0 | 18.21 | 359.48 | 11,583.7 | -43.7 | -481.6 | -9.7 | 12.00 | 12.00 | 0.00 |
| 11,650.0 | 21.21 | 359.48 | 11,607.3 | -35.3 | -481.7 | -1.3 | 12.00 | 12.00 | 0.00 |
| 11,675.0 | 24.21 | 359.48 | 11,630.3 | -25.7 | -481.8 | 8.4 | 12.00 | 12.00 | 0.00 |
| 11,700.0 | 27.21 | 359.48 | 11,652.9 | -14.8 | -481.9 | 19.2 | 12.00 | 12.00 | 0.00 |
| 11,725.0 | 30.21 | 359.48 | 11,674.8 | -2.8 | -482.0 | 31.2 | 12.00 | 12.00 | 0.00 |
| 11,750.0 | 33.21 | 359.48 | 11,696.0 | 10.3 | -482.1 | 44.3 | 12.00 | 12.00 | 0.00 |
| 11,775.0 | 36.21 | 359.48 | 11,716.6 | 24.6 | -482.2 | 58.5 | 12.00 | 12.00 | 0.00 |
| 11,800.0 | 39.21 | 359.48 | 11,736.4 | 39.8 | -482.4 | 73.8 | 12.00 | 12.00 | 0.00 |
| 11,825.0 | 42.21 | 359.48 | 11,755.3 | 56.2 | -482.5 | 90.0 | 12.00 | 12.00 | 0.00 |
| 11,850.0 | 45.21 | 359.48 | 11,773.4 | 73.4 | -482.7 | 107.3 | 12.00 | 12.00 | 0.00 |
| 11,875.0 | 48.21 | 359.48 | 11,790.5 | 91.6 | -482.9 | 125.4 | 12.00 | 12.00 | 0.00 |
| 11,900.0 | 51.21 | 359.48 | 11,806.7 | 110.7 | -483.0 | 144.5 | 12.00 | 12.00 | 0.00 |
| 11,925.0 | 54.21 | 359.48 | 11,821.8 | 130.6 | -483.2 | 164.3 | 12.00 | 12.00 | 0.00 |
| 11,950.0 | 57.21 | 359.48 | 11,835.9 | 151.2 | -483.4 | 184.9 | 12.00 | 12.00 | 0.00 |
| 11,975.0 | 60.21 | 359.48 | 11,848.9 | 172.6 | -483.6 | 206.2 | 12.00 | 12.00 | 0.00 |
| 12,000.0 | 63.21 | 359.48 | 11,860.8 | 194.6 | -483.8 | 228.2 | 12.00 | 12.00 | 0.00 |
| 12,025.0 | 66.21 | 359.48 | 11,871.4 | 217.2 | -484.0 | 250.8 | 12.00 | 12.00 | 0.00 |
| 12,050.0 | 69.21 | 359.48 | 11,880.9 | 240.3 | -484.2 | 273.9 | 12.00 | 12.00 | 0.00 |
| 12,075.0 | 72.21 | 359.48 | 11,889.2 | 263.9 | -484.4 | 297.4 | 12.00 | 12.00 | 0.00 |
| 12,100.0 | 75.21 | 359.48 | 11,896.2 | 287.9 | -484.7 | 321.4 | 12.00 | 12.00 | 0.00 |
| 12,125.0 | 78.21 | 359.48 | 11,901.9 | 312.2 | -484.9 | 345.6 | 12.00 | 12.00 | 0.00 |
| 12,150.0 | 81.21 | 359.48 | 11,906.4 | 336.8 | -485.1 | 370.2 | 12.00 | 12.00 | 0.00 |
| 12,175.0 | 84.21 | 359.48 | 11,909.6 | 361.6 | -485.3 | 394.9 | 12.00 | 12.00 | 0.00 |
| 12,200.0 | 87.21 | 359.48 | 11,911.4 | 386.6 | -485.6 | 419.8 | 12.00 | 12.00 | 0.00 |
| 12,223.2 | 90.00 | 359.48 | 11,912.0 | 409.8 | -485.8 | 443.0 | 12.00 | 12.00 | 0.00 |
| Start 7378.8 hold at 12223.2 MD | | | | | | | | | |
| 12,300.0 | 90.00 | 359.48 | 11,912.0 | 486.5 | -486.5 | 519.6 | 0.00 | 0.00 | 0.00 |
| 12,400.0 | 90.00 | 359.48 | 11,912.0 | 586.5 | -487.4 | 619.4 | 0.00 | 0.00 | 0.00 |
| 12,500.0 | 90.00 | 359.48 | 11,912.0 | 686.5 | -488.3 | 719.2 | 0.00 | 0.00 | 0.00 |
| 12,600.0 | 90.00 | 359.48 | 11,912.0 | 786.5 | -489.2 | 819.1 | 0.00 | 0.00 | 0.00 |
| 12,700.0 | 90.00 | 359.48 | 11,912.0 | 886.5 | -490.1 | 918.9 | 0.00 | 0.00 | 0.00 |
| 12,800.0 | 90.00 | 359.48 | 11,912.0 | 986.5 | -491.1 | 1,018.7 | 0.00 | 0.00 | 0.00 |

ConocoPhillips

Planning Report

| | | | |
|------------------|------------------------------|-------------------------------------|-----------------------------------|
| Database: | EDT 17 Central Planning Prod | Local Co-ordinate Reference: | Well ZIA HILLS UNIT 2032 WC #702H |
| Company: | DELAWARE BASIN EAST | TVD Reference: | GL @ 3173.0usft |
| Project: | LEA PROSPECT (NM-E) | MD Reference: | GL @ 3173.0usft |
| Site: | ZIA HILLS UNIT 2032 PROJECT | North Reference: | Grid |
| Well: | ZIA HILLS UNIT 2032 WC #702H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | OWB | | |
| Design: | PWP0 | | |

| Planned Survey | | | | | | | | | |
|-----------------------|-----------------|-------------|-----------------------|--------------|--------------|-------------------------|-------------------------|------------------------|-----------------------|
| Measured Depth (usft) | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Vertical Section (usft) | Dogleg Rate (°/100usft) | Build Rate (°/100usft) | Turn Rate (°/100usft) |
| 12,900.0 | 90.00 | 359.48 | 11,912.0 | 1,086.5 | -492.0 | 1,118.5 | 0.00 | 0.00 | 0.00 |
| 13,000.0 | 90.00 | 359.48 | 11,912.0 | 1,186.5 | -492.9 | 1,218.3 | 0.00 | 0.00 | 0.00 |
| 13,100.0 | 90.00 | 359.48 | 11,912.0 | 1,286.5 | -493.8 | 1,318.1 | 0.00 | 0.00 | 0.00 |
| 13,200.0 | 90.00 | 359.48 | 11,912.0 | 1,386.5 | -494.7 | 1,417.9 | 0.00 | 0.00 | 0.00 |
| 13,300.0 | 90.00 | 359.48 | 11,912.0 | 1,486.5 | -495.6 | 1,517.7 | 0.00 | 0.00 | 0.00 |
| 13,400.0 | 90.00 | 359.48 | 11,912.0 | 1,586.5 | -496.5 | 1,617.5 | 0.00 | 0.00 | 0.00 |
| 13,500.0 | 90.00 | 359.48 | 11,912.0 | 1,686.5 | -497.5 | 1,717.4 | 0.00 | 0.00 | 0.00 |
| 13,600.0 | 90.00 | 359.48 | 11,912.0 | 1,786.5 | -498.4 | 1,817.2 | 0.00 | 0.00 | 0.00 |
| 13,700.0 | 90.00 | 359.48 | 11,912.0 | 1,886.5 | -499.3 | 1,917.0 | 0.00 | 0.00 | 0.00 |
| 13,800.0 | 90.00 | 359.48 | 11,912.0 | 1,986.5 | -500.2 | 2,016.8 | 0.00 | 0.00 | 0.00 |
| 13,900.0 | 90.00 | 359.48 | 11,912.0 | 2,086.5 | -501.1 | 2,116.6 | 0.00 | 0.00 | 0.00 |
| 14,000.0 | 90.00 | 359.48 | 11,912.0 | 2,186.5 | -502.0 | 2,216.4 | 0.00 | 0.00 | 0.00 |
| 14,100.0 | 90.00 | 359.48 | 11,912.0 | 2,286.5 | -502.9 | 2,316.2 | 0.00 | 0.00 | 0.00 |
| 14,200.0 | 90.00 | 359.48 | 11,912.0 | 2,386.5 | -503.9 | 2,416.0 | 0.00 | 0.00 | 0.00 |
| 14,300.0 | 90.00 | 359.48 | 11,912.0 | 2,486.5 | -504.8 | 2,515.9 | 0.00 | 0.00 | 0.00 |
| 14,400.0 | 90.00 | 359.48 | 11,912.0 | 2,586.4 | -505.7 | 2,615.7 | 0.00 | 0.00 | 0.00 |
| 14,500.0 | 90.00 | 359.48 | 11,912.0 | 2,686.4 | -506.6 | 2,715.5 | 0.00 | 0.00 | 0.00 |
| 14,600.0 | 90.00 | 359.48 | 11,912.0 | 2,786.4 | -507.5 | 2,815.3 | 0.00 | 0.00 | 0.00 |
| 14,700.0 | 90.00 | 359.48 | 11,912.0 | 2,886.4 | -508.4 | 2,915.1 | 0.00 | 0.00 | 0.00 |
| 14,800.0 | 90.00 | 359.48 | 11,912.0 | 2,986.4 | -509.3 | 3,014.9 | 0.00 | 0.00 | 0.00 |
| 14,900.0 | 90.00 | 359.48 | 11,912.0 | 3,086.4 | -510.3 | 3,114.7 | 0.00 | 0.00 | 0.00 |
| 15,000.0 | 90.00 | 359.48 | 11,912.0 | 3,186.4 | -511.2 | 3,214.5 | 0.00 | 0.00 | 0.00 |
| 15,100.0 | 90.00 | 359.48 | 11,912.0 | 3,286.4 | -512.1 | 3,314.3 | 0.00 | 0.00 | 0.00 |
| 15,200.0 | 90.00 | 359.48 | 11,912.0 | 3,386.4 | -513.0 | 3,414.2 | 0.00 | 0.00 | 0.00 |
| 15,300.0 | 90.00 | 359.48 | 11,912.0 | 3,486.4 | -513.9 | 3,514.0 | 0.00 | 0.00 | 0.00 |
| 15,400.0 | 90.00 | 359.48 | 11,912.0 | 3,586.4 | -514.8 | 3,613.8 | 0.00 | 0.00 | 0.00 |
| 15,500.0 | 90.00 | 359.48 | 11,912.0 | 3,686.4 | -515.8 | 3,713.6 | 0.00 | 0.00 | 0.00 |
| 15,600.0 | 90.00 | 359.48 | 11,912.0 | 3,786.4 | -516.7 | 3,813.4 | 0.00 | 0.00 | 0.00 |
| 15,700.0 | 90.00 | 359.48 | 11,912.0 | 3,886.4 | -517.6 | 3,913.2 | 0.00 | 0.00 | 0.00 |
| 15,800.0 | 90.00 | 359.48 | 11,912.0 | 3,986.4 | -518.5 | 4,013.0 | 0.00 | 0.00 | 0.00 |
| 15,900.0 | 90.00 | 359.48 | 11,912.0 | 4,086.4 | -519.4 | 4,112.8 | 0.00 | 0.00 | 0.00 |
| 16,000.0 | 90.00 | 359.48 | 11,912.0 | 4,186.4 | -520.3 | 4,212.6 | 0.00 | 0.00 | 0.00 |
| 16,100.0 | 90.00 | 359.48 | 11,912.0 | 4,286.4 | -521.2 | 4,312.5 | 0.00 | 0.00 | 0.00 |
| 16,200.0 | 90.00 | 359.48 | 11,912.0 | 4,386.4 | -522.2 | 4,412.3 | 0.00 | 0.00 | 0.00 |
| 16,300.0 | 90.00 | 359.48 | 11,912.0 | 4,486.4 | -523.1 | 4,512.1 | 0.00 | 0.00 | 0.00 |
| 16,400.0 | 90.00 | 359.48 | 11,912.0 | 4,586.4 | -524.0 | 4,611.9 | 0.00 | 0.00 | 0.00 |
| 16,500.0 | 90.00 | 359.48 | 11,912.0 | 4,686.4 | -524.9 | 4,711.7 | 0.00 | 0.00 | 0.00 |
| 16,600.0 | 90.00 | 359.48 | 11,912.0 | 4,786.4 | -525.8 | 4,811.5 | 0.00 | 0.00 | 0.00 |
| 16,700.0 | 90.00 | 359.48 | 11,912.0 | 4,886.4 | -526.7 | 4,911.3 | 0.00 | 0.00 | 0.00 |
| 16,800.0 | 90.00 | 359.48 | 11,912.0 | 4,986.3 | -527.6 | 5,011.1 | 0.00 | 0.00 | 0.00 |
| 16,900.0 | 90.00 | 359.48 | 11,912.0 | 5,086.3 | -528.6 | 5,111.0 | 0.00 | 0.00 | 0.00 |
| 17,000.0 | 90.00 | 359.48 | 11,912.0 | 5,186.3 | -529.5 | 5,210.8 | 0.00 | 0.00 | 0.00 |
| 17,100.0 | 90.00 | 359.48 | 11,912.0 | 5,286.3 | -530.4 | 5,310.6 | 0.00 | 0.00 | 0.00 |
| 17,200.0 | 90.00 | 359.48 | 11,912.0 | 5,386.3 | -531.3 | 5,410.4 | 0.00 | 0.00 | 0.00 |
| 17,300.0 | 90.00 | 359.48 | 11,912.0 | 5,486.3 | -532.2 | 5,510.2 | 0.00 | 0.00 | 0.00 |
| 17,400.0 | 90.00 | 359.48 | 11,912.0 | 5,586.3 | -533.1 | 5,610.0 | 0.00 | 0.00 | 0.00 |
| 17,500.0 | 90.00 | 359.48 | 11,912.0 | 5,686.3 | -534.0 | 5,709.8 | 0.00 | 0.00 | 0.00 |
| 17,600.0 | 90.00 | 359.48 | 11,912.0 | 5,786.3 | -535.0 | 5,809.6 | 0.00 | 0.00 | 0.00 |
| 17,700.0 | 90.00 | 359.48 | 11,912.0 | 5,886.3 | -535.9 | 5,909.4 | 0.00 | 0.00 | 0.00 |
| 17,800.0 | 90.00 | 359.48 | 11,912.0 | 5,986.3 | -536.8 | 6,009.3 | 0.00 | 0.00 | 0.00 |
| 17,900.0 | 90.00 | 359.48 | 11,912.0 | 6,086.3 | -537.7 | 6,109.1 | 0.00 | 0.00 | 0.00 |
| 18,000.0 | 90.00 | 359.48 | 11,912.0 | 6,186.3 | -538.6 | 6,208.9 | 0.00 | 0.00 | 0.00 |
| 18,100.0 | 90.00 | 359.48 | 11,912.0 | 6,286.3 | -539.5 | 6,308.7 | 0.00 | 0.00 | 0.00 |
| 18,200.0 | 90.00 | 359.48 | 11,912.0 | 6,386.3 | -540.5 | 6,408.5 | 0.00 | 0.00 | 0.00 |

ConocoPhillips
Planning Report

| | | | |
|-----------|------------------------------|------------------------------|-----------------------------------|
| Database: | EDT 17 Central Planning Prod | Local Co-ordinate Reference: | Well ZIA HILLS UNIT 2032 WC #702H |
| Company: | DELAWARE BASIN EAST | TVD Reference: | GL @ 3173.0usft |
| Project: | LEA PROSPECT (NM-E) | MD Reference: | GL @ 3173.0usft |
| Site: | ZIA HILLS UNIT 2032 PROJECT | North Reference: | Grid |
| Well: | ZIA HILLS UNIT 2032 WC #702H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | OWB | | |
| Design: | PWP0 | | |

| Planned Survey | | | | | | | | | | |
|-------------------------------|--------------------|----------------|-----------------------------|-----------------|-----------------|-------------------------------|-------------------------------|------------------------------|-----------------------------|--|
| Measured Depth (usft) | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Vertical Section (usft) | Dogleg Rate (°/100usft) | Build Rate (°/100usft) | Turn Rate (°/100usft) | |
| 18,300.0 | 90.00 | 359.48 | 11,912.0 | 6,486.3 | -541.4 | 6,508.3 | 0.00 | 0.00 | 0.00 | |
| 18,400.0 | 90.00 | 359.48 | 11,912.0 | 6,586.3 | -542.3 | 6,608.1 | 0.00 | 0.00 | 0.00 | |
| 18,500.0 | 90.00 | 359.48 | 11,912.0 | 6,686.3 | -543.2 | 6,707.9 | 0.00 | 0.00 | 0.00 | |
| 18,600.0 | 90.00 | 359.48 | 11,912.0 | 6,786.3 | -544.1 | 6,807.7 | 0.00 | 0.00 | 0.00 | |
| 18,700.0 | 90.00 | 359.48 | 11,912.0 | 6,886.3 | -545.0 | 6,907.6 | 0.00 | 0.00 | 0.00 | |
| 18,800.0 | 90.00 | 359.48 | 11,912.0 | 6,986.3 | -545.9 | 7,007.4 | 0.00 | 0.00 | 0.00 | |
| 18,900.0 | 90.00 | 359.48 | 11,912.0 | 7,086.3 | -546.9 | 7,107.2 | 0.00 | 0.00 | 0.00 | |
| 19,000.0 | 90.00 | 359.48 | 11,912.0 | 7,186.3 | -547.8 | 7,207.0 | 0.00 | 0.00 | 0.00 | |
| 19,100.0 | 90.00 | 359.48 | 11,912.0 | 7,286.3 | -548.7 | 7,306.8 | 0.00 | 0.00 | 0.00 | |
| 19,200.0 | 90.00 | 359.48 | 11,912.0 | 7,386.2 | -549.6 | 7,406.6 | 0.00 | 0.00 | 0.00 | |
| 19,300.0 | 90.00 | 359.48 | 11,912.0 | 7,486.2 | -550.5 | 7,506.4 | 0.00 | 0.00 | 0.00 | |
| 19,400.0 | 90.00 | 359.48 | 11,912.0 | 7,586.2 | -551.4 | 7,606.2 | 0.00 | 0.00 | 0.00 | |
| 19,500.0 | 90.00 | 359.48 | 11,912.0 | 7,686.2 | -552.3 | 7,706.1 | 0.00 | 0.00 | 0.00 | |
| 19,602.0 | 90.00 | 359.48 | 11,912.0 | 7,788.3 | -553.3 | 7,807.9 | 0.00 | 0.00 | 0.00 | |
| Start 50.0 hold at 19602.0 MD | | | | | | | | | | |
| 19,652.1 | 90.00 | 359.48 | 11,912.0 | 7,838.3 | -553.7 | 7,857.8 | 0.00 | 0.00 | 0.00 | |
| TD at 19652.1 | | | | | | | | | | |

| Design Targets | | | | | | | | | | |
|--------------------------------------------------------------------------------------------|---------------|--------------|------------|--------------|--------------|-----------------|----------------|-------------------|--|--|
| Target Name | Dip Angle (°) | Dip Dir. (°) | TVD (usft) | +N/-S (usft) | +E/-W (usft) | Northing (usft) | Easting (usft) | Latitude | | |
| - hit/miss target | - Shape | | | | | | | Longitude | | |
| LTP (ZHU 2032 WC #70 | 0.00 | 0.00 | 11,912.0 | 7,788.3 | -553.3 | 382,416.42 | 694,989.44 | 32° 2' 59.336 N | | |
| - plan hits target center | | | | | | | | 103° 42' 14.362 W | | |
| - Point | | | | | | | | | | |
| FTP (ZHU 2032 WC #70 | 0.00 | 0.00 | 11,912.0 | -77.0 | -481.3 | 374,551.13 | 695,061.43 | 32° 1' 41.496 N | | |
| - plan misses target center by 204.4usft at 11846.2usft MD (11770.7 TVD, 70.8 N, -482.7 E) | | | | | | | | 103° 42' 14.058 W | | |
| - Circle (radius 50.0) | | | | | | | | | | |
| PBHL (ZHU 2032 WC #70 | 0.00 | 179.48 | 11,912.0 | 7,838.3 | -553.9 | 382,466.42 | 694,988.82 | 32° 2' 59.830 N | | |
| - plan misses target center by 0.2usft at 19652.0usft MD (11912.0 TVD, 7838.3 N, -553.7 E) | | | | | | | | 103° 42' 14.366 W | | |
| - Rectangle (sides W100.0 H7,915.8 D20.0) | | | | | | | | | | |

| Casing Points | | | | | |
|-----------------------|-----------------------|-----------------|--|---------------------|-------------------|
| Measured Depth (usft) | Vertical Depth (usft) | Name | | Casing Diameter (") | Hole Diameter (") |
| 1,500.0 | 1,500.0 | DB SURF 10-3/4 | | 10-3/4 | 14-3/4 |
| 11,473.2 | 11,434.5 | DB INT 7-5/8 | | 7-5/8 | 9-7/8 |
| 19,652.1 | 11,912.0 | PB PROD. -5 1/2 | | 5-1/2 | 6-3/4 |

ConocoPhillips
Planning Report

| | | | |
|-----------|------------------------------|------------------------------|-----------------------------------|
| Database: | EDT 17 Central Planning Prod | Local Co-ordinate Reference: | Well ZIA HILLS UNIT 2032 WC #702H |
| Company: | DELAWARE BASIN EAST | TVD Reference: | GL @ 3173.0usft |
| Project: | LEA PROSPECT (NM-E) | MD Reference: | GL @ 3173.0usft |
| Site: | ZIA HILLS UNIT 2032 PROJECT | North Reference: | Grid |
| Well: | ZIA HILLS UNIT 2032 WC #702H | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | OWB | | |
| Design: | PWP0 | | |

| Plan Annotations | | | | | |
|-----------------------------|-----------------------------|-------------------|-----------------|---------------------------------|--|
| Measured Depth (usft) | Vertical Depth (usft) | Local Coordinates | | Comment | |
| | | +N/-S (usft) | +E/-W (usft) | | |
| 1,500.0 | 1,500.0 | 0.0 | 0.0 | Start Build 2.00 | |
| 2,000.0 | 1,997.5 | -6.1 | -43.1 | Start 2047.6 hold at 2000.0 MD | |
| 4,047.6 | 4,014.0 | -55.5 | -395.2 | Start Drop -1.00 | |
| 5,047.6 | 5,008.9 | -67.7 | -481.4 | Start 6425.6 hold at 5047.6 MD | |
| 11,473.2 | 11,434.5 | -67.7 | -481.4 | Start DLS 12.00 TFO 359.48 | |
| 12,223.2 | 11,912.0 | 409.8 | -485.8 | Start 7378.8 hold at 12223.2 MD | |
| 19,602.0 | 11,912.0 | 7,788.3 | -553.3 | Start 50.0 hold at 19602.0 MD | |
| 19,652.1 | 11,912.0 | 7,838.3 | -553.7 | TD at 19652.1 | |

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

| | |
|------------------|------------------------------|
| OPERATOR'S NAME: | COG OPERATING LLC |
| WELL NAME & NO.: | ZIA HILLS UNIT 2032 WC 702H |
| LOCATION: | Section 20, T.26 S., R.32 E. |
| COUNTY: | Lea County, New Mexico |

COA

| | | | |
|----------------------------------|--------------------------------------------------------|-----------------------------------------------|---------------------------------------------------------|
| H2S | <input checked="" type="radio"/> Yes | <input type="radio"/> No | |
| Potash | <input checked="" type="radio"/> None | <input type="radio"/> Secretary | <input type="radio"/> R-111-P |
| Cave/Karst Potential | <input type="radio"/> Low | <input checked="" type="radio"/> Medium | <input type="radio"/> High |
| Cave/Karst Potential | <input type="radio"/> Critical | | |
| Variance | <input type="radio"/> None | <input checked="" type="radio"/> Flex Hose | <input type="radio"/> Other |
| Wellhead | <input type="radio"/> Conventional | <input checked="" type="radio"/> Multibowl | <input type="radio"/> Both |
| Wellhead Variance | <input type="radio"/> Diverter | | |
| Other | <input type="checkbox"/> 4 String | <input type="checkbox"/> Capitan Reef | <input type="checkbox"/> WIPP |
| Other | <input type="checkbox"/> Fluid Filled | <input type="checkbox"/> Pilot Hole | <input type="checkbox"/> Open Annulus |
| Cementing | <input type="checkbox"/> Contingency Cement Squeeze | <input type="checkbox"/> EchoMeter | <input type="checkbox"/> Primary Cement Squeeze |
| Special Requirements | <input type="checkbox"/> Water Disposal | <input type="checkbox"/> COM | <input checked="" type="checkbox"/> Unit |
| Special Requirements | <input type="checkbox"/> Batch Sundry | | |
| Special Requirements Variance | <input type="checkbox"/> Break Testing | <input type="checkbox"/> Offline Cementing | <input checked="" type="checkbox"/> Casing Clearance |

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H2S) Drilling Plan shall be activated AT SPUD. As a result, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING

Primary Casing Design:

1. The **10-3/4** inch surface casing shall be set at approximately **1350** feet (a minimum of 70 feet (Eddy County) into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature

survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.

- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The **7-5/8** inch intermediate casing shall be set at approximately **11,132** feet. **Keep casing full during run for collapse safety factor.** The minimum required fill of cement behind the **7-5/8** inch intermediate casing is:

Option 1 (Single Stage):

- Cement to surface. If cement does not circulate see B.1.a, c-d above.
 - ❖ In Medium Cave/Karst Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.
3. The **5-1/2** inch production casing shall be set at approximately **19,481** feet The minimum required fill of cement behind the **5-1/2** inch production casing is:

Option 1 (Single Stage):

- Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the **10-3/4** inch surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **10,000 (10M) psi. Variance is approved to use a 5000 (5M) Annular which shall be tested to 3500 (70% Working Pressure) psi.**
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.

- b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
- c. Manufacturer representative shall install the test plug for the initial BOP test.
- d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)

Unit Wells

The well sign for a unit well shall include the unit number in addition to the surface and bottom hole lease numbers. This also applies to participating area numbers. If a participating area has not been established, the operator can use the general unit designation, but will replace the unit number with the participating area number when the sign is replaced.

Commercial Well Determination

A commercial well determination shall be submitted after production has been established for at least six months. (This is not necessary for secondary recovery unit wells)

Casing Clearance:

- Overlap clearance OK for production interval

Operator shall clean up cycles until wellbore is clear of cuttings and any large debris, ensure cutting sizes are adequate "coffee ground or less" before cementing.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)
- If well located in Eddy County
EMAIL or call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
BLM_NM_CFO_DrillingNotifications@BLM.GOV
(575) 361-2822

- If well located in Lea County
Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240,
(575) 689-5981
- 1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per **43 CFR part 3170 Subpart 3172** as soon as 2nd Rig is rigged up on well.
- 2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
- 3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the

following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.

3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR part 3170 Subpart 3172 and API STD 53 Sec. 5.3**.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's

requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.

3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in **43 CFR part 3170 Subpart 3172** must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (only applies to single stage cement jobs, prior to the cement setting up.)

- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR part 3170 Subpart 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per **43 CFR part 3170 Subpart 3172**.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS


All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

KPI 7/17/2024

COC Operating LLC
H₂S Equipment Schematic
Terrain: Shinnery sand hills.

Well pad will be 400' x 400'
with cellar in center of pad

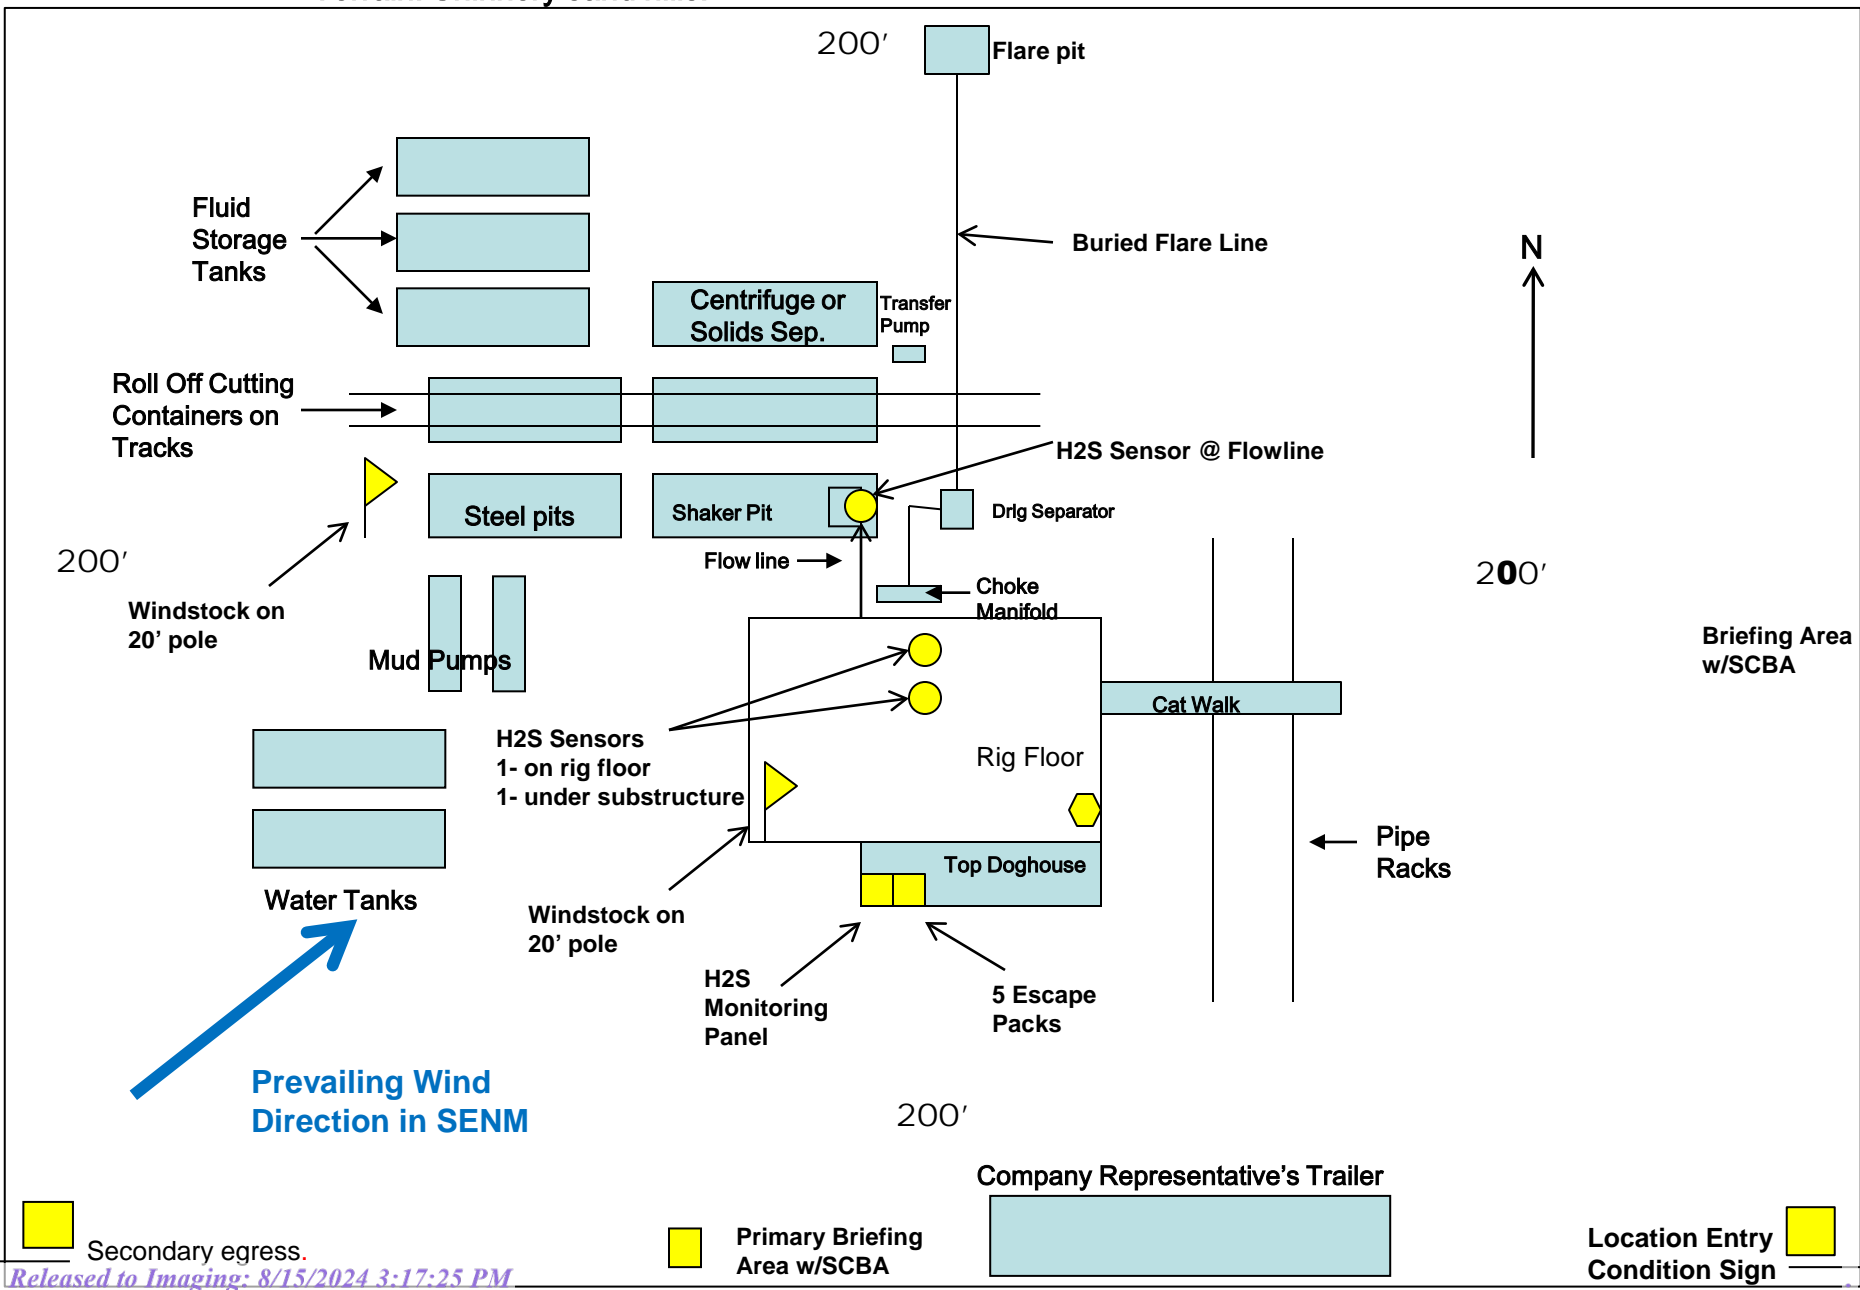

COG OPERATING LLC
HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

1. HYDROGEN SULFIDE TRAINING

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

- a. The hazards and characteristics of hydrogen sulfide (H₂S).
- b. The proper use and maintenance of personal protective equipment and life support systems.
- c. The proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
- d. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

- a. The effects of H₂S on metal components. If high tensile tubulars are to be used, personnel will be trained in their special maintenance requirements.
- b. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
- c. The contents and requirements of the H₂S Drilling Operations Plan and the Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H₂S zone (within 3 days or 500 feet) and weekly H₂S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H₂S Drilling Operations Plan and the Public Protection Plan. This plan shall be available at the well site. All personnel will be required to carry documentation that they have received the proper training.

2. H₂S SAFETY EQUIPMENT AND SYSTEMS

Note: All H₂S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonably expected to contain H₂S. If H₂S greater than 100 ppm is encountered in the gas stream we will shut in and install H₂S equipment.

- a. Well Control Equipment:
 - Flare line.
 - Choke manifold with remotely operated choke.
 - Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit.
 - Auxiliary equipment to include: annular preventer, mud-gas separator, rotating head.

- b. Protective equipment for essential personnel:
Mark II Surviveair 30-minute units located in the dog house and at briefing areas.
- c. H2S detection and monitoring equipment:
2 - portable H2S monitor positioned on location for best coverage and response. These units have warning lights and audible sirens when H2S levels of 20 ppm are reached.
- d. Visual warning systems:
Caution/Danger signs shall be posted on roads providing direct access to location. Signs will be painted a high visibility yellow with black lettering of sufficient size to be readable at a reasonable distance from the immediate location. Bilingual signs will be used, when appropriate. See example attached.
- e. Mud Program:
The mud program has been designed to minimize the volume of H2S circulated to the surface.
- f. Metallurgy:
All drill strings, casings, tubing, wellhead, blowout preventers, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H2S service.
- g. Communication:
Company vehicles equipped with cellular telephone.

COG OPERATING LLC has conducted a review to determine if an H2S contingency plan is required for the above referenced well. We were able to conclude that any potential hazardous volume would be minimal. H2S concentrations of wells in this area from surface to TD are low enough; therefore, we do not believe that an H2S contingency plan is necessary.

W A R N I N G

**YOU ARE ENTERING AN H₂S AREA
AUTHORIZED PERSONNEL ONLY**

- 1. BEARDS OR CONTACT LENSES NOT ALLOWED**
- 2. HARD HATS REQUIRED**
- 3. SMOKING IN DESIGNATED AREAS ONLY**
- 4. BE WIND CONSCIOUS AT ALL TIMES**
- 5. CK WITH COG OPERATING LLC FOREMAN AT MAIN OFFICE**

COG OPERATING LLC

1-575-748-6940

EMERGENCY CALL LIST

| | <u>OFFICE</u> | <u>MOBILE</u> |
|--------------------------|----------------------|----------------------|
| COG OPERATING LLC OFFICE | 575-748-6940 | |
| Albert Gonzales | | 346-287-8169 |

EMERGENCY RESPONSE NUMBERS

| | <u>OFFICE</u> |
|--------------------------------------------------|----------------------|
| STATE POLICE | 575-748-9718 |
| EDDY COUNTY SHERIFF | 575-746-2701 |
| EMERGENCY MEDICAL SERVICES (AMBULANCE) | 911 or 575-746-2701 |
| EDDY COUNTY EMERGENCY MANAGEMENT (HARRY BURGESS) | 575-887-9511 |
| STATE EMERGENCY RESPONSE CENTER (SERC) | 575-476-9620 |
| CARLSBAD POLICE DEPARTMENT | 575-885-2111 |
| CARLSBAD FIRE DEPARTMENT | 575-885-3125 |
| NEW MEXICO OIL CONSERVATION DIVISION | 575-748-1283 |
| INDIAN FIRE & SAFETY | 800-530-8693 |
| HALLIBURTON SERVICES | 800-844-8451 |

State of New Mexico
Energy, Minerals and Natural Resources Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit Electronically
Via E-permitting

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: ConocoPhillips Company

OGRID: 217817

Date: 01/30/2023

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

| Well Name | API | ULSTR | Footages | Anticipated Oil BBL/D | Anticipated Gas MCF/D | Anticipated Produced Water BBL/D |
|-----------------------------|---------|--------------|---------------------|-----------------------|-----------------------|----------------------------------|
| Zia Hills Unit 2032 WC 701H | 30-025- | E-20-26S-32E | 2530 FNL & 887 FWL | ± 2245 | ± 6736 | ± 5165 |
| Zia Hills Unit 2032 WC 702H | 30-025- | E-20-26S-32E | 2547 FNL & 912 FWL | ± 2245 | ± 6736 | ± 5165 |
| Zia Hills Unit 2032 WC 703H | 30-025- | E-20-26S-32E | 2564 FNL & 937 FWL | ± 2245 | ± 6736 | ± 5165 |
| Zia Hills Unit 2032 WC 704H | 30-025- | E-20-26S-32E | 2581 FNL & 962 FWL | ± 2245 | ± 6736 | ± 5165 |
| Zia Hills Unit 2032 WC 705H | 30-025- | E-20-26S-32E | 2598 FNL & 987 FWL | ± 2245 | ± 6736 | ± 5165 |
| Zia Hills Unit 2032 WC 706H | 30-025- | E-20-26S-32E | 2615 FNL & 1012 FWL | ± 2245 | ± 6736 | ± 5165 |
| Zia Hills Unit 2032 WC 707H | 30-025- | E-20-26S-32E | 2632 FNL & 1037 FWL | ± 2245 | ± 6736 | ± 5165 |

IV. Central Delivery Point Name: Zia Hills Unit 2032 WC Facility SWNW 20-26S-32E [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

| Well Name | API | Spud Date | TD Reached Date | Completion Commencement Date | Initial Flow Back Date | First Production Date |
|----------------------------------|---------|------------|---------------------|------------------------------|------------------------|-----------------------|
| Zia Hills Unit 2032 WC 701H-707H | Pending | ± 4/1/2024 | ± 25 days from spud | TBD | TBD | TBD |

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan
EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

| Well | API | Anticipated Average Natural Gas Rate MCF/D | Anticipated Volume of Natural Gas for the First Year MCF |
|------|-----|--------------------------------------------|----------------------------------------------------------|
| | | | |
| | | | |

X. Natural Gas Gathering System (NGGS):

| Operator | System | ULSTR of Tie-in | Anticipated Gathering Start Date | Available Maximum Daily Capacity of System Segment Tie-in |
|----------|--------|-----------------|----------------------------------|-----------------------------------------------------------|
| | | | | |
| | | | | |

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

| |
|--------------------------------------------------------------------------------------------------|
| Signature:  |
| Printed Name: Stan Wagner |
| Title: Regulatory Advisor |
| E-mail Address: stan.s.wagner@conocophillips.com |
| Date: 01/30/2023 |
| Phone: 432-253-9685 |
| OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form) |
| Approved By: |
| Title: |
| Approval Date: |
| Conditions of Approval: |

VI. Separation Equipment

How Operator will size separation equipment to optimize gas capture:

All ConocoPhillips production facility equipment will be sized per industry standards (API 12J) with adequate retention time to effectively separate all phases of production. Each project will take into consideration the number of wells and type curves for each formation pool to ensure adequate facility capacity. Design considerations will also include review of all piping, tanks, VRU's and associated equipment to ensure optimized gas capture minimized risk of release.

VII. Operational Practices

Actions Operator will take to comply with the requirements below:

B. Drilling Operations

- During drilling, flare stacks will be located a minimum of 100 feet from the nearest surface hole location. All gas is captured or combusted. If an emergency or malfunction occurs, gas will be flared or vented for public health, safety, and the environment and be properly reported to the NMOCD pursuant to 19.15.27.8.G.
- Measure or estimate the volume of natural gas that is vented, flared or beneficially used during drilling, completion and production operations, regardless of the reason or authorization for such venting or flaring.

C. Completion Operations

- During completion operations, operator does not produce oil or gas but maintains adequate well control through completion operations.
- Individual well test separators will be set to properly separate gas and liquids. A temporary test separator will be utilized initially to process volumes. In addition, separators will be tied into flowback tanks which will be tied into the gas processing equipment for sales down a pipeline.

D. Venting and flaring during production operations

- During each phase of well life (drilling, completion and production) of a ConocoPhillips well, COP personnel will follow all necessary procedures to ensure both the operation and the equipment are within the NMAC 19.15.27.8 Subsection D guidelines.
- During well operations that require unloading of the well to atmospheric pressure, all reasonable actions will be taken to minimize vented gas
- Through the life of the well all flaring shall be measured, and venting events quantified using the data available and industry best practice.

E. Performance standards for separation, storage tank and flare equipment

- All storage tanks and separation equipment are designed minimize risk of liquid or vapor release and optimize gas capture. This includes automation for automatic gauging and pressure monitoring.

- All flare stacks are equipped with auto ignition devices and/or continuous pilots and are designed to operate at maximum combustion efficiency pursuant NMAC 19.15.27.8 Subsection E. Flares will follow COP spacing guidelines to ensure they are a safe distance from combustibles and operations equipment.
- COP personnel will conduct routine AVO inspections on a regular basis per NMAC 19.15.27.8 Subsection E guidelines.

F. Measurement of vented and flared natural gas.

- Measurement equipment will be installed to quantify gas flared during drilling, completion and production of the well.
- All measurement devices installed will meet accuracy ratings per AGA and API standards.
- Measurement devices will be installed without manifolds that allow diversion of gas around the metering element, except for the sole purpose of inspection of servicing the measurement device.

VIII. Best Management Practices

- Operator will curtail or shut in production, within reasonable limits, during upset conditions to minimize venting and flaring.
- When feasible, Operator will use equipment to capture gas that would otherwise be vented or flared.
- During completions and production operations Operator will minimize blowdowns to atmosphere
- When feasible, Operator will use electric or air actuated equipment to reduce bleed emissions

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 368309

CONDITIONS

| | |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
| Operator: CONOCOPHILLIPS COMPANY 600 W. Illinois Avenue Midland, TX 79701 | OGRID: 217817 |
| | Action Number: 368309 |
| | Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3) |

CONDITIONS

| Created By | Condition | Condition Date |
|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| pkautz | Will require a File As Drilled C-102 and a Directional Survey with the C-104 | 8/15/2024 |
| pkautz | Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string | 8/15/2024 |
| pkautz | Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system | 8/15/2024 |
| pkautz | Cement is required to circulate on both surface and intermediate1 strings of casing | 8/15/2024 |
| pkautz | If cement does not circulate on any string, a CBL is required for that string of casing | 8/15/2024 |