

Form 3160-3
(June 2015)FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: ☐ DRILL ☐ REENTER		5. Lease Serial No.
1b. Type of Well: ☐ Oil Well ☐ Gas Well ☐ Other		6. If Indian, Allottee or Tribe Name
1c. Type of Completion: ☐ Hydraulic Fracturing ☐ Single Zone ☐ Multiple Zone		7. If Unit or CA Agreement, Name and No.
2. Name of Operator		8. Lease Name and Well No.
3a. Address		9. API Well No. 30-025-54071
3b. Phone No. (include area code)		10. Field and Pool, or Exploratory
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface At proposed prod. zone		11. Sec., T. R. M. or Blk. and Survey or Area
14. Distance in miles and direction from nearest town or post office*		12. County or Parish
		13. State
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)	16. No of acres in lease	17. Spacing Unit dedicated to this well
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.	19. Proposed Depth	20. BLM/BIA Bond No. in file
21. Elevations (Show whether DF, KDB, RT, GL, etc.)	22. Approximate date work will start*	23. Estimated duration
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be requested by the BLM. |

25. Signature	Name (Printed/Typed)	Date
Title		
Approved by (Signature)	Name (Printed/Typed)	Date
Title		
Office		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)



C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION	Revised July 9, 2024	
		Submittal Type:	☒ Initial Submittal
			☐ Amended Report
		☐ As Drilled	

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-025-54071	Pool Code 7280	Pool Name BRADLEY;BONE SPRING
Property Code 331002	Property Name PEACHTREE 25 FED COM	Well Number 306H
OGRID No. 7377	Operator Name EOG RESOURCES, INC.	Ground Level Elevation 3342'
Surface Owner: ☐ State ☐ Fee ☐ Tribal ☒ Federal		Mineral Owner: ☐ State ☐ Fee ☐ Tribal ☒ Federal

Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the N/S	Feet from the E/W	Latitude	Longitude	County
D	25	26-S	33-E	-	370' N	618' W	N 32.0206679	W 103.5326026	LEA

Bottom Hole Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the N/S	Feet from the E/W	Latitude	Longitude	County
D	13	26-S	33-E	-	100' N	330' W	N 32.0504340	W 103.5335276	LEA

Dedicated Acres 1280	Infill or Defining Well INFILL	Defining Well API PENDING	Overlapping Spacing Unit (Y/N) Y	Consolidated Code C
Order Numbers NSP AND COM # PENDING			Well Setbacks are under Common Ownership: ☐ Yes ☐ No	

Kick Off Point (KOP)

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the N/S	Feet from the E/W	Latitude	Longitude	County
M	24	26-S	33-E	-	50' S	330' W	N 32.0218249	W 103.5335314	LEA


First Take Point (FTP)

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the N/S	Feet from the E/W	Latitude	Longitude	County
M	24	26-S	33-E	-	100' S	330' W	N 32.0219623	W 103.5335314	LEA

Last Take Point (LTP)

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the N/S	Feet from the E/W	Latitude	Longitude	County
D	13	26-S	33-E	-	100' N	330' W	N 32.0504340	W 103.5335276	LEA

Unitized Area or Area of Uniform Intrest UNITIZED AREA NSP	Spacing Unity Type ☒ Horizontal ☐ Vertical	Ground Floor Elevation 3367'
--	--	--

OPERATOR CERTIFICATION <i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief; and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</i> <i>If this well is a horizontal well, I further certify that this organization has received The consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.</i>  Signature KAYLA MCCONNELL Print Name KAYLA_MCCONNELL@EOGRESOURCES.COM E-mail Address		SURVEYORS CERTIFICATION <i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</i>  Signature and Seal of Professional Surveyor 10/29/2024 12:07:41 PM Certificate Number Date of Survey 06/29/2021	
--	--	--	--

C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION		Revised July 9, 2024
	Submittal Type:	☒ Initial Submittal	
		☐ Amended Report ☐ As Drilled	
Property Name and Well Number PEACHTREE 25 FED COM 306H			

SURFACE LOCATION (SHL)

NEW MEXICO EAST
 NAD 1983
 X=789502 Y=372177
 LAT.: N 32.0206679
 LONG.: W 103.5326026
 NAD 1927
 X=748314 Y=372121
 LAT.: N 32.0205427
 LONG.: W 103.5321382
 370' FNL 618' FWL

KICK OFF POINT (KOP)

NEW MEXICO EAST
 NAD 1983
 X=789211 Y=372596
 LAT.: N 32.0218249
 LONG.: W 103.5335314
 NAD 1927
 X=748023 Y=372539
 LAT.: N 32.0216996
 LONG.: W 103.5330670
 50' FSL 330' FWL

UPPER MOST PERF. (UMP)



NEW MEXICO EAST
 NAD 1983
 X=789211 Y=372646
 LAT.: N 32.0219623
 LONG.: W 103.5335314
 NAD 1927
 X=748023 Y=372589
 LAT.: N 32.0218370
 LONG.: W 103.5330670
 100' FSL 330' FWL

FED PERF. POINT (FPP)

NEW MEXICO EAST
 NAD 1983
 X=789174 Y=377825
 LAT.: N 32.0361973
 LONG.: W 103.5335284
 NAD 1927
 X=747986 Y=377768
 LAT.: N 32.0360722
 LONG.: W 103.5330631
 0' FNL 330' FWL

**LOWER MOST PERF. (LMP)
BOTTOM HOLE LOCATION (BHL)**

NEW MEXICO EAST
 NAD 1983
 X=789135 Y=383004
 LAT.: N 32.0504340
 LONG.: W 103.5335276
 NAD 1927
 X=747948 Y=382947
 LAT.: N 32.0503089
 LONG.: W 103.5330613
 100' FNL 330' FWL

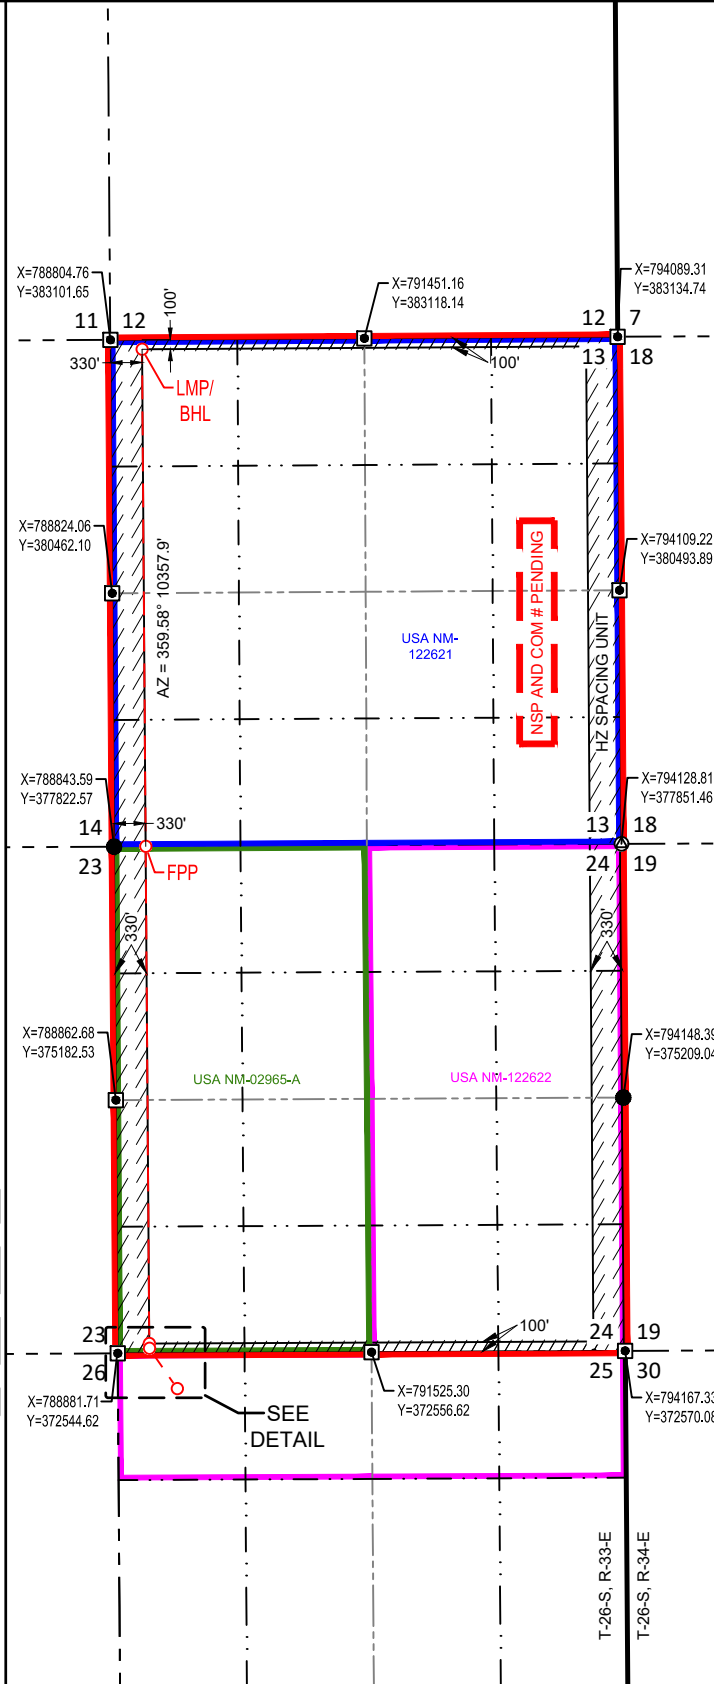

DETAIL VIEW
 SCALE: 1" = 500'

SURVEYORS CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.
 06/29/2021

Date of Survey
 Signature and Seal of Professional Surveyor:



State of New Mexico
Energy, Minerals and Natural Resources Department

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit Electronically
Via E-permitting

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description
Effective May 25, 2021

I. Operator: EOG Resources, Inc. OGRID: 7377 Date: 12/05/2024

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe:

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
PEACHTREE 25 FED COM 306H		D-25-26S-33E	370' FNL & 618' FWL	+/- 1000	+/- 3500	+/- 3000

IV. Central Delivery Point Name: PEACHTREE 25 FED COM CTB [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
PEACHTREE 25 FED COM 306H		1/01/25	1/26/25	02/1/25	03/1/25	03/15/25

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator’s best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan**EFFECTIVE APRIL 1, 2022**

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: *Kayla McConnell*

Printed Name: KAYLA MCCONNELL

Title: Regulatory Specialist

E-mail Address: KAYLA_MCCONNELL@EOGRESOURCES.COM

Date: 12/05/2024

Phone: (432) 265-6804

OIL CONSERVATION DIVISION
(Only applicable when submitted as a standalone form)

Approved By:

Title:

Approval Date:

Conditions of Approval:

**EOG RESOURCES, INC.
PEACHTREE 25 FED COM #306H**

1. GEOLOGIC NAME OF SURFACE FORMATION:

Permian

2. ESTIMATED TOPS OF IMPORTANT GEOLOGICAL MARKERS:

Rustler	1,015'
Tamarisk Anhydrite	1,100'
Top of Salt	1,370'
Base of Salt	5,015'
Lamar	5,245'
Bell Canyon	5,275'
Cherry Canyon	6,320'
Brushy Canyon	8,100'
Bone Spring Lime	9,480'
Leonard Shale	9,520'
1 st Bone Spring Sand	10,420'
TD	10,465'

3. ESTIMATED DEPTHS OF ANTICIPATED FRESH WATER, OIL OR GAS:

Upper Permian Sands	0- 400'	Fresh Water
Cherry Canyon	6,320'	Oil
Brushy Canyon	8,100'	Oil
Leonard Shale	9,520'	Oil
1 st Bone Spring Sand	10,420'	Oil

No other Formations are expected to give up oil, gas or fresh water in measurable quantities. Surface fresh water sands will be protected by setting 13.375" casing at 1,040' and circulating cement back to surface.

**EOG RESOURCES, INC.
PEACHTREE 25 FED COM #306H**

4. CASING PROGRAM - NEW

Hole Size	Interval	Csg OD	Weight	Grade	Conn	DF _{min} Collapse	DF _{min} Burst	DF _{min} Tension
17.5"	0' – 1,040'	13.375"	54.5#	J-55	STC	1.125	1.25	1.60
12.25"	0' – 4,000'	9.625"	40#	J-55	LTC	1.125	1.25	1.60
12.25"	4,000' – 5,115'	9.625"	40#	HCK-55	LTC	1.125	1.25	1.60
8.75"	0' – 10,750'	5.5"	17#	HCP-110	LTC	1.125	1.25	1.60
8.5"	10,750' – 20,682''	5.5"	17#	HCP-110	LTC	1.125	1.25	1.60

Variance is requested to waive the centralizer requirements for the 9-5/8" casing in the 12-1/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 12-1/4" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive any centralizer requirements for the 5-1/2" casing in the 8-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 8-3/4" hole interval to maximize cement bond and zonal isolation.

Cementing Program:

Depth	No. Sacks	Wt. ppg	Yld Ft ³ /sk	Slurry Description
1,040'	435	13.5	1.73	Lead: Class C + 4.0% Bentonite + 0.5% CaCl ₂ + 0.25 lb/sk Cello-Flake (TOC @ Surface)
	129	14.8	1.34	Tail: Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate (TOC @ 840')
5,115'	725	12.7	2.22	Lead: Class C + 10% NaCl + 6% Bentonite Gel + 3% MagOx (TOC @ Surface)
	303	14.8	1.32	Tail: Class C + 10% NaCl + 3% MagOx (TOC @ 4,092')
20,682''	525	11.0	3.21	Lead: Class C + 3% CaCl ₂ + 3% Microbond (TOC @ 4,615')
	2,567	14.4	1.2	Tail: Class H + 0.4% Halad-344 + 0.35% HR-601 + 3% Microbond (TOC @ 10,001')

**EOG RESOURCES, INC.
PEACHTREE 25 FED COM #306H**

Additive	Purpose
Bentonite Gel	Lightweight/Lost circulation prevention
Calcium Chloride	Accelerator
Cello-flake	Lost circulation prevention
Sodium Metasilicate	Accelerator
MagOx	Expansive agent
Sodium Chloride	Accelerator
FL-62	Fluid loss control
Halad-344	Fluid loss control
Halad-9	Fluid loss control
HR-601	Retarder
Microbond	Expansive Agent

Cement integrity tests will be performed immediately following plug bump.

Note: Cement volumes based on bit size plus at least 25% excess in the open hole plus 10% excess in the cased-hole overlap section.

5. MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:

Variance is requested to use a co-flex line between the BOP and choke manifold (instead of using a 4" OD steel line).

The minimum blowout preventer equipment (BOPE) shown in Exhibit #1 will consist of a single ram, mud cross and double ram-type (10,000 psi WP) preventer and an annular preventer (5,000-psi WP). Both units will be hydraulically operated and the ram-type will be equipped with blind rams on bottom and drill pipe rams on top. All BOPE will be tested in accordance with Onshore Oil & Gas order No. 2.

EOG will utilize wing unions on BOPE connections that can be isolated from wellbore pressure through means of a choke. All wing unions will be rated to a pressure that meets or exceeds the pressure rating of the BOPE system.

Variance is requested to use a 5,000 psi annular BOP with the 10,000 psi BOP stack.

Before drilling out of the surface casing, the ram-type BOP and accessory equipment will be tested to 10,000/ 250 psig and the annular preventer to 5,000/ 250 psig.

Pipe rams and blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

A hydraulically operated choke will be installed prior to drilling out of the intermediate casing shoe.

**EOG RESOURCES, INC.
PEACHTREE 25 FED COM #306H**

6. TYPES AND CHARACTERISTICS OF THE PROPOSED MUD SYSTEM:

During this procedure we plan to use a Closed-Loop System and haul contents to the required disposal.

The applicable depths and properties of the drilling fluid systems are as follows.

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 – 1,040'	Fresh - Gel	8.6-8.8	28-34	N/c
1,040' – 5,115'	Brine	8.6-8.8	28-34	N/c
5,115' – 20,682''	Oil Base	8.8-9.5	58-68	N/c - 6

An electronic pit volume totalizer (PVT) will be utilized on the circulating system, to monitor pit volume, flow rate, pump pressure and stroke rate.

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept at the wellsite at all times.

7. AUXILIARY WELL CONTROL AND MONITORING EQUIPMENT:

- (A) A kelly cock will be kept in the drill string at all times.
- (B) A full opening drill pipe-stabbing valve (inside BOP) with proper drill pipe connections will be on the rig floor at all times.
- (C) H₂S monitoring and detection equipment will be utilized from surface casing point to TD.

8. LOGGING, TESTING AND CORING PROGRAM:

Open-hole logs are not planned for this well.

GR-CCL Will be run in cased hole during completions phase of operations.

9. ABNORMAL CONDITIONS, PRESSURES, TEMPERATURES AND POTENTIAL HAZARDS:

The estimated bottom-hole temperature (BHT) at TD is 175 degrees F with an estimated maximum bottom-hole pressure (BHP) at TD of 5,170 psig and a maximum anticipated surface pressure of 2,867 psig (based on 9.5 ppg MW). No hydrogen sulfide or other hazardous gases or fluids have been encountered, reported or are known to exist at this depth in this area. Severe loss circulation is expected from 8,100' to TD.

**EOG RESOURCES, INC.
PEACHTREE 25 FED COM #306H**

10. ANTICIPATED STARTING DATE AND DURATION OF OPERATIONS:

The drilling operation should be finished in approximately one month. If the well is productive, an additional 60-90 days will be required for completion and testing before a decision is made to install permanent facilities.

(A) EOG Resources requests the option to contract a Surface Rig to drill, set surface casing, and cement on the subject well. After WOC 8 hours or 500 psi compressive strength (whichever is greater), the Surface Rig will move off so the wellhead can be installed. A welder will cut the casing to the proper height and weld on the wellhead (both "A" and "B" sections). The weld will be tested to 1000 psi. All valves will be closed and a wellhead cap will be installed (diagram attached). If the timing between rigs is such that EOG Resources would not be able to preset the surface, the Primary Rig will MIRU and drill the well in its entirety per the APD.

11. WELLHEAD:

A multi-bowl wellhead system will be utilized.

After running the 13-3/8" surface casing, a 13-3/8" BOP/BOPE system with a minimum working pressure of 10,000 psi will be installed on the wellhead system and will be pressure tested to 250 psi low followed by a 10,000 psi pressure test. This pressure test will be repeated at least every 30 days, as per Onshore Order No. 2

The minimum working pressure of the BOP and related BOPE required for drilling below the surface casing shoe shall be 10,000 psi.

The multi-bowl wellhead will be installed by vendor's representative(s). A copy of the installation instructions for the Cameron Multi-Bowl WH system has been sent to the NM BLM office in Carlsbad, NM.

The wellhead will be installed by a third party welder while being monitored by WH vendor's representative.

All BOP equipment will be tested utilizing a conventional test plug. Not a cup or J-packer type. EOG Resources reserves the option to conduct BOPE testing during wait on cement periods provided a test plug is utilized.

A solid steel body pack-off will be utilized after running and cementing the intermediate casing. After installation the pack-off and lower flange will be pressure tested to 5000 psi.

Casing strings will be tested as per Onshore Order No. 2 to at least 0.22 psi/ft or 1500 psi, whichever is greater.


EOG RESOURCES, INC.
PEACHTREE 25 FED COM #306H

370' FNL
618' FWL
Section 25
T-26-S, R-33-E

Proposed Wellbore

KB: 3,366'
GL: 3,341'

API: 30-025-*****

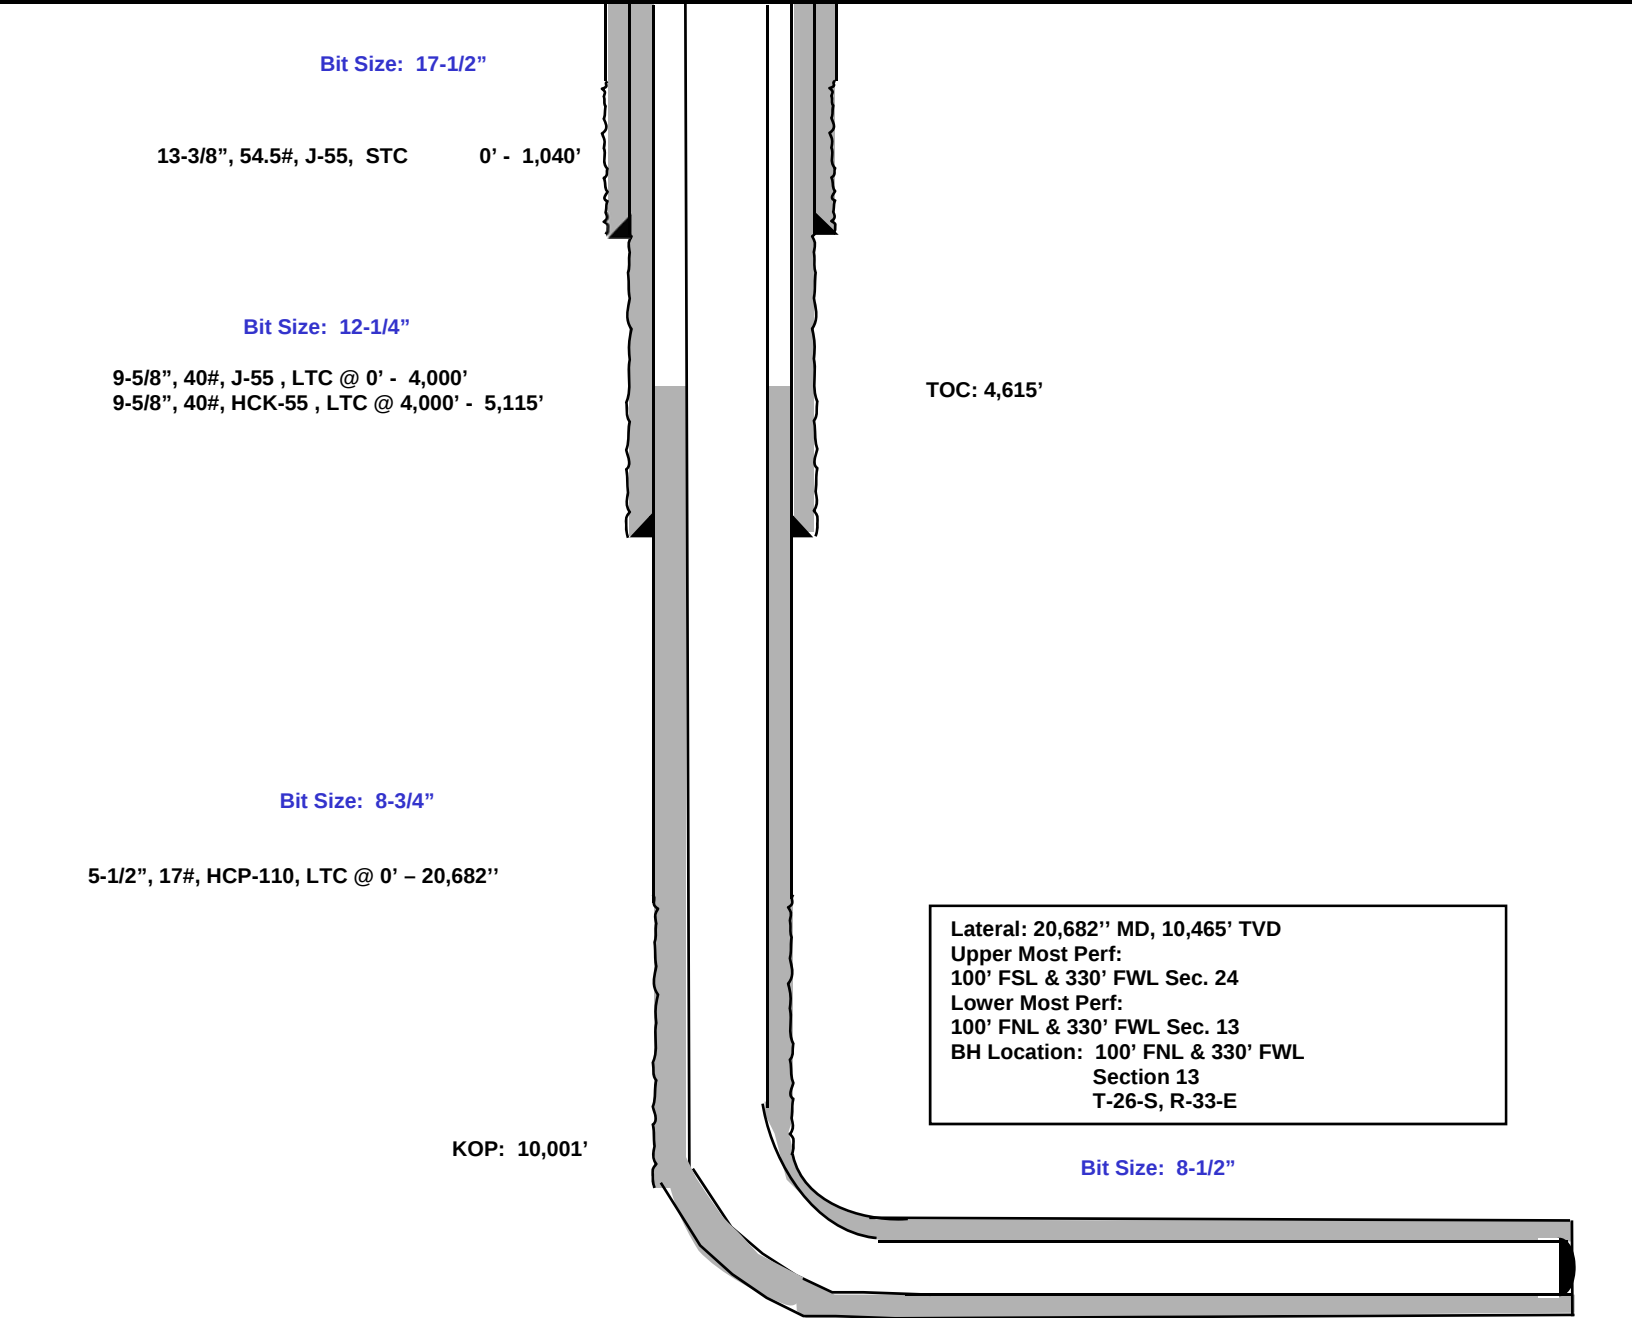

**EOG RESOURCES, INC.
PEACHTREE 25 FED COM #306H**

Hydrogen Sulfide Plan Summary

- A. All personnel shall receive proper H₂S training in accordance with Onshore Order III.C.3.a.
- B. Briefing Area: two perpendicular areas will be designated by signs and readily accessible.
- C. Required Emergency Equipment:

- Well control equipment
 - a. Flare line 150' from wellhead to be ignited by flare gun.
 - b. Choke manifold with a remotely operated choke.
 - c. Mud/gas separator
- Protective equipment for essential personnel.

Breathing apparatus:

- a. Rescue Packs (SCBA) — 1 unit shall be placed at each breathing area, 2 shall be stored in the safety trailer.
- b. Work/Escapes packs — 4 packs shall be stored on the rig floor with sufficient air hose not to restrict work activity.
- c. Emergency Escape Packs — 4 packs shall be stored in the doghouse for emergency evacuation.

Auxiliary Rescue Equipment:

- a. Stretcher
- b. Two OSHA full body harness
- c. 100 ft 5/8 inch OSHA approved rope
- d. 1-20# class ABC fire extinguisher

- H₂S detection and monitoring equipment:

The stationary detector with three sensors will be placed in the upper dog house if equipped, set to visually alarm @ 10 ppm and audible @ 14 ppm. Calibrate a minimum of every 30 days or as needed. The sensors will be placed in the following places: Rig floor / Bell nipple / End of flow line or where well bore fluid is being discharged.

(Gas sample tubes will be stored in the safety trailer)

- Visual warning systems.
 - a. One color code condition sign will be placed at the entrance to the site reflecting the possible conditions at the site.
 - b. A colored condition flag will be on display, reflecting the current condition at the site at the time.
 - c. Two wind socks will be placed in strategic locations, visible from all angles.

**EOG RESOURCES, INC.
PEACHTREE 25 FED COM #306H**

- **Mud program:**
The mud program has been designed to minimize the volume of H₂S circulated to surface. The operator will have the necessary mud products to minimize hazards while drilling in H₂S bearing zones.
- **Metallurgy:**
All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H₂S service.
- **Communication:**
Communication will be via cell phones and land lines where available.

**EOG RESOURCES, INC.
PEACHTREE 25 FED COM #306H**

Emergency Assistance Telephone List

PUBLIC SAFETY: **911 or**

Lea County Sheriff's Department (575) 396-3611

Rod Coffman

Fire Department:

Carlsbad (575) 885-3125

Artesia (575) 746-5050

Hospitals:

Carlsbad (575) 887-4121

Artesia (575) 748-3333

Hobbs (575) 392-1979

Dept. of Public Safety/Carlsbad (575) 748-9718

Highway Department (575) 885-3281

New Mexico Oil Conservation (575) 476-3440

U.S. Dept. of Labor (575) 887-1174

EOG Resources, Inc.

EOG / Midland Office (432) 686-3600

Company Drilling Consultants:

Jett Dueitt Cell (432) 230-4840

Blake Burney

Drilling Engineer

Steve Munsell Office (432) 686-3609

Cell (432) 894-1256

Drilling Manager

Aj Dach Office (432) 686-3751

Cell (817) 480-1167

Drilling Superintendent

Jason Townsend Office (432) 848-9209

Cell (210) 776-5131

H&P Drilling

H&P Drilling Office (432) 563-5757

H&P 415 Drilling Rig Rig (432) 230-4840

Tool Pusher:

Johnathan Craig Cell (817) 760-6374

Brad Garrett

Safety


Brian Chandler (HSE Manager) Office (432) 686-3695

Cell (817) 239-0251

Lea County, NM (NAD 83 NME)

Peachtree 25 Fed Com #306H

Plan #0.1 RT

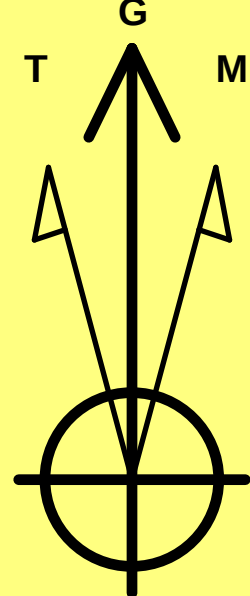

Azimuths to Grid North
 True North: -0.42°
 Magnetic North: 6.19°

Magnetic Field
 Strength: 47470.0nT
 Dip Angle: 59.75°
 Date: 7/27/2020
 Model: IGRF2020

To convert a Magnetic Direction to a Grid Direction, Add 6.19°
 To convert a Magnetic Direction to a True Direction, Add 6.62° East
 To convert a True Direction to a Grid Direction, Subtract 0.42°

PROJECT DETAILS: Lea County, NM (NAD 83 NME)

Geodetic System: US State Plane 1983
 Datum: North American Datum 1983
 Ellipsoid: GRS 1980
 Zone: New Mexico Eastern Zone
 System Datum: Mean Sea Level

WELL DETAILS: #306H

kb = 25' @ 3366.0usft 3341.0
 Northing 372177.00 Easting 789502.00 Latitude 32.0206669°N Longitude 103.5326037°W

SECTION DETAILS



Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	148.4	2.97	325.22	148.3	3.2	-2.2	2.00	325.22	3.2	
3	9852.2	2.97	325.22	9839.2	415.8	-288.8	0.00	0.00	425.4	KOP(Peachtree 25 Fed Com #306H)
4	10000.6	0.00	0.00	9987.5	419.0	-291.0	2.00	180.00	428.6	
5	10750.6	90.00	359.58	10465.0	896.4	-294.5	12.00	359.58	905.9	Fed Perf 1(Peachtree 25 Fed Com #306H)
6	15502.3	90.00	359.58	10465.0	5648.0	-329.0	0.00	0.00	5655.9	
7	15502.5	90.00	359.58	10465.0	5648.2	-329.0	0.00	0.00	5656.1	
8	20681.5	90.00	359.58	10465.0	10827.0	-367.0	0.00	0.00	10833.2	PBHL(Peachtree 25 Fed Com #306H)

CASING DETAILS

No casing data is available

WELLBORE TARGET DETAILS (MAP CO-ORDINATES)

Name	TVD	+N/-S	+E/-W	Northing	Easting
KOP(Peachtree 25 Fed Com #306H)	9987.5	419.0	-291.0	372596.00	789211.00
Fed Perf 1(Peachtree 25 Fed Com #306H)	10465.0	5648.0	-329.0	377825.00	789173.00
PBHL(Peachtree 25 Fed Com #306H)	10465.0	10827.0	-367.0	383004.00	789135.00
FTP(Peachtree 25 Fed Com #306H)	10200.2	469.0	-291.0	372646.00	789211.00

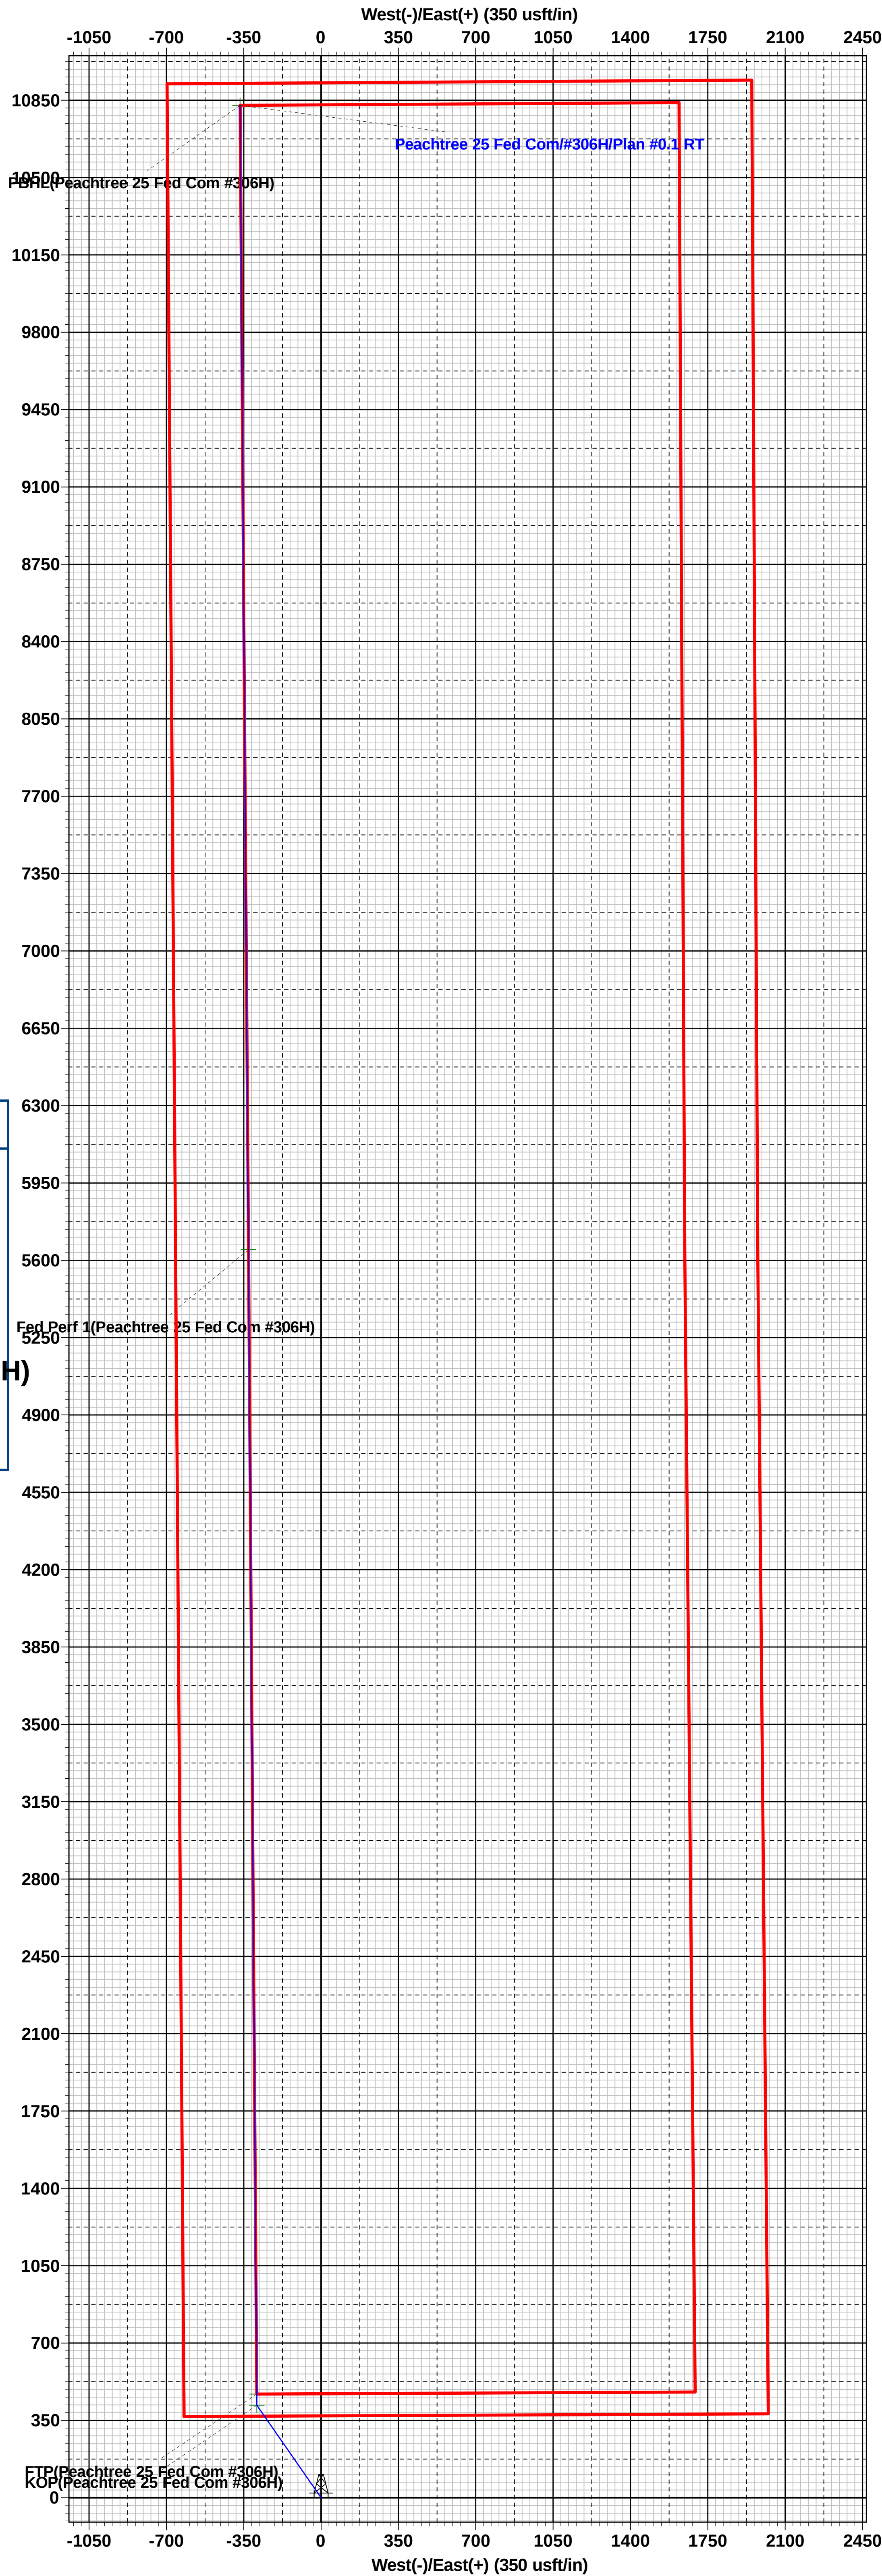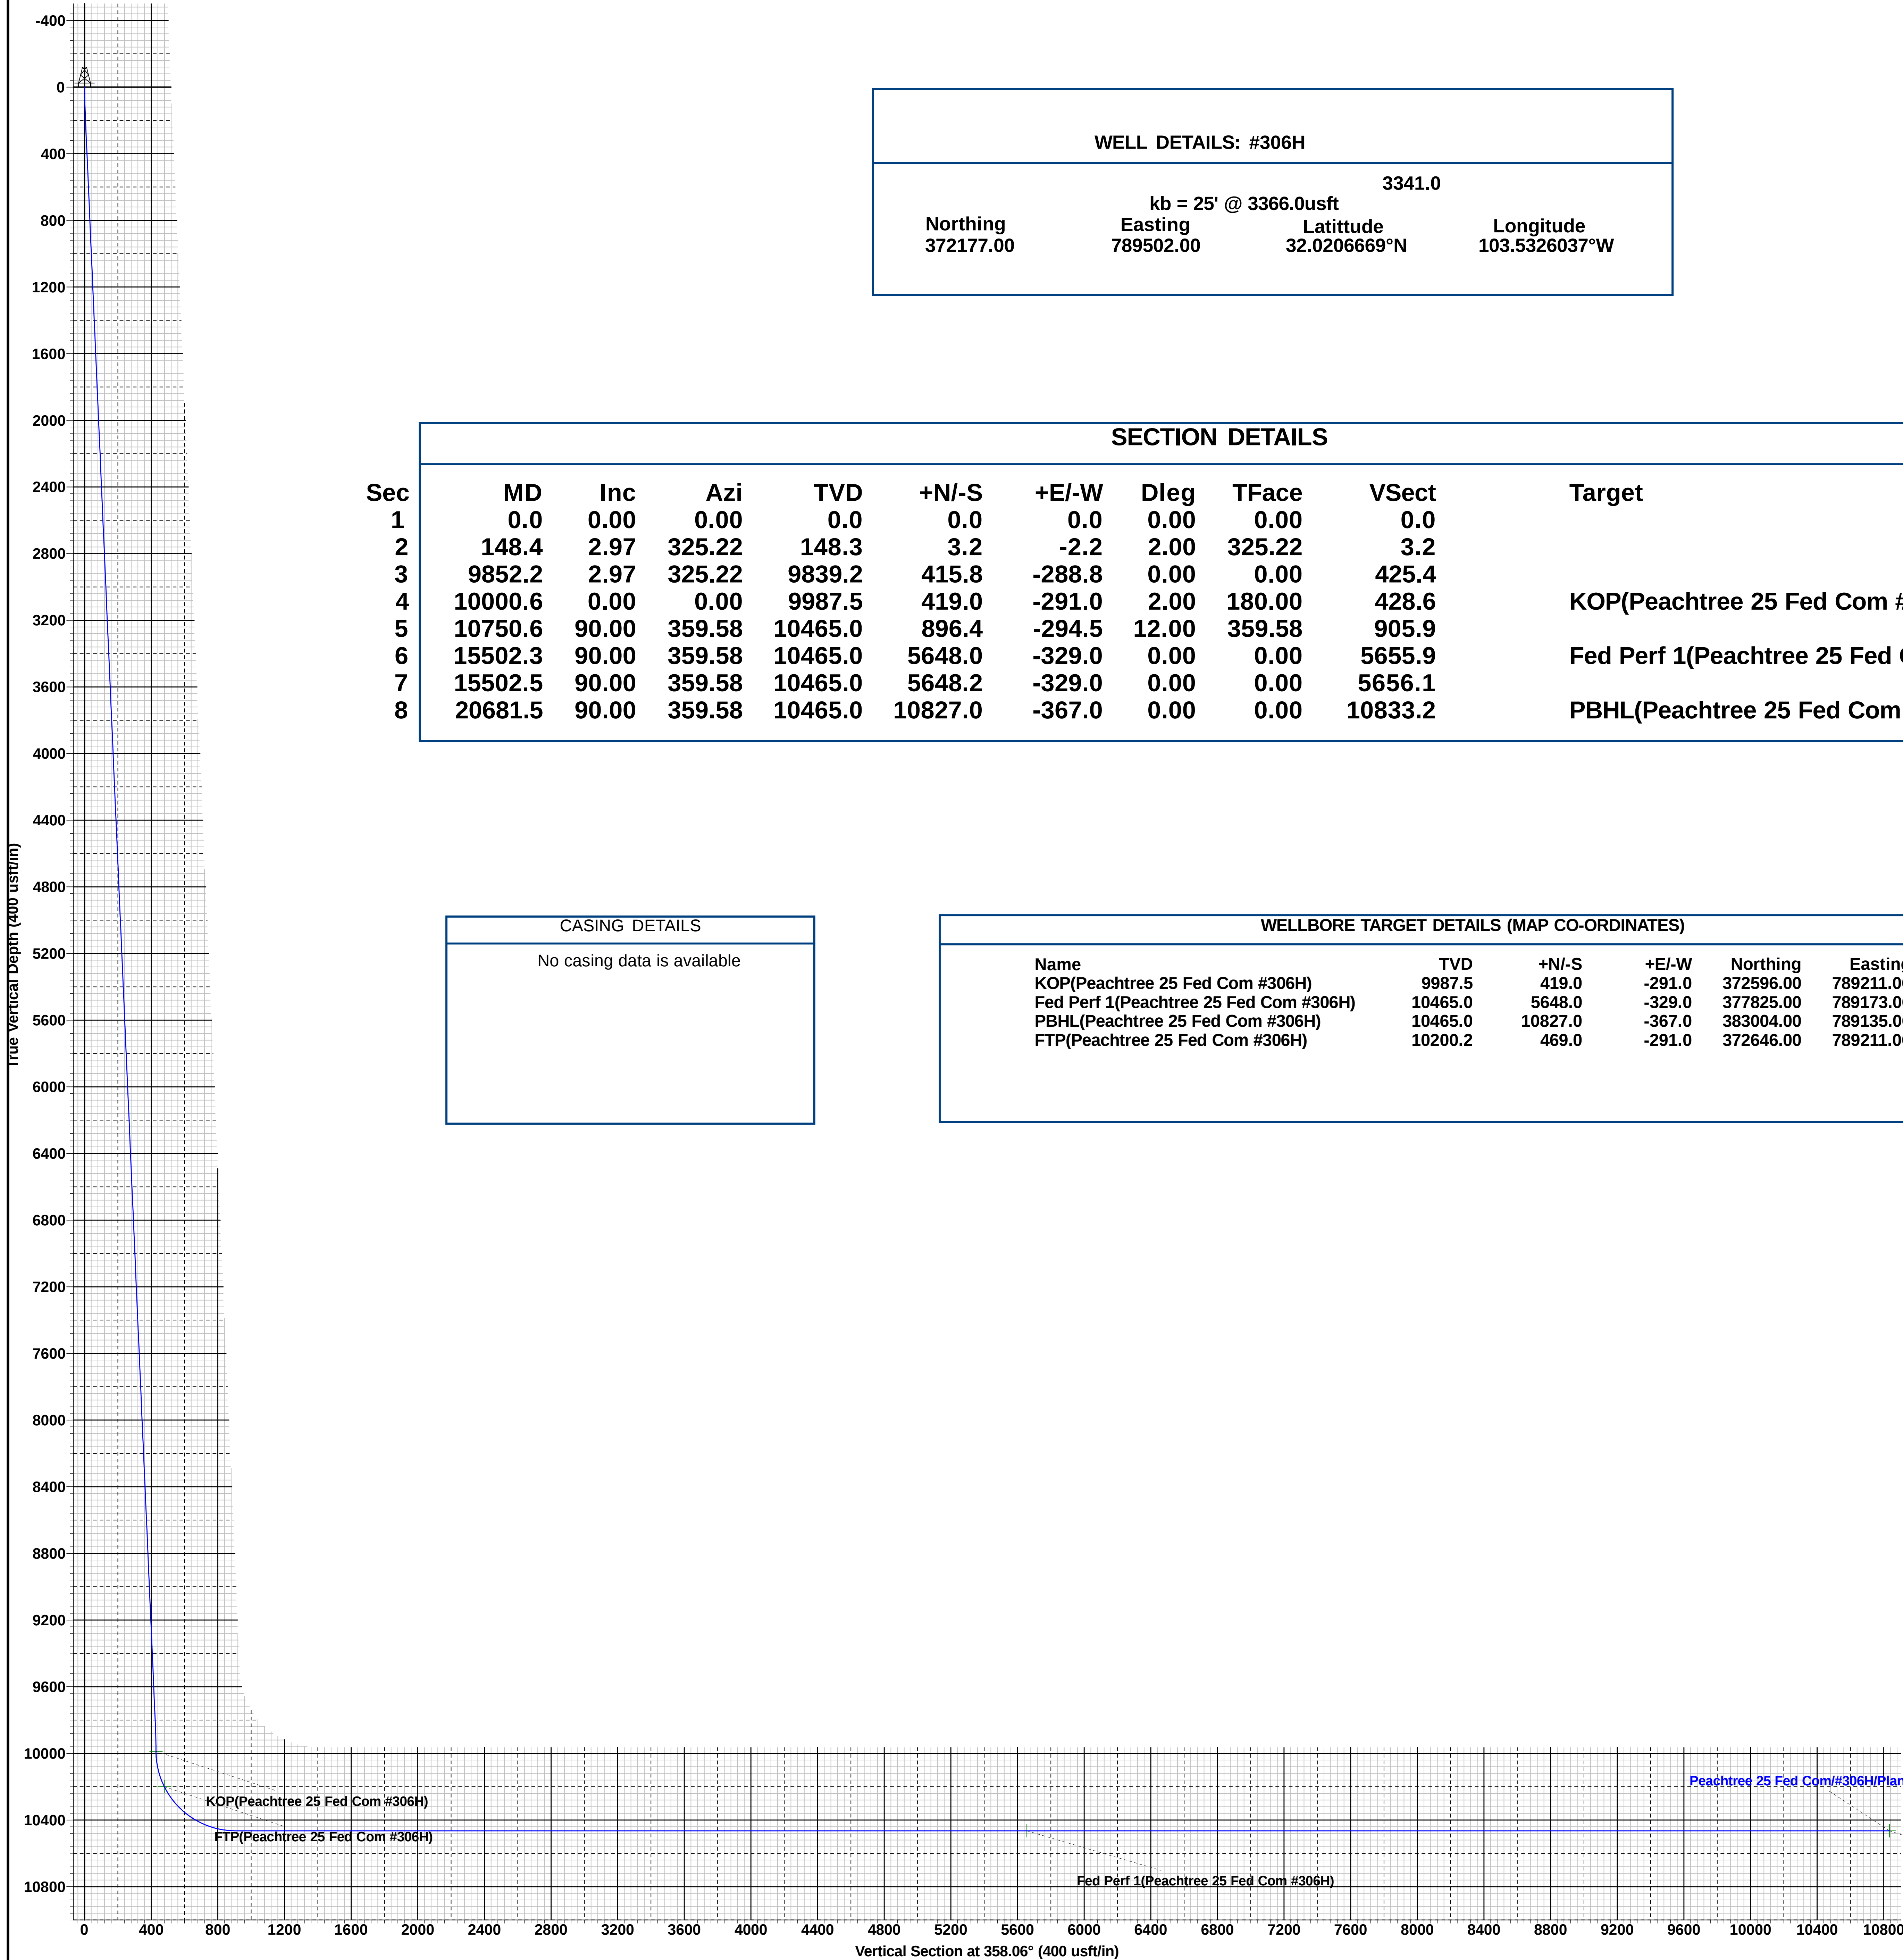



EOG Resources - Midland

Lea County, NM (NAD 83 NME)

Peachtree 25 Fed Com

#306H

OH

Plan: Plan #0.1 RT

Standard Planning Report

27 July, 2020



EOG Resources

Planning Report

Database:	EDM 5000.14	Local Co-ordinate Reference:	Well #306H
Company:	EOG Resources - Midland	TVD Reference:	kb = 25' @ 3366.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	kb = 25' @ 3366.0usft
Site:	Peachtree 25 Fed Com	North Reference:	Grid
Well:	#306H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #0.1 RT		

Project	Lea County, NM (NAD 83 NME)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site		Peachtree 25 Fed Com			
Site Position:		Northing:	372,298.00 usft	Latitude:	32.0209953°N
From:	Map	Easting:	789,709.00 usft	Longitude:	103.5319329°W
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.42 °

Well	#306H					
Well Position	+N/-S	-121.0 usft	Northing:	372,177.00 usft	Latitude:	32.0206669°N
	+E/-W	-207.0 usft	Easting:	789,502.00 usft	Longitude:	103.5326037°W
Position Uncertainty	0.0 usft		Wellhead Elevation:		Ground Level:	3,341.0 usft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	7/27/2020	6.62	59.75	47,469.96239347

Design	Plan #0.1 RT			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.0	0.0	0.0	358.06

Plan Survey Tool Program	Date	7/27/2020		
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks
1	0.0	20,681.5 Plan #0.1 RT (OH)	EOG MWD+IFR1	
			MWD + IFR1	

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
148.4	2.97	325.22	148.3	3.2	-2.2	2.00	2.00	0.00	325.22	
9,852.2	2.97	325.22	9,839.2	415.8	-288.8	0.00	0.00	0.00	0.00	
10,000.6	0.00	0.00	9,987.5	419.0	-291.0	2.00	-2.00	0.00	180.00	KOP(Peachtree 25 Fed)
10,750.6	90.00	359.58	10,465.0	896.4	-294.5	12.00	12.00	-0.06	359.58	
15,502.3	90.00	359.58	10,465.0	5,648.0	-329.0	0.00	0.00	0.00	0.00	Fed Perf 1(Peachtree 25 Fed)
15,502.5	90.00	359.58	10,465.0	5,648.2	-329.0	0.00	0.00	0.00	0.00	
20,681.5	90.00	359.58	10,465.0	10,827.0	-367.0	0.00	0.00	0.00	0.00	PBHL(Peachtree 25 Fed)



EOG Resources

Planning Report

Database:	EDM 5000.14	Local Co-ordinate Reference:	Well #306H
Company:	EOG Resources - Midland	TVD Reference:	kb = 25' @ 3366.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	kb = 25' @ 3366.0usft
Site:	Peachtree 25 Fed Com	North Reference:	Grid
Well:	#306H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #0.1 RT		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	2.00	325.22	100.0	1.4	-1.0	1.5	2.00	2.00	0.00
148.4	2.97	325.22	148.3	3.2	-2.2	3.2	2.00	2.00	0.00
200.0	2.97	325.22	199.9	5.4	-3.7	5.5	0.00	0.00	0.00
300.0	2.97	325.22	299.7	9.6	-6.7	9.8	0.00	0.00	0.00
400.0	2.97	325.22	399.6	13.9	-9.6	14.2	0.00	0.00	0.00
500.0	2.97	325.22	499.5	18.1	-12.6	18.5	0.00	0.00	0.00
600.0	2.97	325.22	599.3	22.4	-15.5	22.9	0.00	0.00	0.00
700.0	2.97	325.22	699.2	26.6	-18.5	27.2	0.00	0.00	0.00
800.0	2.97	325.22	799.1	30.9	-21.4	31.6	0.00	0.00	0.00
900.0	2.97	325.22	898.9	35.1	-24.4	35.9	0.00	0.00	0.00
1,000.0	2.97	325.22	998.8	39.4	-27.3	40.3	0.00	0.00	0.00
1,100.0	2.97	325.22	1,098.7	43.6	-30.3	44.6	0.00	0.00	0.00
1,200.0	2.97	325.22	1,198.5	47.9	-33.3	49.0	0.00	0.00	0.00
1,300.0	2.97	325.22	1,298.4	52.1	-36.2	53.3	0.00	0.00	0.00
1,400.0	2.97	325.22	1,398.3	56.4	-39.2	57.7	0.00	0.00	0.00
1,500.0	2.97	325.22	1,498.1	60.6	-42.1	62.0	0.00	0.00	0.00
1,600.0	2.97	325.22	1,598.0	64.9	-45.1	66.4	0.00	0.00	0.00
1,700.0	2.97	325.22	1,697.9	69.1	-48.0	70.7	0.00	0.00	0.00
1,800.0	2.97	325.22	1,797.7	73.4	-51.0	75.1	0.00	0.00	0.00
1,900.0	2.97	325.22	1,897.6	77.6	-53.9	79.4	0.00	0.00	0.00
2,000.0	2.97	325.22	1,997.4	81.9	-56.9	83.8	0.00	0.00	0.00
2,100.0	2.97	325.22	2,097.3	86.2	-59.8	88.1	0.00	0.00	0.00
2,200.0	2.97	325.22	2,197.2	90.4	-62.8	92.5	0.00	0.00	0.00
2,300.0	2.97	325.22	2,297.0	94.7	-65.7	96.8	0.00	0.00	0.00
2,400.0	2.97	325.22	2,396.9	98.9	-68.7	101.2	0.00	0.00	0.00
2,500.0	2.97	325.22	2,496.8	103.2	-71.6	105.5	0.00	0.00	0.00
2,600.0	2.97	325.22	2,596.6	107.4	-74.6	109.9	0.00	0.00	0.00
2,700.0	2.97	325.22	2,696.5	111.7	-77.6	114.2	0.00	0.00	0.00
2,800.0	2.97	325.22	2,796.4	115.9	-80.5	118.6	0.00	0.00	0.00
2,900.0	2.97	325.22	2,896.2	120.2	-83.5	122.9	0.00	0.00	0.00
3,000.0	2.97	325.22	2,996.1	124.4	-86.4	127.3	0.00	0.00	0.00
3,100.0	2.97	325.22	3,096.0	128.7	-89.4	131.6	0.00	0.00	0.00
3,200.0	2.97	325.22	3,195.8	132.9	-92.3	136.0	0.00	0.00	0.00
3,300.0	2.97	325.22	3,295.7	137.2	-95.3	140.3	0.00	0.00	0.00
3,400.0	2.97	325.22	3,395.6	141.4	-98.2	144.7	0.00	0.00	0.00
3,500.0	2.97	325.22	3,495.4	145.7	-101.2	149.0	0.00	0.00	0.00
3,600.0	2.97	325.22	3,595.3	149.9	-104.1	153.4	0.00	0.00	0.00
3,700.0	2.97	325.22	3,695.2	154.2	-107.1	157.7	0.00	0.00	0.00
3,800.0	2.97	325.22	3,795.0	158.5	-110.0	162.1	0.00	0.00	0.00
3,900.0	2.97	325.22	3,894.9	162.7	-113.0	166.4	0.00	0.00	0.00
4,000.0	2.97	325.22	3,994.8	167.0	-116.0	170.8	0.00	0.00	0.00
4,100.0	2.97	325.22	4,094.6	171.2	-118.9	175.1	0.00	0.00	0.00
4,200.0	2.97	325.22	4,194.5	175.5	-121.9	179.5	0.00	0.00	0.00
4,300.0	2.97	325.22	4,294.4	179.7	-124.8	183.8	0.00	0.00	0.00
4,400.0	2.97	325.22	4,394.2	184.0	-127.8	188.2	0.00	0.00	0.00
4,500.0	2.97	325.22	4,494.1	188.2	-130.7	192.5	0.00	0.00	0.00
4,600.0	2.97	325.22	4,594.0	192.5	-133.7	196.9	0.00	0.00	0.00
4,700.0	2.97	325.22	4,693.8	196.7	-136.6	201.2	0.00	0.00	0.00
4,800.0	2.97	325.22	4,793.7	201.0	-139.6	205.6	0.00	0.00	0.00
4,900.0	2.97	325.22	4,893.6	205.2	-142.5	209.9	0.00	0.00	0.00
5,000.0	2.97	325.22	4,993.4	209.5	-145.5	214.3	0.00	0.00	0.00
5,100.0	2.97	325.22	5,093.3	213.7	-148.4	218.6	0.00	0.00	0.00
5,200.0	2.97	325.22	5,193.2	218.0	-151.4	223.0	0.00	0.00	0.00



EOG Resources

Planning Report

Database:	EDM 5000.14	Local Co-ordinate Reference:	Well #306H
Company:	EOG Resources - Midland	TVD Reference:	kb = 25' @ 3366.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	kb = 25' @ 3366.0usft
Site:	Peachtree 25 Fed Com	North Reference:	Grid
Well:	#306H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #0.1 RT		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,300.0	2.97	325.22	5,293.0	222.2	-154.4	227.3	0.00	0.00	0.00
5,400.0	2.97	325.22	5,392.9	226.5	-157.3	231.7	0.00	0.00	0.00
5,500.0	2.97	325.22	5,492.8	230.8	-160.3	236.0	0.00	0.00	0.00
5,600.0	2.97	325.22	5,592.6	235.0	-163.2	240.4	0.00	0.00	0.00
5,700.0	2.97	325.22	5,692.5	239.3	-166.2	244.7	0.00	0.00	0.00
5,800.0	2.97	325.22	5,792.4	243.5	-169.1	249.1	0.00	0.00	0.00
5,900.0	2.97	325.22	5,892.2	247.8	-172.1	253.4	0.00	0.00	0.00
6,000.0	2.97	325.22	5,992.1	252.0	-175.0	257.8	0.00	0.00	0.00
6,100.0	2.97	325.22	6,091.9	256.3	-178.0	262.1	0.00	0.00	0.00
6,200.0	2.97	325.22	6,191.8	260.5	-180.9	266.5	0.00	0.00	0.00
6,300.0	2.97	325.22	6,291.7	264.8	-183.9	270.9	0.00	0.00	0.00
6,400.0	2.97	325.22	6,391.5	269.0	-186.8	275.2	0.00	0.00	0.00
6,500.0	2.97	325.22	6,491.4	273.3	-189.8	279.6	0.00	0.00	0.00
6,600.0	2.97	325.22	6,591.3	277.5	-192.7	283.9	0.00	0.00	0.00
6,700.0	2.97	325.22	6,691.1	281.8	-195.7	288.3	0.00	0.00	0.00
6,800.0	2.97	325.22	6,791.0	286.0	-198.7	292.6	0.00	0.00	0.00
6,900.0	2.97	325.22	6,890.9	290.3	-201.6	297.0	0.00	0.00	0.00
7,000.0	2.97	325.22	6,990.7	294.5	-204.6	301.3	0.00	0.00	0.00
7,100.0	2.97	325.22	7,090.6	298.8	-207.5	305.7	0.00	0.00	0.00
7,200.0	2.97	325.22	7,190.5	303.0	-210.5	310.0	0.00	0.00	0.00
7,300.0	2.97	325.22	7,290.3	307.3	-213.4	314.4	0.00	0.00	0.00
7,400.0	2.97	325.22	7,390.2	311.6	-216.4	318.7	0.00	0.00	0.00
7,500.0	2.97	325.22	7,490.1	315.8	-219.3	323.1	0.00	0.00	0.00
7,600.0	2.97	325.22	7,589.9	320.1	-222.3	327.4	0.00	0.00	0.00
7,700.0	2.97	325.22	7,689.8	324.3	-225.2	331.8	0.00	0.00	0.00
7,800.0	2.97	325.22	7,789.7	328.6	-228.2	336.1	0.00	0.00	0.00
7,900.0	2.97	325.22	7,889.5	332.8	-231.1	340.5	0.00	0.00	0.00
8,000.0	2.97	325.22	7,989.4	337.1	-234.1	344.8	0.00	0.00	0.00
8,100.0	2.97	325.22	8,089.3	341.3	-237.1	349.2	0.00	0.00	0.00
8,200.0	2.97	325.22	8,189.1	345.6	-240.0	353.5	0.00	0.00	0.00
8,300.0	2.97	325.22	8,289.0	349.8	-243.0	357.9	0.00	0.00	0.00
8,400.0	2.97	325.22	8,388.9	354.1	-245.9	362.2	0.00	0.00	0.00
8,500.0	2.97	325.22	8,488.7	358.3	-248.9	366.6	0.00	0.00	0.00
8,600.0	2.97	325.22	8,588.6	362.6	-251.8	370.9	0.00	0.00	0.00
8,700.0	2.97	325.22	8,688.5	366.8	-254.8	375.3	0.00	0.00	0.00
8,800.0	2.97	325.22	8,788.3	371.1	-257.7	379.6	0.00	0.00	0.00
8,900.0	2.97	325.22	8,888.2	375.3	-260.7	384.0	0.00	0.00	0.00
9,000.0	2.97	325.22	8,988.1	379.6	-263.6	388.3	0.00	0.00	0.00
9,100.0	2.97	325.22	9,087.9	383.9	-266.6	392.7	0.00	0.00	0.00
9,200.0	2.97	325.22	9,187.8	388.1	-269.5	397.0	0.00	0.00	0.00
9,300.0	2.97	325.22	9,287.7	392.4	-272.5	401.4	0.00	0.00	0.00
9,400.0	2.97	325.22	9,387.5	396.6	-275.5	405.7	0.00	0.00	0.00
9,500.0	2.97	325.22	9,487.4	400.9	-278.4	410.1	0.00	0.00	0.00
9,600.0	2.97	325.22	9,587.3	405.1	-281.4	414.4	0.00	0.00	0.00
9,700.0	2.97	325.22	9,687.1	409.4	-284.3	418.8	0.00	0.00	0.00
9,800.0	2.97	325.22	9,787.0	413.6	-287.3	423.1	0.00	0.00	0.00
9,852.2	2.97	325.22	9,839.2	415.8	-288.8	425.4	0.00	0.00	0.00
9,900.0	2.01	325.22	9,886.9	417.5	-290.0	427.1	2.00	-2.00	0.00
10,000.6	0.00	0.00	9,987.5	419.0	-291.0	428.6	2.00	-2.00	0.00
10,025.0	2.92	359.58	10,011.8	419.6	-291.0	429.2	12.00	12.00	0.00
10,050.0	5.92	359.58	10,036.8	421.5	-291.0	431.2	12.00	12.00	0.00
10,075.0	8.92	359.58	10,061.6	424.8	-291.0	434.4	12.00	12.00	0.00
10,100.0	11.92	359.58	10,086.1	429.3	-291.1	438.9	12.00	12.00	0.00
10,125.0	14.92	359.58	10,110.4	435.1	-291.1	444.7	12.00	12.00	0.00



EOG Resources

Planning Report

Database:	EDM 5000.14	Local Co-ordinate Reference:	Well #306H
Company:	EOG Resources - Midland	TVD Reference:	kb = 25' @ 3366.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	kb = 25' @ 3366.0usft
Site:	Peachtree 25 Fed Com	North Reference:	Grid
Well:	#306H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #0.1 RT		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
10,150.0	17.92	359.58	10,134.4	442.2	-291.2	451.8	12.00	12.00	0.00	
10,175.0	20.92	359.58	10,158.0	450.5	-291.2	460.1	12.00	12.00	0.00	
10,200.0	23.92	359.58	10,181.1	460.0	-291.3	469.6	12.00	12.00	0.00	
10,225.0	26.92	359.58	10,203.7	470.7	-291.4	480.3	12.00	12.00	0.00	
10,250.0	29.92	359.58	10,225.7	482.6	-291.5	492.2	12.00	12.00	0.00	
10,275.0	32.92	359.58	10,247.0	495.7	-291.6	505.3	12.00	12.00	0.00	
10,300.0	35.92	359.58	10,267.6	509.8	-291.7	519.4	12.00	12.00	0.00	
10,325.0	38.92	359.58	10,287.5	525.0	-291.8	534.6	12.00	12.00	0.00	
10,350.0	41.92	359.58	10,306.5	541.2	-291.9	550.8	12.00	12.00	0.00	
10,375.0	44.92	359.58	10,324.7	558.4	-292.0	568.0	12.00	12.00	0.00	
10,400.0	47.92	359.58	10,341.9	576.5	-292.1	586.1	12.00	12.00	0.00	
10,425.0	50.92	359.58	10,358.2	595.5	-292.3	605.0	12.00	12.00	0.00	
10,450.0	53.92	359.58	10,373.4	615.3	-292.4	624.8	12.00	12.00	0.00	
10,475.0	56.92	359.58	10,387.6	635.9	-292.6	645.4	12.00	12.00	0.00	
10,500.0	59.92	359.58	10,400.7	657.2	-292.7	666.7	12.00	12.00	0.00	
10,525.0	62.92	359.58	10,412.6	679.1	-292.9	688.6	12.00	12.00	0.00	
10,550.0	65.92	359.58	10,423.4	701.7	-293.1	711.2	12.00	12.00	0.00	
10,575.0	68.92	359.58	10,433.0	724.7	-293.2	734.3	12.00	12.00	0.00	
10,600.0	71.92	359.58	10,441.4	748.3	-293.4	757.8	12.00	12.00	0.00	
10,625.0	74.92	359.58	10,448.5	772.3	-293.6	781.8	12.00	12.00	0.00	
10,650.0	77.92	359.58	10,454.4	796.5	-293.7	806.0	12.00	12.00	0.00	
10,675.0	80.92	359.58	10,459.0	821.1	-293.9	830.6	12.00	12.00	0.00	
10,700.0	83.92	359.58	10,462.3	845.9	-294.1	855.4	12.00	12.00	0.00	
10,725.0	86.92	359.58	10,464.3	870.8	-294.3	880.3	12.00	12.00	0.00	
10,750.6	90.00	359.58	10,465.0	896.4	-294.5	905.9	12.00	12.00	0.00	
10,800.0	90.00	359.58	10,465.0	945.8	-294.8	955.2	0.00	0.00	0.00	
10,900.0	90.00	359.58	10,465.0	1,045.8	-295.6	1,055.2	0.00	0.00	0.00	
11,000.0	90.00	359.58	10,465.0	1,145.8	-296.3	1,155.2	0.00	0.00	0.00	
11,100.0	90.00	359.58	10,465.0	1,245.8	-297.0	1,255.1	0.00	0.00	0.00	
11,200.0	90.00	359.58	10,465.0	1,345.8	-297.7	1,355.1	0.00	0.00	0.00	
11,300.0	90.00	359.58	10,465.0	1,445.8	-298.5	1,455.1	0.00	0.00	0.00	
11,400.0	90.00	359.58	10,465.0	1,545.8	-299.2	1,555.0	0.00	0.00	0.00	
11,500.0	90.00	359.58	10,465.0	1,645.8	-299.9	1,655.0	0.00	0.00	0.00	
11,600.0	90.00	359.58	10,465.0	1,745.8	-300.6	1,755.0	0.00	0.00	0.00	
11,700.0	90.00	359.58	10,465.0	1,845.8	-301.4	1,854.9	0.00	0.00	0.00	
11,800.0	90.00	359.58	10,465.0	1,945.8	-302.1	1,954.9	0.00	0.00	0.00	
11,900.0	90.00	359.58	10,465.0	2,045.8	-302.8	2,054.9	0.00	0.00	0.00	
12,000.0	90.00	359.58	10,465.0	2,145.8	-303.5	2,154.8	0.00	0.00	0.00	
12,100.0	90.00	359.58	10,465.0	2,245.8	-304.3	2,254.8	0.00	0.00	0.00	
12,200.0	90.00	359.58	10,465.0	2,345.8	-305.0	2,354.8	0.00	0.00	0.00	
12,300.0	90.00	359.58	10,465.0	2,445.8	-305.7	2,454.7	0.00	0.00	0.00	
12,400.0	90.00	359.58	10,465.0	2,545.8	-306.5	2,554.7	0.00	0.00	0.00	
12,500.0	90.00	359.58	10,465.0	2,645.8	-307.2	2,654.6	0.00	0.00	0.00	
12,600.0	90.00	359.58	10,465.0	2,745.8	-307.9	2,754.6	0.00	0.00	0.00	
12,700.0	90.00	359.58	10,465.0	2,845.8	-308.6	2,854.6	0.00	0.00	0.00	
12,800.0	90.00	359.58	10,465.0	2,945.7	-309.4	2,954.5	0.00	0.00	0.00	
12,900.0	90.00	359.58	10,465.0	3,045.7	-310.1	3,054.5	0.00	0.00	0.00	
13,000.0	90.00	359.58	10,465.0	3,145.7	-310.8	3,154.5	0.00	0.00	0.00	
13,100.0	90.00	359.58	10,465.0	3,245.7	-311.5	3,254.4	0.00	0.00	0.00	
13,200.0	90.00	359.58	10,465.0	3,345.7	-312.3	3,354.4	0.00	0.00	0.00	
13,300.0	90.00	359.58	10,465.0	3,445.7	-313.0	3,454.4	0.00	0.00	0.00	
13,400.0	90.00	359.58	10,465.0	3,545.7	-313.7	3,554.3	0.00	0.00	0.00	
13,500.0	90.00	359.58	10,465.0	3,645.7	-314.4	3,654.3	0.00	0.00	0.00	
13,600.0	90.00	359.58	10,465.0	3,745.7	-315.2	3,754.3	0.00	0.00	0.00	



EOG Resources

Planning Report

Database:	EDM 5000.14	Local Co-ordinate Reference:	Well #306H
Company:	EOG Resources - Midland	TVD Reference:	kb = 25' @ 3366.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	kb = 25' @ 3366.0usft
Site:	Peachtree 25 Fed Com	North Reference:	Grid
Well:	#306H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #0.1 RT		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
13,700.0	90.00	359.58	10,465.0	3,845.7	-315.9	3,854.2	0.00	0.00	0.00	
13,800.0	90.00	359.58	10,465.0	3,945.7	-316.6	3,954.2	0.00	0.00	0.00	
13,900.0	90.00	359.58	10,465.0	4,045.7	-317.4	4,054.1	0.00	0.00	0.00	
14,000.0	90.00	359.58	10,465.0	4,145.7	-318.1	4,154.1	0.00	0.00	0.00	
14,100.0	90.00	359.58	10,465.0	4,245.7	-318.8	4,254.1	0.00	0.00	0.00	
14,200.0	90.00	359.58	10,465.0	4,345.7	-319.5	4,354.0	0.00	0.00	0.00	
14,300.0	90.00	359.58	10,465.0	4,445.7	-320.3	4,454.0	0.00	0.00	0.00	
14,400.0	90.00	359.58	10,465.0	4,545.7	-321.0	4,554.0	0.00	0.00	0.00	
14,500.0	90.00	359.58	10,465.0	4,645.7	-321.7	4,653.9	0.00	0.00	0.00	
14,600.0	90.00	359.58	10,465.0	4,745.7	-322.4	4,753.9	0.00	0.00	0.00	
14,700.0	90.00	359.58	10,465.0	4,845.7	-323.2	4,853.9	0.00	0.00	0.00	
14,800.0	90.00	359.58	10,465.0	4,945.7	-323.9	4,953.8	0.00	0.00	0.00	
14,900.0	90.00	359.58	10,465.0	5,045.7	-324.6	5,053.8	0.00	0.00	0.00	
15,000.0	90.00	359.58	10,465.0	5,145.7	-325.3	5,153.8	0.00	0.00	0.00	
15,100.0	90.00	359.58	10,465.0	5,245.7	-326.1	5,253.7	0.00	0.00	0.00	
15,200.0	90.00	359.58	10,465.0	5,345.7	-326.8	5,353.7	0.00	0.00	0.00	
15,300.0	90.00	359.58	10,465.0	5,445.7	-327.5	5,453.7	0.00	0.00	0.00	
15,400.0	90.00	359.58	10,465.0	5,545.7	-328.3	5,553.6	0.00	0.00	0.00	
15,502.3	90.00	359.58	10,465.0	5,648.0	-329.0	5,655.9	0.00	0.00	0.00	
15,502.5	90.00	359.58	10,465.0	5,648.2	-329.0	5,656.1	0.00	0.00	0.00	
15,600.0	90.00	359.58	10,465.0	5,745.7	-329.7	5,753.5	0.00	0.00	0.00	
15,700.0	90.00	359.58	10,465.0	5,845.7	-330.4	5,853.5	0.00	0.00	0.00	
15,800.0	90.00	359.58	10,465.0	5,945.7	-331.2	5,953.5	0.00	0.00	0.00	
15,900.0	90.00	359.58	10,465.0	6,045.7	-331.9	6,053.4	0.00	0.00	0.00	
16,000.0	90.00	359.58	10,465.0	6,145.7	-332.6	6,153.4	0.00	0.00	0.00	
16,100.0	90.00	359.58	10,465.0	6,245.7	-333.3	6,253.4	0.00	0.00	0.00	
16,200.0	90.00	359.58	10,465.0	6,345.7	-334.1	6,353.3	0.00	0.00	0.00	
16,300.0	90.00	359.58	10,465.0	6,445.7	-334.8	6,453.3	0.00	0.00	0.00	
16,400.0	90.00	359.58	10,465.0	6,545.7	-335.5	6,553.3	0.00	0.00	0.00	
16,500.0	90.00	359.58	10,465.0	6,645.7	-336.3	6,653.2	0.00	0.00	0.00	
16,600.0	90.00	359.58	10,465.0	6,745.6	-337.0	6,753.2	0.00	0.00	0.00	
16,700.0	90.00	359.58	10,465.0	6,845.6	-337.7	6,853.2	0.00	0.00	0.00	
16,800.0	90.00	359.58	10,465.0	6,945.6	-338.4	6,953.1	0.00	0.00	0.00	
16,900.0	90.00	359.58	10,465.0	7,045.6	-339.2	7,053.1	0.00	0.00	0.00	
17,000.0	90.00	359.58	10,465.0	7,145.6	-339.9	7,153.1	0.00	0.00	0.00	
17,100.0	90.00	359.58	10,465.0	7,245.6	-340.6	7,253.0	0.00	0.00	0.00	
17,200.0	90.00	359.58	10,465.0	7,345.6	-341.3	7,353.0	0.00	0.00	0.00	
17,300.0	90.00	359.58	10,465.0	7,445.6	-342.1	7,452.9	0.00	0.00	0.00	
17,400.0	90.00	359.58	10,465.0	7,545.6	-342.8	7,552.9	0.00	0.00	0.00	
17,500.0	90.00	359.58	10,465.0	7,645.6	-343.5	7,652.9	0.00	0.00	0.00	
17,600.0	90.00	359.58	10,465.0	7,745.6	-344.2	7,752.8	0.00	0.00	0.00	
17,700.0	90.00	359.58	10,465.0	7,845.6	-345.0	7,852.8	0.00	0.00	0.00	
17,800.0	90.00	359.58	10,465.0	7,945.6	-345.7	7,952.8	0.00	0.00	0.00	
17,900.0	90.00	359.58	10,465.0	8,045.6	-346.4	8,052.7	0.00	0.00	0.00	
18,000.0	90.00	359.58	10,465.0	8,145.6	-347.2	8,152.7	0.00	0.00	0.00	
18,100.0	90.00	359.58	10,465.0	8,245.6	-347.9	8,252.7	0.00	0.00	0.00	
18,200.0	90.00	359.58	10,465.0	8,345.6	-348.6	8,352.6	0.00	0.00	0.00	
18,300.0	90.00	359.58	10,465.0	8,445.6	-349.3	8,452.6	0.00	0.00	0.00	
18,400.0	90.00	359.58	10,465.0	8,545.6	-350.1	8,552.6	0.00	0.00	0.00	
18,500.0	90.00	359.58	10,465.0	8,645.6	-350.8	8,652.5	0.00	0.00	0.00	
18,600.0	90.00	359.58	10,465.0	8,745.6	-351.5	8,752.5	0.00	0.00	0.00	
18,700.0	90.00	359.58	10,465.0	8,845.6	-352.2	8,852.4	0.00	0.00	0.00	
18,800.0	90.00	359.58	10,465.0	8,945.6	-353.0	8,952.4	0.00	0.00	0.00	
18,900.0	90.00	359.58	10,465.0	9,045.6	-353.7	9,052.4	0.00	0.00	0.00	




EOG Resources

Planning Report

Database:	EDM 5000.14	Local Co-ordinate Reference:	Well #306H
Company:	EOG Resources - Midland	TVD Reference:	kb = 25' @ 3366.0usft
Project:	Lea County, NM (NAD 83 NME)	MD Reference:	kb = 25' @ 3366.0usft
Site:	Peachtree 25 Fed Com	North Reference:	Grid
Well:	#306H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #0.1 RT		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
19,000.0	90.00	359.58	10,465.0	9,145.6	-354.4	9,152.3	0.00	0.00	0.00	
19,100.0	90.00	359.58	10,465.0	9,245.6	-355.1	9,252.3	0.00	0.00	0.00	
19,200.0	90.00	359.58	10,465.0	9,345.6	-355.9	9,352.3	0.00	0.00	0.00	
19,300.0	90.00	359.58	10,465.0	9,445.6	-356.6	9,452.2	0.00	0.00	0.00	
19,400.0	90.00	359.58	10,465.0	9,545.6	-357.3	9,552.2	0.00	0.00	0.00	
19,500.0	90.00	359.58	10,465.0	9,645.6	-358.1	9,652.2	0.00	0.00	0.00	
19,600.0	90.00	359.58	10,465.0	9,745.6	-358.8	9,752.1	0.00	0.00	0.00	
19,700.0	90.00	359.58	10,465.0	9,845.6	-359.5	9,852.1	0.00	0.00	0.00	
19,800.0	90.00	359.58	10,465.0	9,945.6	-360.2	9,952.1	0.00	0.00	0.00	
19,900.0	90.00	359.58	10,465.0	10,045.6	-361.0	10,052.0	0.00	0.00	0.00	
20,000.0	90.00	359.58	10,465.0	10,145.6	-361.7	10,152.0	0.00	0.00	0.00	
20,100.0	90.00	359.58	10,465.0	10,245.6	-362.4	10,252.0	0.00	0.00	0.00	
20,200.0	90.00	359.58	10,465.0	10,345.6	-363.1	10,351.9	0.00	0.00	0.00	
20,300.0	90.00	359.58	10,465.0	10,445.6	-363.9	10,451.9	0.00	0.00	0.00	
20,400.0	90.00	359.58	10,465.0	10,545.5	-364.6	10,551.8	0.00	0.00	0.00	
20,500.0	90.00	359.58	10,465.0	10,645.5	-365.3	10,651.8	0.00	0.00	0.00	
20,600.0	90.00	359.58	10,465.0	10,745.5	-366.0	10,751.8	0.00	0.00	0.00	
20,681.5	90.00	359.58	10,465.0	10,827.0	-367.0	10,833.2	0.00	0.00	0.00	

Design Targets										
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
KOP(Peachtree 25 Fed - plan hits target center - Point	0.00	0.00	9,987.5	419.0	-291.0	372,596.00	789,211.00	32.0218246°N	103.5335326°W	
FTP(Peachtree 25 Fed - plan misses target center by 0.4usft at 10221.1usft MD (10200.2 TVD, 469.0 N, -291.4 E) - Point	0.00	0.00	10,200.2	469.0	-291.0	372,646.00	789,211.00	32.0219620°N	103.5335314°W	
Fed Perf 1(Peachtree 25 Fed - plan hits target center - Point	0.00	0.00	10,465.0	5,648.0	-329.0	377,825.00	789,173.00	32.0361984°N	103.5335303°W	
PBHL(Peachtree 25 Fed - plan hits target center - Point	0.00	0.00	10,465.0	10,827.0	-367.0	383,004.00	789,135.00	32.0504348°N	103.5335291°W	

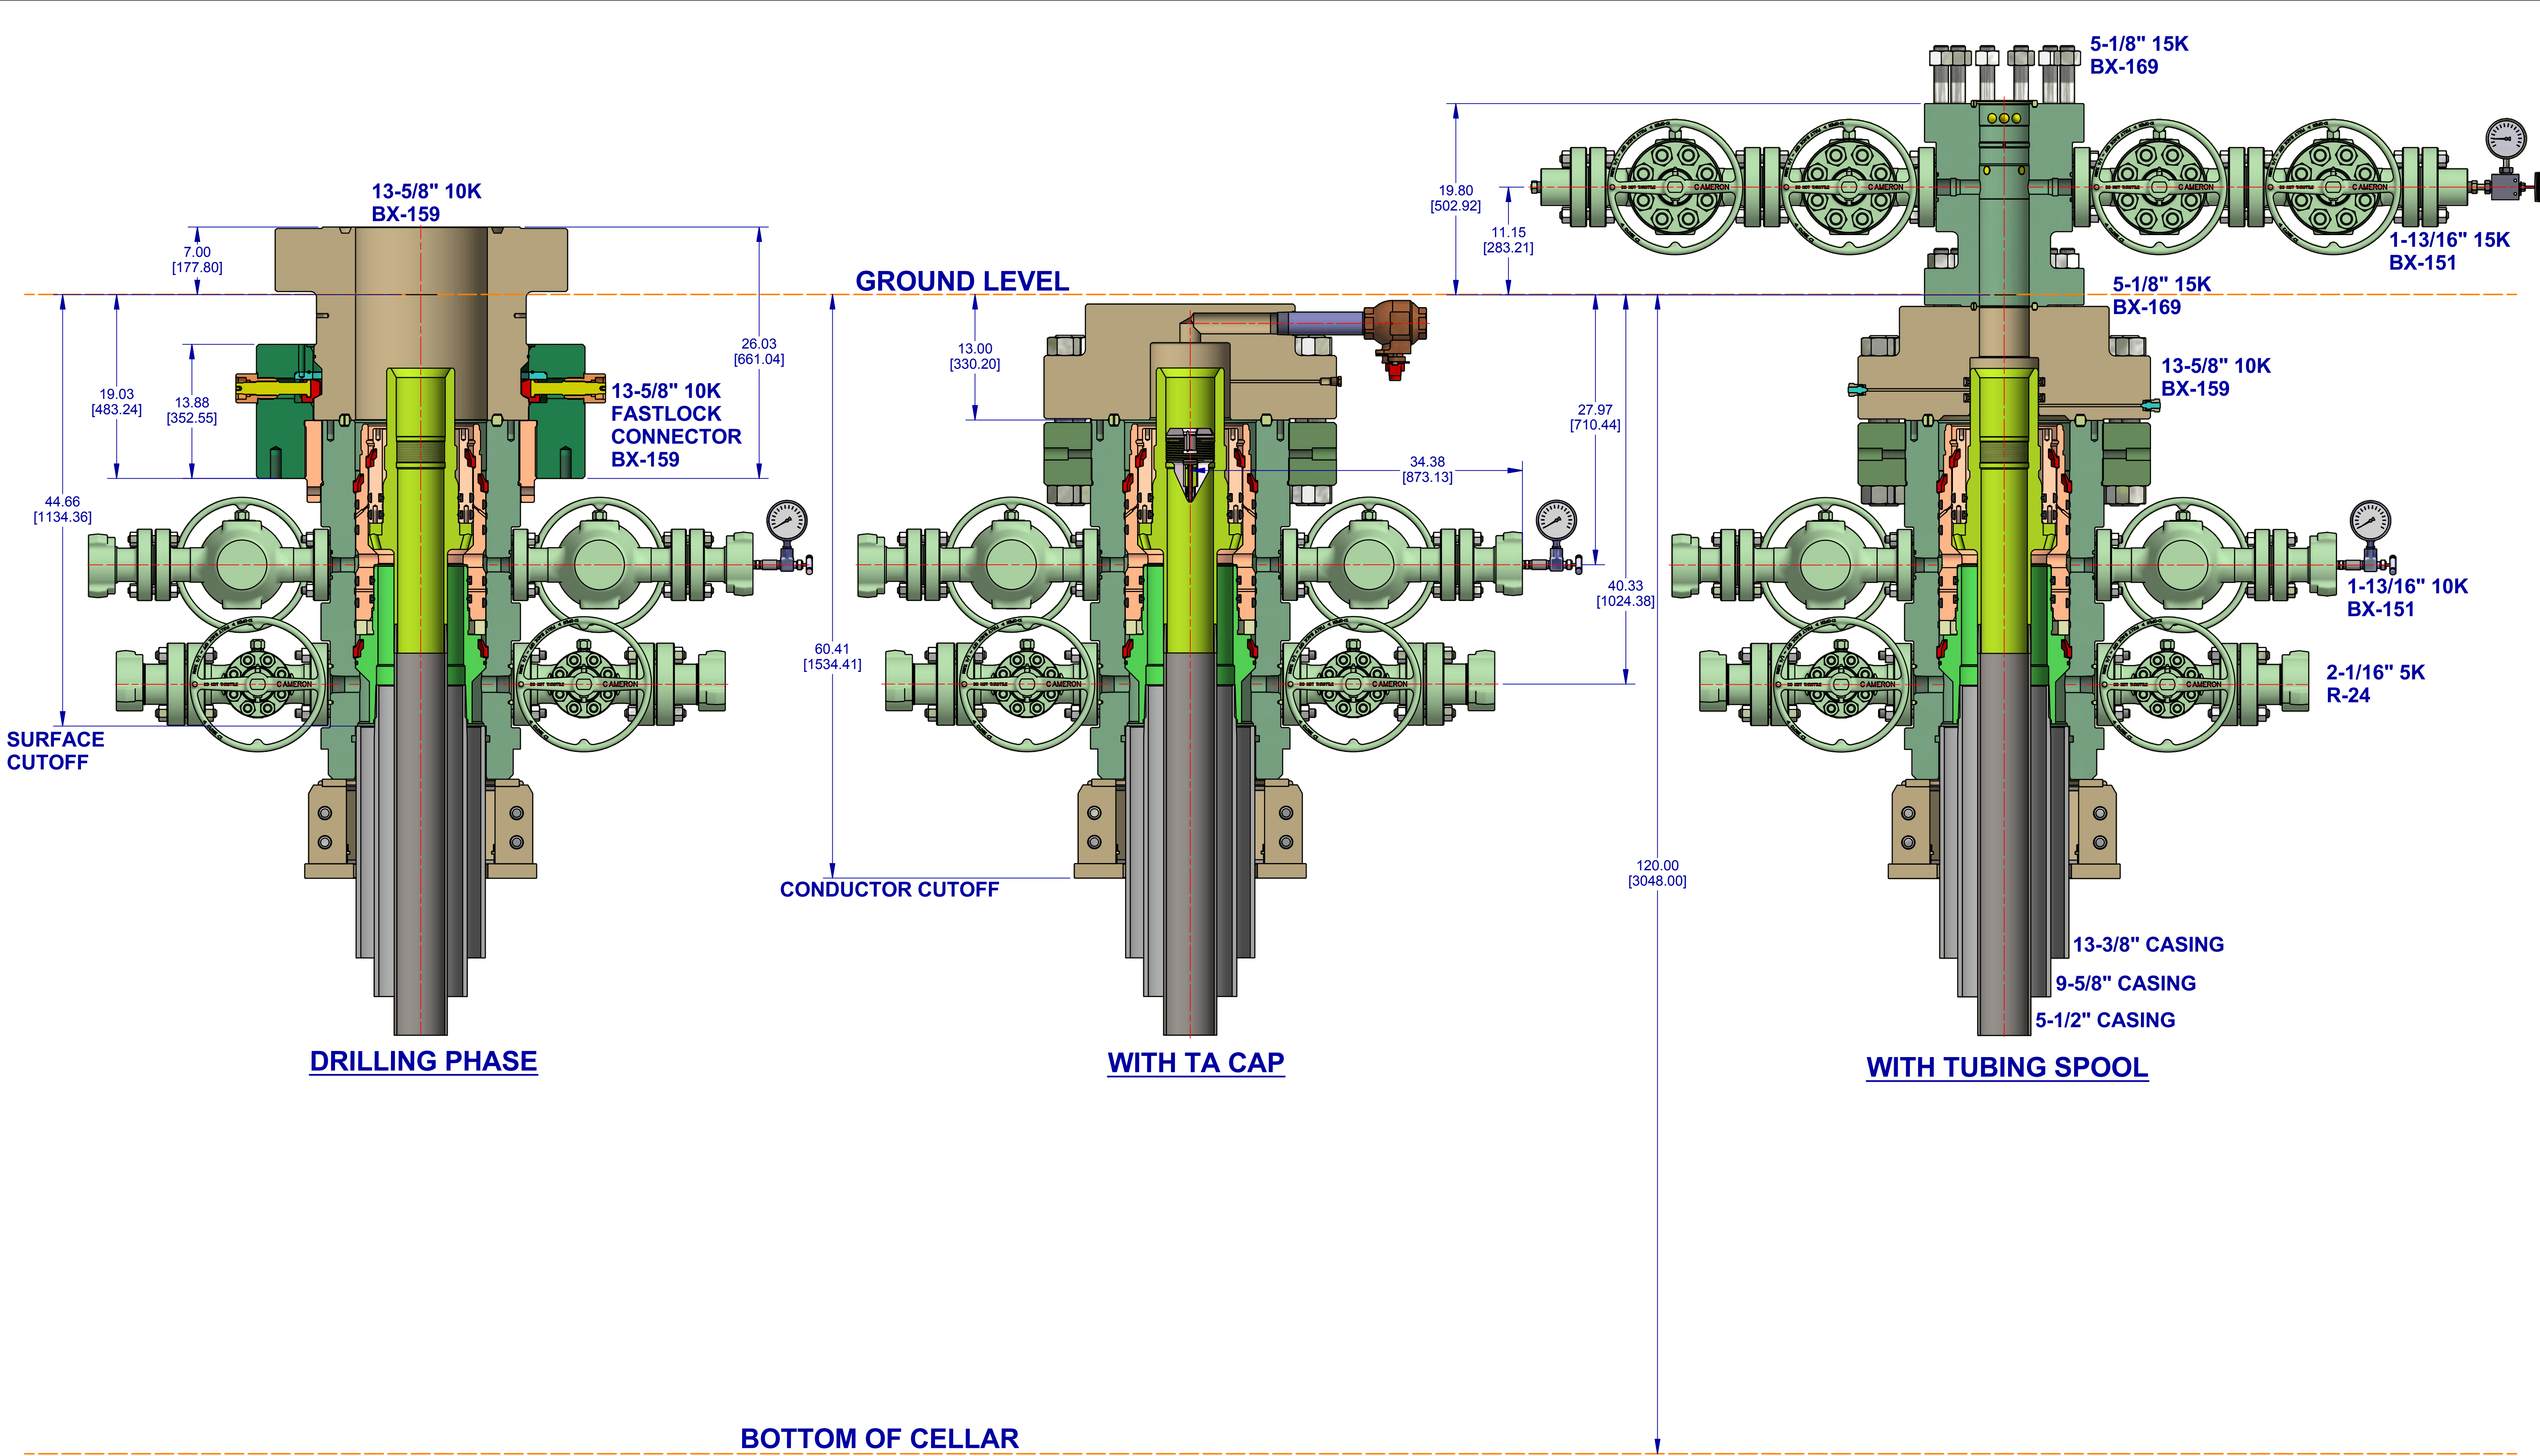




CONFIDENTIAL									
 THIRD ANGLE	DESIGNED IN INCHES DIMENSIONAL UNITS INCHES [MILLIMETERS]	MACHINING TOLERANCES UNLESS OTHERWISE SPECIFIED X [D.] ± = [] ANGLES ± ° ✓ RA ON ALL MACHINED SURFACES		SURFACE TREATMENT		DO NOT SCALE		 CAMERON A Schlumberger Company	SURFACE SYSTEMS
				MATERIAL & HEAT TREAT		DRAWN BY: KEN REED	DATE 6 Nov 18		
				CHECKED BY: PA		DATE 6 Nov 18	DATE 6 Nov 18		
				APPROVED BY: APPROVER NAME		DATE 6 Nov 18			
MACHINED FILLET RADII .015-.050 [0.38-1.27]. BREAK ALL SHARP EDGES .01-.03 [0.2-0.8] RADII OR 45°. SURFACE FINISH IN MICRO (μ) INCHES (Ra). INTERPRET DRAWING PER ASME Y14.5, ASME Y14.36, AND AWS A2.4 STANDARDS. SEE BIM FOR MATERIAL AND SPECIAL REQUIREMENTS. ITEM NUMBERS NOT APPEARING ON BIM DO NOT APPLY.					8147.2 LBS INITIAL USE BIM: 3695.5 KG EWR:650353762		EOG RESOURCES, INC 13-5/8" 10K MN-DS WELLHEAD 13-3/8" X 9-5/8" X 5-1/2"		
					ESTIMATED WEIGHT:		SHEET 1 OF 1		REV 01

Exhibit 4
EOG Resources
Peachtree 25 Fed Com #306H

Well Site Diagram

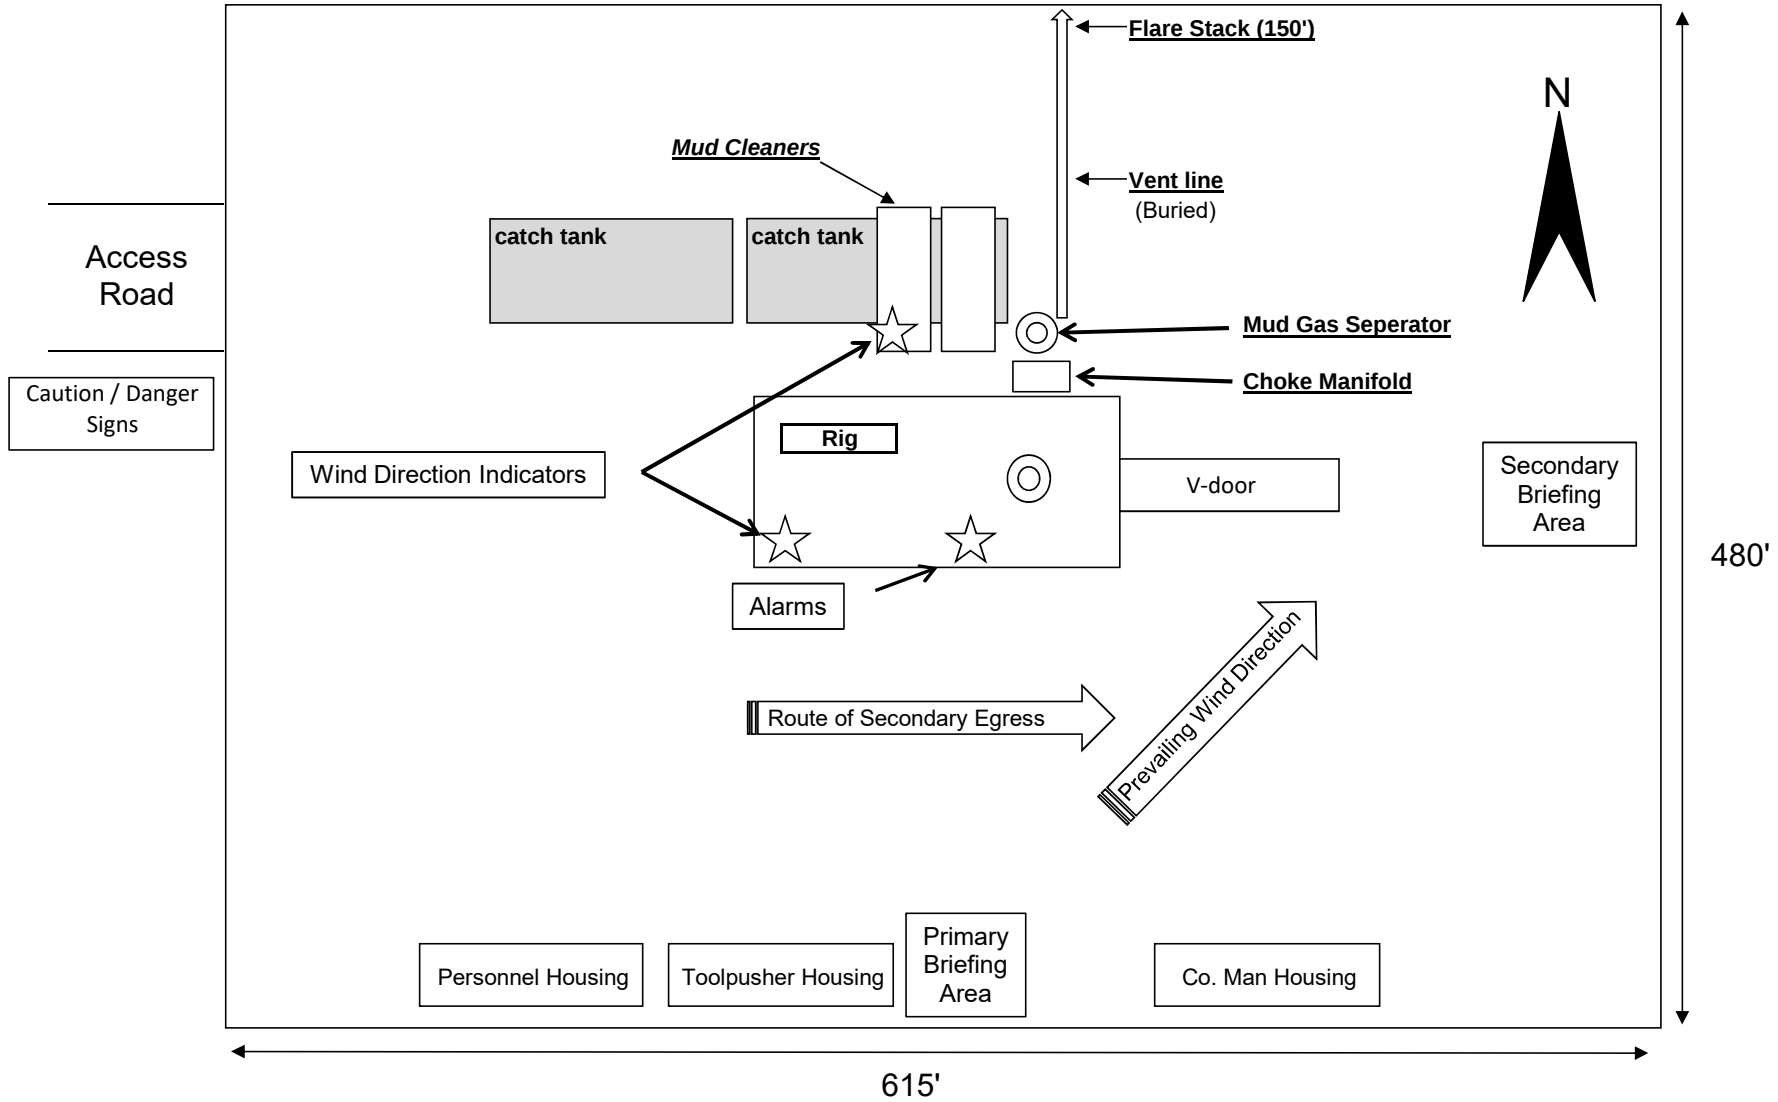

**EOG RESOURCES, INC.
PEACHTREE 25 FED COM #306H**

1. GEOLOGIC NAME OF SURFACE FORMATION:

Permian

2. ESTIMATED TOPS OF IMPORTANT GEOLOGICAL MARKERS:

Rustler	1,015'
Tamarisk Anhydrite	1,100'
Top of Salt	1,370'
Base of Salt	5,015'
Lamar	5,245'
Bell Canyon	5,275'
Cherry Canyon	6,320'
Brushy Canyon	8,100'
Bone Spring Lime	9,480'
Leonard Shale	9,520'
1 st Bone Spring Sand	10,420'
TD	10,465'

3. ESTIMATED DEPTHS OF ANTICIPATED FRESH WATER, OIL OR GAS:

Upper Permian Sands	0- 400'	Fresh Water
Cherry Canyon	6,320'	Oil
Brushy Canyon	8,100'	Oil
Leonard Shale	9,520'	Oil
1 st Bone Spring Sand	10,420'	Oil

No other Formations are expected to give up oil, gas or fresh water in measurable quantities. Surface fresh water sands will be protected by setting 13.375" casing at 1,040' and circulating cement back to surface.

**EOG RESOURCES, INC.
PEACHTREE 25 FED COM #306H**

4. CASING PROGRAM - NEW

Hole Size	Interval	Csg OD	Weight	Grade	Conn	DF _{min} Collapse	DF _{min} Burst	DF _{min} Tension
17.5"	0' – 1,040'	13.375"	54.5#	J-55	STC	1.125	1.25	1.60
12.25"	0' – 4,000'	9.625"	40#	J-55	LTC	1.125	1.25	1.60
12.25"	4,000' – 5,115'	9.625"	40#	HCK-55	LTC	1.125	1.25	1.60
8.75"	0' – 10,750'	5.5"	17#	HCP-110	LTC	1.125	1.25	1.60
8.5"	10,750' – 20,682''	5.5"	17#	HCP-110	LTC	1.125	1.25	1.60

Variance is requested to waive the centralizer requirements for the 9-5/8" casing in the 12-1/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 12-1/4" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive any centralizer requirements for the 5-1/2" casing in the 8-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 8-3/4" hole interval to maximize cement bond and zonal isolation.

Cementing Program:

Depth	No. Sacks	Wt. ppg	Yld Ft ³ /sk	Slurry Description
1,040'	435	13.5	1.73	Lead: Class C + 4.0% Bentonite + 0.5% CaCl ₂ + 0.25 lb/sk Cello-Flake (TOC @ Surface)
	129	14.8	1.34	Tail: Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate (TOC @ 840')
5,115'	725	12.7	2.22	Lead: Class C + 10% NaCl + 6% Bentonite Gel + 3% MagOx (TOC @ Surface)
	303	14.8	1.32	Tail: Class C + 10% NaCl + 3% MagOx (TOC @ 4,092')
20,682''	525	11.0	3.21	Lead: Class C + 3% CaCl ₂ + 3% Microbond (TOC @ 4,615')
	2,567	14.4	1.2	Tail: Class H + 0.4% Halad-344 + 0.35% HR-601 + 3% Microbond (TOC @ 10,001')

**EOG RESOURCES, INC.
PEACHTREE 25 FED COM #306H**

Additive	Purpose
Bentonite Gel	Lightweight/Lost circulation prevention
Calcium Chloride	Accelerator
Cello-flake	Lost circulation prevention
Sodium Metasilicate	Accelerator
MagOx	Expansive agent
Sodium Chloride	Accelerator
FL-62	Fluid loss control
Halad-344	Fluid loss control
Halad-9	Fluid loss control
HR-601	Retarder
Microbond	Expansive Agent

Cement integrity tests will be performed immediately following plug bump.

Note: Cement volumes based on bit size plus at least 25% excess in the open hole plus 10% excess in the cased-hole overlap section.

5. MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:

Variance is requested to use a co-flex line between the BOP and choke manifold (instead of using a 4" OD steel line).

The minimum blowout preventer equipment (BOPE) shown in Exhibit #1 will consist of a single ram, mud cross and double ram-type (10,000 psi WP) preventer and an annular preventer (5,000-psi WP). Both units will be hydraulically operated and the ram-type will be equipped with blind rams on bottom and drill pipe rams on top. All BOPE will be tested in accordance with Onshore Oil & Gas order No. 2.

EOG will utilize wing unions on BOPE connections that can be isolated from wellbore pressure through means of a choke. All wing unions will be rated to a pressure that meets or exceeds the pressure rating of the BOPE system.

Variance is requested to use a 5,000 psi annular BOP with the 10,000 psi BOP stack.

Before drilling out of the surface casing, the ram-type BOP and accessory equipment will be tested to 10,000/ 250 psig and the annular preventer to 5,000/ 250 psig.

Pipe rams and blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

A hydraulically operated choke will be installed prior to drilling out of the intermediate casing shoe.

**EOG RESOURCES, INC.
PEACHTREE 25 FED COM #306H**

6. TYPES AND CHARACTERISTICS OF THE PROPOSED MUD SYSTEM:

During this procedure we plan to use a Closed-Loop System and haul contents to the required disposal.

The applicable depths and properties of the drilling fluid systems are as follows.

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 – 1,040'	Fresh - Gel	8.6-8.8	28-34	N/c
1,040' – 5,115'	Brine	8.6-8.8	28-34	N/c
5,115' – 20,682''	Oil Base	8.8-9.5	58-68	N/c - 6

An electronic pit volume totalizer (PVT) will be utilized on the circulating system, to monitor pit volume, flow rate, pump pressure and stroke rate.

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept at the wellsite at all times.

7. AUXILIARY WELL CONTROL AND MONITORING EQUIPMENT:

- (A) A kelly cock will be kept in the drill string at all times.
- (B) A full opening drill pipe-stabbing valve (inside BOP) with proper drill pipe connections will be on the rig floor at all times.
- (C) H₂S monitoring and detection equipment will be utilized from surface casing point to TD.

8. LOGGING, TESTING AND CORING PROGRAM:

Open-hole logs are not planned for this well.

GR-CCL Will be run in cased hole during completions phase of operations.

9. ABNORMAL CONDITIONS, PRESSURES, TEMPERATURES AND POTENTIAL HAZARDS:

The estimated bottom-hole temperature (BHT) at TD is 175 degrees F with an estimated maximum bottom-hole pressure (BHP) at TD of 5,170 psig and a maximum anticipated surface pressure of 2,867 psig (based on 9.5 ppg MW). No hydrogen sulfide or other hazardous gases or fluids have been encountered, reported or are known to exist at this depth in this area. Severe loss circulation is expected from 8,100' to TD.

**EOG RESOURCES, INC.
PEACHTREE 25 FED COM #306H**

10. ANTICIPATED STARTING DATE AND DURATION OF OPERATIONS:

The drilling operation should be finished in approximately one month. If the well is productive, an additional 60-90 days will be required for completion and testing before a decision is made to install permanent facilities.

(A) EOG Resources requests the option to contract a Surface Rig to drill, set surface casing, and cement on the subject well. After WOC 8 hours or 500 psi compressive strength (whichever is greater), the Surface Rig will move off so the wellhead can be installed. A welder will cut the casing to the proper height and weld on the wellhead (both "A" and "B" sections). The weld will be tested to 1000 psi. All valves will be closed and a wellhead cap will be installed (diagram attached). If the timing between rigs is such that EOG Resources would not be able to preset the surface, the Primary Rig will MIRU and drill the well in its entirety per the APD.

11. WELLHEAD:

A multi-bowl wellhead system will be utilized.

After running the 13-3/8" surface casing, a 13-3/8" BOP/BOPE system with a minimum working pressure of 10,000 psi will be installed on the wellhead system and will be pressure tested to 250 psi low followed by a 10,000 psi pressure test. This pressure test will be repeated at least every 30 days, as per Onshore Order No. 2

The minimum working pressure of the BOP and related BOPE required for drilling below the surface casing shoe shall be 10,000 psi.

The multi-bowl wellhead will be installed by vendor's representative(s). A copy of the installation instructions for the Cameron Multi-Bowl WH system has been sent to the NM BLM office in Carlsbad, NM.

The wellhead will be installed by a third party welder while being monitored by WH vendor's representative.

All BOP equipment will be tested utilizing a conventional test plug. Not a cup or J-packer type. EOG Resources reserves the option to conduct BOPE testing during wait on cement periods provided a test plug is utilized.

A solid steel body pack-off will be utilized after running and cementing the intermediate casing. After installation the pack-off and lower flange will be pressure tested to 5000 psi.

Casing strings will be tested as per Onshore Order No. 2 to at least 0.22 psi/ft or 1500 psi, whichever is greater.

EOG RESOURCES, INC.
PEACHTREE 25 FED COM #306H

370' FNL
618' FWL
Section 25
T-26-S, R-33-E

Proposed Wellbore

KB: 3,366'
GL: 3,341'

API: 30-025-*****


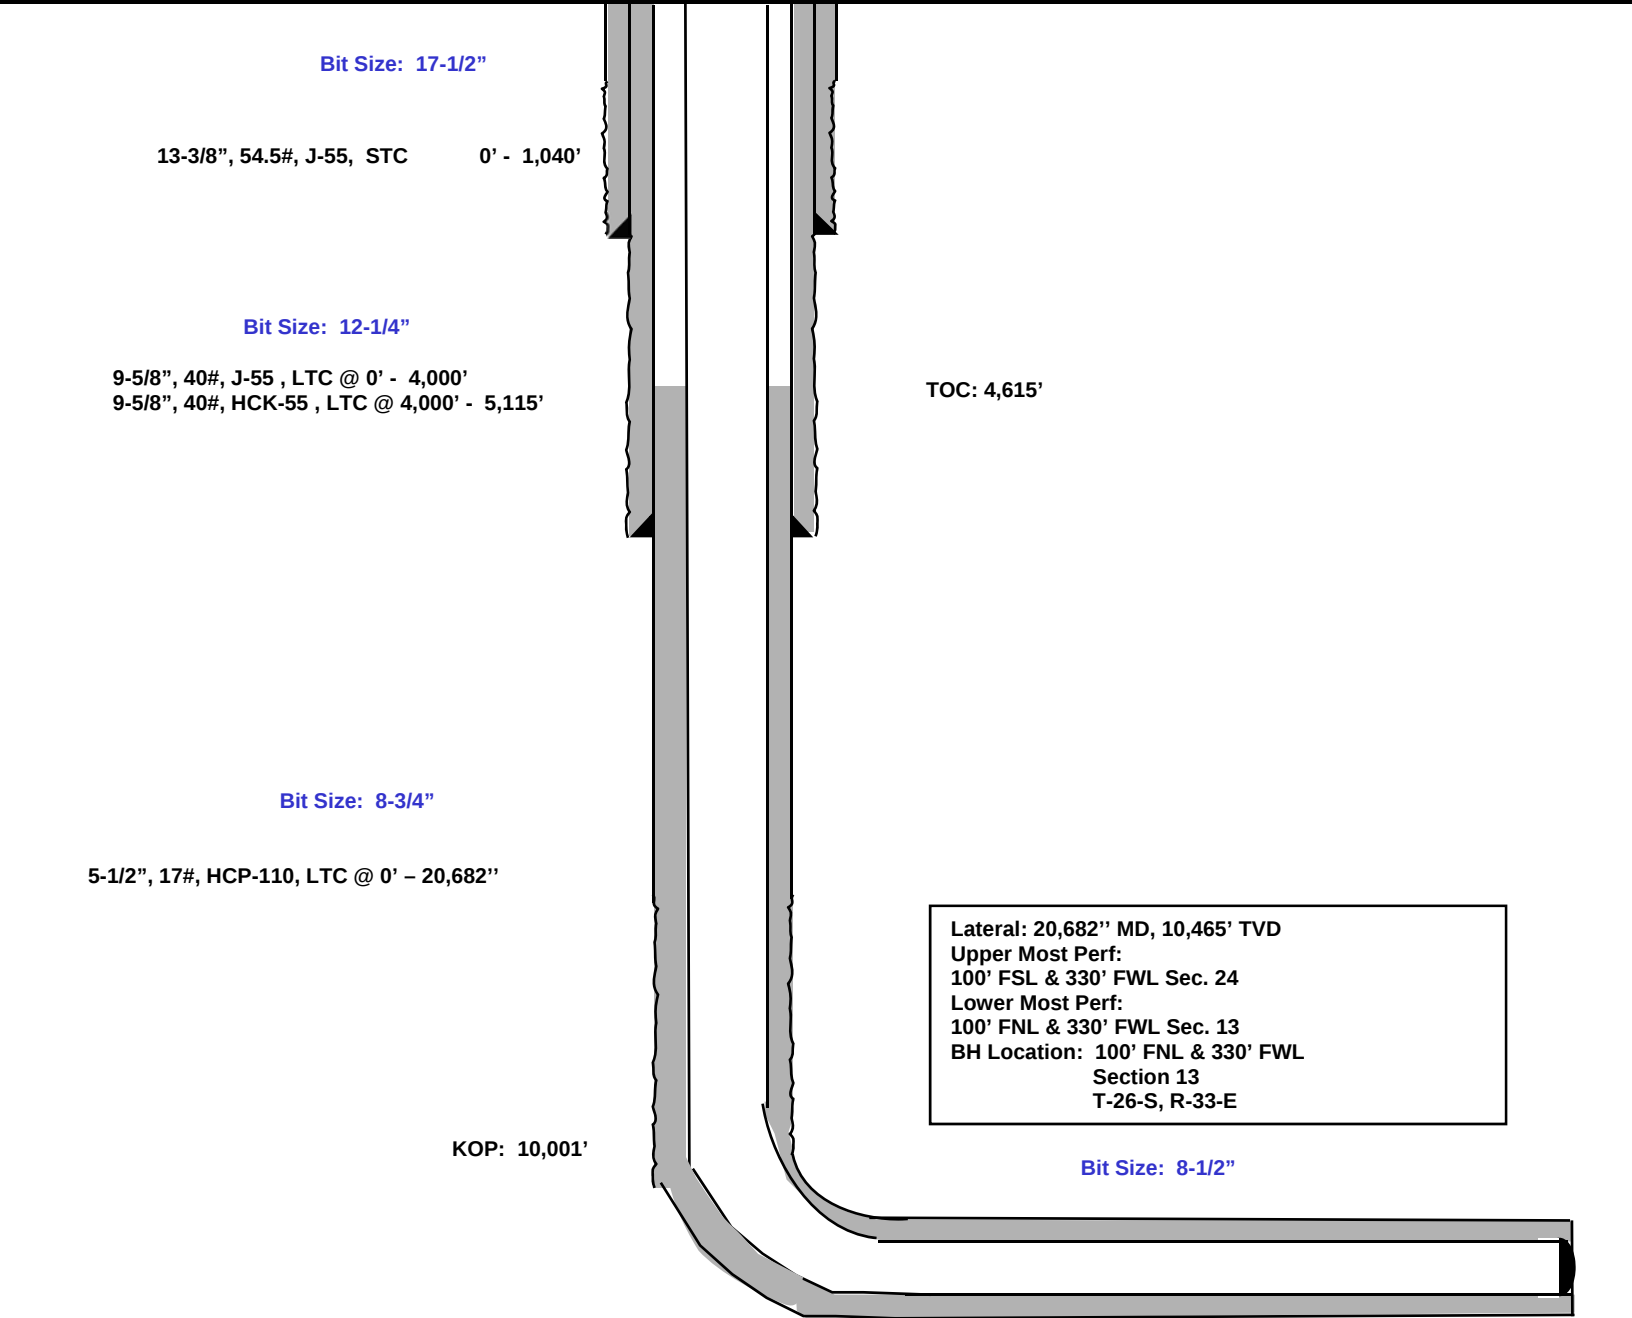


Exhibit 1

EOG Resources

13-5/8" 10M PSI BOP Stack

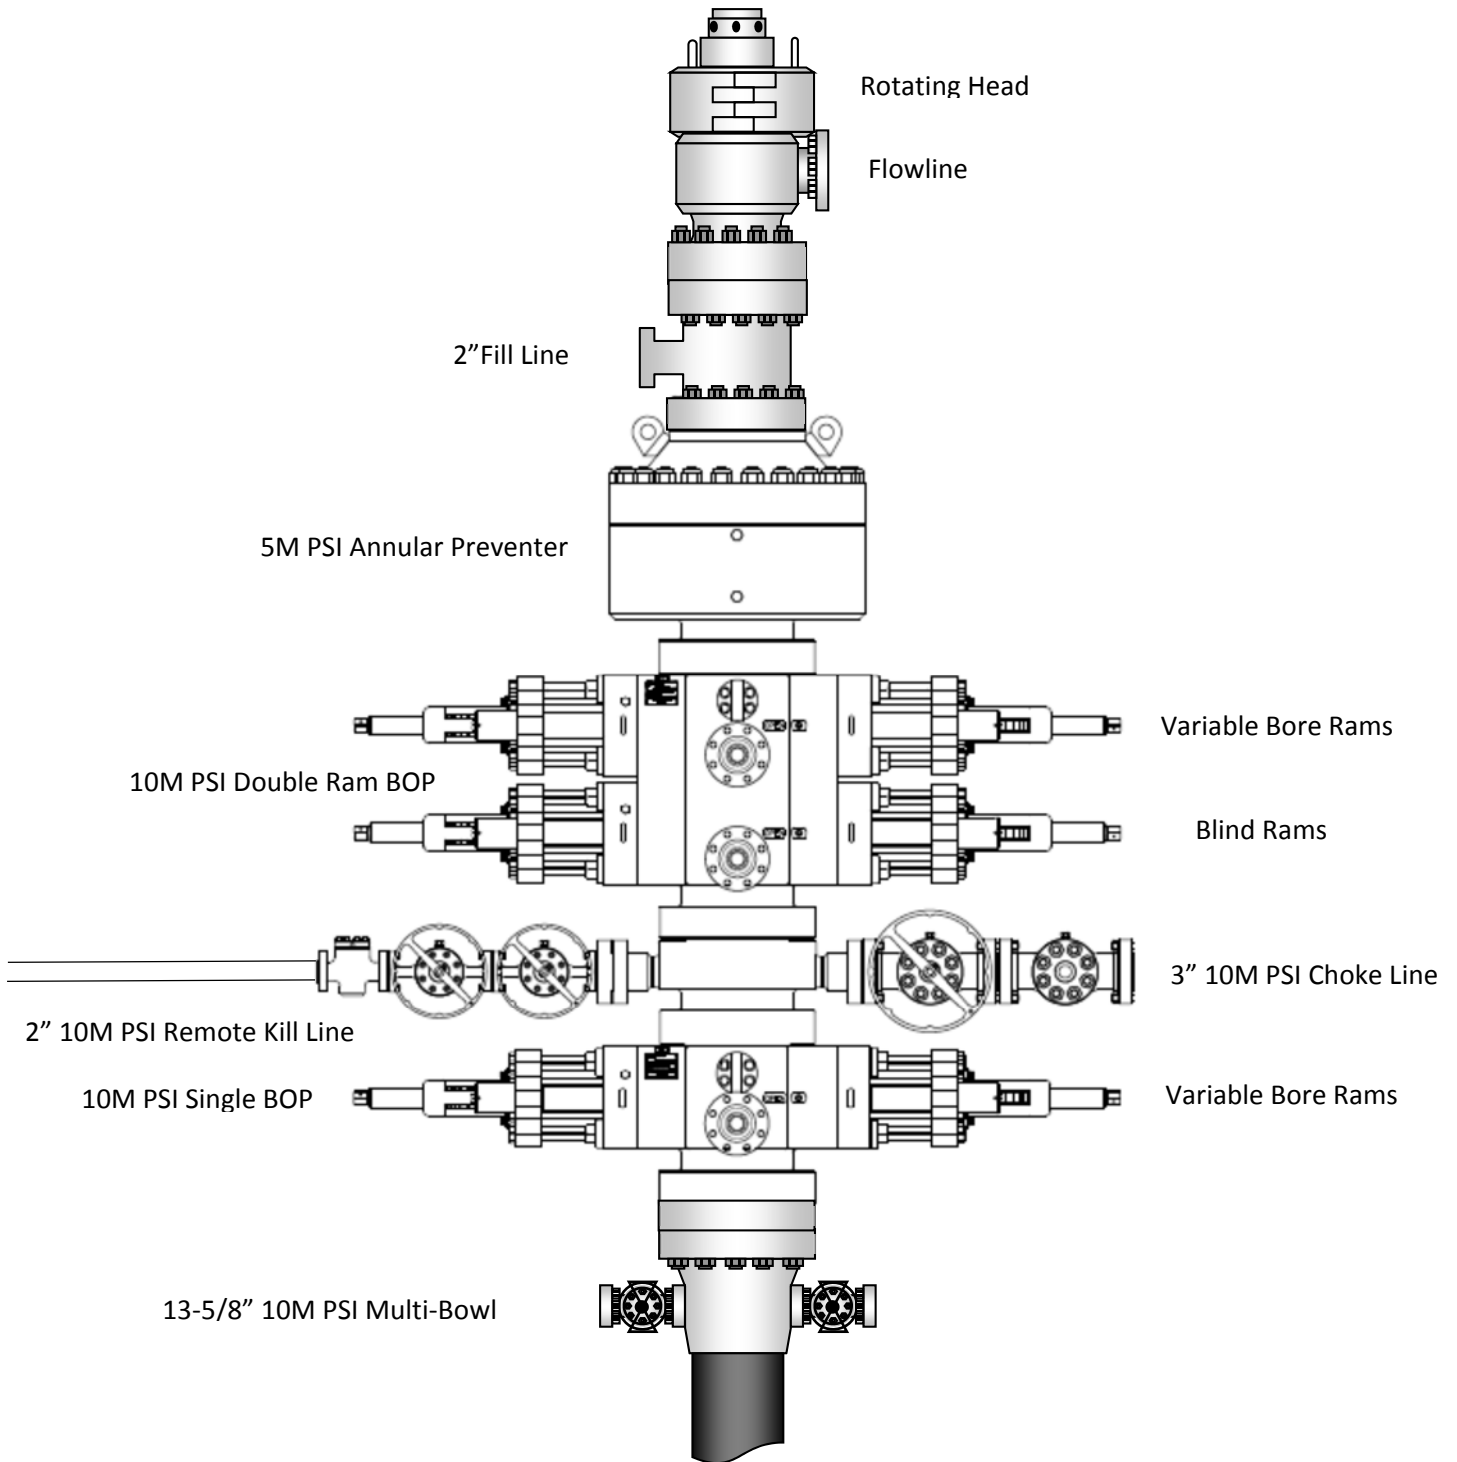

Hose Inspection Report

ContiTech Oil & Marine

Customer	Customer Reference #	CBC Reference #	CBC Inspector	Date of Inspection
H&P Drilling	740021604	COM906112	A. Jaimes	10/17/2016

Hose Manufacturer	Contitech Rubber Industrial
-------------------	-----------------------------

Hose Serial #	62429	Date of Manufacture	05/2012
Hose I.D.	3"	Working Pressure	10000PSI
Hose Type	Choke and Kill	Test Pressure	15000PSI
Manufacturing Standard	API 16C		

Connections

End A: 3.1/16" 10Kpsi API Spec 6A Type 6BX Flange	End B: 3.1/16" 10Kpsi API Spec 6A Type 6BX Flange
• No damage	• No damage
Material: Carbon Steel	Material: Carbon Steel
Seal Face: BX154	Seal Face: BX154
Length Before Hydro Test: 16'	Length After Hydro test: 16'

Conclusion: Hose #62429 passed the external inspection with no notable damages to the hose armor. Internal borescope of the hose showed no damage to the hose liner. Hose #62429 passed the hydrostatic pressure test by holding a pressure of 15,000PSI for 60 minutes. Hose #62429 is suitable for continued service.

Recommendations: In general the hose should be inspected on a regular on-going basis. The frequency and degree of the inspection should as a minimum follow these guidelines:


Visual inspection: Every 3 months (or during installation/removal)
 Annual: In-situ pressure test
 Initial 5 years service: Major inspection
 2nd Major inspection: 8 / 10 years of service
 (Detailed description of test regime available upon request, ISS-059 Rev 04)

****NOTE:** There are a number of critical elements in the hose that cannot be thoroughly checked through standard inspection techniques. Away from dissecting the hose body, the best way to evaluate the condition of the hose is through review of the operating conditions recorded during the hose service life, in particular maximums and peak conditions.

Issued By: Alejandro Jaimes
 Date: 10/25/2016

Checked By: Jeremy Mckay
 Date: 10/25/2016
 QF97

Page 1 of 1

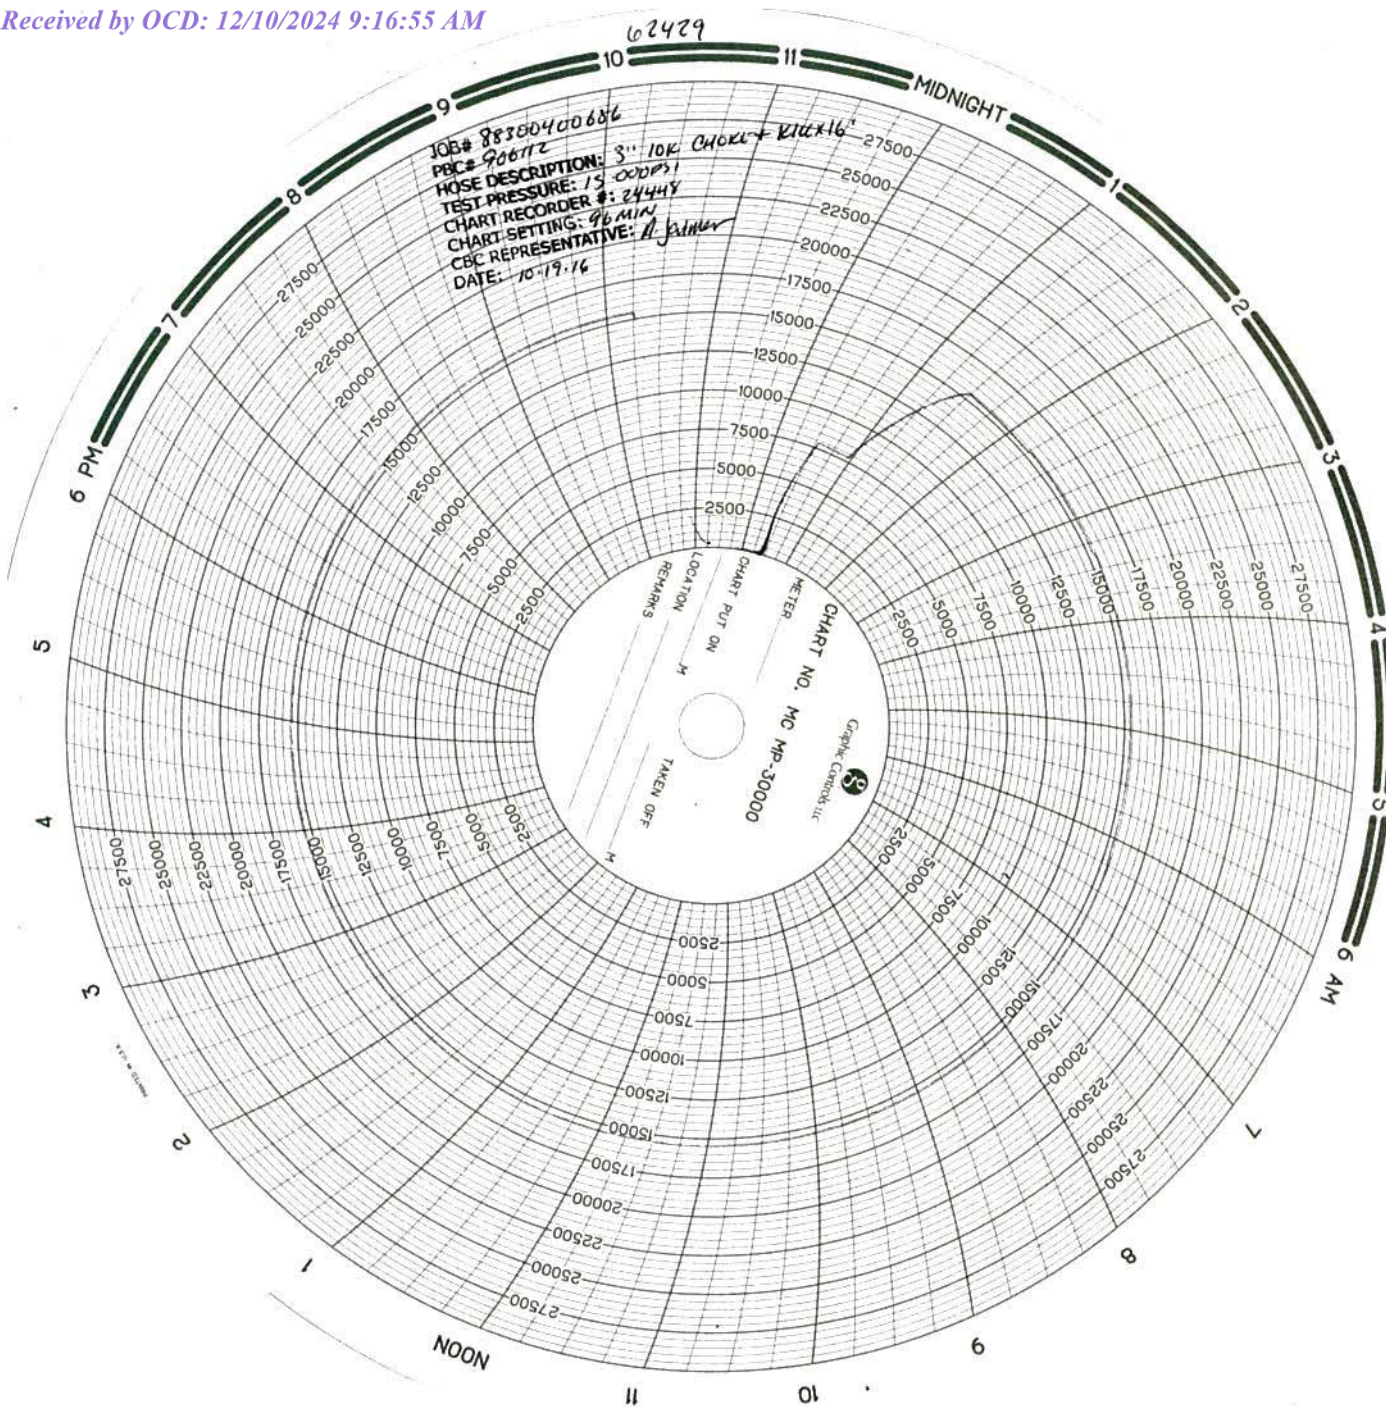

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	EOG Resources Inc
WELL NAME & NO.:	Peachtree 25 Fed Com 306H
SURFACE HOLE FOOTAGE:	370'N & 618'W
BOTTOM HOLE FOOTAGE:	100'N & 330'W
LOCATION:	Section 25 T. 26 S., R. 33 E.
COUNTY:	Lea County, New Mexico

COA

H2S	☒ Yes	☐ No	
Potash	☒ None	☐ Secretary	☐ R-111-P
Cave/Karst Potential	☐ Low	☒ Medium	☐ High
Cave/Karst Potential	☐ Critical		
Variance	☐ None	☒ Flex Hose	☐ Other
Wellhead	☐ Conventional	☒ Multibowl	☐ Both
Wellhead Variance	☐ Diverter		
Other	☐ 4 String	☐ Capitan Reef	☐ WIPP
Other	☐ Fluid Filled	☐ Pilot Hole	☐ Open Annulus
Cementing	☐ Contingency Cement Squeeze	☐ EchoMeter	☐ Primary Cement Squeeze
Special Requirements	☐ Water Disposal	☒ COM	☐ Unit
Special Requirements	☐ Batch Sundry		
Special Requirements Variance	☐ Break Testing	☐ Offline Cementing	☐ Casing Clearance

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H2S) Drilling Plan shall be activated AT SPUD. As a result, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING

Primary Casing Design:

1. The 13-3/8 inch surface casing shall be set at approximately **1,040** feet (a minimum of 25 feet (Lea County) into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface.

- a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The **9-5/8** inch intermediate casing shall be set at approximately **5,115** feet. The minimum required fill of cement behind the **9-5/8** inch intermediate casing is:

Option 1 (Single Stage):

- Cement to surface. If cement does not circulate see B.1.a, c-d above.

Option 2:

Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.

- a. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
 - b. Second stage above DV tool:
 - Cement to surface. If cement does not circulate, contact the appropriate BLM office.
- ❖ In Medium Cave/Karst Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.
3. The **5-1/2** inch production casing shall be set at approximately **20,681** feet. The minimum required fill of cement behind the **5-1/2** inch production casing is:

Option 1 (Single Stage):

- Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

Option 2:

Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.

- a. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
- b. Second stage above DV tool:
 - Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **10,000 (10M) psi. Variance is approved to use a 5000 (5M) Annular which shall be tested to 3500 (70% Working Pressure) psi.**
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- The operator will submit an as-drilled survey well plat of the well completion, but are not limited to, those specified in Onshore Order 1 and 43 CFR part 3170 Subpart 3172.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

EMAIL or call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,

BLM_NM_CFO_DrillingNotifications@BLM.GOV

(575) 361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240,
(575) 689-5981

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure

- rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
- b. When the operator proposes to set surface casing with Spudder Rig
- Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per **43 CFR part 3170 Subpart 3172** as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.

4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR part 3170 Subpart 3172** and **API STD 53 Sec. 5.3**.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:

- a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in **43 CFR part 3170 Subpart 3172** must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (only applies to single stage cement jobs, prior to the cement setting up.)
 - c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR part 3170 Subpart 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
 - d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE.

If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.

- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per **43 CFR part 3170 Subpart 3172**.

C. DRILLING MUD





Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

KPI 9/12/2023

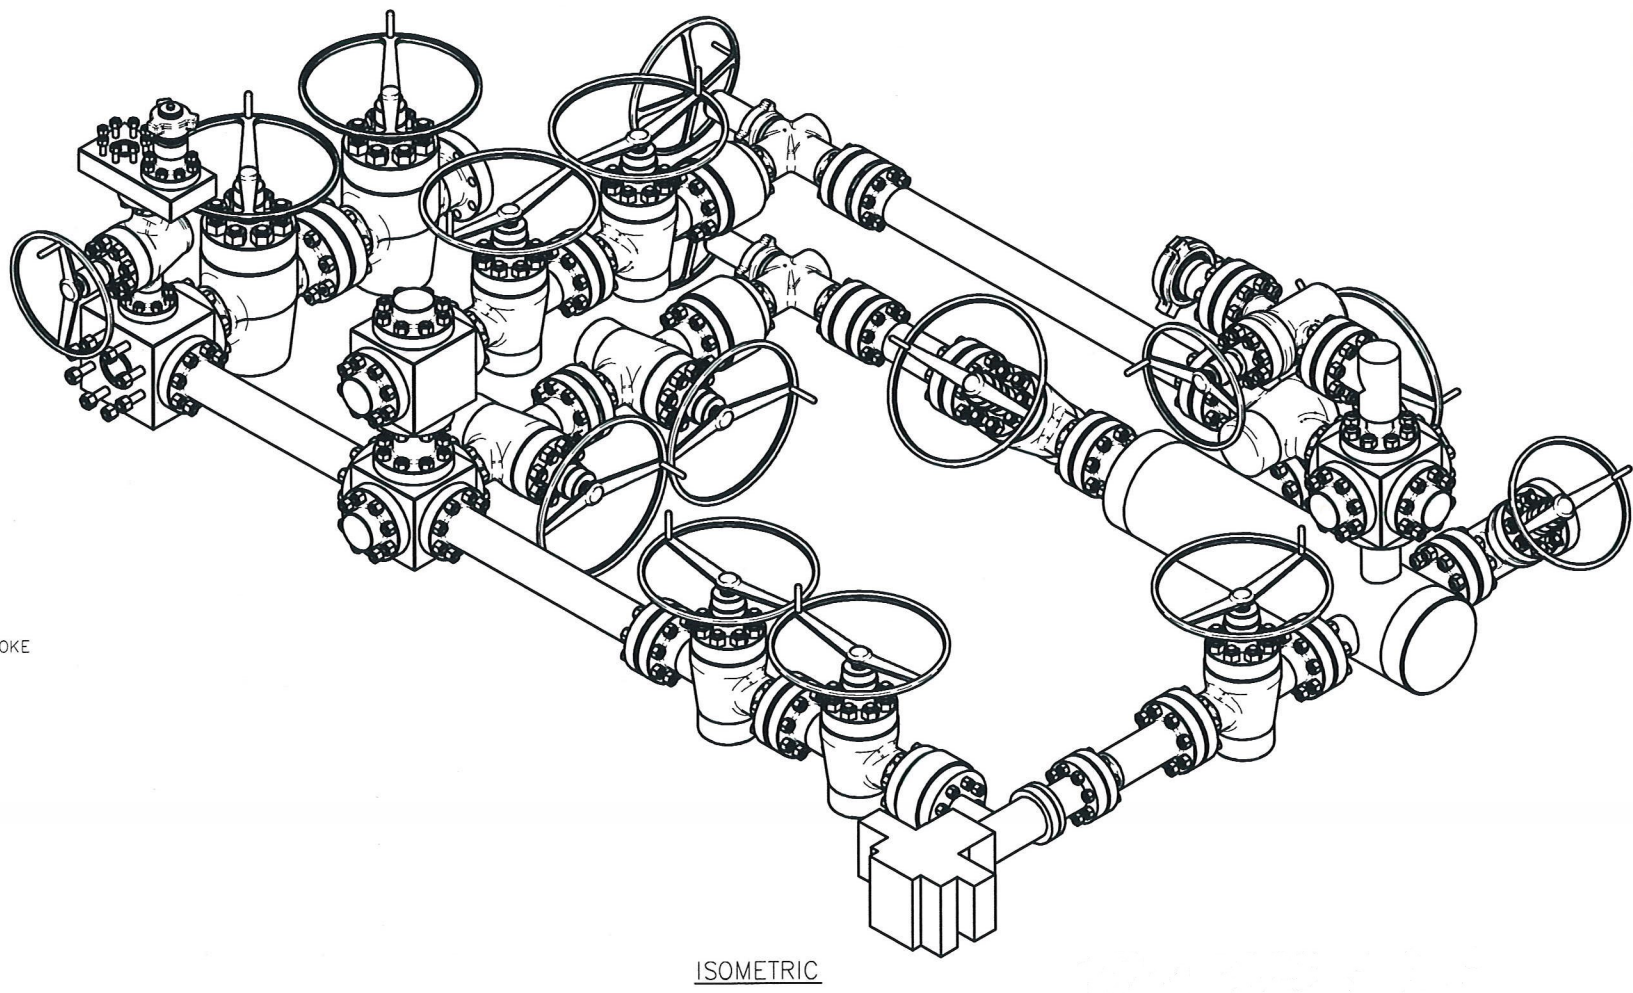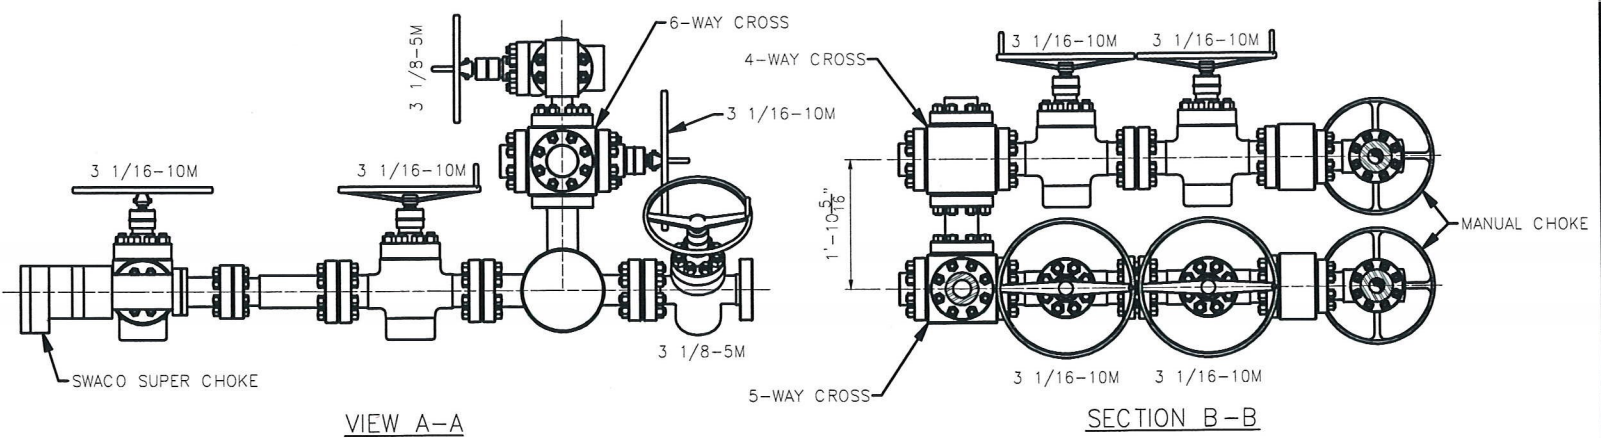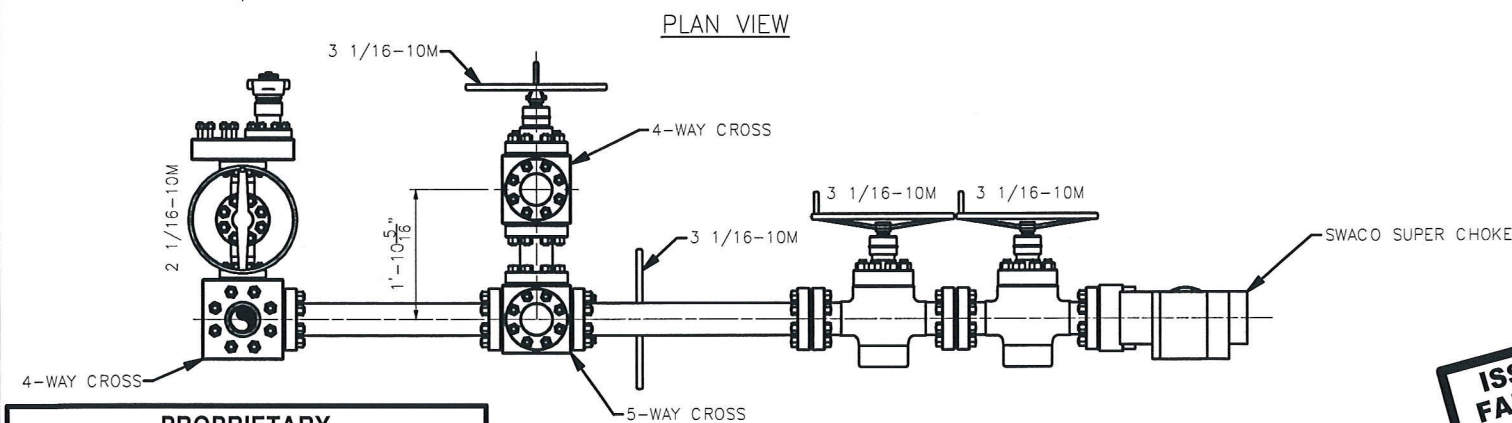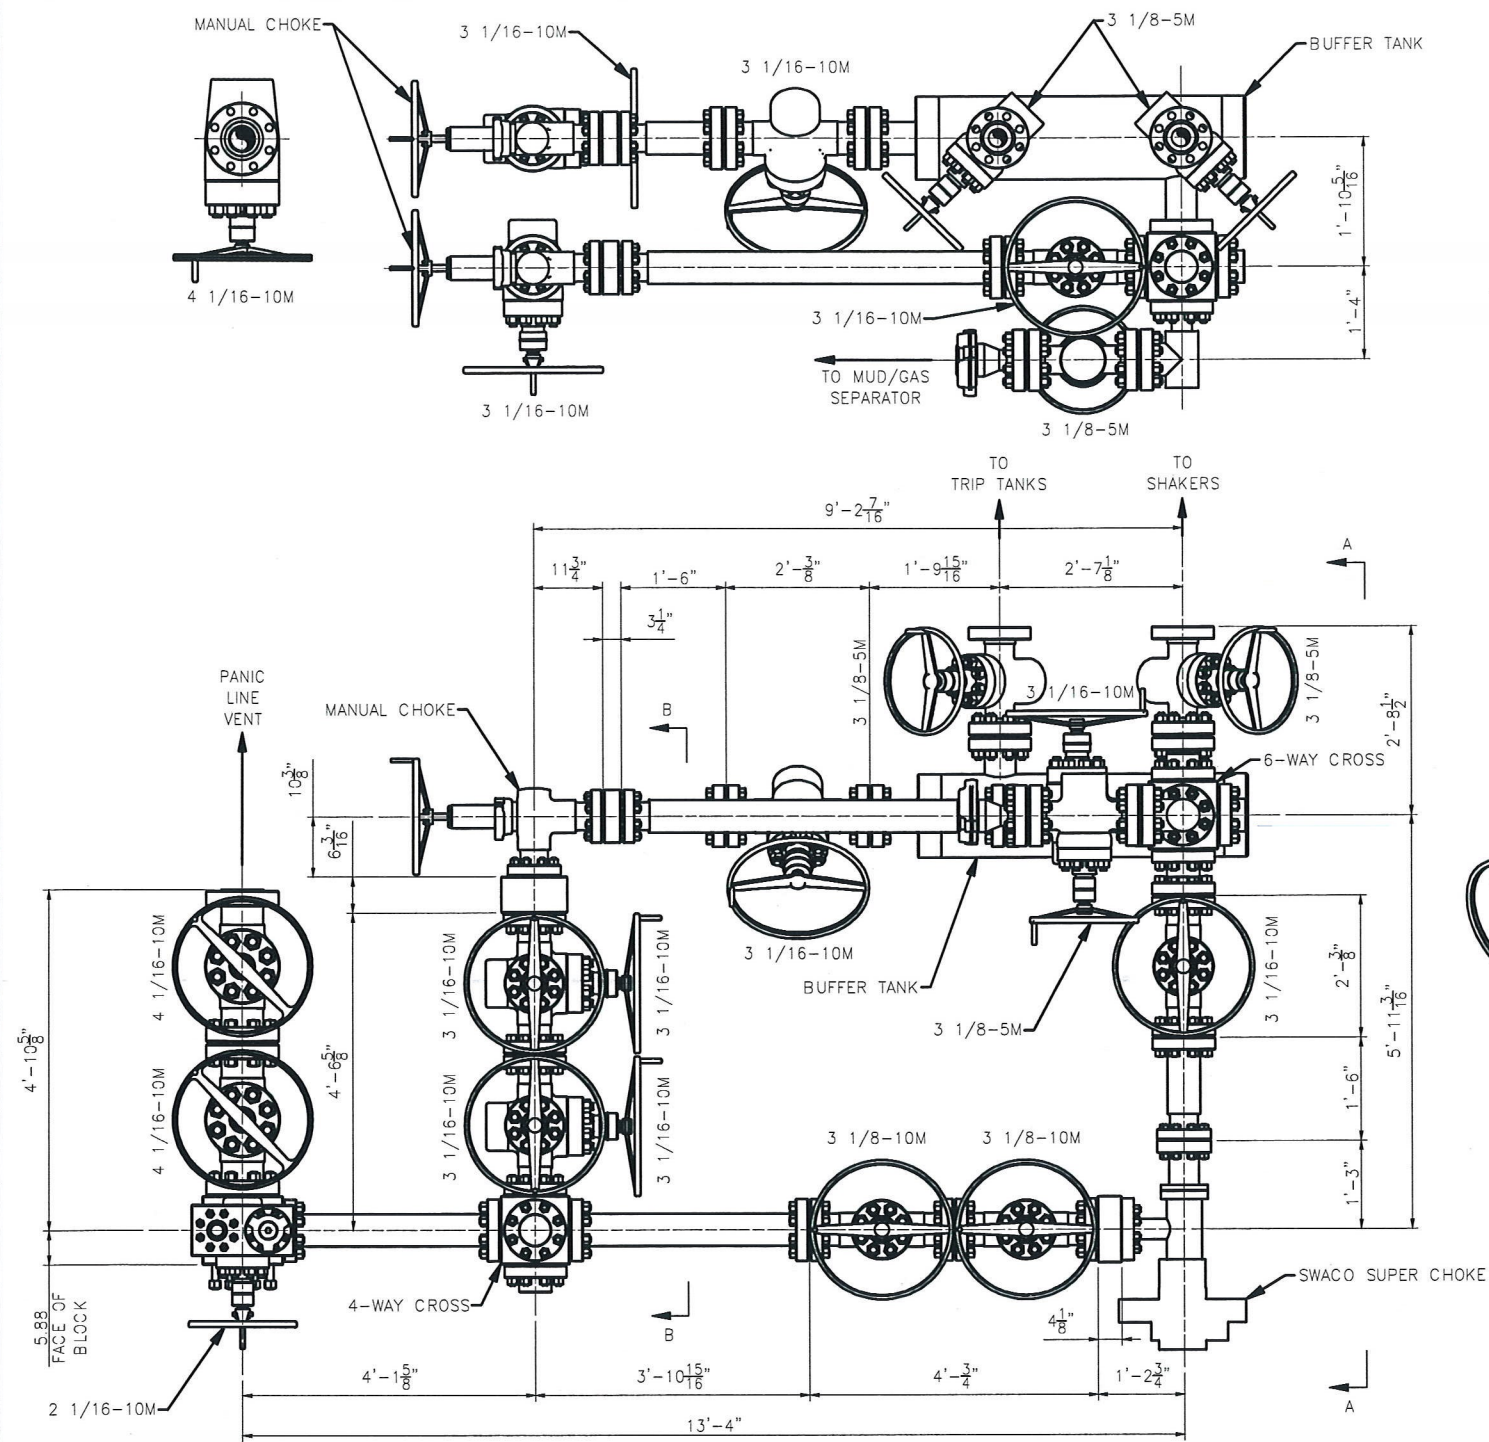


PROPRIETARY

THIS DRAWING AND THE IDEAS AND INFORMATION INCLUDED IN THIS DRAWING ARE PROPRIETARY AND ARE NOT TO BE REPRODUCED, DISTRIBUTED OR DISCLOSED IN ANY MANNER, WITHOUT THE PRIOR, WRITTEN CONSENT OF A DULY AUTHORIZED OFFICER OF HELMERICH & PAYNE INT'L DRILLING CO.

ISSUED FOR FABRICATION
February-10-2014
DRAFTSMAN *MWL*
ENGINEER *[Signature]*

STANDARD TOLERANCES (UNLESS NOTED)			
1. FABRICATION DIMENSIONS:	A-0" TO 24"	± 1/16"	
	B-24" TO 120"	± 1/8"	
2. MACHINED DIMENSIONS:	C-OVER 120"	± 1/4"	
	A-ANGULAR	± .30°	
	B-LINEAR (EXPRESSED AS FRACTION)	± .015	
	C-LINEAR (EXPRESSED TO ONE DECIMAL)	± .1	
	LINEAR (EXPRESSED TO TWO DECIMALS)	± .015	
	LINEAR (EXPRESSED TO THREE DECIMALS)	± .005	
REV	DATE	DESCRIPTION	BY

		HELMERICH & PAYNE INTERNATIONAL DRILLING CO.	
TITLE: 3 CHOKE, 3 LEVEL, 10M CHOKE MANIFOLD G.A.			
CUSTOMER: H&P			
PROJECT:			
DRAWN: MWL	DATE: 2/10/2014	DWG. NO.: HP-D1254	REV: -
SCALE: 3/4"=1'-0"	SHEET: 1 OF 1		

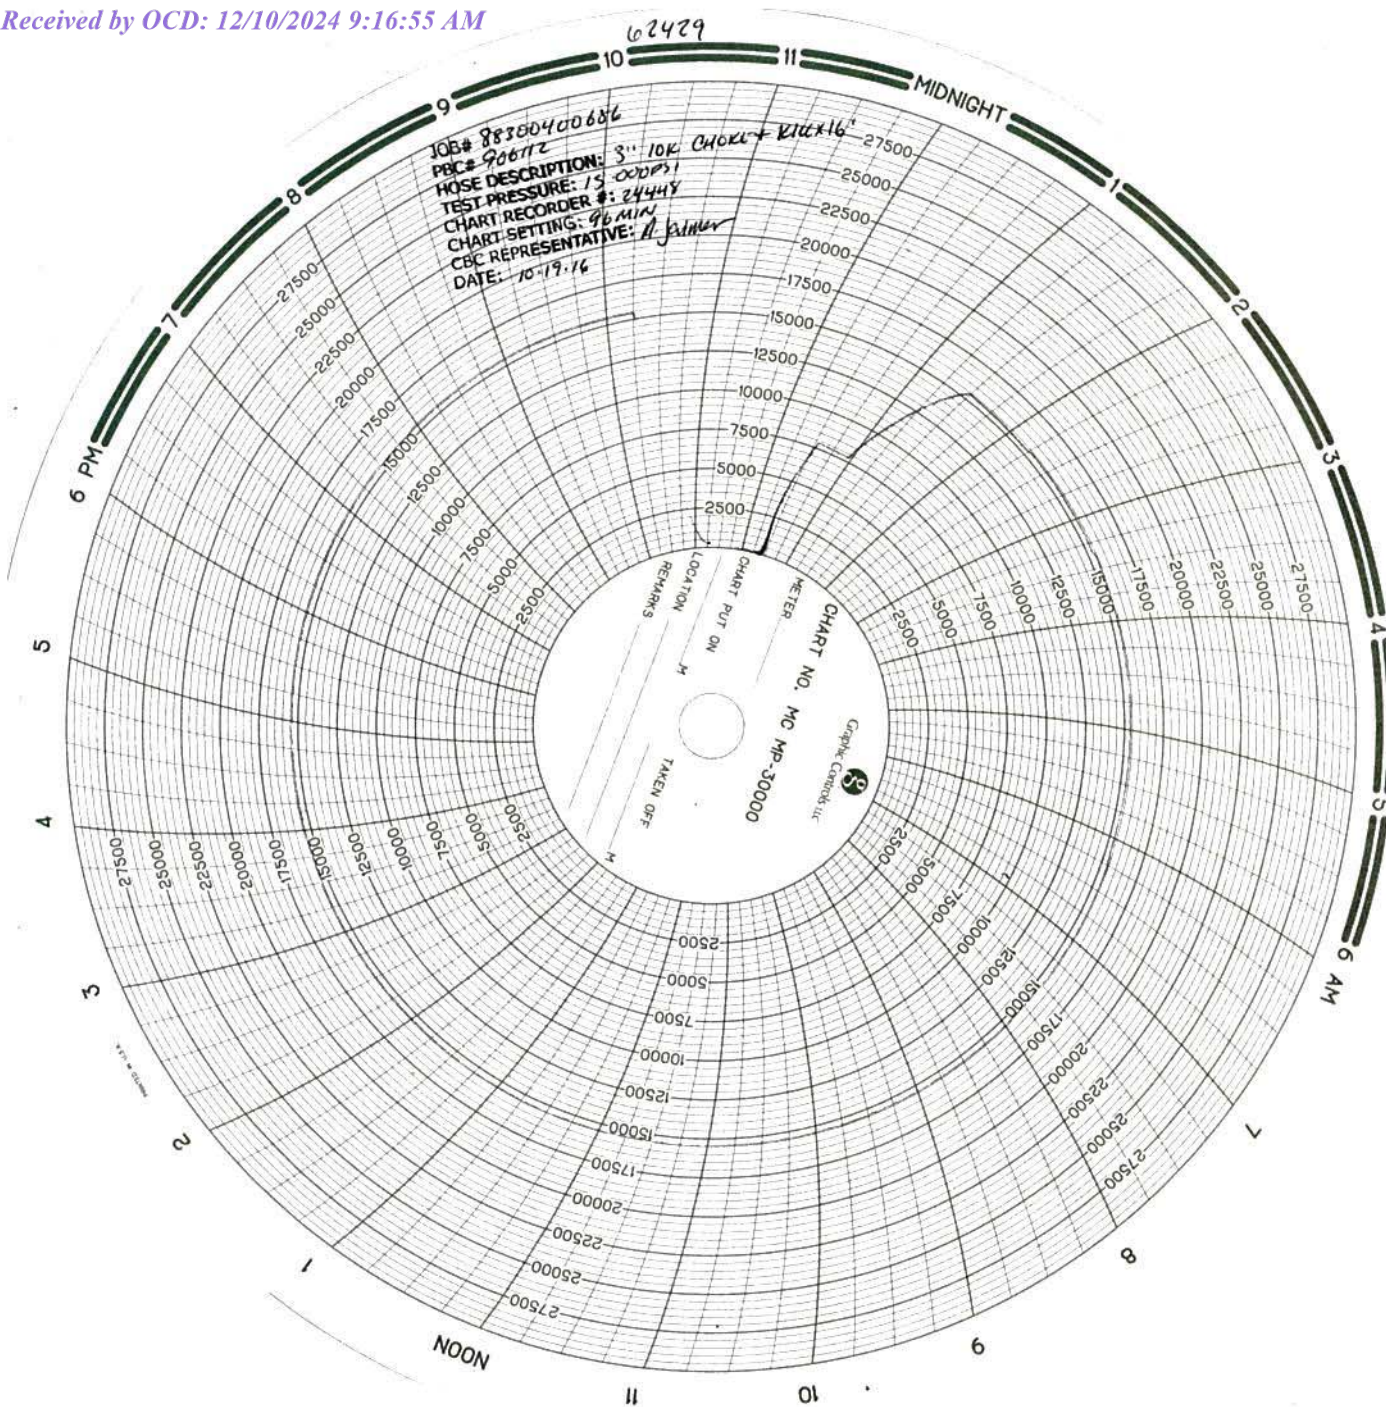

Hose Inspection Report

ContiTech Oil & Marine

Customer	Customer Reference #	CBC Reference #	CBC Inspector	Date of Inspection
H&P Drilling	740021604	COM906112	A. Jaimes	10/17/2016

Hose Manufacturer	Contitech Rubber Industrial
-------------------	-----------------------------

Hose Serial #	62429	Date of Manufacture	05/2012
Hose I.D.	3"	Working Pressure	10000PSI
Hose Type	Choke and Kill	Test Pressure	15000PSI
Manufacturing Standard	API 16C		

Connections

End A: 3.1/16" 10Kpsi API Spec 6A Type 6BX Flange	End B: 3.1/16" 10Kpsi API Spec 6A Type 6BX Flange
• No damage	• No damage
Material: Carbon Steel	Material: Carbon Steel
Seal Face: BX154	Seal Face: BX154
Length Before Hydro Test: 16'	Length After Hydro test: 16'

Conclusion: Hose #62429 passed the external inspection with no notable damages to the hose armor. Internal borescope of the hose showed no damage to the hose liner. Hose #62429 passed the hydrostatic pressure test by holding a pressure of 15,000PSI for 60 minutes. Hose #62429 is suitable for continued service.

Recommendations: In general the hose should be inspected on a regular on-going basis. The frequency and degree of the inspection should as a minimum follow these guidelines:

Visual inspection: Every 3 months (or during installation/removal)
 Annual: In-situ pressure test
 Initial 5 years service: Major inspection
 2nd Major inspection: 8 / 10 years of service
 (Detailed description of test regime available upon request, ISS-059 Rev 04)

****NOTE:** There are a number of critical elements in the hose that cannot be thoroughly checked through standard inspection techniques. Away from dissecting the hose body, the best way to evaluate the condition of the hose is through review of the operating conditions recorded during the hose service life, in particular maximums and peak conditions.

Issued By: Alejandro Jaimes
 Date: 10/25/2016


Checked By: Jeremy Mckay
 Date: 10/25/2016
 QF97

Page 1 of 1

Exhibit 1

EOG Resources

13-5/8" 10M PSI BOP Stack

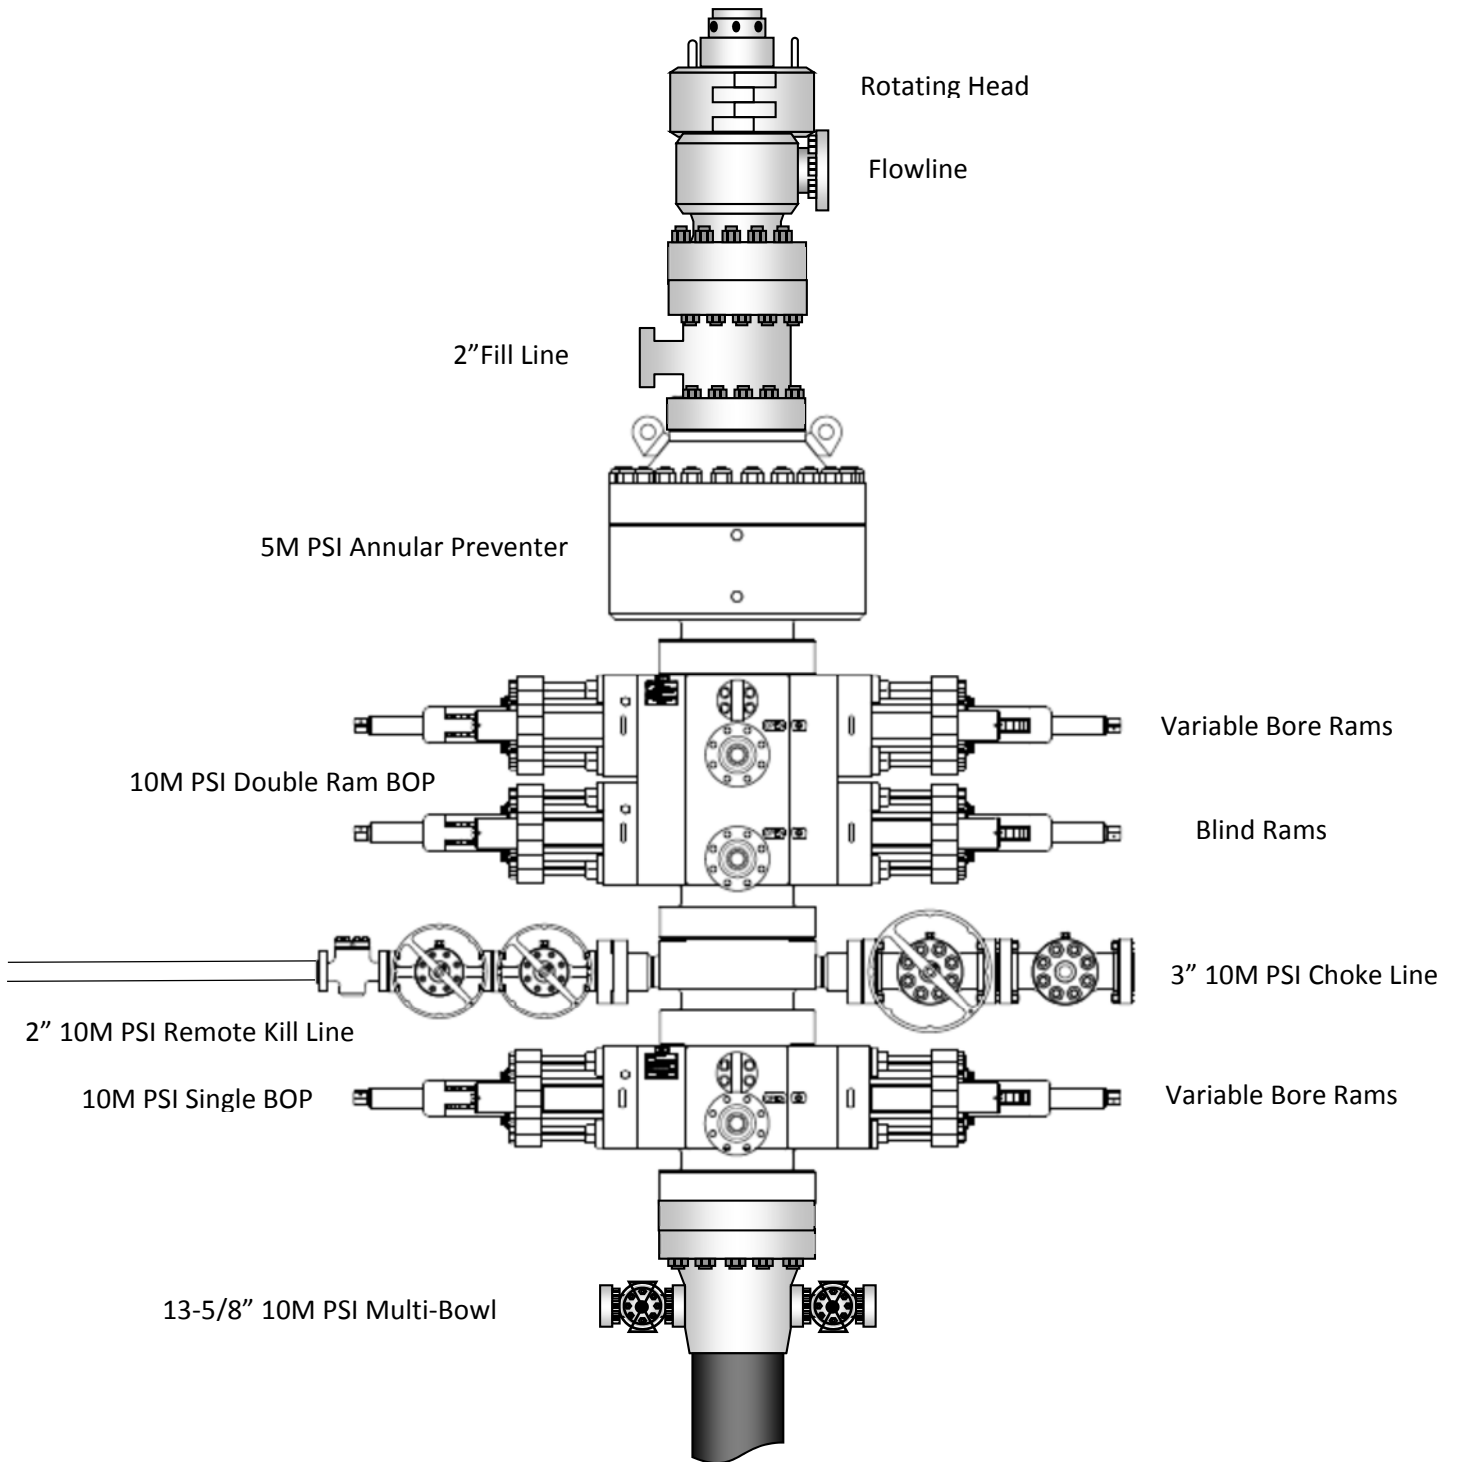

10,000 PSI BOP Annular Variance Request (EOG Variance 1c)

EOG Resources request a variance to use a 5000 psi annular BOP with a 10,000 psi BOP stack. The component and compatibility tables along with the general well control plans demonstrate how the 5000 psi annular BOP will be protected from pressures that exceed its rated working pressure (RWP). The pressure at which the control of the wellbore is transferred from the annular preventer to another available preventer will not exceed 3500 psi (70% of the RWP of the 5000 psi annular BOP).

1. Component and Preventer Compatibility Tables


The tables below outlines the tubulars and the compatible preventers in use. This table, combined with the drilling fluid, documents that two barriers to flow will be maintained at all times.

12-1/4" Intermediate Hole Section 10M psi requirement					
Component	OD	Primary Preventer	RWP	Alternate Preventer(s)	RWP
Drillpipe	5.000" or 4.500"	Annular	5M	Upper 3.5 - 5.5" VBR Lower 3.5 - 5.5" VBR	10M 10M
HWDP	5.000" or 4.500"	Annular	5M	Upper 3.5 - 5.5" VBR Lower 3.5 - 5.5" VBR	10M 10M
Jars	6.500"	Annular	5M	Upper 3.5 - 5.5" VBR Lower 3.5 - 5.5" VBR	10M 10M
DCs and MWD tools	6.500" – 8.000"	Annular	5M	-	-
Mud Motor	8.000" – 9.625"	Annular	5M	-	-
1 st Intermediate casing	9.625"	Annular	5M	-	-
Open-hole	-	Blind Rams	10M	-	-

8-3/4" Production Hole Section 10M psi requirement					
Component	OD	Primary Preventer	RWP	Alternate Preventer(s)	RWP
Drillpipe	5.000" or 4.500"	Annular	5M	Upper 3.5 - 5.5" VBR Lower 3.5 - 5.5" VBR	10M 10M
HWDP	5.000" or 4.500"	Annular	5M	Upper 3.5 - 5.5" VBR Lower 3.5 - 5.5" VBR	10M 10M
Jars	6.500"	Annular	5M	Upper 3.5 - 5.5" VBR Lower 3.5 - 5.5" VBR	10M 10M
DCs and MWD tools	6.500" – 8.000"	Annular	5M	-	-
Mud Motor	6.750" – 8.000"	Annular	5M	-	-
2 nd Intermediate casing	7.625"	Annular	5M	-	-
Open-hole	-	Blind Rams	10M	-	-

VBR = Variable Bore Ram

EOG Resources 13-5/8" 10M PSI BOP Stack

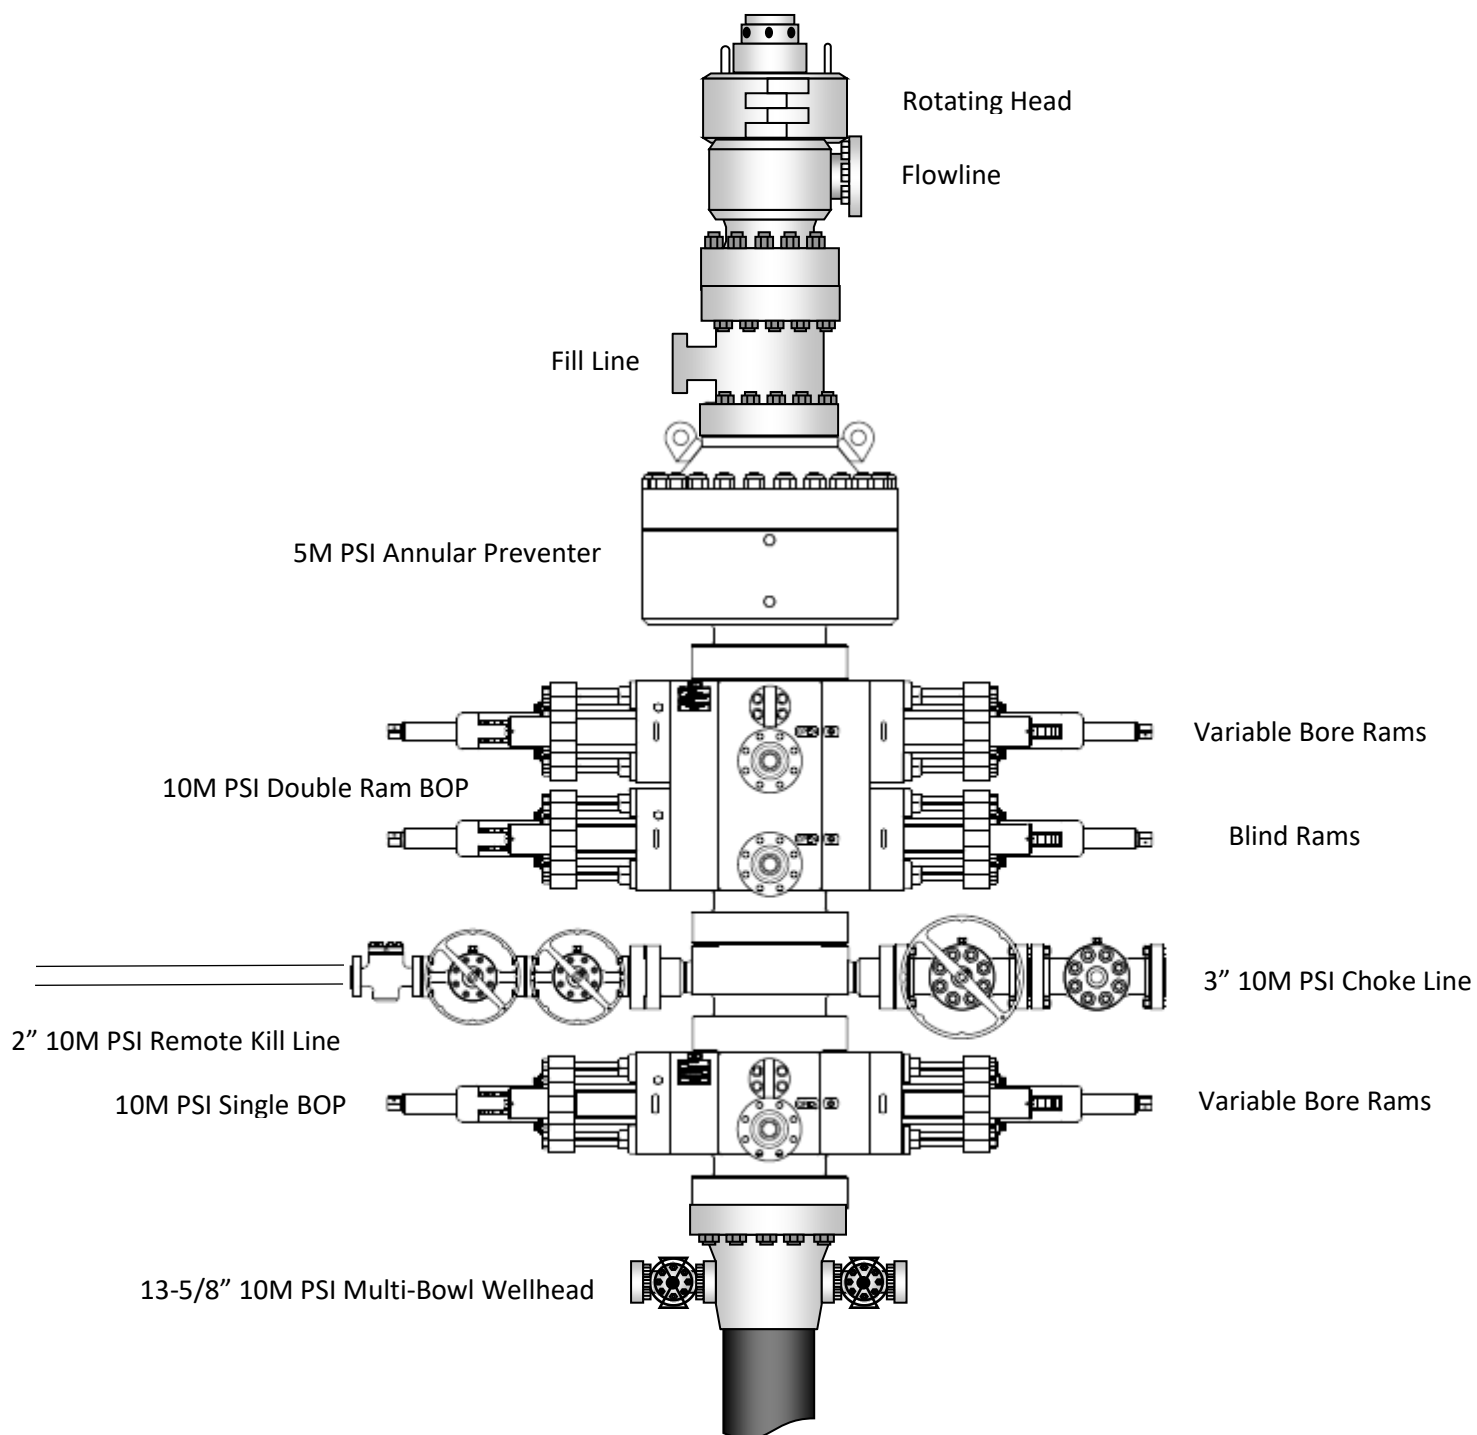

2. Well Control Procedures

Below are the minimal high-level tasks prescribed to assure a proper shut-in while drilling, tripping, running casing, pipe out of the hole (open hole), and moving the BHA through the BOPs. At least one well control drill will be performed weekly per crew to demonstrate compliance with the procedure and well control plan. The well control drill will be recorded in the daily drilling log. The type of drill will be determined by the ongoing operations, but reasonable attempts will be made to vary the type of drill conducted (pit, trip, open hole, choke, etc.). This well control plan will be available for review by rig personnel in the EOG Resources drilling supervisor's office on location, and on the rig floor. All BOP equipment will be tested as per Onshore O&G Order No. 2 with the exception of the 5000 psi annular which will be tested to 100% of its RWP.

General Procedure While Drilling

1. Sound alarm (alert crew)
2. Space out drill string
3. Shut down pumps (stop pumps and rotary)
4. Shut-in Well (uppermost applicable BOP, typically annular preventer first. HCR and choke will already be in the closed position.)
5. Confirm shut-in
6. Notify toolpusher/company representative
7. Read and record the following:
 - a. SIDPP and SICP
 - b. Pit gain
 - c. Time
8. Regroup and identify forward plan
9. If pressure has built or is anticipated during the kill to reach 70% or greater of the RWP of the annular preventer, confirm spacing and close the upper variable bore rams.

General Procedure While Tripping

1. Sound alarm (alert crew)
2. Stab full opening safety valve and close
3. Space out drill string
4. Shut-in (uppermost applicable BOP, typically annular preventer first. HCR and choke will already be in the closed position.)
5. Confirm shut-in
6. Notify toolpusher/company representative
7. Read and record the following:
 - a. SIDPP and SICP
 - b. Pit gain
 - c. Time
8. Regroup and identify forward plan
9. If pressure has built or is anticipated during the kill to reach 70% or greater of the RWP of the annular preventer, confirm spacing and close the upper variable bore rams.

General Procedure While Running Production Casing

1. Sound alarm (alert crew)
2. Stab crossover and full opening safety valve and close
3. Space out string
4. Shut-in (uppermost applicable BOP, typically annular preventer first. HCR and choke will already be in the closed position.)
5. Confirm shut-in
6. Notify toolpusher/company representative
7. Read and record the following:
 - a. SIDPP and SICP
 - b. Pit gain
 - c. Time
8. Regroup and identify forward plan
9. If pressure has built or is anticipated during the kill to reach 70% or greater of the RWP of the annular preventer, confirm spacing and close the upper variable bore rams.

General Procedure With No Pipe In Hole (Open Hole)

1. Sound alarm (alert crew)
2. Shut-in with blind rams. (HCR and choke will already be in the closed position.)
3. Confirm shut-in
4. Notify toolpusher/company representative
5. Read and record the following:
 - a. SICP
 - b. Pit gain
 - c. Time
6. Regroup and identify forward plan

General Procedures While Pulling BHA thru Stack

1. PRIOR to pulling last joint of drillpipe thru the stack.
 - a. Perform flowcheck, if flowing:
 - b. Sound alarm (alert crew)
 - c. Stab full opening safety valve and close
 - d. Space out drill string with tool joint just beneath the upper variable bore rams.
 - e. Shut-in using upper variable bore rams. (HCR and choke will already be in the closed position.)
 - f. Confirm shut-in
 - g. Notify toolpusher/company representative
 - h. Read and record the following:
 - i. SIDPP and SICP
 - ii. Pit gain
 - iii. Time
 - i. Regroup and identify forward plan

2. With BHA in the stack and compatible ram preventer and pipe combo immediately available.
 - a. Sound alarm (alert crew)
 - b. Stab crossover and full opening safety valve and close
 - c. Space out drill string with upset just beneath the upper variable bore rams.
 - d. Shut-in using upper variable bore rams. (HCR and choke will already be in the closed position.)
 - e. Confirm shut-in
 - f. Notify toolpusher/company representative
 - g. Read and record the following:
 - i. SIDPP and SICP
 - ii. Pit gain
 - iii. Time
 - h. Regroup and identify forward plan
3. With BHA in the stack and NO compatible ram preventer and pipe combo immediately available.
 - a. Sound alarm (alert crew)
 - b. If possible to pick up high enough, pull string clear of the stack and follow "Open Hole" scenario.
 - c. If impossible to pick up high enough to pull the string clear of the stack:
 - d. Stab crossover, make up one joint/stand of drillpipe, and full opening safety valve and close
 - e. Space out drill string with tooljoint just beneath the upper variable bore ram.
 - f. Shut-in using upper variable bore ram. (HCR and choke will already be in the closed position.)
 - g. Confirm shut-in
 - h. Notify toolpusher/company representative
 - i. Read and record the following:
 - i. SIDPP and SICP
 - ii. Pit gain
 - iii. Time
 - j. Regroup and identify forward plan

10,000 PSI BOP Annular Variance Request (EOG Variance 1c)

EOG Resources request a variance to use a 5000 psi annular BOP with a 10,000 psi BOP stack. The component and compatibility tables along with the general well control plans demonstrate how the 5000 psi annular BOP will be protected from pressures that exceed its rated working pressure (RWP). The pressure at which the control of the wellbore is transferred from the annular preventer to another available preventer will not exceed 3500 psi (70% of the RWP of the 5000 psi annular BOP).

1. Component and Preventer Compatibility Tables


The tables below outlines the tubulars and the compatible preventers in use. This table, combined with the drilling fluid, documents that two barriers to flow will be maintained at all times.

12-1/4" Intermediate Hole Section 10M psi requirement					
Component	OD	Primary Preventer	RWP	Alternate Preventer(s)	RWP
Drillpipe	5.000" or 4.500"	Annular	5M	Upper 3.5 - 5.5" VBR Lower 3.5 - 5.5" VBR	10M 10M
HWDP	5.000" or 4.500"	Annular	5M	Upper 3.5 - 5.5" VBR Lower 3.5 - 5.5" VBR	10M 10M
Jars	6.500"	Annular	5M	Upper 3.5 - 5.5" VBR Lower 3.5 - 5.5" VBR	10M 10M
DCs and MWD tools	6.500" – 8.000"	Annular	5M	-	-
Mud Motor	8.000" – 9.625"	Annular	5M	-	-
1 st Intermediate casing	9.625"	Annular	5M	-	-
Open-hole	-	Blind Rams	10M	-	-

8-3/4" Production Hole Section 10M psi requirement					
Component	OD	Primary Preventer	RWP	Alternate Preventer(s)	RWP
Drillpipe	5.000" or 4.500"	Annular	5M	Upper 3.5 - 5.5" VBR Lower 3.5 - 5.5" VBR	10M 10M
HWDP	5.000" or 4.500"	Annular	5M	Upper 3.5 - 5.5" VBR Lower 3.5 - 5.5" VBR	10M 10M
Jars	6.500"	Annular	5M	Upper 3.5 - 5.5" VBR Lower 3.5 - 5.5" VBR	10M 10M
DCs and MWD tools	6.500" – 8.000"	Annular	5M	-	-
Mud Motor	6.750" – 8.000"	Annular	5M	-	-
2 nd Intermediate casing	7.625"	Annular	5M	-	-
Open-hole	-	Blind Rams	10M	-	-

VBR = Variable Bore Ram

EOG Resources
13-5/8" 10M PSI BOP Stack

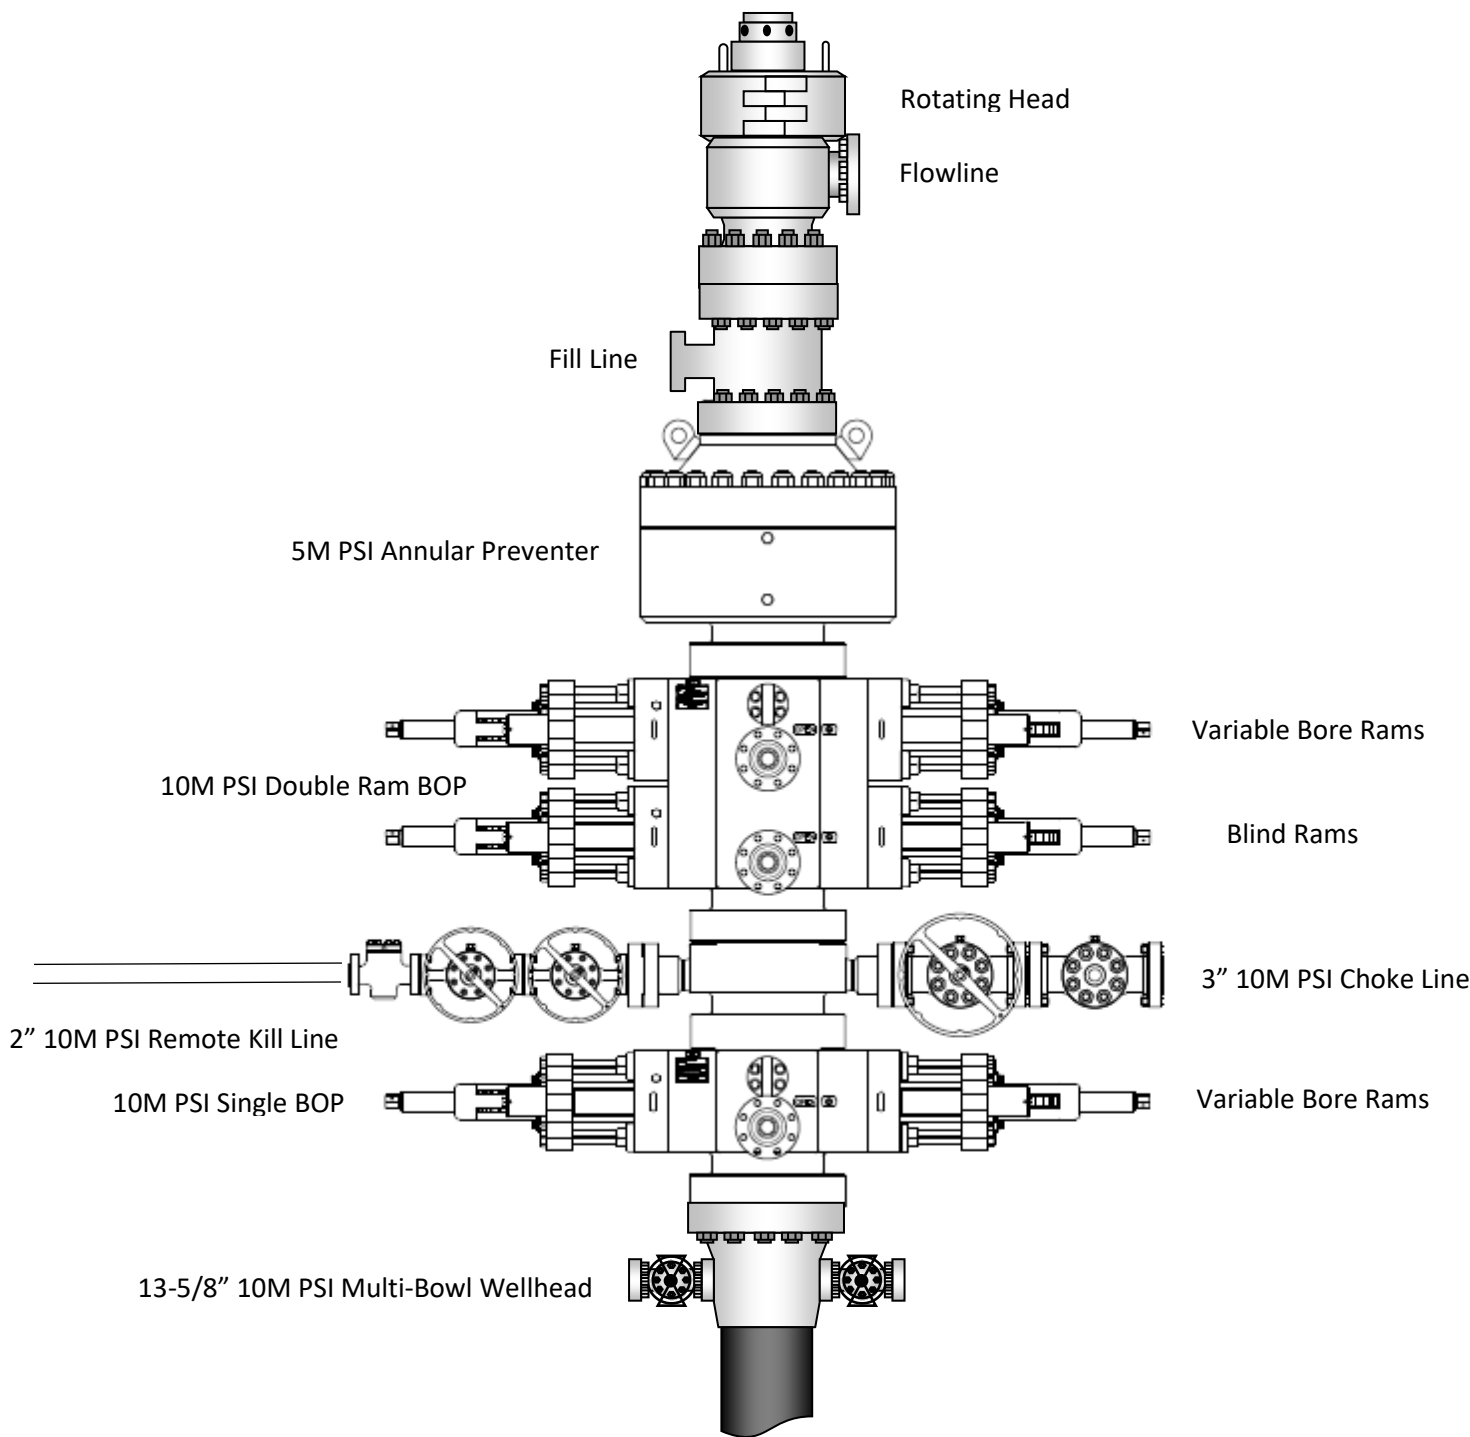

2. Well Control Procedures

Below are the minimal high-level tasks prescribed to assure a proper shut-in while drilling, tripping, running casing, pipe out of the hole (open hole), and moving the BHA through the BOPs. At least one well control drill will be performed weekly per crew to demonstrate compliance with the procedure and well control plan. The well control drill will be recorded in the daily drilling log. The type of drill will be determined by the ongoing operations, but reasonable attempts will be made to vary the type of drill conducted (pit, trip, open hole, choke, etc.). This well control plan will be available for review by rig personnel in the EOG Resources drilling supervisor's office on location, and on the rig floor. All BOP equipment will be tested as per Onshore O&G Order No. 2 with the exception of the 5000 psi annular which will be tested to 100% of its RWP.

General Procedure While Drilling

1. Sound alarm (alert crew)
2. Space out drill string
3. Shut down pumps (stop pumps and rotary)
4. Shut-in Well (uppermost applicable BOP, typically annular preventer first. HCR and choke will already be in the closed position.)
5. Confirm shut-in
6. Notify toolpusher/company representative
7. Read and record the following:
 - a. SIDPP and SICP
 - b. Pit gain
 - c. Time
8. Regroup and identify forward plan
9. If pressure has built or is anticipated during the kill to reach 70% or greater of the RWP of the annular preventer, confirm spacing and close the upper variable bore rams.

General Procedure While Tripping

1. Sound alarm (alert crew)
2. Stab full opening safety valve and close
3. Space out drill string
4. Shut-in (uppermost applicable BOP, typically annular preventer first. HCR and choke will already be in the closed position.)
5. Confirm shut-in
6. Notify toolpusher/company representative
7. Read and record the following:
 - a. SIDPP and SICP
 - b. Pit gain
 - c. Time
8. Regroup and identify forward plan
9. If pressure has built or is anticipated during the kill to reach 70% or greater of the RWP of the annular preventer, confirm spacing and close the upper variable bore rams.

General Procedure While Running Production Casing

1. Sound alarm (alert crew)
2. Stab crossover and full opening safety valve and close
3. Space out string
4. Shut-in (uppermost applicable BOP, typically annular preventer first. HCR and choke will already be in the closed position.)
5. Confirm shut-in
6. Notify toolpusher/company representative
7. Read and record the following:
 - a. SIDPP and SICP
 - b. Pit gain
 - c. Time
8. Regroup and identify forward plan
9. If pressure has built or is anticipated during the kill to reach 70% or greater of the RWP of the annular preventer, confirm spacing and close the upper variable bore rams.

General Procedure With No Pipe In Hole (Open Hole)

1. Sound alarm (alert crew)
2. Shut-in with blind rams. (HCR and choke will already be in the closed position.)
3. Confirm shut-in
4. Notify toolpusher/company representative
5. Read and record the following:
 - a. SICP
 - b. Pit gain
 - c. Time
6. Regroup and identify forward plan

General Procedures While Pulling BHA thru Stack

1. PRIOR to pulling last joint of drillpipe thru the stack.
 - a. Perform flowcheck, if flowing:
 - b. Sound alarm (alert crew)
 - c. Stab full opening safety valve and close
 - d. Space out drill string with tool joint just beneath the upper variable bore rams.
 - e. Shut-in using upper variable bore rams. (HCR and choke will already be in the closed position.)
 - f. Confirm shut-in
 - g. Notify toolpusher/company representative
 - h. Read and record the following:
 - i. SIDPP and SICP
 - ii. Pit gain
 - iii. Time
 - i. Regroup and identify forward plan

2. With BHA in the stack and compatible ram preventer and pipe combo immediately available.
 - a. Sound alarm (alert crew)
 - b. Stab crossover and full opening safety valve and close
 - c. Space out drill string with upset just beneath the upper variable bore rams.
 - d. Shut-in using upper variable bore rams. (HCR and choke will already be in the closed position.)
 - e. Confirm shut-in
 - f. Notify toolpusher/company representative
 - g. Read and record the following:
 - i. SIDPP and SICP
 - ii. Pit gain
 - iii. Time
 - h. Regroup and identify forward plan
3. With BHA in the stack and NO compatible ram preventer and pipe combo immediately available.
 - a. Sound alarm (alert crew)
 - b. If possible to pick up high enough, pull string clear of the stack and follow "Open Hole" scenario.
 - c. If impossible to pick up high enough to pull the string clear of the stack:
 - d. Stab crossover, make up one joint/stand of drillpipe, and full opening safety valve and close
 - e. Space out drill string with tooljoint just beneath the upper variable bore ram.
 - f. Shut-in using upper variable bore ram. (HCR and choke will already be in the closed position.)
 - g. Confirm shut-in
 - h. Notify toolpusher/company representative
 - i. Read and record the following:
 - i. SIDPP and SICP
 - ii. Pit gain
 - iii. Time
 - j. Regroup and identify forward plan

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 410262

CONDITIONS

Operator: EOG RESOURCES INC 5509 Champions Drive Midland, TX 79706	OGRID: 7377
	Action Number: 410262
	Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

CONDITIONS

Created By	Condition	Condition Date
kayla_mcconnell	Cement is required to circulate on both surface and intermediate1 strings of casing.	12/10/2024
kayla_mcconnell	If cement does not circulate on any string, a Cement Bond Log (CBL) is required for that string of casing.	12/10/2024
pkautz	Administrative order required for non-standard spacing unit prior to production.	12/13/2024
pkautz	File As Drilled C-102 and a directional Survey with C-104 completion packet.	12/13/2024
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string.	12/13/2024
pkautz	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.	12/13/2024