

Form 3160-3
(June 2015)FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: ☒ DRILL ☐ REENTER 1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other 1c. Type of Completion: ☐ Hydraulic Fracturing ☐ Single Zone ☒ Multiple Zone		5. Lease Serial No. NMNM66925 6. If Indian, Allottee or Tribe Name 7. If Unit or CA Agreement, Name and No. NMNM137099X 8. Lease Name and Well No. MESA VERDE WC UNIT 50H
2. Name of Operator OXY USA INCORPORATED		9. API Well No. 30-025-54422
3a. Address P.O. BOX 1002, TUPMAN, CA 93276-1002	3b. Phone No. (include area code) (661) 763-6046	10. Field and Pool, or Exploratory MESA VERDE/WOLF CAMP
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface SWSW / 1012 FSL / 955 FWL / LAT 32.21297 / LONG -103.702205 At proposed prod. zone NWNW / 20 FNL / 900 FWL / LAT 32.239157 / LONG -103.702378		11. Sec., T. R. M. or Blk. and Survey or Area SEC 17/T24S/R32E/NMP
14. Distance in miles and direction from nearest town or post office* 36 miles		12. County or Parish LEA
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 1012 feet		16. No of acres in lease 17. Spacing Unit dedicated to this well 320.0
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 30 feet		20. BLM/BIA Bond No. in file FED: ESB000226
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3567 feet	22. Approximate date work will start* 08/01/2025	23. Estimated duration 45 days
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|---|---|
| 1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification.
6. Such other site specific information and/or plans as may be requested by the BLM. |
|---|---|

25. Signature (Electronic Submission) Title Advisor Regulatory Sr.	Name (Printed/Typed) MELISSA GUIDRY / Ph: (713) 366-5716	Date 08/28/2024
Approved by (Signature) (Electronic Submission) Title Assistant Field Manager Lands & Minerals	Name (Printed/Typed) CODY LAYTON / Ph: (575) 234-5959 Office Carlsbad Field Office	Date 02/05/2025

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
 Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)



Approval Date: 02/05/2025

INSTRUCTIONS

GENERAL: This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

ITEM I: If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

ITEM 4: Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

ITEM 14: Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the well, and any other required information, should be furnished when required by Federal agency offices.

ITEMS 15 AND 18: If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective productive zone.

ITEM 22: Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

ITEM 24: If the proposal will involve hydraulic fracturing operations, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

PRINCIPAL PURPOSES: The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service well or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

ROUTINE USE: Information from the record and/or the record will be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM connects this information to an evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications. Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease. The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Connection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

Additional Operator Remarks

Location of Well

0. SHL: SWSW / 1012 FSL / 955 FWL / TWSP: 24S / RANGE: 32E / SECTION: 17 / LAT: 32.21297 / LONG: -103.702205 (TVD: 0 feet, MD: 0 feet)
PPP: SWNW / 2629 FNL / 903 FWL / TWSP: 24S / RANGE: 32E / SECTION: 17 / LAT: 32.217449 / LONG: -103.70238 (TVD: 13020 feet, MD: 16097 feet)
PPP: NWSW / 1327 FSL / 907 FWL / TWSP: 24S / RANGE: 32E / SECTION: 8 / LAT: 32.228321 / LONG: -103.702379 (TVD: 13020 feet, MD: 20054 feet)
PPP: SWSW / 100 FSL / 900 FWL / TWSP: 24S / RANGE: 32E / SECTION: 17 / LAT: 32.210463 / LONG: -103.70238 (TVD: 13020 feet, MD: 13517 feet)
PPP: SWSW / 0 FNL / 905 FWL / TWSP: 24S / RANGE: 32E / SECTION: 8 / LAT: 32.224675 / LONG: -103.702379 (TVD: 13020 feet, MD: 18727 feet)
BHL: NWNW / 20 FNL / 900 FWL / TWSP: 24S / RANGE: 32E / SECTION: 8 / LAT: 32.239157 / LONG: -103.702378 (TVD: 13020 feet, MD: 23782 feet)

BLM Point of Contact

Name: TENILLE C MOLINA
Title: Land Law Examiner
Phone: (575) 234-2224
Email: TCMOLINA@BLM.GOV

Review and Appeal Rights

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.

C-102 Submit Electronically Via OCD Permitting	State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION	Revised July 9, 2024	
		Submittal Type:	☒ Initial Submittal
			☐ Amended Report
		☐ As Drilled	

WELL LOCATION INFORMATION

API Number 30-025-54422	Pool Code 98252	Pool Name MESA VERDE;WOLFCAMP
Property Code 320829	Property Name MESA VERDE WC UNIT	Well Number 50H
OGRID No. 16696	Operator Name OXY USA INC.	Ground Level Elevation 3566.7
Surface Owner: ☐ State ☐ Fee ☐ Tribal ☒ Federal		Mineral Owner: ☐ State ☐ Fee ☐ Tribal ☒ Federal

Surface Location

UL M	Section 17	Township 24S	Range 32E	Lot	Ft. from N/S 1012 SOUTH	Ft. from E/W 955 WEST	Latitude (NAD 83) 32.212970°	Longitude (NAD 83) -103.702205°	County LEA
---------	---------------	-----------------	--------------	-----	----------------------------	--------------------------	---------------------------------	------------------------------------	---------------

Bottom Hole Location

UL D	Section 8	Township 24S	Range 32E	Lot	Ft. from N/S 20 NORTH	Ft. from E/W 900 WEST	Latitude (NAD 83) 32.239157°	Longitude (NAD 83) -103.702378°	County LEA
---------	--------------	-----------------	--------------	-----	--------------------------	--------------------------	---------------------------------	------------------------------------	---------------

Dedicated Acres 320	Infill or Defining Well INFILL	Defining Well API 7H - 30-025-45920	Overlapping Spacing Unit (Y/N) N	Consolidation Code
Order Numbers.		Well setbacks are under Common Ownership: ☐ Yes ☐ No		

Kick Off Point (KOP)

UL M	Section 17	Township 24S	Range 32E	Lot	Ft. from N/S 50 SOUTH	Ft. from E/W 900 WEST	Latitude (NAD 83) 32.210326°	Longitude (NAD 83) -103.702379°	County LEA
---------	---------------	-----------------	--------------	-----	--------------------------	--------------------------	---------------------------------	------------------------------------	---------------

First Take Point (FTP)

UL M	Section 17	Township 24S	Range 32E	Lot	Ft. from N/S 100 SOUTH	Ft. from E/W 900 WEST	Latitude (NAD 83) 32.210463°	Longitude (NAD 83) -103.702380°	County LEA
---------	---------------	-----------------	--------------	-----	---------------------------	--------------------------	---------------------------------	------------------------------------	---------------

Last Take Point (LTP)


UL D	Section 8	Township 24S	Range 32E	Lot	Ft. from N/S 100 NORTH	Ft. from E/W 900 WEST	Latitude (NAD 83) 32.238937°	Longitude (NAD 83) -103.702379°	County LEA
---------	--------------	-----------------	--------------	-----	---------------------------	--------------------------	---------------------------------	------------------------------------	---------------

Unitized Area or Area of Uniform Interest	Spacing Unit Type ☒ Horizontal ☐ Vertical	Ground Floor Elevation:
---	--	-------------------------

OPERATOR CERTIFICATIONS <i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and, if the well is a vertical or directional well, that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of a working interest or unleased mineral interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</i> <i>If this well is a horizontal well, I further certify that this organization has received the consent of at least one lessee or owner of a working interest or unleased mineral interest in each tract (in the target pool or formation) in which any part of the well's completed interval will be located or obtained a compulsory pooling order from the division.</i> Melissa Guidry 08/28/24 Signature _____ Date _____ Melissa Guidry Printed Name _____ melissa_guidry@oxy.com Email Address _____	SURVEYOR CERTIFICATIONS <i>I hereby certify that the well location shown on this plat was plotted from the field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</i>  Signature and Seal of Professional Surveyor _____ 23782 June 05, 2023 Certificate Number _____ Date of Survey _____
---	--



Note: No allowable will be assigned to this completion until all interest have been consolidated or a non-standard unit has been approved by the division.

Property Name MESA VERDE WC UNIT	Well Number 50H	Drawn By Z.L. 07-05-23	Revised By REV: 3 T.I.R. 08-07-24 (UPDATE FORMAT)
-------------------------------------	--------------------	---------------------------	--

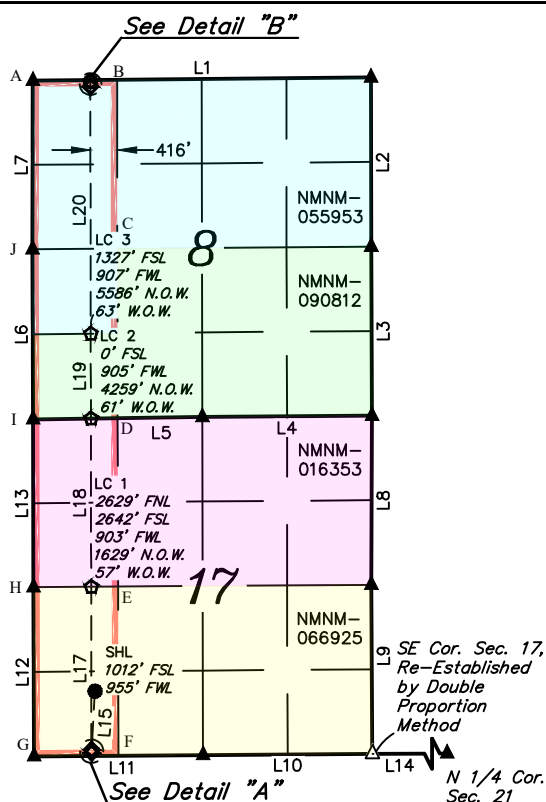

NOTE:

- Distances referenced on plat to section lines are perpendicular.
- Basis of Bearings is a Transverse Mercator Projection with a Central Meridian of W103°53'00" (NAD 83)
- Colored areas within section lines represent oil & gas leases.



LINE TABLE		
LINE	DIRECTION	LENGTH
L1	S89°29'59"W	5283.93'
L2	N00°04'48"W	2641.34'
L3	N00°15'58"W	2642.02'
L4	S89°34'05"W	2651.72'
L5	S89°11'30"W	2645.01'
L6	N00°10'10"W	2659.70'
L7	N00°05'58"E	2634.82'
L8	N00°12'41"E	2641.33'
L9	N00°20'08"W	2641.25'
L10	S89°34'26"W	2644.37'
L11	S89°33'26"W	2643.73'
L12	N00°09'14"W	2642.01'
L13	N00°09'17"W	2623.31'
L14	S89°46'46"W	2650.96'
L15	S03°06'38"W	963.79'
L16	N00°09'14"W	50.00'
L17	N00°05'45"W	2541.76'
L18	N00°05'45"W	2629.35'
L19	N00°05'45"W	1326.86'
L20	N00°05'45"W	3862.73'
L21	N00°05'58"E	80.00'

- = SURFACE HOLE LOCATION
- ◆ = KICK OFF POINT/TAKE POINTS
- ◇ = LEASE CROSSING
- = BOTTOM HOLE LOCATION
- ▲ = SECTION CORNER LOCATED
- △ = SECTION CORNER RE-ESTABLISHED (Not Set on Ground.)
- = HORIZONTAL SPACING UNIT
- N.O.W. = NORTH OF WELL.
- W.O.W. = WEST OF WELL.

HSU COORDINATES				
	NAD 27 N.M. STATE PLANE, EAST ZONE		NAD 83 N.M. STATE PLANE, EAST ZONE	
POINT	NORTHING	EASTING	NORTHING	EASTING
A	451261.25'	694334.52'	451320.26'	735518.47'
B	451278.32'	695655.15'	451337.33'	736839.10'
C	448642.45'	695665.34'	448701.40'	736849.40'
D	445992.10'	695681.81'	446050.98'	736865.98'
E	443360.58'	695699.53'	443419.40'	736883.81'
F	440719.56'	695717.30'	440778.31'	736901.68'
G	440703.81'	694395.78'	440762.56'	735580.15'
H	443345.21'	694377.73'	443404.03'	735562.00'
I	445967.91'	694359.77'	446026.79'	735543.94'
J	448626.99'	694340.87'	448685.93'	735524.93'



SCALE

NAD 83 (SURFACE HOLE LOCATION) LATITUDE = 32°12'46.69" (32.212970°) LONGITUDE = -103°42'07.94" (-103.702205°) NAD 27 (SURFACE HOLE LOCATION) LATITUDE = 32°12'46.25" (32.212847°) LONGITUDE = -103°42'06.21" (-103.701724°) STATE PLANE NAD 83 (N.M. EAST) N: 441785.68' E: 736527.85' STATE PLANE NAD 27 (N.M. EAST) N: 441726.90' E: 695343.51'	NAD 83 (KICK OFF POINT) LATITUDE = 32°12'37.17" (32.210326°) LONGITUDE = -103°42'08.57" (-103.702379°) NAD 27 (KICK OFF POINT) LATITUDE = 32°12'36.73" (32.210202°) LONGITUDE = -103°42'06.84" (-103.701899°) STATE PLANE NAD 83 (N.M. EAST) N: 440823.28' E: 736479.59' STATE PLANE NAD 27 (N.M. EAST) N: 440764.52' E: 695295.22'	NAD 83 (FIRST TAKE POINT) LATITUDE = 32°12'37.67" (32.210463°) LONGITUDE = -103°42'08.57" (-103.702380°) NAD 27 (FIRST TAKE POINT) LATITUDE = 32°12'37.22" (32.210339°) LONGITUDE = -103°42'06.84" (-103.701899°) STATE PLANE NAD 83 (N.M. EAST) N: 440873.27' E: 736479.25' STATE PLANE NAD 27 (N.M. EAST) N: 440814.51' E: 695294.87'	NAD 83 (LEASE CROSSING 1) LATITUDE = 32°13'02.81" (32.217449°) LONGITUDE = -103°42'08.57" (-103.702380°) NAD 27 (LEASE CROSSING 1) LATITUDE = 32°13'02.37" (32.217325°) LONGITUDE = -103°42'06.83" (-103.701898°) STATE PLANE NAD 83 (N.M. EAST) N: 443414.52' E: 736464.36' STATE PLANE NAD 27 (N.M. EAST) N: 443355.70' E: 695280.08'
NAD 83 (LEASE CROSSING 2) LATITUDE = 32°13'28.83" (32.224675°) LONGITUDE = -103°42'08.57" (-103.702379°) NAD 27 (LEASE CROSSING 2) LATITUDE = 32°13'28.38" (32.224551°) LONGITUDE = -103°42'06.83" (-103.701898°) STATE PLANE NAD 83 (N.M. EAST) N: 446043.35' E: 736448.94' STATE PLANE NAD 27 (N.M. EAST) N: 445984.47' E: 695264.78'	NAD 83 (LEASE CROSSING 3) LATITUDE = 32°13'41.96" (32.228321°) LONGITUDE = -103°42'08.57" (-103.702379°) NAD 27 (LEASE CROSSING 3) LATITUDE = 32°13'41.51" (32.228198°) LONGITUDE = -103°42'06.83" (-103.701898°) STATE PLANE NAD 83 (N.M. EAST) N: 447369.95' E: 736441.17' STATE PLANE NAD 27 (N.M. EAST) N: 447311.04' E: 695257.06'	NAD 83 (LAST TAKE POINT) LATITUDE = 32°14'20.17" (32.238937°) LONGITUDE = -103°42'08.57" (-103.702379°) NAD 27 (LAST TAKE POINT) LATITUDE = 32°14'19.73" (32.238814°) LONGITUDE = -103°42'06.83" (-103.701897°) STATE PLANE NAD 83 (N.M. EAST) N: 451231.90' E: 736418.52' STATE PLANE NAD 27 (N.M. EAST) N: 451172.90' E: 695234.57'	NAD 83 (BOTTOM HOLE LOCATION) LATITUDE = 32°14'20.97" (32.239157°) LONGITUDE = -103°42'08.56" (-103.702378°) NAD 27 (BOTTOM HOLE LOCATION) LATITUDE = 32°14'20.52" (32.239034°) LONGITUDE = -103°42'06.83" (-103.701896°) STATE PLANE NAD 83 (N.M. EAST) N: 451311.89' E: 736418.33' STATE PLANE NAD 27 (N.M. EAST) N: 451252.89' E: 695234.38'

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: OXY USA INC. **OGRID:** 16696 **Date:** 0 8/ 2 6/ 2 4

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
SEE ATTACHED						

IV. Central Delivery Point Name: MV 18 CTB [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
SEE ATTACHED						

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan

EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☒ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: <i>Melissa Guidry</i>
Printed Name: Melissa Guidry
Title: Regulatory Advisor Sr.
E-mail Address: melissa_guidry@oxy.com
Date: 08/26/2024
Phone: 713-497-2481
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)
Approved By:
Title:
Approval Date:
Conditions of Approval:

III. Well(s)

Well Name	API	WELL LOCATION (ULSTR)	Footages	ANTICIPATED OIL BBL/D	ANTICIPATED GAS MCF/D	ANTICIPATED PROD WATER BBL/D
MESA VERDE BS UNIT 159H	Pending	N-16-24S-32E	585 FSL 1657 FWL	2250	3600	3350
MESA VERDE BS UNIT 160H	Pending	N-16-24S-32E	585 FSL 1687 FWL	2250	3600	3350
MESA VERDE WC UNIT 33H	Pending	M-17-24S-32E	1012 FSL 925 FWL	2330	11300	10000
MESA VERDE WC UNIT 34H	Pending	M-17-24S-32E	1012 FSL 985 FWL	2330	11300	10000
MESA VERDE WC UNIT 35H	Pending	M-17-24S-32E	1011 FSL 1045 FWL	2330	11300	10000
MESA VERDE WC UNIT 36H	Pending	P-17-24S-32E	1121 FSL 1268 FEL	2330	11300	10000
MESA VERDE WC UNIT 37H	Pending	P-17-24S-32E	1121 FSL 1208 FEL	2330	11300	10000
MESA VERDE WC UNIT 38H	Pending	P-17-24S-32E	1121 FSL 1178 FEL	2330	11300	10000
MESA VERDE WC UNIT 50H	Pending	M-17-24S-32E	1012 FSL 955 FWL	2330	11300	10000
MESA VERDE WC UNIT 51H	Pending	M-17-24S-32E	1012 FSL 1015 FWL	2330	11300	10000
MESA VERDE WC UNIT 52H	Pending	P-17-24S-32E	1121 FSL 1238 FEL	2330	11300	10000
MESA VERDE WC UNIT 53H	Pending	P-17-24S-32E	1121 FSL 1148 FEL	2330	11300	10000

V. Anticipated Schedule

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
MESA VERDE BS UNIT 159H	Pending	TBD	TBD	TBD	TBD	TBD
MESA VERDE BS UNIT 160H	Pending	TBD	TBD	TBD	TBD	TBD
MESA VERDE WC UNIT 33H	Pending	TBD	TBD	TBD	TBD	TBD
MESA VERDE WC UNIT 34H	Pending	TBD	TBD	TBD	TBD	TBD
MESA VERDE WC UNIT 35H	Pending	TBD	TBD	TBD	TBD	TBD
MESA VERDE WC UNIT 36H	Pending	TBD	TBD	TBD	TBD	TBD
MESA VERDE WC UNIT 37H	Pending	TBD	TBD	TBD	TBD	TBD
MESA VERDE WC UNIT 38H	Pending	TBD	TBD	TBD	TBD	TBD
MESA VERDE WC UNIT 50H	Pending	TBD	TBD	TBD	TBD	TBD
MESA VERDE WC UNIT 51H	Pending	TBD	TBD	TBD	TBD	TBD
MESA VERDE WC UNIT 52H	Pending	TBD	TBD	TBD	TBD	TBD
MESA VERDE WC UNIT 53H	Pending	TBD	TBD	TBD	TBD	TBD

Central Delivery Point Name : MV 18 CTB

Part VI. Separation Equipment

Operator will size the flowback separator to handle 11,000 Bbls of fluid and 6-10MMscfd which is more than the expected peak rates for these wells. Each separator is rated to 1440psig, and pressure control valves and automated communication will cause the wells to shut in in the event of an upset at the facility, therefore no gas will be flared on pad during an upset. Current Oxy practices avoid use of flare or venting on pad, therefore if there is an upset or emergency condition at the facility, the wells will immediately shut down, and reassume production once the condition has cleared.

VII. Operational Practices

Gathering System and Pipeline Notification

Well(s) will be connected to a production facility after flowback operations are complete, where a gas transporter system is in place. The gas produced from production facility is dedicated to Enlink and is connected to Enlink low pressure located in Lea County, New Mexico. OXY USA INC. ("OXY") provides (periodically) to Enlink a drilling, completion and estimated first production date for wells that are scheduled to be drilled in the foreseeable future. In addition, OXY and Enlink have periodic conference calls to discuss changes to drilling and completion schedules. Gas from these wells will be processed at the Lobo Processing Plant located in Loving County, Texas.

Flowback Strategy

After the fracture treatment/completion operations, well(s) will be produced to temporary production tanks and gas will be flared or vented. During flowback, the fluids and sand content will be monitored. When the produced fluids contain minimal sand, the wells will be turned to production facilities. Gas sales should start as soon as the wells start flowing through the production facilities, unless there are operational issues on Enterprise system at that time. Based on current information, it is OXY's belief the system can take this gas upon completion of the well(s).

Safety requirements during cleanout operations from the use of underbalanced air cleanout systems may necessitate that sand and non-pipeline quality gas be vented and/or flared rather than sold on a temporary basis.

VIII. Best Management Practices

Alternatives to Reduce Flaring

Below are alternatives considered from a conceptual standpoint to reduce the amount of gas flared.

Power Generation – On lease

Only a portion of gas is consumed operating the generator, remainder of gas will be flared


Compressed Natural Gas – On lease

Gas flared would be minimal, but might be uneconomical to operate when gas volume declines


NGL Removal – On lease

Plants are expensive, residue gas is still flared, and uneconomical to operate when gas volume declines

	SOUTH BONESPRING	
	Oil (bbl/d)	Gas (mcf/d)
Jan-2024	1,250	5,135
Feb-2024	1,184	6,041
Mar-2024	933	5,849
Apr-2024	670	5,349
May-2024	517	4,893
Jun-2024	421	4,401
Jul-2024	355	3,994
Aug-2024	306	3,652
Sep-2024	270	3,368
Oct-2024	240	3,125
Nov-2024	217	2,915
Dec-2024	197	2,731
Jan-2025	181	2,566
Feb-2025	167	2,426
Mar-2025	155	2,301
Apr-2025	145	2,184
May-2025	136	2,078
Jun-2025	127	1,982
Jul-2025	120	1,894
Aug-2025	114	1,812
Sep-2025	108	1,739
Oct-2025	102	1,670
Nov-2025	98	1,607
Dec-2025	93	1,549
Jan-2026	89	1,493
Feb-2026	85	1,444
Mar-2026	82	1,398
Apr-2026	79	1,353
May-2026	76	1,311
Jun-2026	73	1,271
Jul-2026	71	1,234
Aug-2026	68	1,198
Sep-2026	66	1,165
Oct-2026	64	1,133
Nov-2026	62	1,104
Dec-2026	60	1,075

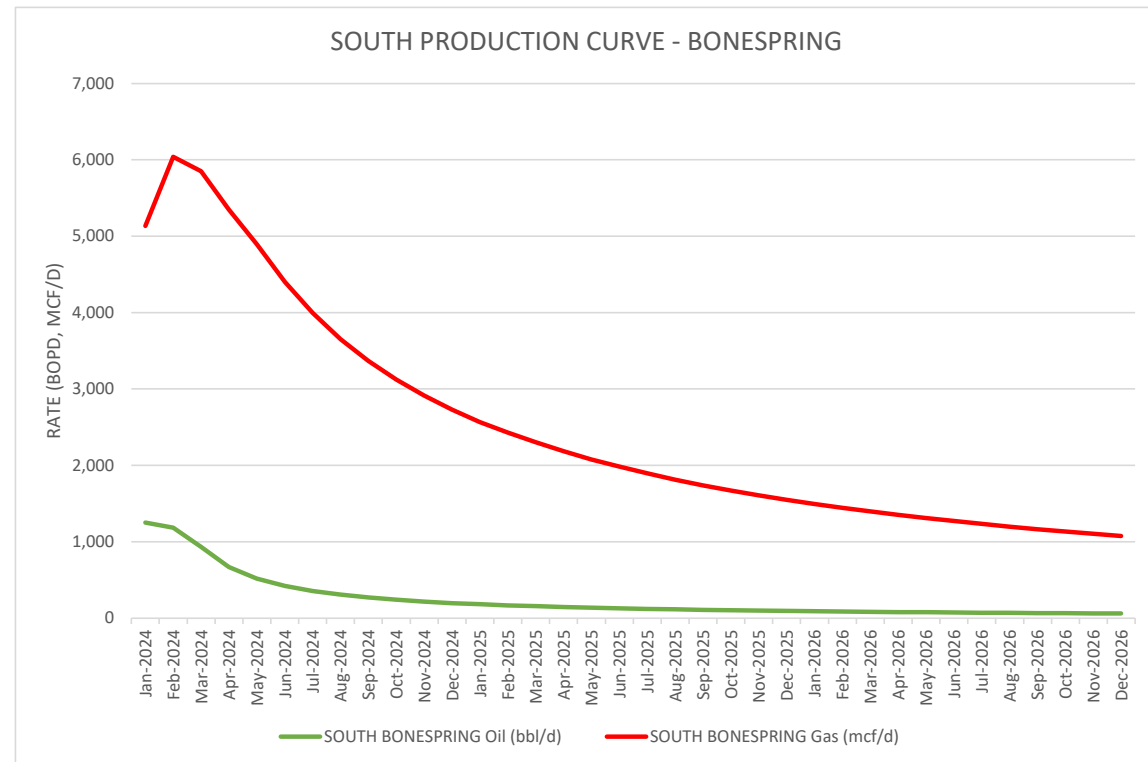

	SOUTH WOLFCAMP	
	Oil (bbl/d)	Gas (mcf/d)
Jan-2024	1,178	8,636
Feb-2024	995	8,951
Mar-2024	706	7,614
Apr-2024	544	6,588
May-2024	445	5,841
Jun-2024	377	5,261
Jul-2024	328	4,794
Aug-2024	291	4,402
Sep-2024	261	4,076
Oct-2024	238	3,797
Nov-2024	218	3,555
Dec-2024	201	3,343
Jan-2025	187	3,152
Feb-2025	175	2,990
Mar-2025	165	2,844
Apr-2025	156	2,708
May-2025	148	2,584
Jun-2025	140	2,471
Jul-2025	133	2,368
Aug-2025	127	2,272
Sep-2025	122	2,184
Oct-2025	117	2,104
Nov-2025	112	2,029
Dec-2025	108	1,959
Jan-2026	104	1,893
Feb-2026	101	1,834
Mar-2026	97	1,778
Apr-2026	94	1,725
May-2026	91	1,674
Jun-2026	89	1,626
Jul-2026	86	1,581
Aug-2026	84	1,538
Sep-2026	81	1,498
Oct-2026	79	1,460
Nov-2026	77	1,423
Dec-2026	75	1,389

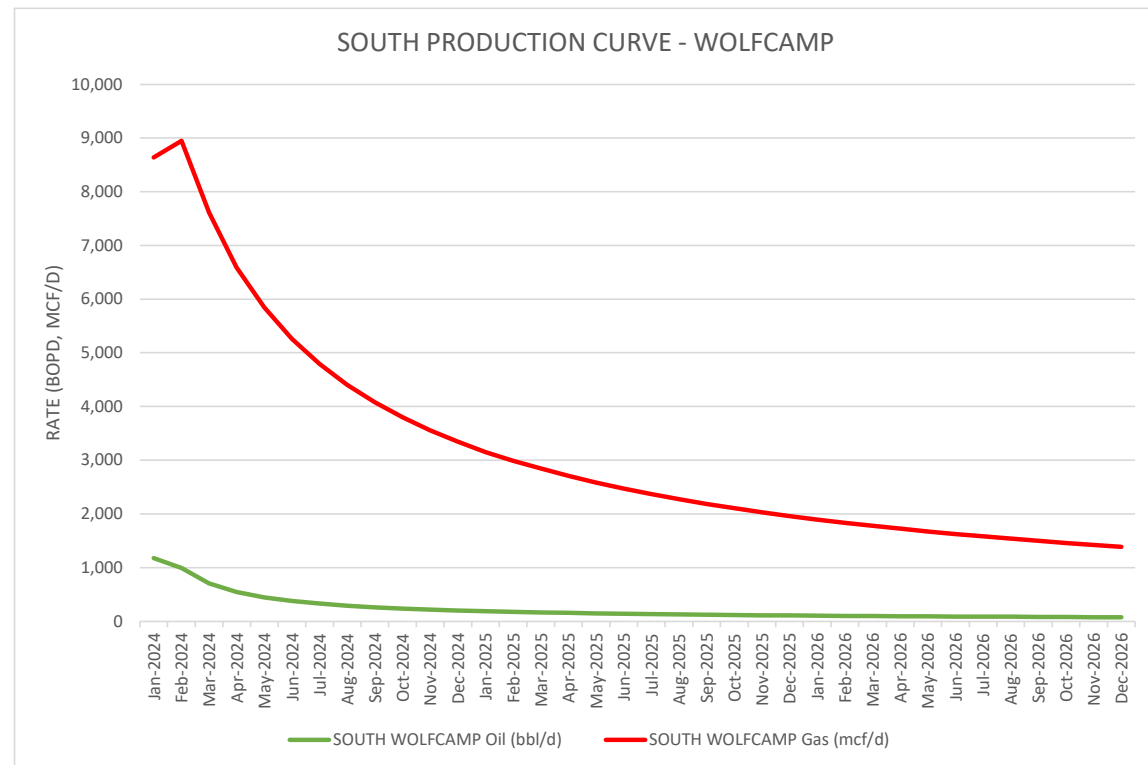



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Operator Certification Data Report

02/10/2025

Operator

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

NAME: MELISSA GUIDRY

Signed on: 12/02/2024

Title: Advisor Regulatory Sr.

Street Address: 5 GREENWAY PLAZA SUITE 110

City: HOUSTON

State: TX

Zip: 77026

Phone: (713)497-2481

Email address: MELISSA_GUIDRY@OXY.COM

Field

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Application Data

02/10/2025

APD ID: 10400100712

Submission Date: 08/28/2024

Operator Name: OXY USA INCORPORATED

Well Name: MESA VERDE WC UNIT

Well Number: 50H

Well Type: OIL WELL

Well Work Type: Drill

Highlighted data
reflects the most
recent changes
[Show Final Text](#)

Section 1 - General

APD ID: 10400100712

Tie to previous NOS? N

Submission Date: 08/28/2024

BLM Office: Carlsbad

User: MELISSA GUIDRY

Title: Advisor Regulatory Sr.

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM66925

Lease Acres:

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? YES

Federal or Indian agreement: FEDERAL

Agreement number: NMNM137099X

Agreement name:

Keep application confidential? N

Permitting Agent? NO

APD Operator: OXY USA INCORPORATED

Operator letter of

Operator Info

Operator Organization Name: OXY USA INCORPORATED

Operator Address: P.O. BOX 1002

Zip: 93276-1002

Operator PO Box:

Operator City: TUPMAN

State: CA

Operator Phone: (661)763-6046

Operator Internet Address:

Section 2 - Well Information

Well in Master Development Plan? NO

Master Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: MESA VERDE WC UNIT

Well Number: 50H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: MESA VERDE

Pool Name: WOLF CAMP

Operator Name: OXY USA INCORPORATED

Well Name: MESA VERDE WC UNIT

Well Number: 50H

Is the proposed well in an area containing other mineral resources? USEABLE WATER,NATURAL GAS,OIL

Is the proposed well in a Helium production area? N

Use Existing Well Pad? N

New surface disturbance?

Type of Well Pad: MULTIPLE WELL

Multiple Well Pad Name: MSAVRD_T24SR32E

Number: 17_02

Well Class: HORIZONTAL

Number of Legs: 1

Well Work Type: Drill

Well Type: OIL WELL

Describe Well Type:

Well sub-Type: INFILL

Describe sub-type:

Distance to town: 36 Miles

Distance to nearest well: 30 FT

Distance to lease line: 1012 FT

Reservoir well spacing assigned acres Measurement: 320 Acres

Well plat: MESAVERDEWCUNIT50H_C102_20240828124331.pdf

MESAVERDEWCUNIT50H_SITE_PLAN_20240828124337.pdf

Well work start Date: 08/01/2025

Duration: 45 DAYS

Section 3 - Well Location Table

Survey Type: RECTANGULAR

Describe Survey Type:

Datum: NAD83

Vertical Datum: NAVD88

Survey number:

Reference Datum: GROUND LEVEL

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this
SHL Leg #1	1012	FSL	955	FWL	24S	32E	17	Aliquot SWS W	32.21297	- 103.702205	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 66925	3567	0	0	N
KOP Leg #1	50	FSL	900	FWL	24S	32E	17	Aliquot SWS W	32.210326	- 103.702379	LEA	NEW MEXI CO	NEW MEXI CO	F	NMNM 66925	- 8754	12489	12321	N

Operator Name: OXY USA INCORPORATED

Well Name: MESA VERDE WC UNIT

Well Number: 50H

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this
PPP Leg #1-1	100	FSL	900	FW L	24S	32E	17	Aliquot SWS W	32.210463	- 103.70238	LEA	NEW MEXICO	NEW MEXICO	F	NMNM 66925	- 9453	13517	13020	Y
PPP Leg #1-2	2629	FNL	903	FW L	24S	32E	17	Aliquot SWN W	32.217449	- 103.70238	LEA	NEW MEXICO	NEW MEXICO	F	NMNM 16353	- 9453	16097	13020	Y
PPP Leg #1-3	0	FNL	905	FW L	24S	32E	8	Aliquot SWS W	32.224675	- 103.702379	LEA	NEW MEXICO	NEW MEXICO	F	NMNM 90812	- 9453	18727	13020	Y
PPP Leg #1-4	1327	FSL	907	FW L	24S	32E	8	Aliquot NWS W	32.228321	- 103.702379	LEA	NEW MEXICO	NEW MEXICO	F	NMNM 55953	- 9453	20054	13020	Y
EXIT Leg #1	100	FNL	900	FW L	24S	32E	8	Aliquot NWN W	32.238937	- 103.702379	LEA	NEW MEXICO	NEW MEXICO	F	NMNM 55953	- 9453	23703	13020	Y
BHL Leg #1	20	FNL	900	FW L	24S	32E	8	Aliquot NWN W	32.239157	- 103.702378	LEA	NEW MEXICO	NEW MEXICO	F	NMNM 55953	- 9453	23782	13020	N



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

02/10/2025

APD ID: 10400100712

Submission Date: 08/28/2024

Highlighted data
reflects the most
recent changes

Operator Name: OXY USA INCORPORATED

Well Name: MESA VERDE WC UNIT

Well Number: 50H

Well Type: OIL WELL

Well Work Type: Drill

[Show Final Text](#)

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical	Measured Depth	Lithologies	Mineral Resources	Producing Formatio
14984075	RUSTLER	3567	837	837	ANHYDRITE, DOLOMITE, SHALE	USEABLE WATER	N
14984076	SALADO	2401	1166	1166	ANHYDRITE, DOLOMITE, HALITE, SHALE	OTHER : SALT	N
14984077	CASTILE	464	3103	3103	ANHYDRITE	OTHER : SALT	N
14984078	DELAWARE	-1094	4661	4661	LIMESTONE, SANDSTONE, SILTSTONE	NATURAL GAS, OIL, OTHER : BRINE	Y
14984079	BELL CANYON	-1123	4690	4690	SANDSTONE, SILTSTONE	NATURAL GAS, OIL, OTHER : BRINE	Y
14984080	CHERRY CANYON	-2006	5573	5574	SANDSTONE, SILTSTONE	NATURAL GAS, OIL, OTHER : BRINE	Y
14984081	BRUSHY CANYON	-3315	6882	6908	SANDSTONE, SILTSTONE	OTHER : LOSSES	N
14984082	BONE SPRING	-5018	8585	8656	LIMESTONE, SANDSTONE, SILTSTONE	NATURAL GAS, OIL	Y
14984083	BONE SPRING 1ST	-6106	9673	9773	LIMESTONE, SANDSTONE, SILTSTONE	NATURAL GAS, OIL	Y
14984084	BONE SPRING 2ND	-6699	10266	10381	LIMESTONE, SANDSTONE, SILTSTONE	NATURAL GAS, OIL	Y
14984085	BONE SPRING 3RD	-7992	11559	11708	LIMESTONE, SANDSTONE, SILTSTONE	NATURAL GAS, OIL	Y
14984086	WOLFCAMP	-8446	12013	12174	SANDSTONE, SILTSTONE	NATURAL GAS, OIL	Y

Section 2 - Blowout Prevention

Pressure Rating (PSI): 10M

Rating Depth: 13020

Equipment: 13-5/8" 5M Annular, 10M Blind Ram, 10M Double Ram

Requesting Variance? YES

Variance request: Request for the use of a flexible choke line from the BOP to Choke Manifold.

Testing Procedure: BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per 43 CFR part 3170 Subpart 3172 requirements. The System may be

Operator Name: OXY USA INCORPORATED**Well Name:** MESA VERDE WC UNIT**Well Number:** 50H

upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested. Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. OXY requests permission to adjust the BOP break testing requirements as per the agreement reached in the OXY/BLM meeting on September 5, 2019. See the attached BOP Break Testing variance.

Choke Diagram Attachment:

MESAVERDEWCUNIT50H_ChkManifolds_20240828131836.pdf

BOP Diagram Attachment:

MESAVERDEWCUNIT50H_BOP_20240828131840.pdf

MESAVERDEWCUNIT50H_13inADAPT_10.75in_7.625in_10x10_20240828131845.pdf

MESAVERDEWCUNIT50H_FlexhoseCert_20240828131904.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	14.75	10.75	NEW	API	N	0	897	0	897	3567	2670	897	J-55	45.5	BUTT	1	1.1	BUOY	1.4	BUOY	1.4
2	INTERMEDIATE	9.875	7.625	NEW	API	N	0	12670	0	12500	3698	-8933	12670	HCL-80	26.4	BUTT	1	1.1	BUOY	1.4	BUOY	1.4
3	PRODUCTION	6.75	5.5	NEW	API	N	0	23782	0	13020	3698	-9453	23782	P-110	23	OTHER - Sprint-SF	1	1.1	BUOY	1.4	BUOY	1.4

Casing Attachments

Operator Name: OXY USA INCORPORATED

Well Name: MESA VERDE WC UNIT

Well Number: 50H

Casing Attachments

Casing ID: 1StringSURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

MESAVERDEWCUNIT50H_CsgCriteria_20240828131956.pdf

Casing ID: 2StringINTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

MESAVERDEWCUNIT50H_CsgCriteria_20240828132015.pdf

Casing ID: 3StringPRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

MESAVERDEWCUNIT50H_CsgCriteria_20240828132044.pdf

MESAVERDEWCUNIT50H_VAM_SPRINT_SF_5.5in_23ppf_P110RY_20240828132054.pdf

Section 4 - Cement

Operator Name: OXY USA INCORPORATED**Well Name:** MESA VERDE WC UNIT**Well Number:** 50H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead	1	0	897	750	1.33	14.8	998	100	Class C	Accelerator

INTERMEDIATE	Lead	2	0	7158	1106	1.71	13.3	1891	25	Class C	Accelerator
--------------	------	---	---	------	------	------	------	------	----	---------	-------------

INTERMEDIATE	Lead	1	7158	1267 0	740	1.68	13.2	1243	5	Class C	Retarder, Dispersant
--------------	------	---	------	-----------	-----	------	------	------	---	---------	----------------------

PRODUCTION	Lead	1	1217 0	2378 2	658	1.84	13.3	1211	25	Class C	Retarder
------------	------	---	-----------	-----------	-----	------	------	------	----	---------	----------

Section 5 - Circulating Medium

Mud System Type: Closed**Will an air or gas system be Used?** NO**Description of the equipment for the circulating system in accordance with Onshore Order #2:****Diagram of the equipment for the circulating system in accordance with Onshore Order #2:**

Describe what will be on location to control well or mitigate other conditions: Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times. The following is a general list of products: Barite, Bentonite, Gypsum, Lime, Soda Ash, Caustic Soda, Nut Plug, Cedar Fiber, Cotton Seed Hulls, Drilling Paper, Salt Water Clay, CACL2. Oxy will use a closed mud system.

Describe the mud monitoring system utilized: PVT/MD Totco/Visual Monitoring

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
-----------	--------------	----------	----------------------	----------------------	---------------------	-----------------------------	----	----------------	----------------	-----------------	----------------------------

Operator Name: OXY USA INCORPORATED**Well Name:** MESA VERDE WC UNIT**Well Number:** 50H

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	897	WATER-BASED MUD	8.6	8.8							
897	1267 0	OTHER : SATURATED BRINE-BASED OR OIL-BASED MUD	8	10							
1267 0	2378 2	OTHER : WATER-BASED MUD OR OIL-BASED MUD	9.5	13.5							

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

GR from TD to surface (horizontal well vertical portion of hole)

Mud Log from Bone Spring - TD

CBL (production string) - to be ran by completions.

List of open and cased hole logs run in the well:

GAMMA RAY LOG, CEMENT BOND LOG, DIRECTIONAL SURVEY, MUD LOG/GEOLOGICAL LITHOLOGY LOG,

Coring operation description for the well:

No coring is planned at this time.

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 9141

Anticipated Surface Pressure: 6276

Anticipated Bottom Hole Temperature(F): 185

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geohazards description:

Contingency Plans geohazards

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations

MESAVERDEWCUNIT50H_H2S1_20240828132751.pdf

Operator Name: OXY USA INCORPORATED**Well Name:** MESA VERDE WC UNIT**Well Number:** 50H

MESAVERDEWCUNIT50H_H2S2_20240828132755.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

MESAVERDEWCUNIT50H_DirectPlan_20240828132807.pdf

Other proposed operations facets description:**Other proposed operations facets attachment:**

MESAVERDEWCUNIT50H_SpudRigData_20240828132819.pdf

MESAVERDEWCUNIT50H_NGMP___WMP_20240828132825.pdf

MESAVERDEWCUNIT50H_DrillPlan_20241202161041.pdf

MESAVERDEWCUNIT50H_Blanket_Design_A_Pad_Document_MSAVRD_T24SR32E_17_02_20241202160546.pdf

MESAVERDEWCUNIT50H_Blanket_Design_A___OXY___3S_Slim_v7.1_20241202160555.pdf

Other Variance attachment:

MESAVERDEWCUNIT50H_5MAnnBOPVariance_20240828132829.pdf

MESAVERDEWCUNIT50H_BOPBreakTestingVariance_20240828132835.pdf

MESAVERDEWCUNIT50H_BradenheadCBLVariance_20240828132839.pdf

MESAVERDEWCUNIT50H_OfflineCementVariance_20240828132844.pdf



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

SUPO Data Report

02/10/2025

APD ID: 10400100712

Submission Date: 08/28/2024

Operator Name: OXY USA INCORPORATED

Well Name: MESA VERDE WC UNIT

Well Number: 50H

Well Type: OIL WELL

Well Work Type: Drill

Highlighted data
reflects the most
recent changes
[Show Final Text](#)

Section 1 - Existing Roads

Will existing roads be used? YES

Existing Road Map:

MESAVERDEWCUNIT50H_ExistingRoads_20240828132857.pdf

Existing Road Purpose: ACCESS,FLUID TRANSPORT

Row(s) Exist? NO

ROW ID(s)

ID:

Do the existing roads need to be improved? NO

Existing Road Improvement Description:

Existing Road Improvement Attachment:

Section 2 - New or Reconstructed Access Roads

Will new roads be needed? YES

New Road Map:

MESAVERDEWCUNIT50H_NewRoads_20240828132912.pdf

New road type: LOCAL

Length: 5843

Feet

Width (ft.): 30

Max slope (%): 0

Max grade (%): 0

Army Corp of Engineers (ACOE) permit required? N

ACOE Permit Number(s):

New road travel width: 20

New road access erosion control: Watershed diversion every 200', if needed.

New road access plan or profile prepared? N

New road access plan

Operator Name: OXY USA INCORPORATED**Well Name:** MESA VERDE WC UNIT**Well Number:** 50H**Access road engineering design?** N**Access road engineering design****Turnout?** N**Access surfacing type:** OTHER**Access topsoil source:** ONSITE**Access surfacing type description:** CALICHE**Access onsite topsoil source depth:** 0**Offsite topsoil source description:****Onsite topsoil removal process:** If available**Access other construction information:****Access miscellaneous information:****Number of access turnouts:****Access turnout map:**

Drainage Control

New road drainage crossing: CULVERT**Drainage Control comments:** Watershed diversion every 200', if needed.**Road Drainage Control Structures (DCS) description:** Watershed diversion every 200', if needed.**Road Drainage Control Structures (DCS) attachment:**

Access Additional Attachments

Section 3 - Location of Existing Wells

Existing Wells Map? YES**Attach Well map:**

MESAVERDEWCUNIT50H_ExistingWells_20240828132934.pdf

Section 4 - Location of Existing and/or Proposed Production Facilities

Submit or defer a Proposed Production Facilities plan? SUBMIT**Production Facilities description:****Production Facilities map:**

MESAVERDEWCUNIT50H_LeaseFacility_20240828132949.pdf

Operator Name: OXY USA INCORPORATED

Well Name: MESA VERDE WC UNIT

Well Number: 50H

Section 5 - Location and Types of Water Supply

Water Source Table

Water source type: GW WELL

Water source use type:

SURFACE CASING

OTHER

Describe use type: DRILLING

INTERMEDIATE/PRODUCTION CASING

Source latitude:

Source longitude:

Source datum:

Water source permit type:

WATER WELL

Water source transport method:

PIPELINE

TRUCKING

Source land ownership: COMMERCIAL

Source transportation land ownership: COMMERCIAL

Water source volume (barrels): 2000

Source volume (acre-feet): 0.25778619

Source volume (gal): 84000

Water source and transportation

MESAVERDEWCUNIT50H_WtrSrcGRR_20240828133009.pdf
MESAVERDEWCUNIT50H_WtrSrcMesq_20240828133015.pdf
MESAVERDEWCUNIT50H_WATER__CALICHE_MAP_20240828133021.pdf

Water source comments: This well will be drilled using a combination of water mud systems. It will be obtained from commercial water stations (Gregory Rockhouse, Mesquite) in the area and will be hauled to location by transport truck using existing and proposed roads.
New water well? N

New Water Well Info

Well latitude:

Well Longitude:

Well datum:

Well target aquifer:

Est. depth to top of aquifer(ft):

Est thickness of aquifer:

Aquifer comments:

Aquifer documentation:

Well depth (ft):

Well casing type:

Operator Name: OXY USA INCORPORATED**Well Name:** MESA VERDE WC UNIT**Well Number:** 50H**Well casing outside diameter (in.):****Well casing inside diameter (in.):****New water well casing?****Used casing source:****Drilling method:****Drill material:****Grout material:****Grout depth:****Casing length (ft.):****Casing top depth (ft.):****Well Production type:****Completion Method:****Water well additional information:****State appropriation permit:****Additional information attachment:**

Section 6 - Construction Materials

Using any construction materials: YES

Construction Materials description: Primary All caliche utilized for the drilling pad and proposed access road will be obtained from an existing BLM/State/Fee approved pit or from prevailing deposits found on the location. Will use BLM recommended extra caliche from other locations close by for roads, if available. Secondary The secondary way of obtaining caliche to build locations and roads will be by turning over the location. This means, caliche will be obtained from the actual well site. A caliche permit will be obtained from BLM prior to pushing up any caliche. 2400 cubic yards is max amount of caliche needed for pad and roads. Amount will vary for each pad. The procedure below has been approved by BLM personnel: a. The top 6 of topsoil is pushed off and stockpiled along the side of the location. b. An approximate 120 X 120 area is used within the proposed well site to remove caliche. c. Subsoil is removed and piled alongside the 120 X 120 within the pad site. d. When caliche is found, material will be stockpiled within the pad site to build the location and road. e. Then subsoil is pushed back in the hole and caliche is spread accordingly across entire location and road. f. Once the well is drilled the stockpiled top soil will be used for interim reclamation and spread along areas where caliche is picked up and the location size is reduced. Neither caliche nor subsoil will be stockpiled outside of the well pad. Topsoil will be stockpiled along the edge of the pad as depicted in the site plan included with this APD.

Construction Materials source location

MESAVERDEWCUNIT50H_WATER__CALICHE_MAP_20240828133034.pdf

Section 7 - Methods for Handling

Waste type: DRILLING**Waste content description:** Water-Based Cuttings, Water-Based Mud, Oil-Based Cuttings, Oil-Based Mud, Produced Water**Amount of waste:** 1797 barrels**Waste disposal frequency :** Daily**Safe containment description:** Haul-Off Bins**Safe containmant attachment:****Waste disposal type:** HAUL TO COMMERCIAL FACILITY**Disposal location ownership:** COMMERCIAL**Disposal type description:**

Disposal location description: An approved facility that can process drill cuttings, drill fluids, flowback water, produced water, contaminated soils, and other non-hazardous wastes. Methods of Handling Waste Material: a. A closed loop system will be utilized consisting of above ground steel tanks and haul-off bins.

Operator Name: OXY USA INCORPORATED**Well Name:** MESA VERDE WC UNIT**Well Number:** 50H

Disposal of liquids, drilling fluids and cuttings will be disposed of at an approved facility. Solids-CRI, Liquids-Laguna b. All trash, junk and other waste material will be contained in trash cages or bins to prevent scattering. When the job is completed, all contents will be removed and disposed of in an approved sanitary landfill. c. The supplier, including broken sacks, will pickup slats remaining after completion of well. d. A Porto-john will be provided for the rig crews. This equipment will be properly maintained during the drilling and completion operations and will be removed when all operations are complete. e. Disposal of fluids to be transported will be by the following companies. TFH Ltd, Laguna SWD Facility

Reserve Pit

Reserve Pit being used? NO**Temporary disposal of produced water into reserve pit?** NO**Reserve pit length (ft.)****Reserve pit width (ft.)****Reserve pit depth (ft.)****Reserve pit volume (cu. yd.)****Is at least 50% of the reserve pit in cut?****Reserve pit liner****Reserve pit liner specifications and installation description**

Cuttings Area

Cuttings Area being used? NO**Are you storing cuttings on location?** Y

Description of cuttings location A closed loop system will be utilized consisting of above ground steel tanks and haul-off bins. Disposal of liquids, drilling fluids and cuttings will be disposed of at an approved facility.

Cuttings area length (ft.)**Cuttings area width (ft.)****Cuttings area depth (ft.)****Cuttings area volume (cu. yd.)****Is at least 50% of the cuttings area in cut?****WCuttings area liner****Cuttings area liner specifications and installation description**

Section 8 - Ancillary

Are you requesting any Ancillary Facilities?: N**Ancillary Facilities****Comments:**

Operator Name: OXY USA INCORPORATED**Well Name:** MESA VERDE WC UNIT**Well Number:** 50H

Section 9 - Well Site

Well Site Layout Diagram:

MESAVERDEWCUNIT50H_ClosedLoop_20240828133114.pdf

Comments:

Section 10 - Plans for Surface Reclamation

Type of disturbance: New Surface Disturbance**Multiple Well Pad Name:** MSAVRD_T24SR32E**Multiple Well Pad Number:** 17_02

Recontouring

MESAVERDEWCUNIT50H_Cut_Fill_20240828133138.pdf

MESAVERDEWCUNIT50H_SITE_PLAN_20240828133244.pdf

Drainage/Erosion control construction: Reclamation to be wind rowed as needed to control erosion.**Drainage/Erosion control reclamation:** Reclamation to be wind rowed as needed to control erosion.

Well pad proposed disturbance (acres): 10.18	Well pad interim reclamation (acres): 1.42	Well pad long term disturbance (acres): 8.75
Road proposed disturbance (acres): 4.02	Road interim reclamation (acres): 1.34	Road long term disturbance (acres): 2.68
Powerline proposed disturbance (acres): 3.01	Powerline interim reclamation (acres): 3.01	Powerline long term disturbance (acres): 0
Pipeline proposed disturbance (acres): 13.92	Pipeline interim reclamation (acres): 9.28	Pipeline long term disturbance (acres): 4.64
Other proposed disturbance (acres): 1.42	Other interim reclamation (acres): 0	Other long term disturbance (acres): 1.42
Total proposed disturbance: 32.550000000000004	Total interim reclamation: 15.049999999999999	Total long term disturbance: 17.490000000000002

Disturbance Comments:

Reconstruction method: If the well is deemed commercially productive, caliche from the areas of the pad site not required for operations will be reclaimed. The original topsoil will be returned to the area of the drill pad not necessary to operate the well. These unused areas of the drill pad will be contoured, as close as possible, to match the original topography, and the area will be seeded with an approved BLM mixture to re-establish vegetation. After concluding the drilling and/or completion operations, if the well is found non-commercial, the caliche will be removed from the pad and transported to the original caliche pit or used for other drilling locations. The road will be reclaimed as directed by the BLM. The original topsoil will again be returned to the pad and contoured, as close as possible, to the original topography and the area will be seeded with an approved BLM mixture to re-establish vegetation.

Topsoil redistribution: The original topsoil will be returned to the area of the drill pad not necessary to operate the well.

Soil treatment: To be determined by BLM.

Existing Vegetation at the well pad: To be determined by BLM at onsite.

Existing Vegetation at the well pad

Operator Name: OXY USA INCORPORATED

Well Name: MESA VERDE WC UNIT

Well Number: 50H

Existing Vegetation Community at the road: To be determined by BLM at onsite.

Existing Vegetation Community at the road

Existing Vegetation Community at the pipeline: To be determined by BLM at onsite.

Existing Vegetation Community at the pipeline

Existing Vegetation Community at other disturbances: To be determined by BLM at onsite.

Existing Vegetation Community at other disturbances

Non native seed used? N

Non native seed description:

Seedling transplant description:

Will seedlings be transplanted for this project? N

Seedling transplant description

Will seed be harvested for use in site reclamation? N

Seed harvest description:

Seed harvest description attachment:

Seed

Seed Table

Seed Summary	
Seed Type	Pounds/Acre

Total pounds/Acre:

Seed reclamation

Operator Contact/Responsible Official

First Name: Mike

Phone: (575)631-6618

Last Name: Wilson

Email: michael_wilson@oxy.com

Seedbed prep:

Seed BMP:

Seed method:

Existing invasive species? N

Existing invasive species treatment description:

Operator Name: OXY USA INCORPORATED

Well Name: MESA VERDE WC UNIT

Well Number: 50H

Existing invasive species treatment

Weed treatment plan description: To be determined by BLM.

Weed treatment plan

Monitoring plan description: To be determined by BLM.

Monitoring plan

Success standards: To be determined by BLM.

Pit closure description: NA

Pit closure attachment:

Section 11 - Surface Ownership

Disturbance type: WELL PAD

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Disturbance type: NEW ACCESS ROAD

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

Operator Name: OXY USA INCORPORATED

Well Name: MESA VERDE WC UNIT

Well Number: 50H

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Disturbance type: PIPELINE

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Operator Name: OXY USA INCORPORATED

Well Name: MESA VERDE WC UNIT

Well Number: 50H

Disturbance type: OTHER

Describe: ELECTRIC LINES

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:USFS Ranger District:

Section 12 - Other

Right of Way needed? YUse APD as ROW? Y

ROW Type(s): 281001 ROW - ROADS,285003 ROW – POWER TRANS,288100 ROW – O&G Pipeline,288101 ROW – O&G Facility Sites,289001 ROW- O&G Well Pad

ROW

SUPO Additional Information: Permian Basin MOA : To be submitted after APD acceptance. GIS shapefiles available for BLM.

Use a previously conducted onsite? N

Previous Onsite information:

Other SUPO

MESAVERDEWCUNIT50H_NGMP___WMP_20240828133530.pdf

MESAVERDEWCUNIT50H_StakingSheet_20240828133540.pdf



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

PWD Data Report

02/10/2025

APD ID: 10400100712

Submission Date: 08/28/2024

Operator Name: OXY USA INCORPORATED

Well Name: MESA VERDE WC UNIT

Well Number: 50H

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined

Would you like to utilize Lined Pit PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit

Pit liner description:

Pit liner manufacturers

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule

Lined pit reclamation description:

Lined pit reclamation

Leak detection system description:

Leak detection system

Operator Name: OXY USA INCORPORATED

Well Name: MESA VERDE WC UNIT

Well Number: 50H

Lined pit Monitor description:

Lined pit Monitor

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information

Section 3 - Unlined

Would you like to utilize Unlined Pit PWD options? N

Produced Water Disposal (PWD) Location:

PWD disturbance (acres):

PWD surface owner:

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule

Unlined pit reclamation description:

Unlined pit reclamation

Unlined pit Monitor description:

Unlined pit Monitor

Do you propose to put the produced water to beneficial use?

Beneficial use user

Estimated depth of the shallowest aquifer (feet):

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic

State

Unlined Produced Water Pit Estimated

Unlined pit: do you have a reclamation bond for the pit?

Operator Name: OXY USA INCORPORATED**Well Name:** MESA VERDE WC UNIT**Well Number:** 50H**Is the reclamation bond a rider under the BLM bond?****Unlined pit bond number:****Unlined pit bond amount:****Additional bond information****Section 4 -****Would you like to utilize Injection PWD options?** N**Produced Water Disposal (PWD) Location:****PWD surface owner:****PWD disturbance (acres):****Injection PWD discharge volume (bbl/day):****Injection well mineral owner:****Injection well type:****Injection well number:****Injection well name:****Assigned injection well API number?****Injection well API number:****Injection well new surface disturbance (acres):****Minerals protection information:****Mineral protection****Underground Injection Control (UIC) Permit?****UIC Permit****Section 5 - Surface****Would you like to utilize Surface Discharge PWD options?** N**Produced Water Disposal (PWD) Location:****PWD surface owner:****PWD disturbance (acres):****Surface discharge PWD discharge volume (bbl/day):****Surface Discharge NPDES Permit?****Surface Discharge NPDES Permit attachment:****Surface Discharge site facilities information:****Surface discharge site facilities map:****Section 6 -****Would you like to utilize Other PWD options?** N**Produced Water Disposal (PWD) Location:****PWD surface owner:****PWD disturbance (acres):****Other PWD discharge volume (bbl/day):**

Operator Name: OXY USA INCORPORATED

Well Name: MESA VERDE WC UNIT

Well Number: 50H

Other PWD type description:

Other PWD type

Have other regulatory requirements been met?

Other regulatory requirements



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Bond Info Data

02/10/2025

APD ID: 10400100712

Submission Date: 08/28/2024

Operator Name: OXY USA INCORPORATED

Well Name: MESA VERDE WC UNIT

Well Number: 50H

Well Type: OIL WELL

Well Work Type: Drill

Highlighted data
reflects the most
recent changes
[Show Final Text](#)

Bond

Federal/Indian APD: FED

BLM Bond number: ESB000226

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information

Oxy USA Inc. - MESA VERDE WC UNIT 50H

Drill Plan

1. Geologic Formations

TVD of Target (ft):	13020	Pilot Hole Depth (ft):	
Total Measured Depth (ft):	23782	Deepest Expected Fresh Water (ft):	837

Delaware Basin

Formation	MD-RKB (ft)	TVD-RKB (ft)	Expected Fluids
Rustler	837	837	
Salado	1166	1166	Salt
Castile	3103	3103	Salt
Delaware	4661	4661	Oil/Gas/Brine
Bell Canyon	4690	4690	Oil/Gas/Brine
Cherry Canyon	5574	5573	Oil/Gas/Brine
Brushy Canyon	6908	6882	Losses
Bone Spring	8656	8585	Oil/Gas
Bone Spring 1st	9773	9673	Oil/Gas
Bone Spring 2nd	10381	10266	Oil/Gas
Bone Spring 3rd	11708	11559	Oil/Gas
Wolfcamp	12174	12013	Oil/Gas
Penn			Oil/Gas
Strawn			Oil/Gas

*H2S, water flows, loss of circulation, abnormal pressures, etc.

2. Casing Program

		MD		TVD					
Section	Hole Size (in)	From (ft)	To (ft)	From (ft)	To (ft)	Csg. OD (in)	Csg Wt. (ppf)	Grade	Conn.
Surface	14.75	0	897	0	897	10.75	45.5	J-55	BTC
Intermediate	9.875	0	12670	0	12500	7.625	26.4	L-80 HC	BTC
Production	6.75	0	23782	0	13020	5.5	20	P-110	Sprint-SF

All casing strings will be tested in accordance with 43 CFR part 3170 Subpart 3172

All Casing SF Values will meet or exceed those below			
SF Collapse	SF Burst	Body SF Tension	Joint SF Tension
1.00	1.100	1.4	1.4

	Y or N
Is casing new? If used, attach certification as required in 43 CFR 3160	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	Y
Does the above casing design meet or exceed BLM’s minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50’ above the Reef?	
Is well within the designated 4 string boundary.	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500’ into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100’ to 600’ below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

3. Cementing Program

Section	Stage	Slurry:	Sacks	Yield (ft^3/ft)	Density (lb/gal)	Excess:	TOC	Placement	Description
Surface	1	Surface - Tail	750	1.33	14.8	100%	-	Circulate	Class C+Accel.
Int.	1	Intermediate 1S - Tail	740	1.68	13.2	5%	7,158	Circulate	Class C+Ret., Disper.
Int.	2	Intermediate 2S - Tail BH	1106	1.71	13.3	25%	-	Bradenhead	Class C+Accel.
Prod.	1	Production - Tail	658	1.84	13.3	25%	12,170	Circulate	Class C+Ret.

Offline Cementing Request

Oxy requests a variance to cement the 9.625” and/or 7.625” intermediate casing strings offline in accordance to the approved variance, EC Tran 461365. Please see Offline Cementing Variance attachment for further details.

Bradenhead CBL Request

Oxy requests permission to adjust the CBL requirement after bradenhead cement jobs, on 7-5/8” intermediate casings, as per the agreement reached in the OXY/BLM meeting on September 5, 2019. Please see Bradenhead CBL Variance attachment for further details.

4. Pressure Control Equipment

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Type		✓	Tested to:	Deepest TVD Depth (ft) per Section:
9.875" Hole	13-5/8"	5M	Annular		✓	70% of working pressure	12500
		5M	Blind Ram		✓	250 psi / 5000 psi	
			Pipe Ram				
			Double Ram		✓		
			Other*				
6.75" Hole	13-5/8"	5M	Annular		✓	100% of working pressure	13020
		10M	Blind Ram		✓	250 psi / 10000 psi	
			Pipe Ram				
			Double Ram		✓		
			Other*				

*Specify if additional ram is utilized

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per 43 CFR part 3170 Subpart 3172 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke

5M Annular BOP Request

Per BLM’s Memorandum No. NM-2017-008: *Decision and Rationale for a Variance Allowing the Use of a 5M Annular Preventer with a 10M BOP Stack*, Oxy requests to employ a 5M annular with a 10M BOPE stack in the pilot and lateral sections of the well and will ensure that two barriers to flow are maintained at all times. Please see Annular BOP Variance attachment for further details.

	Formation integrity test will be performed per 43 CFR part 3170 Subpart 3172.	
	On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with 43 CFR part 3170 Subpart 3172.	
	A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.	
	Y	Are anchors required by manufacturer?
	A multibowl or a unionized multibowl wellhead system will be employed. The wellhead and connection to the BOPE will meet all API 6A requirements. The BOP will be tested per 43 CFR part 3170 Subpart 3172 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested. We will test the flange connection of the wellhead with a test port that is directly in the flange. We are proposing that we will run the wellhead through the rotary prior to cementing surface casing as discussed with the BLM on October 8, 2015. See attached schematics.	

BOP Break Testing Request

Oxy requests permission to adjust the BOP break testing requirements as per the agreement reached in the OXY/BLM meeting on September 5, 2019. Please see BOP Break Testing Variance attachment for further details.

Oxy will use Cameron ADAPT wellhead system that uses an OEC top flange connection. This connection has been fully vetted and verified by API to Spec 6A and carries an API monogram.

5. Mud Program

Section	Depth - MD		Depth - TVD		Type	Weight (ppg)	Viscosity	Water Loss
	From (ft)	To (ft)	From (ft)	To (ft)				
Surface	0	897	0	897	Water-Based Mud	8.6 - 8.8	40-60	N/C
Intermediate	897	12670	897	12500	Saturated Brine-Based or Oil-Based Mud	8.0 - 10.0	35-45	N/C
Production	12670	23782	12500	13020	Water-Based or Oil-Based Mud	9.5 - 13.5	38-50	N/C

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times. The following is a general list of products: Barite, Bentonite, Gypsum, Lime, Soda Ash, Caustic Soda, Nut Plug, Cedar Fiber, Cotton Seed Hulls,

What will be used to monitor the loss or gain of fluid?	PVT/MD Totco/Visual Monitoring
---	--------------------------------

6. Logging and Testing Procedures

Logging, Coring and Testing.		
Yes	Will run GR from TD to surface (horizontal well – vertical portion of hole).	
	Stated logs run will be in the Completion Report and submitted to the BLM.	
No	Logs are planned based on well control or offset log information.	
No	Drill stem test? If yes, explain	
No	Coring? If yes, explain	
Additional logs planned		Interval
No	Resistivity	
No	Density	
Yes	CBL	Production string
Yes	Mud log	Bone Spring – TD
No	PEX	

7. Drilling Conditions

Condition	Specify what type and where?
BH Pressure at deepest TVD	9141 psi
Abnormal Temperature	No
BH Temperature at deepest TVD	185°F

Pump high viscosity sweeps as needed for hole cleaning. The mud system will be monitored visually/manually as well as with an electronic PVT. The necessary mud products for additional weight and fluid loss control will be on location at all times. Appropriately weighted mud will be used to isolate potential gas, oil, and water zones until such time as casing can be cemented into place for

Hydrogen Sulfide (H2S) monitors will be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of 43 CFR part 3170 Subpart 3172. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.	
N	H2S is present
Y	H2S Plan attached

8. Other facets of operation

		Yes/No
Will the well be drilled with a walking/skidding operation? If yes, describe. We plan to drill the 5 well pad in batch by section: all surface sections, intermediate sections and production sections. The wellhead will be secured with a night cap whenever the rig is not over the well.		Yes
Will more than one drilling rig be used for drilling operations? If yes, describe. Oxy requests the option to contract a Surface Rig to drill, set surface casing, and cement for this well. If the timing between rigs is such that Oxy would not be able to preset surface, the Primary Rig will MIRU and drill the well in its entirety per the APD. Please see the attached document for information on the spudder rig.		Yes
Total Estimated Cuttings Volume: 1797 bbls		

Oxy USA Inc. - Blanket Design Pad Document

OXY - Blanket Design A

Pad Name: MSAVRD_T24SR32E_17_02

SHL: 1221' FSL 1105' FWL, Sec 17, T24S-R32E

Oxy requests for the bellow wells to be approved for the two designs listed in the Blanket Design document (**Blanket Design A –OXY –3S Slim v7.**) The MDs and TVDs for all intervals are within the boundary conditions. The max inclination and DLS are also within the boundary conditions (directional plans attached separately for review.)

1. Blanket Design - Wells

Well Name	APD #	Surface		Intermediate		Production	
		MD	TVD	MD	TVD	MD	TVD
MESA VERDE BS UNIT 69H	N/A - New Permit	892	892	11786	11219	22051	11219
MESA VERDE BS UNIT 70H	N/A - New Permit	904	904	11761	11219	22026	11219
MESA VERDE WC UNIT 33H	N/A - New Permit	891	891	12708	12500	23626	12830
MESA VERDE WC UNIT 34H	N/A - New Permit	905	905	12632	12500	23549	12830
MESA VERDE WC UNIT 35H	N/A - New Permit	916	916	12728	12500	23373	12620
MESA VERDE WC UNIT 50H	N/A - New Permit	897	897	12670	12500	23782	13020
MESA VERDE WC UNIT 51H	N/A - New Permit	912	912	12649	12500	23765	13020

2. Review Criteria Table

	Y or N
Is casing new? If used, attach certification as required in 43 CFR 3160	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	Y
Does the above casing design meet or exceed BLM’s minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50’ above the Reef?	
Is well within the designated 4 string boundary.	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500’ into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100’ to 600’ below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

3. Geologic Formations

Formation	MD-RKB (ft)	TVD-RKB (ft)	Expected Fluids
Rustler	832	832	
Salado	1162	1162	Salt
Castile	3101	3101	Salt
Delaware	4658	4658	Oil/Gas/Brine
Bell Canyon	4686	4686	Oil/Gas/Brine
Cherry Canyon	5578	5569	Oil/Gas/Brine
Brushy Canyon	6945	6877	Losses
Bone Spring	8726	8580	Oil/Gas
Bone Spring 1st	9863	9667	Oil/Gas
Bone Spring 2nd	10482	10259	Oil/Gas
Bone Spring 3rd			Oil/Gas
Wolfcamp			Oil/Gas
Penn			Oil/Gas
Strawn			Oil/Gas

4. Cementing Program

Section	Stage	Slurry:	Sacks	Yield (ft^3/ft)	Density (lb/gal)	Excess:	TOC	Placement	Description
Surface	1	Surface - Tail	746	1.33	14.8	100%	-	Circulate	Class C+Accel.
Int.	1	Intermediate 1S - Tail	616	1.68	13.2	5%	7,195	Circulate	Class C+Ret., Disper.
Int.	2	Intermediate 2S - Tail BH	1111	1.71	13.3	25%	-	Bradenhead	Class C+Accel.
Prod.	1	Production - Tail	610	1.84	13.3	25%	11,286	Circulate	Class C+Ret.



Oxy Bulk Design - Casing Design "A"



1. Casing Program

The designs and associated details listed in this document are the "worst case scenario" boundaries for design safety factors.

Location and lithology have NOT been accounted for in these designs; however, the designs are NOT valid for wells within KPLA Boundaries or Capitan Reef areas. The specific well details will be based on the APD/Sundry package and the information listed in the COA.

The mud program listed below will remain the same between each design variation.

Hole will be full during casing run for well control and tensile SF.

Casing will be kept at least half full during run for these designs to meet BLM collapse SF requirement.

Design Variation "A1"

Section	Hole Size (in)	MD		TVD		Csg. OD (in)	Csg Wt. (ppf)	Grade	Conn.
		From (ft)	To (ft)	From (ft)	To (ft)				
Surface	14.75	0	1200	0	1200	10.75	45.5	J-55	BTC
Intermediate	9.875	0	13111*	0	12775*	7.625	26.4	L-80 HC	BTC Axis HT
Production	6.75	0	23361	0	12775	5.5	20	P-110	Wedge 461 Sprint SF DWC/C-HT-IS

*Curve could be in intermediate or production section

Design Variation "A2" - Option to Pivot to Design "B" for Contingency 4S

Section	Hole Size (in)	MD		TVD		Csg. OD (in)	Csg Wt. (ppf)	Grade	Conn.
		From (ft)	To (ft)	From (ft)	To (ft)				
Surface	17.5	0	1200	0	1200	13.375	54.5	J-55	BTC
Intermediate	12.25†	0	13111*	0	12775*	7.625	26.4	L-80 HC	BTC Axis HT
Production	6.75	0	23361	0	12775	5.5	20	P-110	Wedge 461 Sprint SF DWC/C-HT-IS

*Curve could be in intermediate or production section

†If 4S Contingency is not required, Oxy requests permission to transition from 12.25" to 9.875" Intermediate at some point during the hole section. Cement volumes will be updated on C103 submission.

All casing strings will be tested in accordance with 43 CFR part 3170 Subpart 3172

All Casing SF Values will meet or exceed those below			
SF Collapse	SF Burst	Body SF Tension	Joint SF Tension
1.00	1.100	1.4	1.4



Oxy Bulk Design - Casing Design "A"



§Annular Clearance Variance Request

As per the agreement reached in the Oxy/BLM face-to-face meeting on Feb 22, 2018, Oxy requests permission to allow deviation from the 0.422" annular clearance requirement. Please see Annular Clearance Variance attachment for further details.

§Annular Clearance Variance Request may not apply to all connections used or presented.

2. Trajectory / Boundary Conditions

Section	MD		TVD		Max. Angle	Max. Planned DLS
	Deepest KOP (ft)	End Build (ft)	Deepest KOP (ft)	End Build (ft)		
Surface	0	1200	0	1200	5°	1°/100 ft
Intermediate	5000 (inside Cherry Canyon)	6500	4980	6390	20°	2°/100 ft
	12211	13111	12202	12775	92° ‡	12°/100 ft ‡
Production	12211 (~100' MD past ICP)	13111	12202	12775	92° ‡	12°/100 ft ‡

‡ Applies only when intermediate casing depth is deepened to landing point to match TVD of production in some areas where required to accommodate higher MWs in depleted areas.

Oxy has reviewed casing burst, collapse, and axial loadcases in Landmark StressCheck with the boundary conditions in the table above which satisfies Oxy and BLM minimum design criteria. Triaxial plots for each casing string is shown in Section 7 and intermediate load case inputs are shown in Section 8.



Oxy Bulk Design - Casing Design "A"



3. Cementing Program

NOTE: Blanket design is for technical review only. The cement volumes will be adjusted to ensure cement tops meet BLM requirements.

Design Variation "A1"

Section	Stage	Slurry:	Sacks	Yield (ft ³ /ft)	Density (lb/gal)	Excess:	TOC	Placement	Description
Surface	1	Surface - Tail	819	1.33	14.8	100%	-	Circulate	Class C+Accel.
Int.	1	Intermediate 1S - Tail	658	1.68	13.2	5%	7,206	Circulate	Class C+Ret., Disper.
Int.	2	Intermediate 2S - Tail BH	1111	1.71	13.3	25%	-	Bradenhead	Class C+Accel.
Prod.	1	Production - Tail	665	1.84	13.3	25%	11,611	Circulate	Class C+Ret.
Prod.	2*	Production - Tail BH*	TBD	1.84	13.3	50%	500' inside prev csg	Circulate	Class C+Ret.

*Only applies in scenario where planned single stage job TOC is not 500' above previous shoe as designed/programmed requiring bradenhead 2nd stage to meet requirements

Design Variation "A2"

Section	Stage	Slurry:	Sacks	Yield (ft ³ /ft)	Density (lb/gal)	Excess:	TOC	Placement	Description
Surface	1	Surface - Tail	1023	1.33	14.8	100%	-	Circulate	Class C+Accel.
Int.	1	Intermediate 1S - Tail	658	1.68	13.2	5%	7,206	Circulate	Class C+Ret., Disper.
Int.	2	Intermediate 2S - Tail BH	1293	1.71	13.3	25%	-	Bradenhead	Class C+Accel.
Prod.	1	Production - Tail	665	1.84	13.3	25%	11,611	Circulate	Class C+Ret.
Prod.	2*	Production - Tail BH*	TBD	1.84	13.3	50%	500' inside prev csg	Circulate	Class C+Ret.

*Only applies in scenario where planned single stage job TOC is not 500' above previous shoe as designed/programmed requiring bradenhead 2nd stage to meet requirements

Offline Cementing Request

Oxy requests a variance to cement the 9.625" and/or 7.625" intermediate casing strings offline in accordance to the approved variance, EC Tran 461365. Please see Offline Cementing Variance attachment for further details.

Bradenhead CBL Request

Oxy requests permission to adjust the CBL requirement after bradenhead cement jobs, on 7-5/8" intermediate casings, as per the agreement reached in the OXY/BLM meeting on September 5, 2019. Please see Bradenhead CBL Variance attachment for further details.



Oxy Bulk Design - Casing Design "A"



4. Pressure Control Equipment

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Type		✓	Tested to:	Deepest TVD Depth (ft) per Section:
9.875" Hole	13-5/8"	5M	Annular		✓	70% of working pressure	12775**
		5M	Blind Ram		✓	250 psi / 5000 psi	
			Pipe Ram				
			Double Ram		✓		
			Other*				
6.75" Hole	13-5/8"	5M	Annular		✓	100% of working pressure	12775
		10M	Blind Ram		✓	250 psi / 10000 psi	
			Pipe Ram				
			Double Ram		✓		
			Other*				

*Specify if additional ram is utilized

**Curve could be in intermediate or production section

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per 43 CFR part 3170 Subpart 3172 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.

5M Annular BOP Request

Per BLM's Memorandum No. NM-2017-008: *Decision and Rationale for a Variance Allowing the Use of a 5M Annular Preventer with a 10M BOP Stack*, Oxy requests to employ a 5M annular with a 10M BOPE stack in the pilot and lateral sections of the well and will ensure that two barriers to flow are



Oxy Bulk Design - Casing Design "A"



Formation integrity test will be performed per 43 CFR part 3170 Subpart 3172.

On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with 43 CFR part 3170 Subpart 3172.

A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. Coflex hoses are in compliance with API 16C and meets inspection and testing requirements. See attached for specs and hydrostatic test chart.

Y

Are anchors required by manufacturer?

A multibowl or a unionized multibowl wellhead system will be employed. The wellhead and connection to the BOPE will meet all API 6A requirements. The BOP will be tested per 43 CFR part 3170 Subpart 3172 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested. We will test the flange connection of the wellhead with a test port that is directly in the flange. We are proposing that we will run the wellhead through the rotary prior to cementing surface casing as discussed with the BLM on October 8, 2015.

See attached Schematics.

BOP Break Testing Request

Oxy requests permission to adjust the BOP break testing requirements as per the agreement reached in the OXY/BLM meeting on September 5, 2019. Please see BOP Break Testing Variance attachment for further details.

Hammer Union Variance

Oxy requests permission for hammer unions behind the choke to be routed to the gas buster. The hammer unions will not be subject to wellbore pressure in compliance with API STD 53.

Oxy will use Cameron ADAPT wellhead system that uses an OEC top flange connection. This connection has been fully vetted and verified by API to Spec 6A and carries an API monogram.



Oxy Bulk Design - Casing Design "A"



5. Mud Program & Drilling Conditions

Section	Depth - MD		Depth - TVD		Type	Weight (ppg)	Viscosity	Water Loss
	From (ft)	To (ft)	From (ft)	To (ft)				
Surface	0	1200	0	1200	Water-Based Mud	8.6 - 8.8	40-60	N/C
Intermediate	1200	13111*	1200	12775*	Saturated Brine-Based or Oil-Based Mud	8.0 - 10.0	35-45	N/C
Production	13111	23361	12775	12775	Water-Based or Oil-Based Mud	9.5 - 13.5	38-50	N/C

Curve could be in intermediate or production section

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times. The following is a general list of products: Barite, Bentonite, Gypsum, Lime, Soda Ash, Caustic Soda, Nut Plug, Cedar Fiber, Cotton Seed Hulls, Drilling Paper, Salt Water Clay, CACL2. Oxy will use a closed mud system.

Drilling Blind Request

In the event total losses are encountered in the intermediate section, Oxy requests permission to drill blind due to depleted formations where risk of hydrocarbon kicks are unlikely.

- Oxy will first attempt to cure losses before proceeding with drilling blind
- Drilling blind will only be allowed in the Castille and formations below
- While drilling blind, will monitor backside by filling-up on connections and utilize gas monitors
- Depths at which losses occurred and attempt to cure losses with relevant details (LCM sweep info, etc.) will be documented in the drillers log and Subsequent Reports to the BLM.
- If a well control event (hydrocarbon kick) occurs while drilling blind, the BLM will be notified after the well is secured and returned to static.

What will be used to monitor the loss or gain of fluid?

PVT/MD Totco/Visual Monitoring

Pump high viscosity sweeps as needed for hole cleaning. The mud system will be monitored visually/manually as well as with an electronic PVT. The necessary mud products for additional weight and fluid loss control will be on location at all times. Appropriately weighted mud will be used to isolate potential gas, oil, and water zones until such time as casing can be cemented into place for zonal isolation.




Oxy Bulk Design - Casing Design "A"




6. Wellbore Diagram(s)

Design Variation "A1"

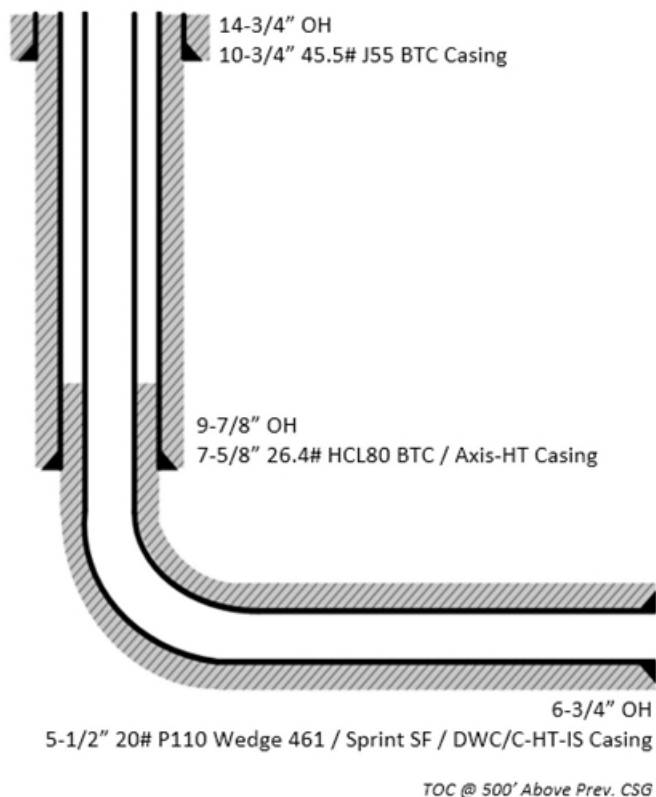

Design Variation "A2"

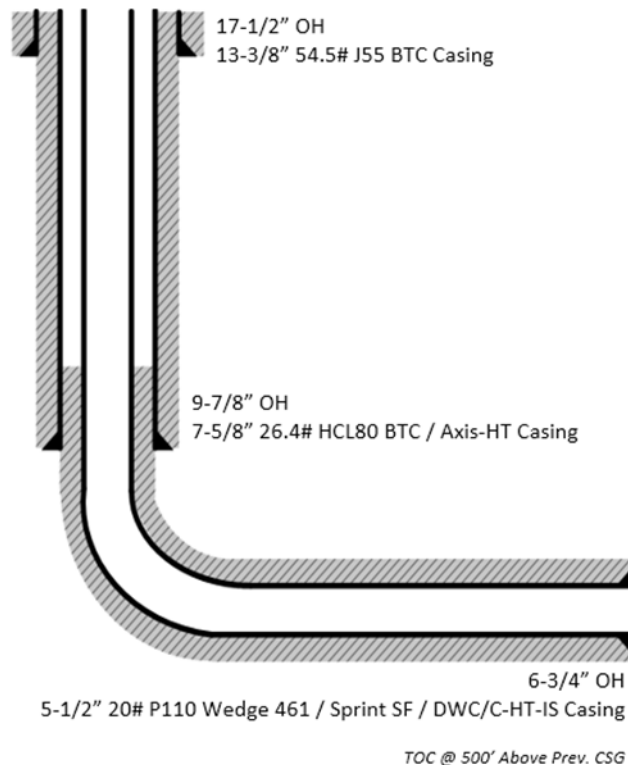




Oxy Bulk Design - Casing Design "A"




7. Landmark StressCheck Screenshots – Triaxial Output

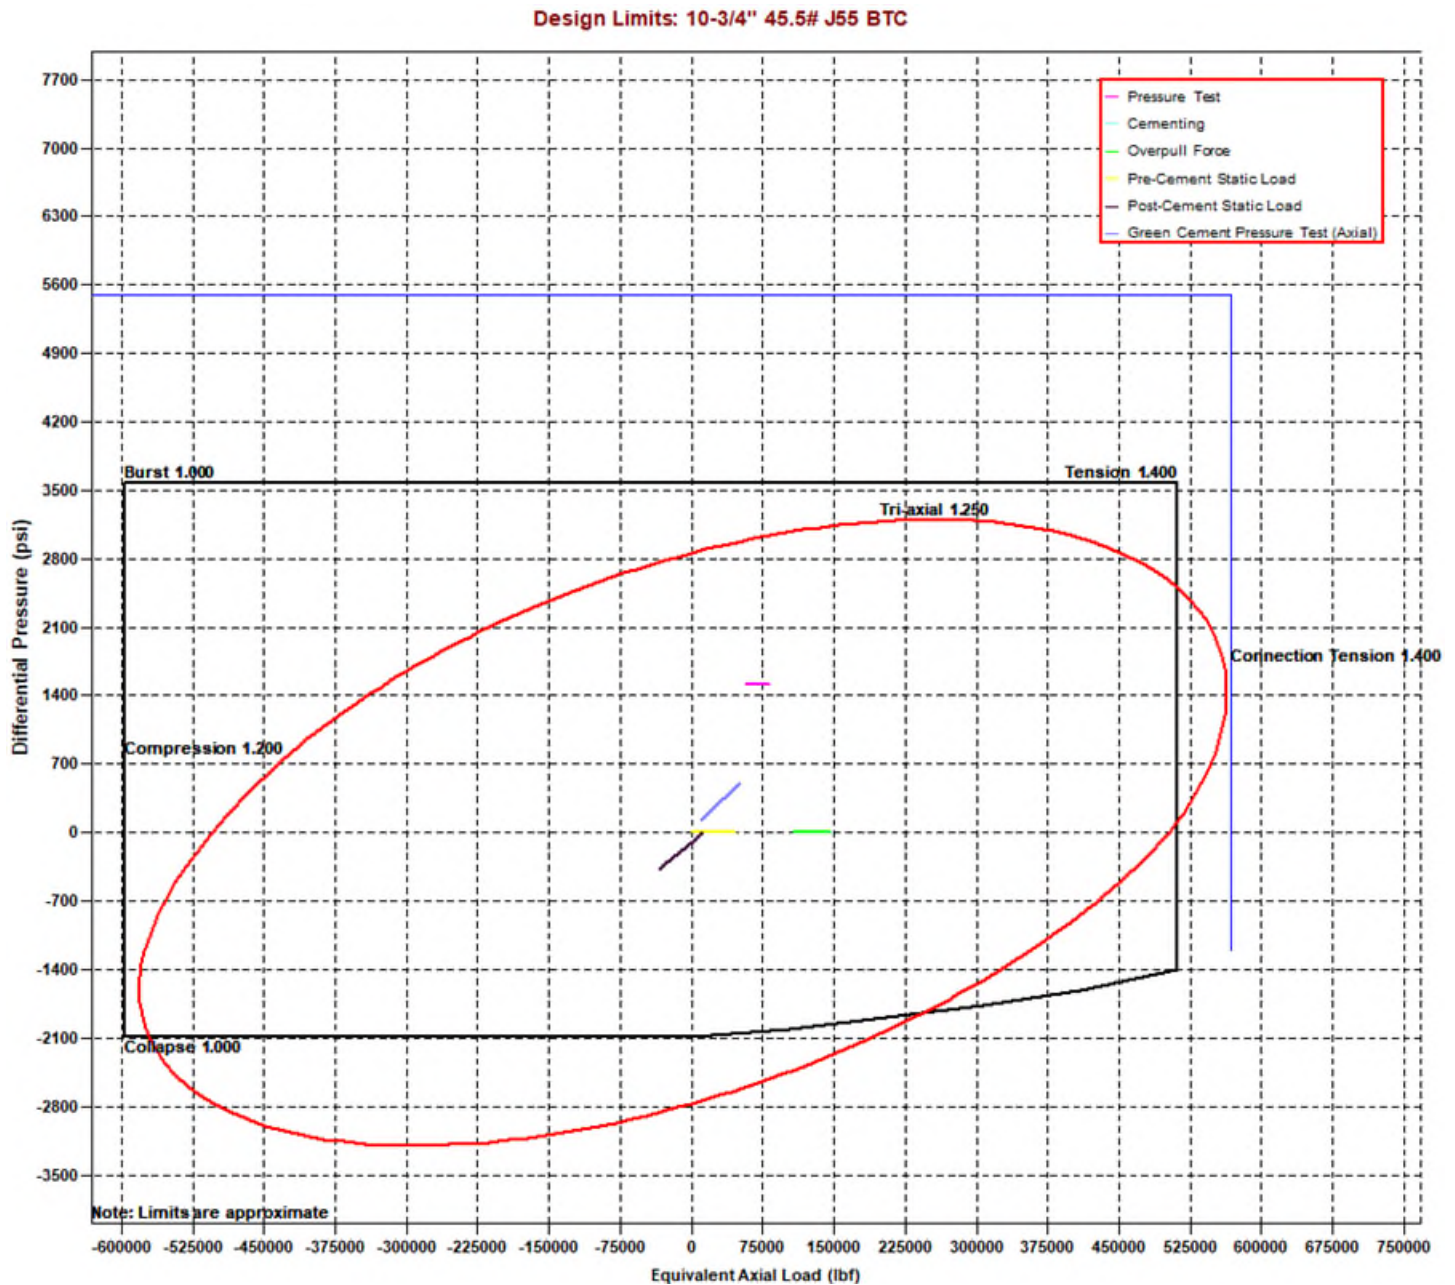




Oxy Bulk Design - Casing Design "A"

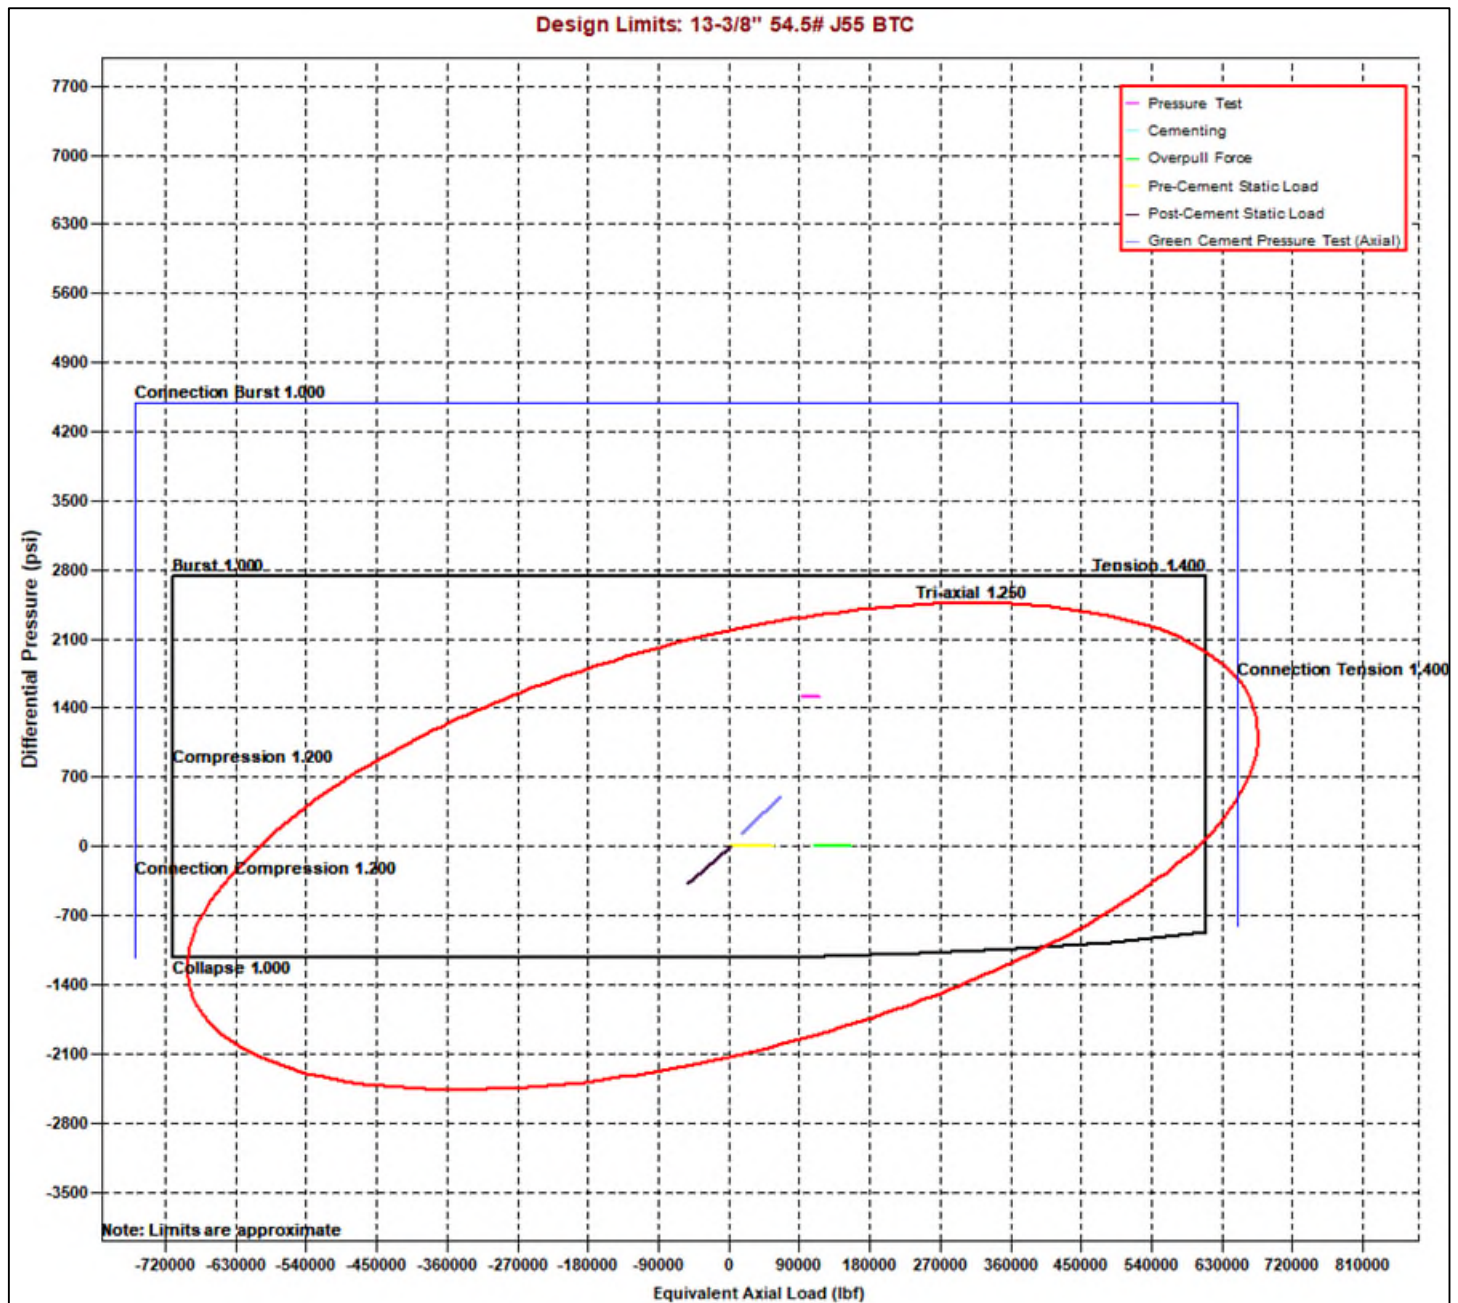



Oxy Bulk Design - Casing Design "A"

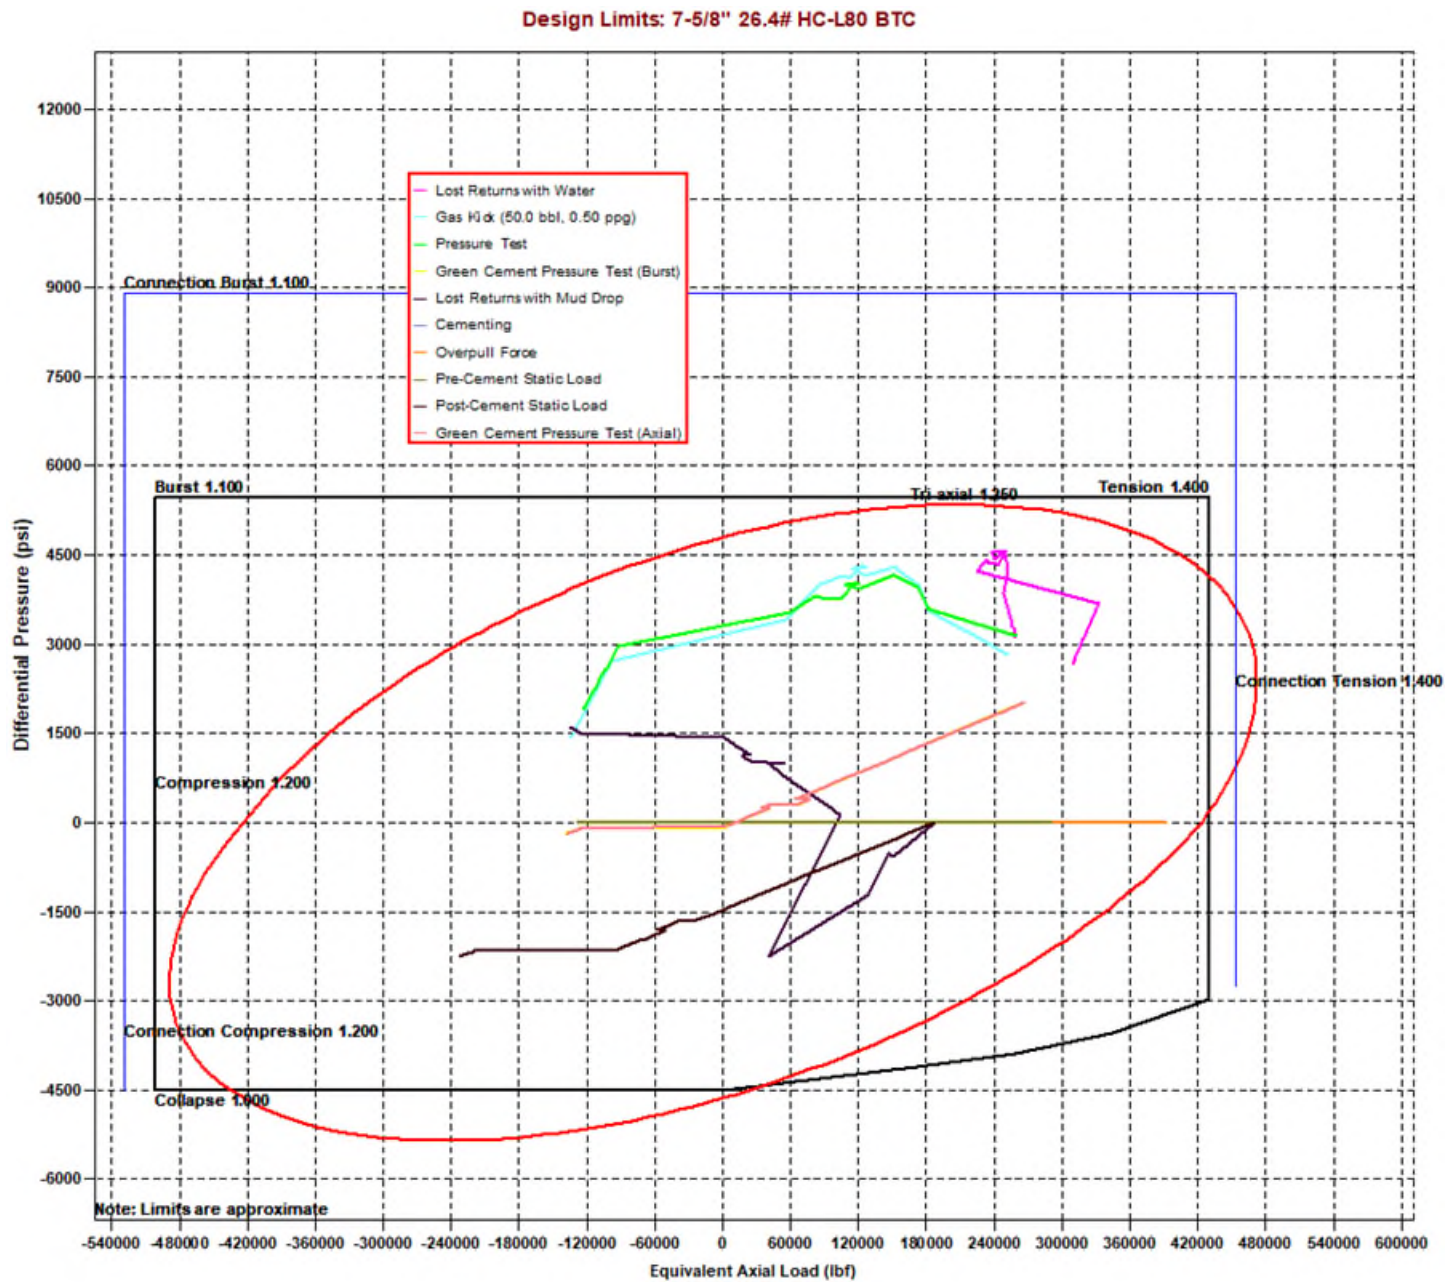




Oxy Bulk Design - Casing Design "A"



Design Limits: 5-1/2" 20# P110 Sprint SF

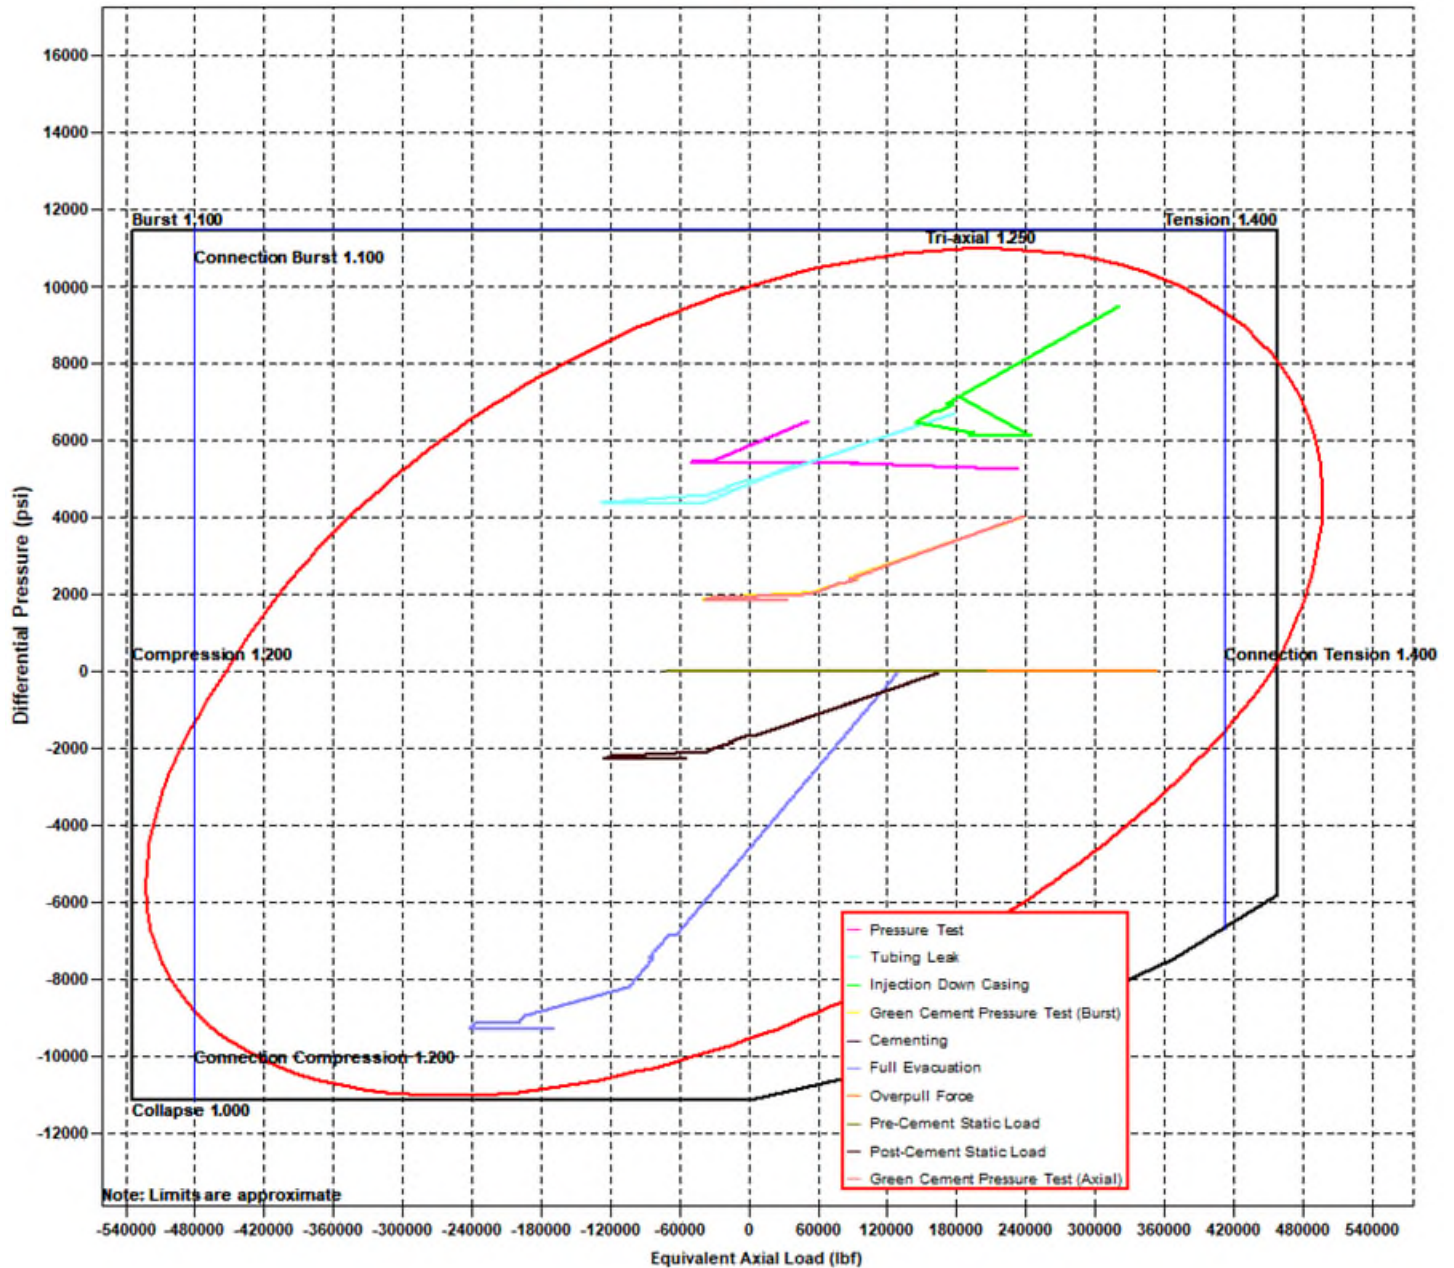



Oxy Bulk Design - Casing Design "A"



8. Landmark StressCheck Screenshots – Inputs for Intermediate CSG Load Cases

Burst Load Cases

General		7 5/8" Intermediate Casing
Burst Loads Data		
Drilling Load:	Lost Returns with Water	
Fracture at Shoe (MD= 13111.00 ft):	10591 psi	
Mud/Water Interface, MD:	0.00 ft	
Mud Weight	11.28 ppg	
Assigned External Pressure:	Fluid Gradients (w/ Pore Pressure)	
Drilling Load:	Gas Kick Profile	
Influx Depth, MD:	23361.00 ft	
Kick Volume:	50.0 bbl	
Kick Intensity	0.50 ppg	
Maximum Mud Weight:	13.50 ppg	
Kick Gas Gravity:	0.55 (0.1159 psi/ft @ 182 °F & 9291 psi)	
Fracture at Shoe (MD= 13111.00 ft):	10591 psi	
Drill Pipe OD:	5.000 in	
Collar OD:	5.500 in	
Collar Length:	200.00 ft	
Assigned External Pressure:	Fluid Gradients (w/ Pore Pressure)	
Drilling Load:	Pressure Test	
Test Pressure:	3120 psi	
Mud Weight:	10.00 ppg	
Assigned External Pressure:	Fluid Gradients (w/ Pore Pressure)	
Drilling Load:	Green Cement Pressure Test	
Test Pressure:	2000 psi	
Mud Weight at Shoe:	10.00 ppg	
TOC, MD:	25.00 ft	
Lead Slurry Density:	13.30 ppg	
Tail Slurry Density:	13.30 ppg	
Tail Slurry Length:	5906.00 ft	
Displacement Fluid Density:	10.00 ppg	
Float Collar Depth, MD:	12800.00 ft	
External Pressure:	Fluid Gradients (w/ Pore Pressure)	
TOC, MD:	25.00 ft	
Prior Shoe, MD:	1200.00 ft	
Mud Weight Above TOC:	10.00 ppg	
Fluid Gradient Below TOC:	8.33 ppg	
Wellhead Pressure:	13 psi	
Pore Pressure In Open Hole:	Yes	



Oxy Bulk Design - Casing Design "A"



Collapse Load Cases

General		7 5/8" Intermediate Casing
Collapse Loads Data		
Drilling Load:		Cementing
Mud Weight at Shoe:		10.00 ppg
TOC, MD:		25.00 ft
Lead Slurry Density:		13.30 ppg
Tail Slurry Density:		13.30 ppg
Tail Slurry Length:		5906.00 ft
Displacement Fluid Density:		10.00 ppg
Float Collar Depth, MD:		12800.00 ft
Assigned External Pressure:		Fluid Gradients (w/ Pore Pressure)
Drilling Load:		Lost Returns with Mud Drop
Lost Returns Depth, MD:		13110.89 ft
Pore Pressure at Lost Returns Depth:		8183 psi
Pore Pressure Gradient at Lost Returns Depth:		12.33 ppg
Mud Weight:		13.50 ppg
Mud Drop Level, MD:		1106.39 ft
Assigned External Pressure:		Fluid Gradients (w/ Pore Pressure)
External Pressure:		Fluid Gradients (w/ Pore Pressure)
TOC, MD:		25.00 ft
Prior Shoe, MD:		1200.00 ft
Fluid Gradient Above TOC:		10.00 ppg
Fluid Gradient Below TOC:		10.00 ppg
Wellhead Pressure:		13 psi
Pore Pressure In Open Hole Below TOC:		No

Axial Load Cases

General		7 5/8" Intermediate Casing
Axial Loads Data		
Overpull Force:		100000 lbf
Pre-Cement Static Load:		Yes
Pickup Force:		0 lbf
Post-Cement Static Load:		Yes
Green Cement Pressure Test:		2000 psi
Service Loads:		Yes



Oxy Bulk Design - Casing Design "A"



9. Landmark StressCheck Screenshot – Int. Casing Triaxial Results Table (Pressure Test)

StressCheck - [Triaxial Results - Blanket Design A1 *]

File Edit Wellbore Tubular View Composer Tools Window Help

7 5/8" Intermediate Casing

Pressure Test

Triaxial Results

	Depth (MD) (ft)	Axial Force (lbf)		Equivalent Axial Load (lbf)	Bending Stress at OD (psi)	Absolute Safety Factor				Temperature (°F)	Pressure (psi)		Add'l Pickup To Prevent Buck. (lbf)	Buckled Length (ft)
		Apparent (w/Bending)	Actual (w/o Bending)			Triaxial	Burst	Collapse (V)	Axial		Internal	External		
28	12300	-142410	-17423	-94936	16622.5	1.79	2.10	N/A	(4.09)	178	9505	6732		
29	12400	-149639	-24652	-100590	16622.5	1.87	2.25	N/A	(3.89)	179	9555	6970		
30	12400	-149640	-24653	-100591	16622.5	1.87	2.25	N/A	(3.89)	179	9555	6970		
31	12500	-156448	-31461	-105919	16622.5	1.95	2.42	N/A	(3.72)	180	9603	7193		
32	12500	-156449	-31462	-105920	16622.5	1.95	2.42	N/A	(3.72)	180	9603	7193		
33	12550	-159630	-34643	-108410	16622.5	1.99	2.50	N/A	(3.64)	180	9625	7298		
34	12550	-159631	-34644	-108411	16622.5	1.99	2.50	N/A	(3.64)	180	9625	7298		
35	12600	-162630	-37643	-110759	16622.5	2.03	2.59	N/A	(3.58)	180	9646	7396		
36	12600	-162631	-37644	-110760	16622.5	2.03	2.59	N/A	(3.58)	180	9646	7396		
37	12650	-165426	-40439	-112949	16622.5	2.07	2.67	N/A	(3.52)	181	9665	7488		
38	12650	-165427	-40440	-112950	16622.5	2.07	2.67	N/A	(3.52)	181	9665	7488		
39	12700	-167997	-43010	-114963	16622.5	2.10	2.76	N/A	(3.46)	181	9683	7573		
40	12700	-167998	-43011	-114963	16622.5	2.10	2.76	N/A	(3.46)	181	9683	7573		
41	12750	-170322	-45335	-116784	16622.5	2.13	2.84	N/A	(3.41)	181	9699	7649		
42	12750	-170323	-45336	-116785	16622.5	2.13	2.84	N/A	(3.41)	181	9699	7649		
43	12800	-172385	-47398	-118401	16622.5	2.16	2.91	N/A	(3.37)	181	9714	7717		
44	12800	-172386	-47399	-118401	16622.5	2.16	2.91	N/A	(3.37)	181	9714	7717		
45	12850	-174169	-49183	-119799	16622.5	2.19	2.98	N/A	(3.34)	182	9726	7775		
46	12850	-174170	-49183	-119800	16622.5	2.19	2.98	N/A	(3.34)	182	9726	7775		
47	12900	-175662	-50675	-120969	16622.5	2.21	3.04	N/A	(3.31)	182	9736	7824		
48	12950	-176851	-51864	-121901	16622.5	2.23	3.09	N/A	(3.29)	182	9745	7863		
49	13000	-177727	-52740	-122588	16622.5	2.24	3.13	N/A	(3.27)	182	9751	7892		
50	13000	-177728	-52741	-122588	16622.5	2.24	3.13	N/A	(3.27)	182	9751	7892		
51	13050	-178285	-53298	-123025	16622.5	2.25	3.15	N/A	(3.26)	182	9755	7910		
52	13111	-178527	-53540	-123214	16622.5	2.25	3.16	N/A	(3.26)	182	9756	7918		
53														
54														
55														
56														

() Compression
(V) Vector Collapse Safety Factor

Internal Pressure = Surface Pressure + Hydrostatic = 9756 psi

External Pressure = Fluid Gradient w/ Pore Pressure = 7918 psi

Burst SF = 3.16

NOTE: Specific load case inputs for the pressure test can be seen in **Section 8** above. The test pressure does not exceed 70% of the minimum internal yield.



Oxy Bulk Design - Casing Design "A"



10. Intermediate Non-API Casing Spec Sheet



Technical Data Sheet

7 5/8" 26.40 lbs/ft. L80HC - Axis HT

Mechanical Properties

Minimum Yield Strength	psi.	80,000
Maximum Yield Strength	psi.	95,000
Minimum Tensile Strength	psi.	95,000

Dimensions

		Pipe	AXIS HT
Outside Diameter	in.	7.625	8.500
Wall Thickness	in.	0.328	-
Inside Diameter	in.	6.969	-
Standard Drift	in.	6.844	6.844
Alternate Drift	in.	-	-
Plain End Weight	lbs/ft.	-	-
Nominal Linear Weight	lbs/ft.	26.40	-

Performance

		Pipe	AXIS HT
Minimum Collapse Pressure	psi.	4,320	-
Minimum Internal Yield Pressure	psi.	6,020	6,020
Minimum Pipe Body Yield Strength	lbs.	602 x 1,000	-
Joint Strength	lbs.	-	635 x 1,000

Make-Up Torques

		Pipe	AXIS HT
Optimum Make-Up Torque	ft/lbs.	-	8,000
Maximum Operational Torque	ft/lbs.	-	25,000

Disclaimer: The content of this Technical Data Sheet is for general information only and does not guarantee performance and/or accuracy, which can only be determined by a professional expert with the specific installation and operation parameters. Information printed or downloaded may not be current and no longer in control by Axis Pipe and Tube. Anyone using the information herein does so at his or her own risk. To verify that you have the latest technical information, please contact Axis Pipe and Tube Technical Sales +1 (979) 599-7600. www.axispipeandtube.com



Oxy Bulk Design - Casing Design "A"



11. Production Non-API Casing Spec Sheets

Printed on: 11/09/2021

TenarisHydril Wedge 461[®] MS



Coupling	Pipe Body
Grade: P1104CY	Grade: P110-4CY
Body: White	1st Band: White
1st Band: Pale Green	2nd Band: Pale Green
2nd Band: -	3rd Band: Pale Green
3rd Band: -	4th Band: -
	5th Band: -
	6th Band: -

Outside Diameter	5.500 in.	Wall Thickness	0.361 in.	Grade	P110-4CY
Min. Wall Thickness	87.50 %	Pipe Body Drift	API Standard	Type	Casing
Connection OD Option	MS				

Pipe Body Data

Geometry		Performance	
Nominal OD	5.500 in.	Body Yield Strength	729 x1000 lb
Nominal Weight	20 lb/ft	Min. Internal Yield Pressure	14,360 psi
Drift	4.653 in.	SMYS	125,000 psi
Nominal ID	4.778 in.	Collapse Pressure	12,300 psi

Connection Data

Geometry		Performance		Make-Up Torques	
Connection OD	6.050 in.	Tension Efficiency	100 %	Minimum	17,000 ft-lb
Coupling Length	7.714 in.	Joint Yield Strength	729 x1000 lb	Optimum	18,000 ft-lb
Connection ID	4.778 in.	Internal Pressure Capacity	14,360 psi	Maximum	21,600 ft-lb
Make-up Loss	3.775 in.	Compression Efficiency	100 %	Operation Limit Torques	
Threads per inch	3.40	Compression Strength	729 x1000 lb	Operating Torque	43,000 ft-lb
Connection OD Option	Ms	Max. Allowable Bending	104 °/100 ft	Yield Torque	51,000 ft-lb
		External Pressure Capacity	12,300 psi	Buck-On	
		Coupling Face Load	273,000 lb	Minimum	21,600 ft-lb
				Maximum	23,100 ft-lb

Notes

This connection is fully interchangeable with:
 Wedge 441® - 5.5 in. - 0.304 / 0.361 in.
 Wedge 461® - 5.5 in. - 0.304 / 0.415 / 0.476 in.
 Connections with Dopeless® Technology are fully compatible with the same connection in its Standard version
 In October 2019, TenarisHydril Wedge XP® 2.0 was renamed TenarisHydril Wedge 461™. Product dimensions and properties remain identical and both connections are fully interchangeable

For the latest performance data, always visit our website: www.tenaris.com

Tenaris has issued this document for general information only and the information in this document, including, without limitation, any pictures, drawings or designs ("Information") is not intended to constitute professional or any other type of advice or recommendation and is provided on an "as is" basis. No warranty is given. Tenaris has not independently verified any information – if any – provided by the user in connection with, or for the purpose of, the Information contained hereunder. The use of the Information is at user's own risk and Tenaris does not assume any responsibility or liability of any kind for any loss, damage or injury resulting from, or in connection with any Information contained hereunder or any use thereof. The Information in this document is subject to change or modification without notice. Tenaris's products and services are subject to Tenaris's standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services, as the case may be, between petitioner and Tenaris. For more complete information please contact a Tenaris's representative or visit our website at www.tenaris.com. ©Tenaris 2021. All rights reserved.



Oxy Bulk Design - Casing Design "A"




Generated on May 21, 2024



CONNECTION DATA SHEET

OD: 5.500 in. Grade: P110
Weight: 20.00 lb/ft Drift: 4.653 in. (API)
Wall Th.: 0.361 in.

VAM® SPRINT-SF

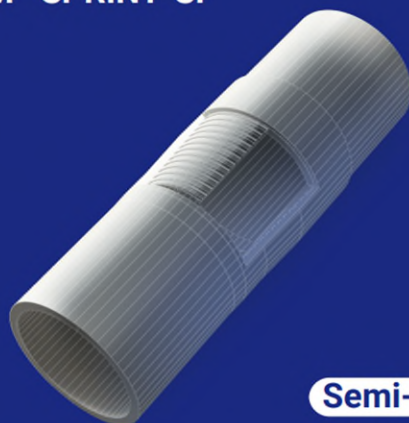

Semi-Flush

Field Torque Values

Make-up Torque (ft-lb)

20,000 MIN
22,500 OPTI
25,000 MAX

Torque with Sealability (ft-lb)

36,000 MTS

Locked Flank Torque (ft-lb)

4,500 MIN
15,750 MAX

(2) MTS: Maximum Torque with Sealability.

PIPE BODY PROPERTIES

Nominal OD	5.500	in.
Nominal ID	4.778	in.
Nominal Wall Thickness	0.361	in.
Minimum Wall Thickness	87.5	%
Nominal Weight (API)	20.00	lb/ft
Plain End Weight	19.83	lb/ft
Drift	4.653	in.
Grade Type	API 5CT	
Minimum Yield Strength	110	ksi
Maximum Yield Strength	140	ksi
Minimum Ultimate Tensile Strength	125	ksi
Pipe Body Yield Strength	641	klb
Internal Yield Pressure	12,640	psi
Collapse Pressure	11,100	psi

CONNECTION PROPERTIES

Connection Type	Semi-Premium Integral Semi-Flu	
Nominal Connection OD	5.783	in.
Nominal Connection ID	4.718	in.
Make-up Loss	5.965	in.
Tension Efficiency	90	% Pipe Body
Compression Efficiency	90	% Pipe Body
Internal Pressure Efficiency	100	% Pipe Body
External Pressure Efficiency	100	% Pipe Body

JOINT PERFORMANCES

Tension Strength	577	klb
Compression Strength	577	klb
Internal Pressure Resistance	12,640	psi
External Pressure Resistance	11,100	psi
Maximum Bending, Structural	78	°/100 ft
Maximum Bending, with Sealability(1)	30	°/100 ft

(1) Sealability rating demonstrated as per API RP 5C5 / ISO 13679



**BOOST YOUR EFFICIENCY, REDUCE COSTS
AND ENSURE 100% WELL INTEGRITY WITH
VAM® FIELD SERVICE**

Scan the QR code
to contact us



The information available on this Site ("Information") is offered for general information. It is supposed to be correct at the time of publishing on the Site but is not intended to constitute professional advice and is provided 'as is'. Vallourec does not guarantee the completeness and accuracy of this Information. Under no circumstances will Vallourec be liable for damage, liability of any kind, or any loss or injury that may result from the credibility given to this Information or its use. The Information may be amended, corrected, at any time by Vallourec without warning. Vallourec's products and services are subject to Vallourec's The Information may be amended, corrected, and/or supplemented at any time by Vallourec without warning, standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services.



Oxy Bulk Design - Casing Design "A"



DWC/C-HT-IS

Connection Data Sheet

OD (in.)	WEIGHT (lbs./ft.)	WALL (in.)	GRADE	API DRIFT (in.)	RBW%	CONNECTION
5.500	Nominal: 20.00 Plain End: 19.83	0.361	‡VST P110MY	4.653	87.5	DWC/C-HT-IS

PIPE PROPERTIES		
Nominal OD	5.500	in.
Nominal ID	4.778	in.
Nominal Area	5.828	sq.in.
Grade Type	API 5CT	
Min. Yield Strength	125	ksi
Max. Yield Strength	140	ksi
Min. Tensile Strength	135	ksi
Yield Strength	729	klb
Ultimate Strength	787	klb
Min. Internal Yield Pressure	14,360	psi
Collapse Pressure	12,090	psi

CONNECTION PROPERTIES	
Connection Type	Semi-Premium T&C
Connection OD (nom)	6.050 in.
Connection ID (nom)	4.778 in.
Make-Up Loss	4.125 in.
Coupling Length	9.250 in.
Critical Cross Section	5.828 sq.in.
Tension Efficiency	89.1% of pipe
Compression Efficiency	88.0% of pipe
Internal Pressure Efficiency	86.1% of pipe
External Pressure Efficiency	100.0% of pipe

CONNECTION PERFORMANCES		
Yield Strength	649	klb
Parting Load	729	klb
Compression Rating	641	klb
Min. Internal Yield Pressure	12,360	psi
External Pressure Resistance	12,090	psi
Maximum Uniaxial Bend Rating	91.7	°/100 ft
Reference String Length w 1.4 Design Factor	22,890	ft.

FIELD TORQUE VALUES	
Min. Make-up torque	16,600 ftlb
Opti. Make-up torque	17,950 ftlb
Max. Make-up torque	19,300 ftlb
Min. Shoulder Torque	1,660 ftlb
Max. Shoulder Torque	13,280 ftlb
Max. Delta Turn	0.200 Turns
‡Maximum Operational Torque	23,800 ftlb
‡Maximum Torsional Value (MTV)	26,180 ftlb

‡ Maximum Operational Torque and Maximum Torsional Value only valid with Vallourec P110MY Material.
‡ P110MY - Coupling Min Yield Strength is 110ksi and Coupling Max Yield is 125ksi.

"VST = Vallourec Star as the mill source for the pipe, "P110EC" is the grade name"

Need Help? Contact: tech.support@vam-usa.com

For detailed information on performance properties, refer to DWC Connection Data Notes on following page(s).

Connection specifications within the control of VAM USA were correct as of the date printed. Specifications are subject to change without notice. Certain connection specifications are dependent on the mechanical properties of the pipe. Mechanical properties of mill proprietary pipe grades were obtained from mill publications and are subject to change. Properties of mill proprietary grades should be confirmed with the mill. Users are advised to obtain current connection specifications and verify pipe mechanical properties for each application.

All information is provided by VAM USA or its affiliates at user's sole risk, without liability for loss, damage or injury resulting from the use thereof; and on an "AS IS" basis without warranty or representation of any kind, whether express or implied, including without limitation any warranty of merchantability, fitness for purpose or completeness. This document and its contents are subject to change without notice. In no event shall VAM USA or its affiliates be responsible for any indirect, special, incidental, punitive, exemplary or consequential loss or damage (including without limitation, loss of use, loss of bargain, loss of revenue, profit or anticipated profit) however caused or arising, and whether such losses or damages were foreseeable or VAM USA or its affiliates was advised of the possibility of such damages.

03/04/2024 08:36:50 PM





Oxy Bulk Design - Casing Design "A"



VAM USA
2107 CityWest Boulevard Suite 1300
Houston, TX 77042
Phone: 713-479-3200
Fax: 713-479-3234
VAM® USA Sales E-mail: VAMUSAsales@vam-usa.com
Tech Support Email: tech.support@vam-usa.com

DWC Connection Data Sheet Notes:

1. DWC connections are available with a seal ring (SR) option.
2. All standard DWC/C connections are interchangeable for a given pipe OD. DWC connections are interchangeable with DWC/C-SR connections of the same OD and wall.
3. Connection performance properties are based on nominal pipe body and connection dimensions.
4. DWC connection internal and external pressure resistance is calculated using the API rating for buttress connections. API Internal pressure resistance is calculated from formulas 31, 32, and 35 in the API Bulletin 5C3.
5. DWC joint strength is the minimum pipe body yield strength multiplied by the connection critical area.
6. API joint strength is for reference only. It is calculated from formulas 42 and 43 in the API Bulletin 5C3.
7. Bending efficiency is equal to the compression efficiency.
8. The torque values listed are recommended. The actual torque required may be affected by field conditions such as temperature, thread compound, speed of make-up, weather conditions, etc.
9. Connection yield torque is not to be exceeded.
10. Reference string length is calculated by dividing the joint strength by both the nominal weight in air and a design factor (DF) of 1.4. These values are offered for reference only and do not include load factors such as bending, buoyancy, temperature, load dynamics, etc.
11. DWC connections will accommodate API standard drift diameters.
12. DWC/C family of connections are compatible with API Buttress BTC connections. Please contact tech.support@vam-usa.com for details on connection ratings and make-up.

Connection specifications within the control of VAM USA were correct as of the date printed. Specifications are subject to change without notice. Certain connection specifications are dependent on the mechanical properties of the pipe. Mechanical properties of mill proprietary pipe grades were obtained from mill publications and are subject to change. Properties of mill proprietary grades should be confirmed with the mill. Users are advised to obtain current connection specifications and verify pipe mechanical properties for each application.

All information is provided by VAM USA or its affiliates at user's sole risk, without liability for loss, damage or injury resulting from the use thereof; and on an "AS IS" basis without warranty or representation of any kind, whether express or implied, including without limitation any warranty of merchantability, fitness for purpose or completeness. This document and its contents are subject to change without notice. In no event shall VAM USA or its affiliates be responsible for any indirect, special, incidental, punitive, exemplary or consequential loss or damage (including without limitation, loss of use, loss of bargain, loss of revenue, profit or anticipated profit) however caused or arising, and whether such losses or damages were foreseeable or VAM USA or its affiliates was advised of the possibility of such damages.

03/04/2024 08:36:50 PM



OXY

PRD NM DIRECTIONAL PLANS (NAD 1983)

Mesa Verde WC Unit

Mesa Verde WC Unit 50H

Wellbore #1

Plan: Permitting Plan

Standard Planning Report

07 May, 2024

OXY

Planning Report

Database:	HOPSPP	Local Co-ordinate Reference:	Well Mesa Verde WC Unit 50H
Company:	ENGINEERING DESIGNS	TVD Reference:	RKB=25' @ 3590.40ft
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB=25' @ 3590.40ft
Site:	Mesa Verde WC Unit	North Reference:	Grid
Well:	Mesa Verde WC Unit 50H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permitting Plan		

Project	PRD NM DIRECTIONAL PLANS (NAD 1983)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		Using geodetic scale factor

Site	Mesa Verde WC Unit		
Site Position:		Northing:	441,172.41 usft
From:	Map	Easting:	734,323.24 usft
Position Uncertainty:	44.72 ft	Slot Radius:	13.200 in
		Latitude:	32.211320
		Longitude:	-103.709345

Well	Mesa Verde WC Unit 50H		
Well Position	+N/-S	0.00 ft	Northing:
	+E/-W	0.00 ft	Easting:
Position Uncertainty		2.00 ft	Wellhead Elevation:
Grid Convergence:		0.34 °	Ground Level:
			3,565.40 ft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HDGM_FILE	5/7/2024	6.22	59.72	47,355.60000000

Design	Permitting Plan			
Audit Notes:				
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.00	0.00	0.00	357.86

Plan Survey Tool Program	Date	5/7/2024		
Depth From (ft)	Depth To (ft)	Survey (Wellbore)	Tool Name	Remarks
1	0.00	23,782.44	Permitting Plan (Wellbore #1)	B005Mc_MWD+HRGM+SA
				MWD+HRGM+Sag+MSA

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
5,040.00	0.00	0.00	5,040.00	0.00	0.00	0.00	0.00	0.00	0.00	
6,340.16	13.00	189.66	6,329.03	-144.80	-24.66	1.00	1.00	0.00	189.66	
12,489.43	13.00	189.66	12,320.66	-1,508.62	-256.90	0.00	0.00	0.00	0.00	
13,517.44	90.00	359.67	13,020.00	-950.08	-288.20	10.00	7.49	16.54	169.74	
23,782.44	90.00	359.67	13,020.00	9,314.75	-348.11	0.00	0.00	0.00	0.00	PBHL (Mesa Verde

OXY

Planning Report

Database:	HOPSPP	Local Co-ordinate Reference:	Well Mesa Verde WC Unit 50H
Company:	ENGINEERING DESIGNS	TVD Reference:	RKB=25' @ 3590.40ft
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB=25' @ 3590.40ft
Site:	Mesa Verde WC Unit	North Reference:	Grid
Well:	Mesa Verde WC Unit 50H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permitting Plan		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00
3,200.00	0.00	0.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,600.00	0.00	0.00	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,700.00	0.00	0.00	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,800.00	0.00	0.00	0.00	0.00	0.00	0.00
3,900.00	0.00	0.00	3,900.00	0.00	0.00	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	4,000.00	0.00	0.00	0.00	0.00	0.00	0.00
4,100.00	0.00	0.00	4,100.00	0.00	0.00	0.00	0.00	0.00	0.00
4,200.00	0.00	0.00	4,200.00	0.00	0.00	0.00	0.00	0.00	0.00
4,300.00	0.00	0.00	4,300.00	0.00	0.00	0.00	0.00	0.00	0.00
4,400.00	0.00	0.00	4,400.00	0.00	0.00	0.00	0.00	0.00	0.00
4,500.00	0.00	0.00	4,500.00	0.00	0.00	0.00	0.00	0.00	0.00
4,600.00	0.00	0.00	4,600.00	0.00	0.00	0.00	0.00	0.00	0.00
4,700.00	0.00	0.00	4,700.00	0.00	0.00	0.00	0.00	0.00	0.00
4,800.00	0.00	0.00	4,800.00	0.00	0.00	0.00	0.00	0.00	0.00
4,900.00	0.00	0.00	4,900.00	0.00	0.00	0.00	0.00	0.00	0.00
5,000.00	0.00	0.00	5,000.00	0.00	0.00	0.00	0.00	0.00	0.00
5,040.00	0.00	0.00	5,040.00	0.00	0.00	0.00	0.00	0.00	0.00
5,100.00	0.60	189.66	5,100.00	-0.31	-0.05	-0.31	1.00	1.00	0.00
5,200.00	1.60	189.66	5,199.98	-2.20	-0.38	-2.19	1.00	1.00	0.00
5,300.00	2.60	189.66	5,299.91	-5.81	-0.99	-5.77	1.00	1.00	0.00

OXY

Planning Report

Database:	HOPSPP	Local Co-ordinate Reference:	Well Mesa Verde WC Unit 50H
Company:	ENGINEERING DESIGNS	TVD Reference:	RKB=25' @ 3590.40ft
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB=25' @ 3590.40ft
Site:	Mesa Verde WC Unit	North Reference:	Grid
Well:	Mesa Verde WC Unit 50H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permitting Plan		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,400.00	3.60	189.66	5,399.76	-11.15	-1.90	-11.07	1.00	1.00	0.00
5,500.00	4.60	189.66	5,499.51	-18.19	-3.10	-18.07	1.00	1.00	0.00
5,600.00	5.60	189.66	5,599.11	-26.96	-4.59	-26.77	1.00	1.00	0.00
5,700.00	6.60	189.66	5,698.54	-37.43	-6.37	-37.17	1.00	1.00	0.00
5,800.00	7.60	189.66	5,797.77	-49.62	-8.45	-49.27	1.00	1.00	0.00
5,900.00	8.60	189.66	5,896.77	-63.51	-10.81	-63.06	1.00	1.00	0.00
6,000.00	9.60	189.66	5,995.51	-79.10	-13.47	-78.54	1.00	1.00	0.00
6,100.00	10.60	189.66	6,093.96	-96.39	-16.41	-95.71	1.00	1.00	0.00
6,200.00	11.60	189.66	6,192.09	-115.36	-19.65	-114.55	1.00	1.00	0.00
6,300.00	12.60	189.66	6,289.87	-136.03	-23.16	-135.07	1.00	1.00	0.00
6,340.16	13.00	189.66	6,329.03	-144.80	-24.66	-143.78	1.00	1.00	0.00
6,400.00	13.00	189.66	6,387.34	-158.07	-26.92	-156.96	0.00	0.00	0.00
6,500.00	13.00	189.66	6,484.77	-180.25	-30.70	-178.98	0.00	0.00	0.00
6,600.00	13.00	189.66	6,582.21	-202.43	-34.47	-201.00	0.00	0.00	0.00
6,700.00	13.00	189.66	6,679.65	-224.61	-38.25	-223.02	0.00	0.00	0.00
6,800.00	13.00	189.66	6,777.08	-246.79	-42.03	-245.04	0.00	0.00	0.00
6,900.00	13.00	189.66	6,874.52	-268.96	-45.80	-267.07	0.00	0.00	0.00
7,000.00	13.00	189.66	6,971.95	-291.14	-49.58	-289.09	0.00	0.00	0.00
7,100.00	13.00	189.66	7,069.39	-313.32	-53.36	-311.11	0.00	0.00	0.00
7,200.00	13.00	189.66	7,166.83	-335.50	-57.13	-333.13	0.00	0.00	0.00
7,300.00	13.00	189.66	7,264.26	-357.68	-60.91	-355.15	0.00	0.00	0.00
7,400.00	13.00	189.66	7,361.70	-379.86	-64.69	-377.18	0.00	0.00	0.00
7,500.00	13.00	189.66	7,459.14	-402.04	-68.46	-399.20	0.00	0.00	0.00
7,600.00	13.00	189.66	7,556.57	-424.21	-72.24	-421.22	0.00	0.00	0.00
7,700.00	13.00	189.66	7,654.01	-446.39	-76.02	-443.24	0.00	0.00	0.00
7,800.00	13.00	189.66	7,751.45	-468.57	-79.79	-465.27	0.00	0.00	0.00
7,900.00	13.00	189.66	7,848.88	-490.75	-83.57	-487.29	0.00	0.00	0.00
8,000.00	13.00	189.66	7,946.32	-512.93	-87.35	-509.31	0.00	0.00	0.00
8,100.00	13.00	189.66	8,043.75	-535.11	-91.12	-531.33	0.00	0.00	0.00
8,200.00	13.00	189.66	8,141.19	-557.29	-94.90	-553.35	0.00	0.00	0.00
8,300.00	13.00	189.66	8,238.63	-579.46	-98.68	-575.38	0.00	0.00	0.00
8,400.00	13.00	189.66	8,336.06	-601.64	-102.45	-597.40	0.00	0.00	0.00
8,500.00	13.00	189.66	8,433.50	-623.82	-106.23	-619.42	0.00	0.00	0.00
8,600.00	13.00	189.66	8,530.94	-646.00	-110.01	-641.44	0.00	0.00	0.00
8,700.00	13.00	189.66	8,628.37	-668.18	-113.78	-663.46	0.00	0.00	0.00
8,800.00	13.00	189.66	8,725.81	-690.36	-117.56	-685.49	0.00	0.00	0.00
8,900.00	13.00	189.66	8,823.25	-712.54	-121.34	-707.51	0.00	0.00	0.00
9,000.00	13.00	189.66	8,920.68	-734.71	-125.12	-729.53	0.00	0.00	0.00
9,100.00	13.00	189.66	9,018.12	-756.89	-128.89	-751.55	0.00	0.00	0.00
9,200.00	13.00	189.66	9,115.55	-779.07	-132.67	-773.57	0.00	0.00	0.00
9,300.00	13.00	189.66	9,212.99	-801.25	-136.45	-795.60	0.00	0.00	0.00
9,400.00	13.00	189.66	9,310.43	-823.43	-140.22	-817.62	0.00	0.00	0.00
9,500.00	13.00	189.66	9,407.86	-845.61	-144.00	-839.64	0.00	0.00	0.00
9,600.00	13.00	189.66	9,505.30	-867.79	-147.78	-861.66	0.00	0.00	0.00
9,700.00	13.00	189.66	9,602.74	-889.97	-151.55	-883.68	0.00	0.00	0.00
9,800.00	13.00	189.66	9,700.17	-912.14	-155.33	-905.71	0.00	0.00	0.00
9,900.00	13.00	189.66	9,797.61	-934.32	-159.11	-927.73	0.00	0.00	0.00
10,000.00	13.00	189.66	9,895.05	-956.50	-162.88	-949.75	0.00	0.00	0.00
10,100.00	13.00	189.66	9,992.48	-978.68	-166.66	-971.77	0.00	0.00	0.00
10,200.00	13.00	189.66	10,089.92	-1,000.86	-170.44	-993.79	0.00	0.00	0.00
10,300.00	13.00	189.66	10,187.36	-1,023.04	-174.21	-1,015.82	0.00	0.00	0.00
10,400.00	13.00	189.66	10,284.79	-1,045.22	-177.99	-1,037.84	0.00	0.00	0.00
10,500.00	13.00	189.66	10,382.23	-1,067.39	-181.77	-1,059.86	0.00	0.00	0.00
10,600.00	13.00	189.66	10,479.66	-1,089.57	-185.54	-1,081.88	0.00	0.00	0.00
10,700.00	13.00	189.66	10,577.10	-1,111.75	-189.32	-1,103.90	0.00	0.00	0.00

OXY

Planning Report

Database:	HOPSPP	Local Co-ordinate Reference:	Well Mesa Verde WC Unit 50H
Company:	ENGINEERING DESIGNS	TVD Reference:	RKB=25' @ 3590.40ft
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB=25' @ 3590.40ft
Site:	Mesa Verde WC Unit	North Reference:	Grid
Well:	Mesa Verde WC Unit 50H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permitting Plan		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
10,800.00	13.00	189.66	10,674.54	-1,133.93	-193.10	-1,125.93	0.00	0.00	0.00
10,900.00	13.00	189.66	10,771.97	-1,156.11	-196.87	-1,147.95	0.00	0.00	0.00
11,000.00	13.00	189.66	10,869.41	-1,178.29	-200.65	-1,169.97	0.00	0.00	0.00
11,100.00	13.00	189.66	10,966.85	-1,200.47	-204.43	-1,191.99	0.00	0.00	0.00
11,200.00	13.00	189.66	11,064.28	-1,222.64	-208.21	-1,214.02	0.00	0.00	0.00
11,300.00	13.00	189.66	11,161.72	-1,244.82	-211.98	-1,236.04	0.00	0.00	0.00
11,400.00	13.00	189.66	11,259.16	-1,267.00	-215.76	-1,258.06	0.00	0.00	0.00
11,500.00	13.00	189.66	11,356.59	-1,289.18	-219.54	-1,280.08	0.00	0.00	0.00
11,600.00	13.00	189.66	11,454.03	-1,311.36	-223.31	-1,302.10	0.00	0.00	0.00
11,700.00	13.00	189.66	11,551.46	-1,333.54	-227.09	-1,324.13	0.00	0.00	0.00
11,800.00	13.00	189.66	11,648.90	-1,355.72	-230.87	-1,346.15	0.00	0.00	0.00
11,900.00	13.00	189.66	11,746.34	-1,377.89	-234.64	-1,368.17	0.00	0.00	0.00
12,000.00	13.00	189.66	11,843.77	-1,400.07	-238.42	-1,390.19	0.00	0.00	0.00
12,100.00	13.00	189.66	11,941.21	-1,422.25	-242.20	-1,412.21	0.00	0.00	0.00
12,200.00	13.00	189.66	12,038.65	-1,444.43	-245.97	-1,434.24	0.00	0.00	0.00
12,300.00	13.00	189.66	12,136.08	-1,466.61	-249.75	-1,456.26	0.00	0.00	0.00
12,400.00	13.00	189.66	12,233.52	-1,488.79	-253.53	-1,478.28	0.00	0.00	0.00
12,489.43	13.00	189.66	12,320.66	-1,508.62	-256.90	-1,497.97	0.00	0.00	0.00
12,500.00	11.96	190.57	12,330.98	-1,510.87	-257.31	-1,500.21	10.00	-9.83	8.59
12,600.00	2.88	232.43	12,430.08	-1,522.62	-261.21	-1,511.80	10.00	-9.08	41.85
12,700.00	8.57	344.23	12,529.71	-1,516.97	-265.24	-1,506.01	10.00	5.68	111.81
12,800.00	18.39	352.74	12,626.84	-1,494.09	-269.26	-1,483.00	10.00	9.83	8.51
12,900.00	28.34	355.40	12,718.53	-1,454.68	-273.17	-1,443.47	10.00	9.95	2.66
13,000.00	38.31	356.76	12,801.98	-1,399.93	-276.84	-1,388.62	10.00	9.97	1.35
13,100.00	48.30	357.62	12,874.66	-1,331.51	-280.15	-1,320.12	10.00	9.98	0.86
13,200.00	58.28	358.25	12,934.36	-1,251.50	-283.01	-1,240.06	10.00	9.99	0.63
13,300.00	68.27	358.75	12,979.27	-1,162.32	-285.33	-1,150.86	10.00	9.99	0.50
13,400.00	78.27	359.19	13,008.02	-1,066.69	-287.04	-1,055.23	10.00	9.99	0.44
13,500.00	88.26	359.60	13,019.74	-967.51	-288.09	-956.08	10.00	9.99	0.41
13,517.44	90.00	359.67	13,020.00	-950.08	-288.20	-938.65	10.00	9.99	0.40
13,600.00	90.00	359.67	13,020.00	-867.52	-288.68	-856.13	0.00	0.00	0.00
13,700.00	90.00	359.67	13,020.00	-767.52	-289.27	-756.18	0.00	0.00	0.00
13,800.00	90.00	359.67	13,020.00	-667.52	-289.85	-656.23	0.00	0.00	0.00
13,900.00	90.00	359.67	13,020.00	-567.52	-290.43	-556.28	0.00	0.00	0.00
14,000.00	90.00	359.67	13,020.00	-467.53	-291.02	-456.33	0.00	0.00	0.00
14,100.00	90.00	359.67	13,020.00	-367.53	-291.60	-356.38	0.00	0.00	0.00
14,200.00	90.00	359.67	13,020.00	-267.53	-292.18	-256.43	0.00	0.00	0.00
14,300.00	90.00	359.67	13,020.00	-167.53	-292.77	-156.48	0.00	0.00	0.00
14,400.00	90.00	359.67	13,020.00	-67.53	-293.35	-56.53	0.00	0.00	0.00
14,500.00	90.00	359.67	13,020.00	32.47	-293.94	43.42	0.00	0.00	0.00
14,600.00	90.00	359.67	13,020.00	132.46	-294.52	143.37	0.00	0.00	0.00
14,700.00	90.00	359.67	13,020.00	232.46	-295.10	243.32	0.00	0.00	0.00
14,800.00	90.00	359.67	13,020.00	332.46	-295.69	343.27	0.00	0.00	0.00
14,900.00	90.00	359.67	13,020.00	432.46	-296.27	443.22	0.00	0.00	0.00
15,000.00	90.00	359.67	13,020.00	532.46	-296.85	543.17	0.00	0.00	0.00
15,100.00	90.00	359.67	13,020.00	632.46	-297.44	643.12	0.00	0.00	0.00
15,200.00	90.00	359.67	13,020.00	732.45	-298.02	743.07	0.00	0.00	0.00
15,300.00	90.00	359.67	13,020.00	832.45	-298.60	843.02	0.00	0.00	0.00
15,400.00	90.00	359.67	13,020.00	932.45	-299.19	942.97	0.00	0.00	0.00
15,500.00	90.00	359.67	13,020.00	1,032.45	-299.77	1,042.92	0.00	0.00	0.00
15,600.00	90.00	359.67	13,020.00	1,132.45	-300.35	1,142.87	0.00	0.00	0.00
15,700.00	90.00	359.67	13,020.00	1,232.45	-300.94	1,242.82	0.00	0.00	0.00
15,800.00	90.00	359.67	13,020.00	1,332.44	-301.52	1,342.77	0.00	0.00	0.00
15,900.00	90.00	359.67	13,020.00	1,432.44	-302.11	1,442.73	0.00	0.00	0.00
16,000.00	90.00	359.67	13,020.00	1,532.44	-302.69	1,542.68	0.00	0.00	0.00

OXY

Planning Report

Database:	HOPSPP	Local Co-ordinate Reference:	Well Mesa Verde WC Unit 50H
Company:	ENGINEERING DESIGNS	TVD Reference:	RKB=25' @ 3590.40ft
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB=25' @ 3590.40ft
Site:	Mesa Verde WC Unit	North Reference:	Grid
Well:	Mesa Verde WC Unit 50H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permitting Plan		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
16,100.00	90.00	359.67	13,020.00	1,632.44	-303.27	1,642.63	0.00	0.00	0.00
16,200.00	90.00	359.67	13,020.00	1,732.44	-303.86	1,742.58	0.00	0.00	0.00
16,300.00	90.00	359.67	13,020.00	1,832.44	-304.44	1,842.53	0.00	0.00	0.00
16,400.00	90.00	359.67	13,020.00	1,932.43	-305.02	1,942.48	0.00	0.00	0.00
16,500.00	90.00	359.67	13,020.00	2,032.43	-305.61	2,042.43	0.00	0.00	0.00
16,600.00	90.00	359.67	13,020.00	2,132.43	-306.19	2,142.38	0.00	0.00	0.00
16,700.00	90.00	359.67	13,020.00	2,232.43	-306.77	2,242.33	0.00	0.00	0.00
16,800.00	90.00	359.67	13,020.00	2,332.43	-307.36	2,342.28	0.00	0.00	0.00
16,900.00	90.00	359.67	13,020.00	2,432.43	-307.94	2,442.23	0.00	0.00	0.00
17,000.00	90.00	359.67	13,020.00	2,532.42	-308.53	2,542.18	0.00	0.00	0.00
17,100.00	90.00	359.67	13,020.00	2,632.42	-309.11	2,642.13	0.00	0.00	0.00
17,200.00	90.00	359.67	13,020.00	2,732.42	-309.69	2,742.08	0.00	0.00	0.00
17,300.00	90.00	359.67	13,020.00	2,832.42	-310.28	2,842.03	0.00	0.00	0.00
17,400.00	90.00	359.67	13,020.00	2,932.42	-310.86	2,941.98	0.00	0.00	0.00
17,500.00	90.00	359.67	13,020.00	3,032.41	-311.44	3,041.93	0.00	0.00	0.00
17,600.00	90.00	359.67	13,020.00	3,132.41	-312.03	3,141.88	0.00	0.00	0.00
17,700.00	90.00	359.67	13,020.00	3,232.41	-312.61	3,241.83	0.00	0.00	0.00
17,800.00	90.00	359.67	13,020.00	3,332.41	-313.19	3,341.78	0.00	0.00	0.00
17,900.00	90.00	359.67	13,020.00	3,432.41	-313.78	3,441.73	0.00	0.00	0.00
18,000.00	90.00	359.67	13,020.00	3,532.41	-314.36	3,541.68	0.00	0.00	0.00
18,100.00	90.00	359.67	13,020.00	3,632.40	-314.94	3,641.63	0.00	0.00	0.00
18,200.00	90.00	359.67	13,020.00	3,732.40	-315.53	3,741.58	0.00	0.00	0.00
18,300.00	90.00	359.67	13,020.00	3,832.40	-316.11	3,841.53	0.00	0.00	0.00
18,400.00	90.00	359.67	13,020.00	3,932.40	-316.70	3,941.48	0.00	0.00	0.00
18,500.00	90.00	359.67	13,020.00	4,032.40	-317.28	4,041.43	0.00	0.00	0.00
18,600.00	90.00	359.67	13,020.00	4,132.40	-317.86	4,141.38	0.00	0.00	0.00
18,700.00	90.00	359.67	13,020.00	4,232.39	-318.45	4,241.33	0.00	0.00	0.00
18,800.00	90.00	359.67	13,020.00	4,332.39	-319.03	4,341.28	0.00	0.00	0.00
18,900.00	90.00	359.67	13,020.00	4,432.39	-319.61	4,441.24	0.00	0.00	0.00
19,000.00	90.00	359.67	13,020.00	4,532.39	-320.20	4,541.19	0.00	0.00	0.00
19,100.00	90.00	359.67	13,020.00	4,632.39	-320.78	4,641.14	0.00	0.00	0.00
19,200.00	90.00	359.67	13,020.00	4,732.39	-321.36	4,741.09	0.00	0.00	0.00
19,300.00	90.00	359.67	13,020.00	4,832.38	-321.95	4,841.04	0.00	0.00	0.00
19,400.00	90.00	359.67	13,020.00	4,932.38	-322.53	4,940.99	0.00	0.00	0.00
19,500.00	90.00	359.67	13,020.00	5,032.38	-323.12	5,040.94	0.00	0.00	0.00
19,600.00	90.00	359.67	13,020.00	5,132.38	-323.70	5,140.89	0.00	0.00	0.00
19,700.00	90.00	359.67	13,020.00	5,232.38	-324.28	5,240.84	0.00	0.00	0.00
19,800.00	90.00	359.67	13,020.00	5,332.38	-324.87	5,340.79	0.00	0.00	0.00
19,900.00	90.00	359.67	13,020.00	5,432.37	-325.45	5,440.74	0.00	0.00	0.00
20,000.00	90.00	359.67	13,020.00	5,532.37	-326.03	5,540.69	0.00	0.00	0.00
20,100.00	90.00	359.67	13,020.00	5,632.37	-326.62	5,640.64	0.00	0.00	0.00
20,200.00	90.00	359.67	13,020.00	5,732.37	-327.20	5,740.59	0.00	0.00	0.00
20,300.00	90.00	359.67	13,020.00	5,832.37	-327.78	5,840.54	0.00	0.00	0.00
20,400.00	90.00	359.67	13,020.00	5,932.37	-328.37	5,940.49	0.00	0.00	0.00
20,500.00	90.00	359.67	13,020.00	6,032.36	-328.95	6,040.44	0.00	0.00	0.00
20,600.00	90.00	359.67	13,020.00	6,132.36	-329.53	6,140.39	0.00	0.00	0.00
20,700.00	90.00	359.67	13,020.00	6,232.36	-330.12	6,240.34	0.00	0.00	0.00
20,800.00	90.00	359.67	13,020.00	6,332.36	-330.70	6,340.29	0.00	0.00	0.00
20,900.00	90.00	359.67	13,020.00	6,432.36	-331.29	6,440.24	0.00	0.00	0.00
21,000.00	90.00	359.67	13,020.00	6,532.36	-331.87	6,540.19	0.00	0.00	0.00
21,100.00	90.00	359.67	13,020.00	6,632.35	-332.45	6,640.14	0.00	0.00	0.00
21,200.00	90.00	359.67	13,020.00	6,732.35	-333.04	6,740.09	0.00	0.00	0.00
21,300.00	90.00	359.67	13,020.00	6,832.35	-333.62	6,840.04	0.00	0.00	0.00
21,400.00	90.00	359.67	13,020.00	6,932.35	-334.20	6,939.99	0.00	0.00	0.00
21,500.00	90.00	359.67	13,020.00	7,032.35	-334.79	7,039.94	0.00	0.00	0.00

OXY

Planning Report

Database:	HOPSPP	Local Co-ordinate Reference:	Well Mesa Verde WC Unit 50H
Company:	ENGINEERING DESIGNS	TVD Reference:	RKB=25' @ 3590.40ft
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB=25' @ 3590.40ft
Site:	Mesa Verde WC Unit	North Reference:	Grid
Well:	Mesa Verde WC Unit 50H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permitting Plan		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
21,600.00	90.00	359.67	13,020.00	7,132.35	-335.37	7,139.89	0.00	0.00	0.00
21,700.00	90.00	359.67	13,020.00	7,232.34	-335.95	7,239.84	0.00	0.00	0.00
21,800.00	90.00	359.67	13,020.00	7,332.34	-336.54	7,339.80	0.00	0.00	0.00
21,900.00	90.00	359.67	13,020.00	7,432.34	-337.12	7,439.75	0.00	0.00	0.00
22,000.00	90.00	359.67	13,020.00	7,532.34	-337.70	7,539.70	0.00	0.00	0.00
22,100.00	90.00	359.67	13,020.00	7,632.34	-338.29	7,639.65	0.00	0.00	0.00
22,200.00	90.00	359.67	13,020.00	7,732.34	-338.87	7,739.60	0.00	0.00	0.00
22,300.00	90.00	359.67	13,020.00	7,832.33	-339.46	7,839.55	0.00	0.00	0.00
22,400.00	90.00	359.67	13,020.00	7,932.33	-340.04	7,939.50	0.00	0.00	0.00
22,500.00	90.00	359.67	13,020.00	8,032.33	-340.62	8,039.45	0.00	0.00	0.00
22,600.00	90.00	359.67	13,020.00	8,132.33	-341.21	8,139.40	0.00	0.00	0.00
22,700.00	90.00	359.67	13,020.00	8,232.33	-341.79	8,239.35	0.00	0.00	0.00
22,800.00	90.00	359.67	13,020.00	8,332.32	-342.37	8,339.30	0.00	0.00	0.00
22,900.00	90.00	359.67	13,020.00	8,432.32	-342.96	8,439.25	0.00	0.00	0.00
23,000.00	90.00	359.67	13,020.00	8,532.32	-343.54	8,539.20	0.00	0.00	0.00
23,100.00	90.00	359.67	13,020.00	8,632.32	-344.12	8,639.15	0.00	0.00	0.00
23,200.00	90.00	359.67	13,020.00	8,732.32	-344.71	8,739.10	0.00	0.00	0.00
23,300.00	90.00	359.67	13,020.00	8,832.32	-345.29	8,839.05	0.00	0.00	0.00
23,400.00	90.00	359.67	13,020.00	8,932.31	-345.88	8,939.00	0.00	0.00	0.00
23,500.00	90.00	359.67	13,020.00	9,032.31	-346.46	9,038.95	0.00	0.00	0.00
23,600.00	90.00	359.67	13,020.00	9,132.31	-347.04	9,138.90	0.00	0.00	0.00
23,700.00	90.00	359.67	13,020.00	9,232.31	-347.63	9,238.85	0.00	0.00	0.00
23,782.44	90.00	359.67	13,020.00	9,314.75	-348.11	9,321.25	0.00	0.00	0.00

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (usft)	Easting (usft)	Latitude	Longitude
KOP (Mesa Verde WC - hit/miss target - Shape - Point	0.00	0.00	0.00	-1,524.28	-284.37	440,472.63	736,422.07	32.209363	-103.702572
- plan misses target center by 1550.57ft at 0.00ft MD (0.00 TVD, 0.00 N, 0.00 E)									
FTP (Mesa Verde WC - plan misses target center by 25.91ft at 13348.19ft MD (12995.20 TVD, -1116.87 N, -286.23 E) - Point	0.00	0.00	13,020.00	-1,124.34	-287.18	440,872.55	736,419.26	32.210462	-103.702574
PBHL (Mesa Verde - plan hits target center - Point	0.00	0.00	13,020.00	9,314.75	-348.11	451,311.12	736,358.34	32.239156	-103.702573

OXY
Planning Report

Database:	HOPSPP	Local Co-ordinate Reference:	Well Mesa Verde WC Unit 50H
Company:	ENGINEERING DESIGNS	TVD Reference:	RKB=25' @ 3590.40ft
Project:	PRD NM DIRECTIONAL PLANS (NAD 1983)	MD Reference:	RKB=25' @ 3590.40ft
Site:	Mesa Verde WC Unit	North Reference:	Grid
Well:	Mesa Verde WC Unit 50H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Permitting Plan		

Formations					
Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction (°)
837.40	837.40	RUSTLER			
1,166.40	1,166.40	SALADO			
3,103.40	3,103.40	CASTILE			
4,661.40	4,661.40	DELAWARE			
4,690.40	4,690.40	BELL CANYON			
5,574.17	5,573.40	CHERRY CANYON			
6,908.09	6,882.40	BRUSHY CANYON			
8,655.90	8,585.40	BONE SPRING			
9,772.52	9,673.40	BONE SPRING 1ST			
10,381.13	10,266.40	BONE SPRING 2ND			
11,708.15	11,559.40	BONE SPRING 3RD			
12,174.09	12,013.40	WOLFCAMP			
12,342.41	12,177.40	WOLFCAMP A			

Plan Annotations				
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment
		+N/-S (ft)	+E/-W (ft)	
5,040.00	5,040.00	0.00	0.00	Build 1°/100'
6,340.16	6,329.03	-144.80	-24.66	Hold 13° Tangent
12,489.43	12,320.66	-1,508.62	-256.90	KOP, Build & Turn 10°/100'
13,517.44	13,020.00	-950.08	-288.20	Landing Point
23,782.44	13,020.00	9,314.75	-348.11	TD at 23782.44' MD

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	OXY USA INCORPORATED
WELL NAME & NO.:	MESA VERDE WC UNIT 50H
LOCATION:	Section 17, T.24 S., R.32 E.
COUNTY:	Lea County, New Mexico

COA

H2S	☒ Yes	☐ No	
Potash	☒ None	☐ Secretary	☐ R-111-P
Cave/Karst Potential	☒ Low	☐ Medium	☐ High
Cave/Karst Potential	☐ Critical		
Variance	☐ None	☒ Flex Hose	☐ Other
Wellhead	☐ Conventional	☒ Multibowl	☐ Both
Wellhead Variance	☐ Diverter		
Other	☐ 4 String	☐ Capitan Reef	☐ WIPP
Other	☐ Fluid Filled	☐ Pilot Hole	☐ Open Annulus
Cementing	☐ Contingency Cement Squeeze	☐ EchoMeter	☒ Primary Cement Squeeze
Special Requirements	☐ Water Disposal	☒ COM	☐ Unit
Special Requirements	☐ Batch Sundry		
Special Requirements Variance	☒ Break Testing	☒ Offline Cementing	☐ Casing Clearance

A. HYDROGEN SULFIDE

A Hydrogen Sulfide (H2S) Drilling Plan shall be activated AT SPUD. As a result, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.

B. CASING

NOTE: WELL APPROVED FOR DESIGNS A1 AND A2. REVIEW CEMENT VOLUMES TO ACHIEVE TIE BACKS LISTED BELOW.

A1:

1. The **10-3/4** inch surface casing shall be set at approximately **925** feet (a minimum of 25 feet (Lea County) into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface. *BLM Geology Feedback: The operator proposal may not protect the Magenta Dolomite Aquifer at approximately 897' and*

adequately protect all usable water zones. BLM suggests to set surface casing at 925' in the Rustler formation to protect the groundwater aquifer in this area. If salt is encountered set 25 feet above the salt.

- a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **24 hours in the Potash Area** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The 7-5/8 inch intermediate casing shall be set at approximately **12,670 feet. KEEP CASING 1/2 FULL FOR COLLAPSE SF. PRESSURE TEST NEEDS EXTERNAL PRESSURE REVIEW AS WELL.** The minimum required fill of cement behind the 7-5/8 inch intermediate casing is:

Option 1 (Single Stage):

- Cement to surface. If cement does not circulate see B.1.a, c-d above.

Operator has proposed to cement in two stages by conventionally cementing the first stage and performing a bradenhead squeeze on the second stage, contingent upon no returns to surface.

- a. First stage: Operator will cement with intent to reach the top of the **Brushy Canyon**
 - b. Second stage:
 - Operator will perform bradenhead squeeze and top-out. Cement to surface. If cement does not reach surface, the appropriate BLM office shall be notified
- ❖ In Secretary Potash Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.

Operator has proposed to pump down 10-3/4" X 7-5/8" annulus. Operator must top out cement after the bradenhead squeeze and verify cement to surface. Operator can also check TOC with Echo-meter. CBL must be run from TD of the 7-5/8" casing to surface if confidence is lacking on the quality of the bradenhead squeeze cement job. Submit results to BLM.

If cement does not tie-back into the previous casing shoe, a third stage remediation BH may be performed. The appropriate BLM office shall be notified.

Bradenhead squeeze in the production interval is only as an edge case remediation measure and is NOT approved in this COA. If production cement job experiences losses and a bradenhead squeeze is needed for tie-back, BLM Engineering should be notified prior to job with volumes and planned wellbore schematic. CBL will be needed when this occurs.

3. The 5-1/2 inch production casing shall be set at approximately 23,782 feet. The minimum required fill of cement behind the 5-1/2 inch production casing is:

Option 1 (Single Stage):

- Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

A2:

1. The 13-3/8 inch surface casing shall be set at approximately 925 feet (a minimum of 25 feet (Lea County) into the Rustler Anhydrite, above the salt, and below usable fresh water) and cemented to the surface. *BLM Geology Feedback: The operator proposal may not protect the Magenta Dolomite Aquifer at approximately 897' and adequately protect all usable water zones. BLM suggests to set surface casing at 925' in the Rustler formation to protect the groundwater aquifer in this area. If salt is encountered set 25 feet above the salt.*
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **24 hours in the Potash Area** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that

string.

2. The 7-5/8 inch intermediate casing shall be set at approximately **12,670 feet**. **KEEP CASING 1/2 FULL FOR COLLAPSE SF. PRESSURE TEST NEEDS EXTERNAL PRESSURE REVIEW AS WELL.** The minimum required fill of cement behind the 7-5/8 inch intermediate casing is:

Option 1 (Single Stage):

- Cement to surface. If cement does not circulate see B.1.a, c-d above.

Option 2 (Bradenhead):

Operator has proposed to cement in two stages by conventionally cementing the first stage and performing a bradenhead squeeze on the second stage, contingent upon no returns to surface.

- c. First stage: Operator will cement with intent to reach the top of the **Brushy Canyon**
 - d. Second stage:
 - Operator will perform bradenhead squeeze and top-out. Cement to surface. If cement does not reach surface, the appropriate BLM office shall be notified
3. The 5-1/2 inch production casing shall be set at approximately **23,782 feet**. The minimum required fill of cement behind the 5-1/2 inch production casing is:

Option 1 (Single Stage):

- Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
2. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface

casing shoe shall be **10,000 (10M) psi. Variance is approved to use a 5000 (5M) Annular which shall be tested to 3500 (70% Working Pressure) psi.**

- a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
- b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
- c. Manufacturer representative shall install the test plug for the initial BOP test.
- d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- The operator will submit an as-drilled survey well plat of the well completion, but are not limited to, those specified in Onshore Order 1 and 2.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

(Note: For a minimum 5M BOPE or less (Utilizing a 10M BOPE system)

BOPE Break Testing Variance

- BOPE Break Testing is ONLY permitted for 5M BOPE or less. **(Annular preventer must be tested to a minimum of 70% of BOPE working pressure and shall be higher than the MASP)**
- BOPE Break Testing is NOT permitted to drilling the production hole section.
- Variance only pertains to the intermediate hole-sections and no deeper than the Bone Springs formation.
- While in transfer between wells, the BOPE shall be secured by the hydraulic carrier or cradle.
- Any well control event while drilling require notification to the BLM Petroleum Engineer (575-706-2779) prior to the commencement of any BOPE Break Testing

operations.

- A full BOPE test is required prior to drilling the first deep intermediate hole section. If any subsequent hole interval is deeper than the first, a full BOPE test will be required. (200' TVD tolerance between intermediate shoes is allowable).
- The BLM is to be contacted (575-361-2822 Eddy County) 4 hours prior to BOPE tests.
- As a minimum, a full BOPE test shall be performed at 21-day intervals.
- In the event any repairs or replacement of the BOPE is required, the BOPE shall test as per Onshore Oil and Gas Order No. 2.
- If in the event break testing is not utilized, then a full BOPE test would be conducted.

Offline Cementing

Offline cementing OK for surface and intermediate intervals. Notify the BLM prior to the commencement of any offline cementing procedure.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

Contact Eddy County Petroleum Engineering Inspection Staff:

Email or call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220; BLM_NM_CFO_DrillingNotifications@BLM.GOV; (575) 361-2822

Contact Lea County Petroleum Engineering Inspection Staff:

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575) 689-5981

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - i. Notify the BLM when moving in and removing the Spudder Rig.
 - ii. Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - iii. BOP/BOPE test to be conducted per **43 CFR 3172** as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be

operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.

3. For intervals in which cement to surface is required, cement to surface should be verified with a visual check and density or pH check to differentiate cement from spacer and drilling mud. The results should be documented in the driller's log and daily reports.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.

2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends of both lead and tail cement, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.

3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.

4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.

5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.

6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.

7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

8. Whenever a casing string is cemented in the R-111-Q potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in **43 CFR 3172**.

2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - i. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - ii. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - iii. Manufacturer representative shall install the test plug for the initial BOP test.
 - iv. Whenever any seal subject to test pressure is broken, all the tests in 43 CFR 3172.6(b)(9) must be followed.
 - v. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - i. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead cement), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - ii. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the cement plug. The BOPE test can be initiated after bumping the cement plug with the casing valve open. (only applies to single stage cement jobs, prior to the cement setting up.)
 - iii. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer and can be initiated immediately with the casing valve open. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to **43 CFR 3172** with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for 8 hours or 500 pounds compressive strength, whichever is greater, prior to

initiating the test (see casing segment as lead cement may be critical item).

- iv. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- v. The results of the test shall be reported to the appropriate BLM office.
- vi. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- vii. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- viii. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per **43 CFR 3172**.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area. Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

KPI 1/29/2025



Permian Drilling Hydrogen Sulfide Drilling Operations Plan

Open drill site. No homes or buildings are near the proposed location.

1. Escape

Personnel shall escape upwind of wellbore in the event of an emergency gas release. Escape can take place through the lease road on the Southeast side of the location. Personnel need to move to a safe distance and block the entrance to location. If the primary route is not an option due to the wind direction, then a secondary egress route should be taken.





Permian Drilling Hydrogen Sulfide Drilling Operations Plan New Mexico

Scope

This contingency plan establishes guidelines for the public, all company employees, and contract employees who's work activities may involve exposure to hydrogen sulfide (H₂S) gas.

While drilling this well, it is possible to encounter H₂S bearing formations. At all times, the first barrier to control H₂S emissions will be the drilling fluid, which will have a density high enough to control influx.

Objective

1. Provide an immediate and predetermined response plan to any condition when H₂S is detected. All H₂S detections in excess of 10 parts per million (ppm) concentration are considered an Emergency.
2. Prevent any and all accidents, and prevent the uncontrolled release of hydrogen sulfide into the atmosphere.
3. Provide proper evacuation procedures to cope with emergencies.
4. Provide immediate and adequate medical attention should an injury occur.

Discussion

Implementation:	This plan with all details is to be fully implemented before drilling to <u>commence</u> .
Emergency response Procedure:	This section outlines the conditions and denotes steps to be taken in the event of an emergency.
Emergency equipment Procedure:	This section outlines the safety and emergency equipment that will be required for the drilling of this well.
Training provisions:	This section outlines the training provisions that must be adhered to prior to drilling.
Drilling emergency call lists:	Included are the telephone numbers of all persons to be contacted should an emergency exist.
Briefing:	This section deals with the briefing of all people involved in the drilling operation.
Public safety:	Public safety personnel will be made aware of any potential evacuation and any additional support needed.
Check lists:	Status check lists and procedural check lists have been included to insure adherence to the plan.
General information:	A general information section has been included to supply support information.

Hydrogen Sulfide Training

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on the well:

1. The hazards and characteristics of H₂S.
2. Proper use and maintenance of personal protective equipment and life support systems.
3. H₂S detection.
4. Proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures and prevailing winds.
5. Proper techniques for first aid and rescue procedures.
6. Physical effects of hydrogen sulfide on the human body.
7. Toxicity of hydrogen sulfide and sulfur dioxide.
8. Use of SCBA and supplied air equipment.
9. First aid and artificial respiration.
10. Emergency rescue.

In addition, supervisory personnel will be trained in the following areas:

1. The effects of H₂S on metal components. If high tensile strength tubular is to be used, personnel will be trained in their special maintenance requirements.
2. Corrective action and shut-in procedures when drilling a well, blowout prevention and well control procedures.
3. The contents and requirements of the H₂S Drilling Operations Plan.

H₂S training refresher must have been taken within one year prior to drilling the well. Specifics on the well to be drilled will be discussed during the pre-spud meeting. H₂S and well control (choke) drills will be performed while drilling the well, at least on a weekly basis. This plan shall be available in the well site. All personnel will be required to carry the documentation proving that the H₂S training has been taken.

Service company and visiting personnel

- A. Each service company that will be on this well will be notified if the zone contains H₂S.
- B. Each service company must provide for the training and equipment of their employees before they arrive at the well site.
- C. Each service company will be expected to attend a well site

Emergency Equipment Requirements

1. **Well control equipment**

The well shall have hydraulic BOP equipment for the anticipated pressures. Equipment is to be tested on installation and follow Oxy Well Control standard, as well as 43 CFR part 3170 Subpart 3172.

Special control equipment:

- A. Hydraulic BOP equipment with remote control on ground.
Remotely operated choke.
- B. Rotating head
- C. Gas buster equipment shall be installed before drilling out of surface pipe.

2. **Protective equipment for personnel**

- A. Four (4) 30-minute positive pressure air packs (2 at each briefing area) on location.
- B. Adequate fire extinguishers shall be located at strategic locations.
- C. Radio / cell telephone communication will be available at the rig.
 - Rig floor and trailers.
 - Vehicle.

3. **Hydrogen sulfide sensors and alarms**

- A. H₂S sensor with alarms will be located on the rig floor, at the bell nipple, and at the flow line. These monitors will be set to alarm at 10 ppm with strobe light, and audible alarm.
- B. Hand operated detectors with tubes.
- C. H₂S monitor tester (to be provided by contract Safety Company.)
- D. There shall be one combustible gas detector on location at all times.

4. **Visual Warning Systems**

- A. One sign located at each location entrance with the following language:

**Caution – potential poison gas
Hydrogen sulfide
No admittance without authorization**

Wind sock – wind streamers:

- A. One 36” (in length) wind sock located at protection center, at height visible from rig floor.
- B. One 36” (in length) wind sock located at height visible from pit areas.

Condition flags

- A. One each condition flag to be displayed to denote conditions.

green – normal conditions

yellow – potential danger

red – danger, H2S present

- B. Condition flag shall be posted at each location sign entrance.

5. Mud Program

The mud program is designed to minimize the risk of having H2S and other formation fluids at surface. Proper mud weight and safe drilling practices will be applied. H2S scavengers will be used to minimize the hazards while drilling. Below is a summary of the drilling program.

Mud inspection devices:

Garrett gas train or hatch tester for inspection of sulfide concentration in mud system.

6. Metallurgy

- A. Drill string, casing, tubing, wellhead, blowout preventers, drilling spools or adapters, kill lines, choke manifold, lines and valves shall be suitable for the H2S service.
- B. All the elastomers, packing, seals and ring gaskets shall be suitable for H2S service.

7. Well Testing

No drill stem test will be performed on this well.

8. Evacuation plan

Evacuation routes should be established prior to well spud for each well and discussed with all rig personnel.

9. Designated area

- A. Parking and visitor area: all vehicles are to be parked at a predetermined safe distance from the wellhead.
- B. There will be a designated smoking area.
- C. Two briefing areas on either side of the location at the maximum allowable distance from the well bore so they offset prevailing winds perpendicularly, or at a 45-degree angle if wind direction tends to shift in the area.

Emergency procedures

- A. In the event of any evidence of H₂S level above 10 ppm, take the following steps:
 - 1. The Driller will pick up off bottom, shut down the pumps, slow down the pipe rotation.
 - 2. Secure and don escape breathing equipment, report to the upwind designated safe briefing / muster area.
 - 3. All personnel on location will be accounted for and emergency search should begin for any missing, the Buddy System will be implemented.
 - 4. Order non-essential personnel to leave the well site, order all essential personnel out of the danger zone and upwind to the nearest designated safe briefing / muster area.
 - 5. Entrance to the location will be secured to a higher level than our usual "Meet and Greet" requirement, and the proper condition flag will be displayed at the entrance to the location.
 - 6. Take steps to determine if the H₂S level can be corrected or suppressed and, if so, proceed as required.
- B. If uncontrollable conditions occur:
 - 1. Take steps to protect and/or remove any public in the down-wind area from the rig – partial evacuation and isolation. Notify necessary public safety personnel and appropriate regulatory entities (i.e. BLM) of the situation.

2. Remove all personnel to the nearest upwind designated safe briefing / muster area or off location.
3. Notify public safety personnel of safe briefing / muster area.
4. An assigned crew member will blockade the entrance to the location. No unauthorized personnel will be allowed entry to the location.
5. Proceed with best plan (at the time) to regain control of the well. Maintain tight security and safety procedures.

C. Responsibility:

1. Designated personnel.
 - a. Shall be responsible for the total implementation of this plan.
 - b. Shall be in complete command during any emergency.
 - c. Shall designate a back-up.

- All personnel:
1. On alarm, don escape unit and report to the nearest upwind designated safe briefing / muster area upw
 2. Check status of personnel (buddy system).
 3. Secure breathing equipment.
 4. Await orders from supervisor.

- Drill site manager:
1. Don escape unit if necessary and report to nearest upwind designated safe briefing / muster area.
 2. Coordinate preparations of individuals to return to point of release with tool pusher and driller (using the buddy system).
 3. Determine H2S concentrations.
 4. Assess situation and take control measures.

- Tool pusher:
1. Don escape unit Report to up nearest upwind designated safe briefing / muster area.
 2. Coordinate preparation of individuals to return to point of release with tool pusher drill site manager (using the buddy system).
 3. Determine H2S concentration.
 4. Assess situation and take control measures.

- Driller:
1. Don escape unit, shut down pumps, continue

- rotating DP.
 - 2. Check monitor for point of release.
 - 3. Report to nearest upwind designated safe briefing / muster area.
 - 4. Check status of personnel (in an attempt to rescue, use the buddy system).
 - 5. Assigns least essential person to notify Drill Site Manager and tool pusher by quickest means in case of their absence.
 - 6. Assumes the responsibilities of the Drill Site Manager and tool pusher until they arrive should they be absent.
- Derrick man
- Floor man #1
- Floor man #2
- Mud engineer:
- 1. Will remain in briefing / muster area until instructed by supervisor.
- 1. Report to nearest upwind designated safe briefing / muster area.
 - 2. When instructed, begin check of mud for ph and H2S level. (Garett gas train.)
- Safety personnel:
- 1. Mask up and check status of all personnel and secure operations as instructed by drill site manager.

Taking a kick

When taking a kick during an H2S emergency, all personnel will follow standard Well control procedures after reporting to briefing area and masking up.

Open-hole logging

All unnecessary personnel off floor. Drill Site Manager and safety personnel should monitor condition, advise status and determine need for use of air equipment.

Running casing or plugging

Following the same “tripping” procedure as above. Drill Site Manager and safety personnel should determine if all personnel have access to protective equipment.

Ignition procedures

The decision to ignite the well is the responsibility of the operator (Oxy Drilling Management). The decision should be made only as a last resort and in a situation where it is clear that:

1. Human life and property are endangered.
2. There is no hope controlling the blowout under the prevailing conditions at the well.

Instructions for igniting the well

1. Two people are required for the actual igniting operation. They must wear self-contained breathing units and have a safety rope attached. One man (tool pusher or safety engineer) will check the atmosphere for explosive gases with the gas monitor. The other man is responsible for igniting the well.
2. Primary method to ignite: 25 mm flare gun with range of approximately 500 feet.
3. Ignite upwind and do not approach any closer than is warranted.
4. Select the ignition site best for protection, and which offers an easy escape route.
5. Before firing, check for presence of combustible gas.
6. After lighting, continue emergency action and procedure as before.
7. All unassigned personnel will remain in briefing area until instructed by supervisor or directed by the Drill Site Manager.

Remember: After well is ignited, burning hydrogen sulfide will convert to sulfur dioxide, which is also highly toxic. **Do not assume the area is safe after the well is ignited.**

Status check list

Note: All items on this list must be completed before drilling to production casing point.

1. H2S sign at location entrance.
2. Two (2) wind socks located as required.
3. Four (4) 30-minute positive pressure air packs (2 at each Briefing area) on location for all rig personnel and mud loggers.
4. Air packs inspected and ready for use.
5. Cascade system and hose line hook-up as needed.
6. Cascade system for refilling air bottles as needed.
7. Condition flag on location and ready for use.
8. H2S detection system hooked up and tested.
9. H2S alarm system hooked up and tested.
10. Hand operated H2S detector with tubes on location.
11. 1 – 100' length of nylon rope on location.
12. All rig crew and supervisors trained as required.
13. All outside service contractors advised of potential H2S hazard on well.
14. No smoking sign posted and a designated smoking area identified.
15. Calibration of all H2S equipment shall be noted on the IADC report.

Checked by: _____ Date: _____

Procedural check list during H2S events

Perform each tour:

1. Check fire extinguishers to see that they have the proper charge.
2. Check breathing equipment to ensure that it is in proper working order.
3. Make sure all the H2S detection system is operative.

Perform each week:

1. Check each piece of breathing equipment to make sure that demand or forced air regulator is working. This requires that the bottle be opened and the mask assembly be put on tight enough so that when you inhale, you receive air or feel air flow.
2. BOP skills (well control drills).
3. Check supply pressure on BOP accumulator stand by source.
4. Check breathing equipment mask assembly to see that straps are loosened and turned back, ready to put on.
5. Check pressure on breathing equipment air bottles to make sure they are charged to full volume. (Air quality checked for proper air grade "D" before bringing to location)
6. Confirm pressure on all supply air bottles.
7. Perform breathing equipment drills with on-site personnel.
8. Check the following supplies for availability.
 - A. Emergency telephone list.
 - B. Hand operated H2S detectors and tubes.

General evacuation plan

1. When the company approved supervisor (Drill Site Manager, consultant, rig pusher, or driller) determines the H2S gas cannot be limited to the well location and the public will be involved, he will activate the evacuation plan.
2. Drill Site Manager or designee will notify local government agency that a hazardous condition exists and evacuation needs to be implemented.
3. Company or contractor safety personnel that have been trained in the use of H2S detection equipment and self-contained breathing equipment will monitor H2S concentrations, wind directions, and area of exposure. They will delineate the outer perimeter of the hazardous gas area. Extension to the evacuation area will be determined from information gathered.
4. Law enforcement personnel (state police, police dept., fire dept., and sheriff's dept.) Will be called to aid in setting up and maintaining road blocks. Also, they will aid in evacuation of the public if necessary.
5. After the discharge of gas has been controlled, company safety personnel will determine when the area is safe for re-entry.

Important: Law enforcement personnel will not be asked to come into a contaminated area. Their assistance will be limited to uncontaminated areas. Constant radio contact will be maintained with them.

Emergency actions

Well blowout – if emergency

1. Evacuate all personnel to “Safe Briefing / Muster Areas” or off location if needed.
2. If sour gas – evacuate rig personnel.
3. If sour gas – evacuate public within 3000 ft radius of exposure.
4. Don SCBA and shut well in if possible using the buddy system.
5. Notify Drilling Superintendent and call 911 for emergency help (fire dept and ambulance) if needed.
6. Implement the Blowout Contingency Plan, and Drilling Emergency Action Plan.
6. Give first aid as needed.

Person down location/facility

1. If immediately possible, contact 911. Give location and wait for confirmation.
2. Don SCBA and perform rescue operation using buddy system.

Toxic effects of hydrogen sulfide

Hydrogen sulfide is extremely toxic. The acceptable ceiling concentration for eight-hour exposure is 10 ppm, which is .001% by volume. Hydrogen sulfide is heavier than air (specific gravity – 1.192) and colorless. It forms an explosive mixture with air between 4.3 and 46.0 percent by volume. Hydrogen sulfide is almost as toxic as hydrogen cyanide and is between five and six times more toxic than carbon monoxide. Toxicity data for hydrogen sulfide and various other gases are compared in table i. Physical effects at various hydrogen sulfide exposure levels are shown in table ii.

Table i
Toxicity of various gases

Common name	Chemical formula	Specific gravity (sc=1)	Threshold limit (1)	Hazardous limit (2)	Lethal concentration (3)
Hydrogen Cyanide	Hcn	0.94	10 ppm	150 ppm/hr	300 ppm
Hydrogen Sulfide	H2S	1.18	10 ppm	250 ppm/hr	600 ppm
Sulfur Dioxide	So2	2.21	5 ppm	-	1000 ppm
Chlorine	Cl2	2.45	1 ppm	4 ppm/hr	1000 ppm
Carbon Monoxide	Co	0.97	50 ppm	400 ppm/hr	1000 ppm
Carbon Dioxide	Co2	1.52	5000 ppm	5%	10%
Methane	Ch4	0.55	90,000 ppm	Combustible above 5% in air	

- 1) threshold limit – concentration at which it is believed that all workers may be repeatedly exposed day after day without adverse effects.
- 2) hazardous limit – concentration that will cause death with short-term exposure.
- 3) lethal concentration – concentration that will cause death with short-term exposure.

Toxic effects of hydrogen sulfide

Table ii
Physical effects of hydrogen sulfide

Percent (%)	Ppm	Concentration Grains 100 std. Ft3*	Physical effects
0.001	<10	00.65	Obvious and unpleasant odor.

0.002	10	01.30	Safe for 8 hours of exposure.
0.010	100	06.48	Kill smell in 3 – 15 minutes. May sting eyes and throat.
0.020	200	12.96	Kills smell shortly; stings eyes and throat.
0.050	500	32.96	Dizziness; breathing ceases in a few minutes; needs prompt artificial respiration.
0.070	700	45.36	Unconscious quickly; death will result if not rescued promptly.
0.100	1000	64.30	Unconscious at once; followed by death within minutes.

*at 15.00 psia and 60'f.

Use of self-contained breathing equipment (SCBA)

1. Written procedures shall be prepared covering safe use of SCBA's in dangerous atmosphere, which might be encountered in normal operations or in emergencies. Personnel shall be familiar with these procedures and the available SCBA.
2. SCBA's shall be inspected frequently at random to insure that they are properly used, cleaned, and maintained.
3. Anyone who may use the SCBA's shall be trained in how to insure proper face-piece to face seal. They shall wear SCBA's in normal air and then wear them in a test atmosphere. (note: such items as facial hair {beard or sideburns} and eyeglasses will not allow proper seal.) Anyone that may be reasonably expected to wear SCBA's should have these items removed before entering a toxic atmosphere. A special mask must be obtained for anyone who must wear eyeglasses or contact lenses.
4. Maintenance and care of SCBA's:
 - a. A program for maintenance and care of SCBA's shall include the following:
 1. Inspection for defects, including leak checks.
 2. Cleaning and disinfecting.
 3. Repair.
 4. Storage.
 - b. Inspection, self-contained breathing apparatus for emergency use shall be inspected monthly.
 1. Fully charged cylinders.
 2. Regulator and warning device operation.
 3. Condition of face piece and connections.
 4. Rubber parts shall be maintained to keep them pliable and prevent deterioration.
 - c. Routinely used SCBA's shall be collected, cleaned and disinfected as frequently as necessary to insure proper protection is provided.
5. Persons assigned tasks that requires use of self-contained breathing equipment shall be certified physically fit (medically cleared) for breathing equipment usage at least annually.
6. SCBA's should be worn when:
 - A. Any employee works near the top or on top of any tank unless test reveals less than 10 ppm of H₂S.

- B. When breaking out any line where H₂S can reasonably be expected.
- C. When sampling air in areas to determine if toxic concentrations of H₂S exists.
- D. When working in areas where over 10 ppm H₂S has been detected.
- E. At any time there is a doubt as to the H₂S level in the area to be entered.

Rescue
First aid for H₂S poisoning

Do not panic!


Remain calm – think!



1. Don SCBA breathing equipment.
2. Remove victim(s) utilizing buddy system to fresh air as quickly as possible. (go up-wind from source or at right angle to the wind. Not down wind.)
3. Briefly apply chest pressure – arm lift method of artificial respiration to clean the victim's lungs and to avoid inhaling any toxic gas directly from the victim's lungs.
4. Provide for prompt transportation to the hospital, and continue giving artificial respiration if needed.
5. Hospital(s) or medical facilities need to be informed, before-hand, of the possibility of H₂S gas poisoning – no matter how remote the possibility is.
6. Notify emergency room personnel that the victim(s) has been exposed to H₂S gas.


Besides basic first aid, everyone on location should have a good working knowledge of artificial respiration.

Revised CM 6/27/2012

Gas Separator Routing Flex III Rigs

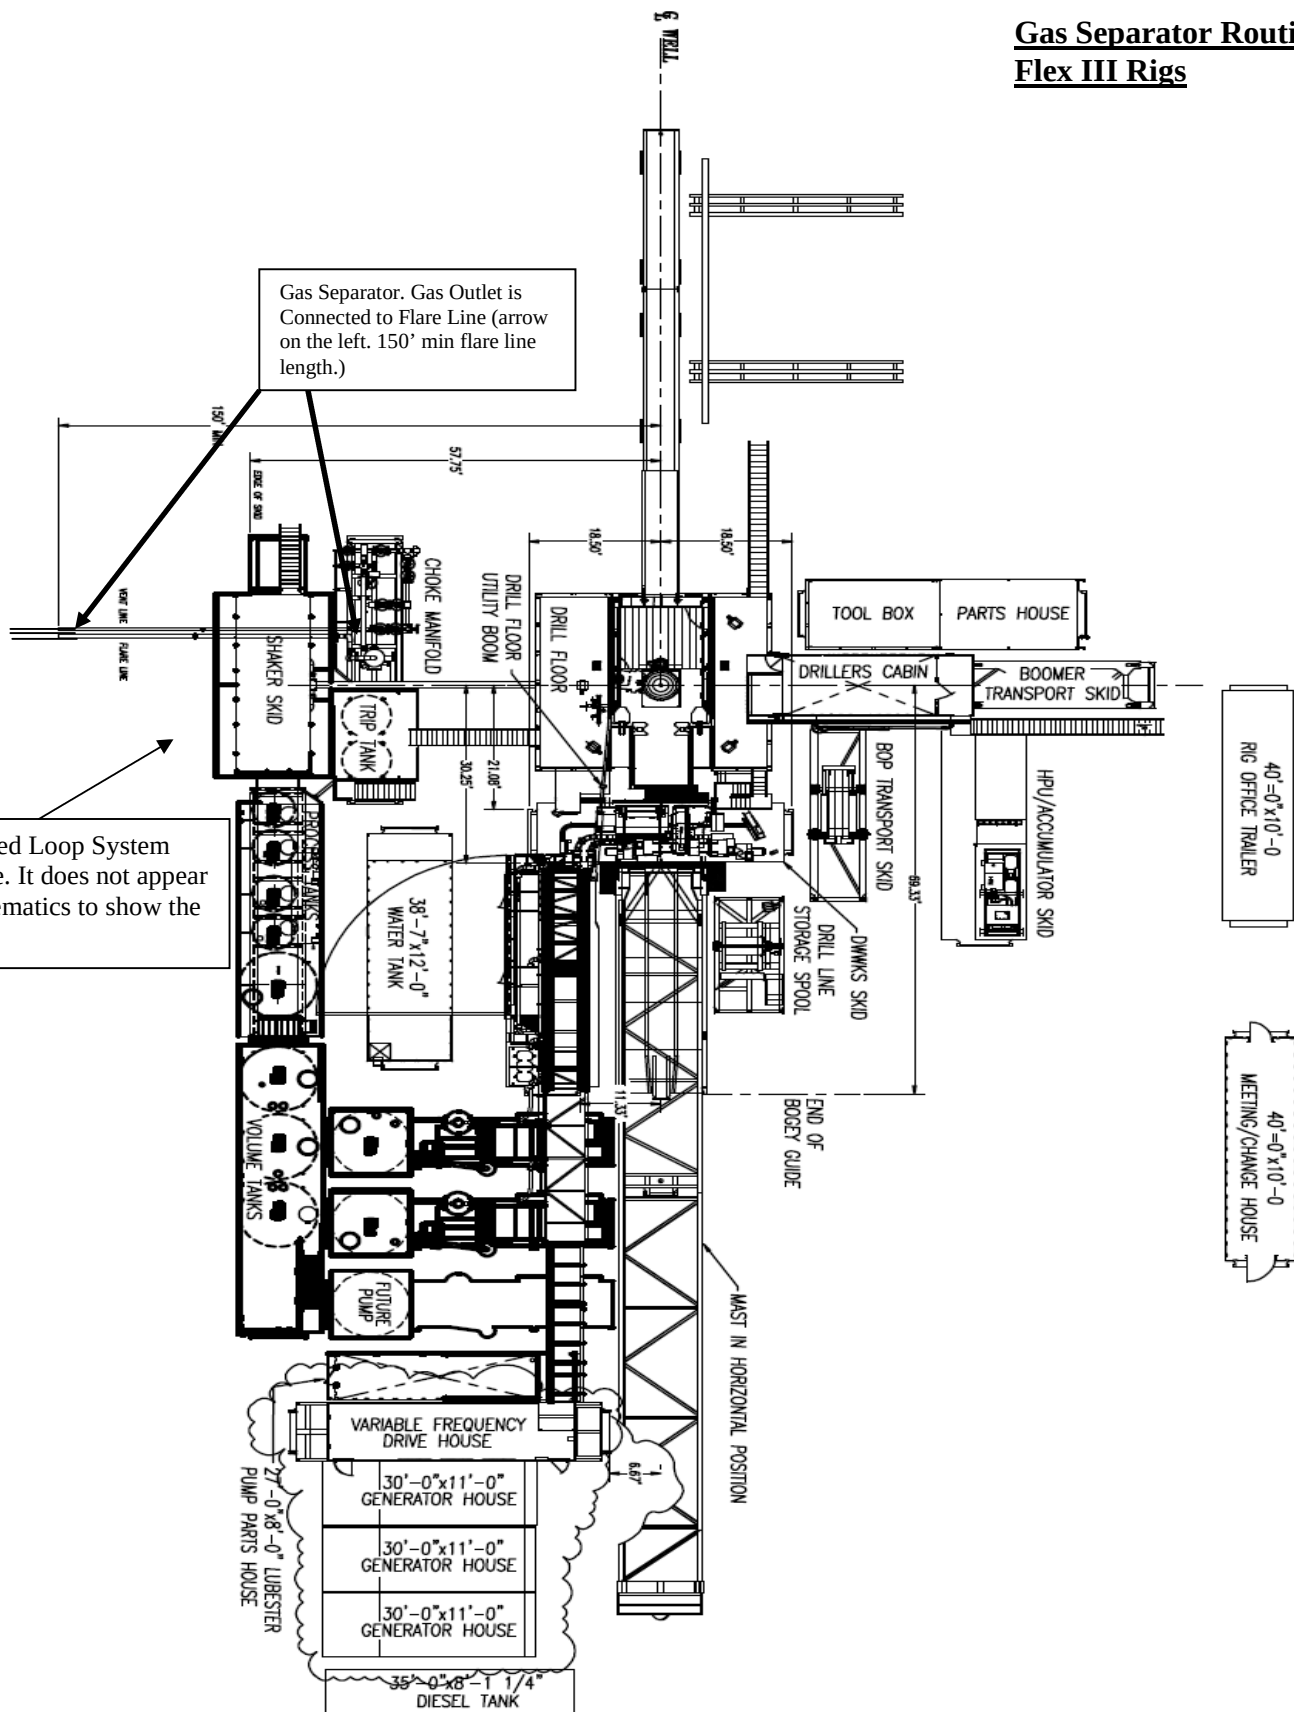

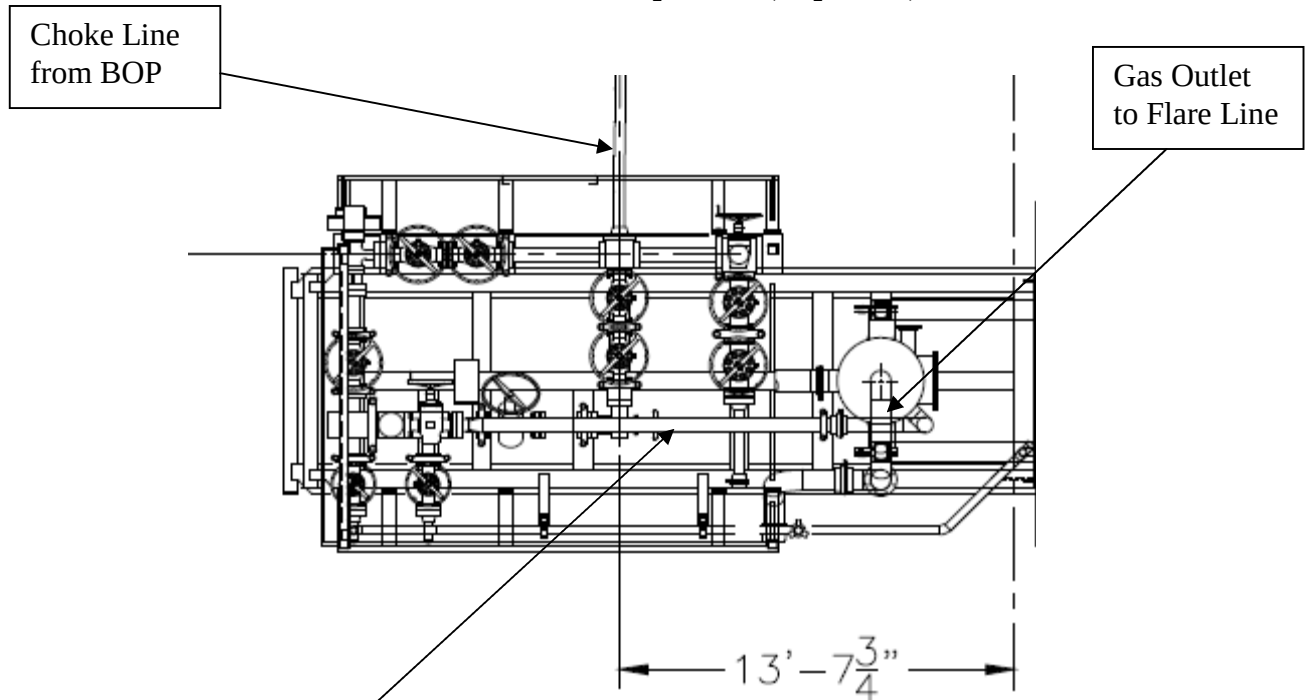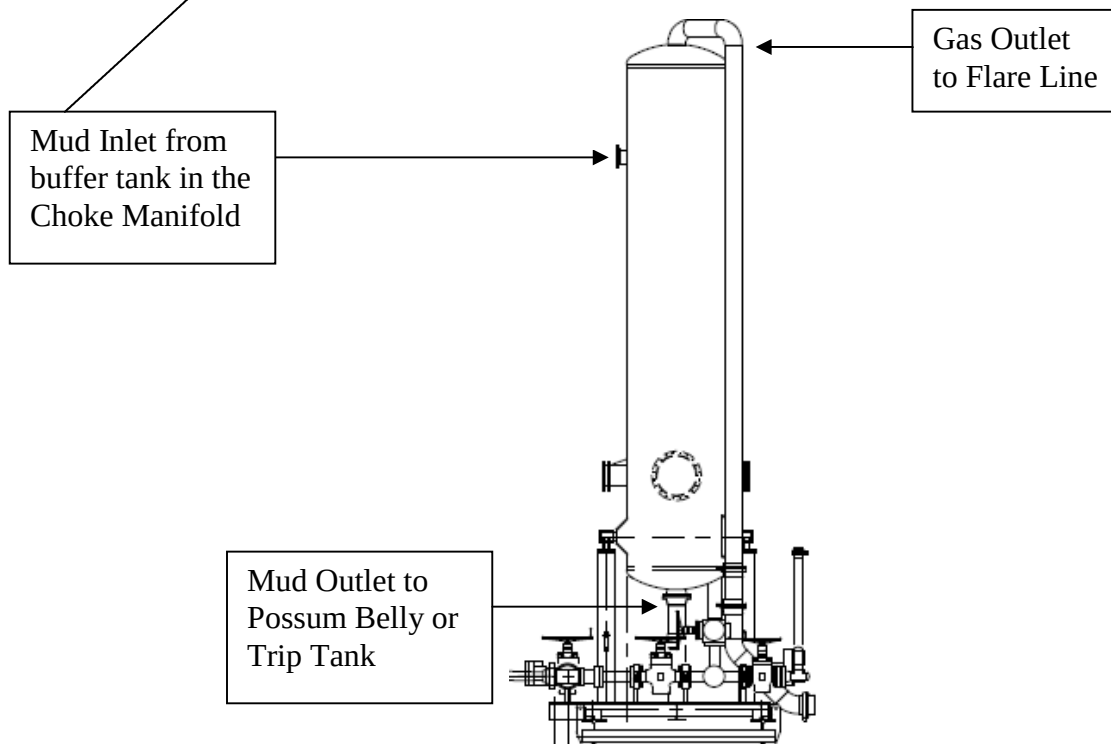Choke Manifold – Gas Separator (Top View)**Choke Manifold – Gas Separator (Side View)**

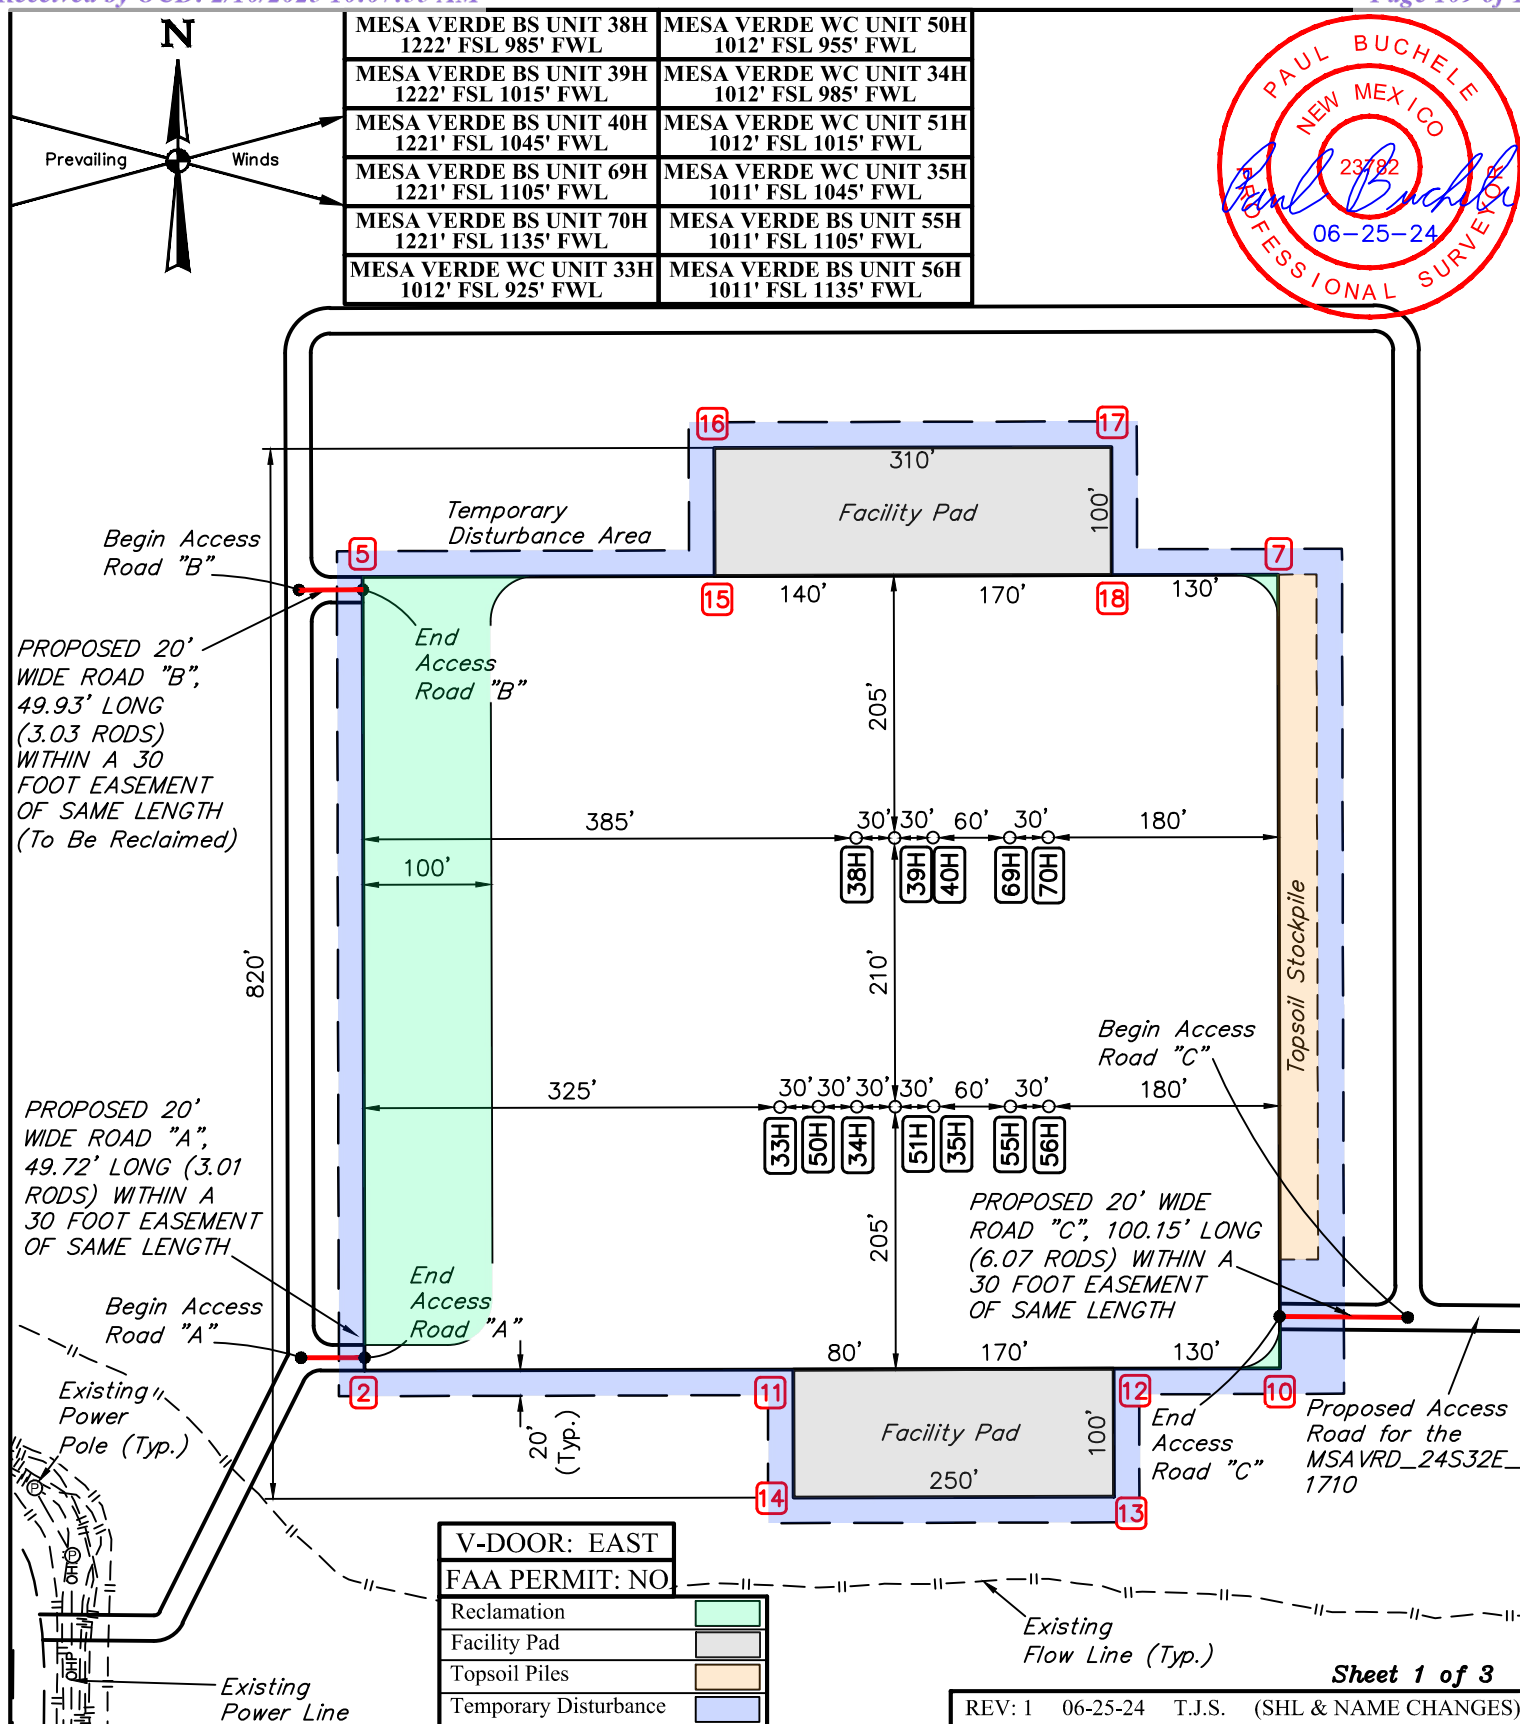

NOTES:

- Basis of Bearings is a Transverse Mercator Projection with a Central Meridian of W103°53'00" (NAD 83)


OXY USA INC.

MSAVRD T24SR32E 17 02
SW 1/4 SW 1/4, SECTION 17, T24S, R32E, N.M.P.M.
LEA COUNTY, NEW MEXICO

UELS, LLC
 Corporate Office * 85 South 200 East
 Vernal, UT 84078 * (435) 789-1017

SURVEYED BY	C.T., C.S.	06-05-23	SCALE
DRAWN BY	Z.L.	07-05-23	1" = 150'
SITE PLAN			





35H - EL: 3566.1' NAD 83 LATITUDE = 32°12'46.69" (32.212970°) LONGITUDE = -103°42'06.89" (-103.701914°) NAD 27 (SURFACE HOLE LOCATION) LATITUDE = 32°12'46.25" (32.212847°) LONGITUDE = -103°42'05.16" (-103.701433°) STATE PLANE NAD 83 (N.M. EAST) N: 441786.27' E: 736617.83' STATE PLANE NAD 27 (N.M. EAST) N: 441727.49' E: 695433.49'	38H - EL: 3566.9' NAD 83 LATITUDE = 32°12'48.77" (32.213547°) LONGITUDE = -103°42'07.59" (-103.702109°) NAD 27 LATITUDE = 32°12'48.33" (32.213424°) LONGITUDE = -103°42'05.86" (-103.701628°) STATE PLANE NAD 83 (N.M. EAST) N: 441995.83' E: 736556.46' STATE PLANE NAD 27 (N.M. EAST) N: 441937.05' E: 695372.13'	39H - EL: 3566.4' NAD 83 LATITUDE = 32°12'48.77" (32.213547°) LONGITUDE = -103°42'07.24" (-103.702012°) NAD 27 LATITUDE = 32°12'48.33" (32.213424°) LONGITUDE = -103°42'05.51" (-103.701531°) STATE PLANE NAD 83 (N.M. EAST) N: 441996.03' E: 736586.45' STATE PLANE NAD 27 (N.M. EAST) N: 441937.25' E: 695402.12'	40H - EL: 3565.9' NAD 83 LATITUDE = 32°12'48.77" (32.213548°) LONGITUDE = -103°42'06.89" (-103.701915°) NAD 27 LATITUDE = 32°12'48.33" (32.213424°) LONGITUDE = -103°42'05.16" (-103.701434°) STATE PLANE NAD 83 (N.M. EAST) N: 441996.23' E: 736616.44' STATE PLANE NAD 27 (N.M. EAST) N: 441937.44' E: 695432.11'
55H - EL: 3565.9' NAD 83 LATITUDE = 32°12'46.69" (32.212971°) LONGITUDE = -103°42'06.19" (-103.701720°) NAD 27 LATITUDE = 32°12'46.25" (32.212847°) LONGITUDE = -103°42'04.46" (-103.701239°) STATE PLANE NAD 83 (N.M. EAST) N: 441786.67' E: 736677.82' STATE PLANE NAD 27 (N.M. EAST) N: 441727.89' E: 695493.48'	56H - EL: 3565.9' NAD 83 LATITUDE = 32°12'46.69" (32.212971°) LONGITUDE = -103°42'05.84" (-103.701623°) NAD 27 LATITUDE = 32°12'46.25" (32.212847°) LONGITUDE = -103°42'04.11" (-103.701142°) STATE PLANE NAD 83 (N.M. EAST) N: 441786.87' E: 736707.82' STATE PLANE NAD 27 (N.M. EAST) N: 441728.09' E: 695523.48'	69H - EL: 3565.9' NAD 83 LATITUDE = 32°12'48.77" (32.213548°) LONGITUDE = -103°42'06.19" (-103.701721°) NAD 27 LATITUDE = 32°12'48.33" (32.213424°) LONGITUDE = -103°42'04.46" (-103.701240°) STATE PLANE NAD 83 (N.M. EAST) N: 441996.63' E: 736676.43' STATE PLANE NAD 27 (N.M. EAST) N: 441937.84' E: 695492.10'	70H - EL: 3565.4' NAD 83 LATITUDE = 32°12'48.77" (32.213548°) LONGITUDE = -103°42'05.85" (-103.701624°) NAD 27 LATITUDE = 32°12'48.33" (32.213424°) LONGITUDE = -103°42'04.11" (-103.701143°) STATE PLANE NAD 83 (N.M. EAST) N: 441996.83' E: 736706.43' STATE PLANE NAD 27 (N.M. EAST) N: 441938.04' E: 695522.10'
33H - EL: 3567.5' NAD 83 LATITUDE = 32°12'46.69" (32.212970°) LONGITUDE = -103°42'08.29" (-103.702302°) NAD 27 LATITUDE = 32°12'46.25" (32.212846°) LONGITUDE = -103°42'06.56" (-103.701821°) STATE PLANE NAD 83 (N.M. EAST) N: 441785.48' E: 736497.86' STATE PLANE NAD 27 (N.M. EAST) N: 441726.70' E: 695313.52'	34H - EL: 3566.3' NAD 83 LATITUDE = 32°12'46.69" (32.212970°) LONGITUDE = -103°42'07.59" (-103.702108°) NAD 27 LATITUDE = 32°12'46.25" (32.212847°) LONGITUDE = -103°42'05.86" (-103.701627°) STATE PLANE NAD 83 (N.M. EAST) N: 441785.88' E: 736557.85' STATE PLANE NAD 27 (N.M. EAST) N: 441727.10' E: 695373.51'	50H - EL: 3566.7' NAD 83 LATITUDE = 32°12'46.69" (32.212970°) LONGITUDE = -103°42'07.94" (-103.702205°) NAD 27 LATITUDE = 32°12'46.25" (32.212847°) LONGITUDE = -103°42'06.21" (-103.701724°) STATE PLANE NAD 83 (N.M. EAST) N: 441785.68' E: 736527.85' STATE PLANE NAD 27 (N.M. EAST) N: 441726.90' E: 695343.51'	51H - EL: 3566.7' NAD 83 LATITUDE = 32°12'46.69" (32.212970°) LONGITUDE = -103°42'07.24" (-103.702011°) NAD 27 LATITUDE = 32°12'46.25" (32.212847°) LONGITUDE = -103°42'05.51" (-103.701530°) STATE PLANE NAD 83 (N.M. EAST) N: 441786.07' E: 736587.84' STATE PLANE NAD 27 (N.M. EAST) N: 441727.29' E: 695403.50'
2 - EL: 3570.7' NAD 83 LATITUDE = 32°12'44.66" (32.212406°) LONGITUDE = -103°42'12.07" (-103.703352°) NAD 27 LATITUDE = 32°12'44.22" (32.212282°) LONGITUDE = -103°42'10.34" (-103.702871°) STATE PLANE NAD 83 (N.M. EAST) N: 441578.37' E: 736174.28' STATE PLANE NAD 27 (N.M. EAST) N: 441519.59' E: 694989.93'	5 - EL: 3570.3' NAD 83 LATITUDE = 32°12'50.80" (32.214110°) LONGITUDE = -103°42'12.07" (-103.703354°) NAD 27 LATITUDE = 32°12'50.35" (32.213986°) LONGITUDE = -103°42'10.34" (-103.702873°) STATE PLANE NAD 83 (N.M. EAST) N: 442198.24' E: 736170.18' STATE PLANE NAD 27 (N.M. EAST) N: 442139.45' E: 694985.86'	7 - EL: 3563.3' NAD 83 LATITUDE = 32°12'50.80" (32.214111°) LONGITUDE = -103°42'03.75" (-103.701042°) NAD 27 LATITUDE = 32°12'50.36" (32.213988°) LONGITUDE = -103°42'02.02" (-103.700562°) STATE PLANE NAD 83 (N.M. EAST) N: 442202.97' E: 736885.03' STATE PLANE NAD 27 (N.M. EAST) N: 442144.18' E: 695700.71'	10 - EL: 3564.7' NAD 83 LATITUDE = 32°12'44.67" (32.212408°) LONGITUDE = -103°42'03.75" (-103.701041°) NAD 27 LATITUDE = 32°12'44.22" (32.212284°) LONGITUDE = -103°42'02.02" (-103.700560°) STATE PLANE NAD 83 (N.M. EAST) N: 441583.10' E: 736889.13' STATE PLANE NAD 27 (N.M. EAST) N: 441524.33' E: 695704.79'
11 - EL: 3567.8' NAD 83 LATITUDE = 32°12'44.66" (32.212407°) LONGITUDE = -103°42'08.17" (-103.702269°) NAD 27 LATITUDE = 32°12'44.22" (32.212283°) LONGITUDE = -103°42'06.44" (-103.701789°) STATE PLANE NAD 83 (N.M. EAST) N: 441580.59' E: 736509.21' STATE PLANE NAD 27 (N.M. EAST) N: 441521.81' E: 695324.87'	12 - EL: 3564.8' NAD 83 LATITUDE = 32°12'44.67" (32.212407°) LONGITUDE = -103°42'05.26" (-103.701461°) NAD 27 LATITUDE = 32°12'44.22" (32.212284°) LONGITUDE = -103°42'03.53" (-103.700980°) STATE PLANE NAD 83 (N.M. EAST) N: 441582.24' E: 736759.16' STATE PLANE NAD 27 (N.M. EAST) N: 441523.47' E: 695574.81'	13 - EL: 3565.1' NAD 83 LATITUDE = 32°12'43.68" (32.212132°) LONGITUDE = -103°42'05.26" (-103.701461°) NAD 27 LATITUDE = 32°12'43.23" (32.212009°) LONGITUDE = -103°42'03.53" (-103.700980°) STATE PLANE NAD 83 (N.M. EAST) N: 441482.26' E: 736759.82' STATE PLANE NAD 27 (N.M. EAST) N: 441423.49' E: 695575.47'	14 - EL: 3567.9' NAD 83 LATITUDE = 32°12'43.67" (32.212132°) LONGITUDE = -103°42'08.17" (-103.702269°) NAD 27 LATITUDE = 32°12'43.23" (32.212008°) LONGITUDE = -103°42'06.44" (-103.701788°) STATE PLANE NAD 83 (N.M. EAST) N: 441480.61' E: 736509.87' STATE PLANE NAD 27 (N.M. EAST) N: 441421.83' E: 695325.52'
15 - EL: 3567.3' NAD 83 LATITUDE = 32°12'50.80" (32.214111°) LONGITUDE = -103°42'08.87" (-103.702465°) NAD 27 LATITUDE = 32°12'50.35" (32.213987°) LONGITUDE = -103°42'07.14" (-103.701984°) STATE PLANE NAD 83 (N.M. EAST) N: 442200.06' E: 736445.12' STATE PLANE NAD 27 (N.M. EAST) N: 442141.27' E: 695260.80'	16 - EL: 3567.0' NAD 83 LATITUDE = 32°12'51.79" (32.214385°) LONGITUDE = -103°42'08.87" (-103.702465°) NAD 27 LATITUDE = 32°12'51.34" (32.214262°) LONGITUDE = -103°42'07.14" (-103.701984°) STATE PLANE NAD 83 (N.M. EAST) N: 442300.04' E: 736444.46' STATE PLANE NAD 27 (N.M. EAST) N: 442241.25' E: 695260.14'	17 - EL: 3564.3' NAD 83 LATITUDE = 32°12'51.79" (32.214386°) LONGITUDE = -103°42'05.27" (-103.701463°) NAD 27 LATITUDE = 32°12'51.34" (32.214262°) LONGITUDE = -103°42'03.54" (-103.700982°) STATE PLANE NAD 83 (N.M. EAST) N: 442302.09' E: 736754.40' STATE PLANE NAD 27 (N.M. EAST) N: 442243.30' E: 695570.08'	18 - EL: 3565.0' NAD 83 LATITUDE = 32°12'50.80" (32.214111°) LONGITUDE = -103°42'05.27" (-103.701463°) NAD 27 LATITUDE = 32°12'50.36" (32.213988°) LONGITUDE = -103°42'03.53" (-103.700982°) STATE PLANE NAD 83 (N.M. EAST) N: 442202.11' E: 736755.06' STATE PLANE NAD 27 (N.M. EAST) N: 442143.32' E: 695570.74'

Sheet 2 of 3

REV: 1 06-25-24 T.J.S. (SHL & NAME CHANGES)

NOTES:

- Basis of Bearings is a Transverse Mercator Projection with a Central Meridian of W103°53'00" (NAD 83)


OXY USA INC.

MSAVRD T24SR32E 17 02
SW 1/4 SW 1/4, SECTION 17, T24S, R32E, N.M.P.M.
LEA COUNTY, NEW MEXICO



UELS, LLC
Corporate Office * 85 South 200 East
Vernal, UT 84078 * (435) 789-1017

SURVEYED BY	C.T., C.S.	06-05-23	SCALE
DRAWN BY	Z.L.	07-05-23	AS SHOWN
SITE PLAN			



BEGIN ACCESS ROAD "A" - EL: 3570.8'	END ACCESS ROAD "A" - EL: 3570.8'	BEGIN ACCESS ROAD "B" - EL: 3570.9'	END ACCESS ROAD "B" - EL: 3570.4'
NAD 83	NAD 83	NAD 83	NAD 83
LATITUDE = 32°12'44.76" (32.212433°)	LATITUDE = 32°12'44.76" (32.212433°)	LATITUDE = 32°12'50.70" (32.214082°)	LATITUDE = 32°12'50.70" (32.214082°)
LONGITUDE = -103°42'12.65" (-103.703513°)	LONGITUDE = -103°42'12.07" (-103.703352°)	LONGITUDE = -103°42'12.65" (-103.703515°)	LONGITUDE = -103°42'12.07" (-103.703354°)
NAD 27	NAD 27	NAD 27	NAD 27
LATITUDE = 32°12'44.32" (32.212310°)	LATITUDE = 32°12'44.31" (32.212310°)	LATITUDE = 32°12'50.25" (32.213959°)	LATITUDE = 32°12'50.25" (32.213959°)
LONGITUDE = -103°42'10.92" (-103.703032°)	LONGITUDE = -103°42'10.34" (-103.702871°)	LONGITUDE = -103°42'10.92" (-103.703034°)	LONGITUDE = -103°42'10.34" (-103.702873°)
STATE PLANE NAD 83 (N.M. EAST)	STATE PLANE NAD 83 (N.M. EAST)	STATE PLANE NAD 83 (N.M. EAST)	STATE PLANE NAD 83 (N.M. EAST)
N: 441588.04' E: 736124.51'	N: 441588.31' E: 736174.22'	N: 442187.88' E: 736120.33'	N: 442188.22' E: 736170.25'
STATE PLANE NAD 27 (N.M. EAST)	STATE PLANE NAD 27 (N.M. EAST)	STATE PLANE NAD 27 (N.M. EAST)	STATE PLANE NAD 27 (N.M. EAST)
N: 441529.26' E: 694940.16'	N: 441529.53' E: 694989.87'	N: 442129.09' E: 694936.01'	N: 442129.43' E: 694985.92'

BEGIN ACCESS ROAD "C" - EL: 3564.1'	END ACCESS ROAD "C" - EL: 3564.9'
NAD 83	NAD 83
LATITUDE = 32°12'45.06" (32.212516°)	LATITUDE = 32°12'45.07" (32.212519°)
LONGITUDE = -103°42'02.58" (-103.700717°)	LONGITUDE = -103°42'03.75" (-103.701041°)
NAD 27	NAD 27
LATITUDE = 32°12'44.61" (32.212392°)	LATITUDE = 32°12'44.62" (32.212395°)
LONGITUDE = -103°42'00.85" (-103.700237°)	LONGITUDE = -103°42'02.02" (-103.700560°)
STATE PLANE NAD 83 (N.M. EAST)	STATE PLANE NAD 83 (N.M. EAST)
N: 441623.13' E: 736988.99'	N: 441623.51' E: 736888.87'
STATE PLANE NAD 27 (N.M. EAST)	STATE PLANE NAD 27 (N.M. EAST)
N: 441564.35' E: 695804.65'	N: 441564.74' E: 695704.52'

Sheet 3 of 3

REV: 1 06-25-24 T.J.S. (NAME CHANGE)

NOTES:

- Basis of Bearings is a Transverse Mercator Projection with a Central Meridian of W103°53'00" (NAD 83)

OXY USA INC.


MSAVRD T24SR32E 17 02
SW 1/4 SW 1/4, SECTION 17, T24S, R32E, N.M.P.M.
LEA COUNTY, NEW MEXICO



UELS, LLC
Corporate Office * 85 South 200 East
Vernal, UT 84078 * (435) 789-1017

SURVEYED BY	C.T., C.S.	06-05-23	SCALE
DRAWN BY	Z.L.	07-05-23	AS SHOWN
SITE PLAN			


10M Choke Panel

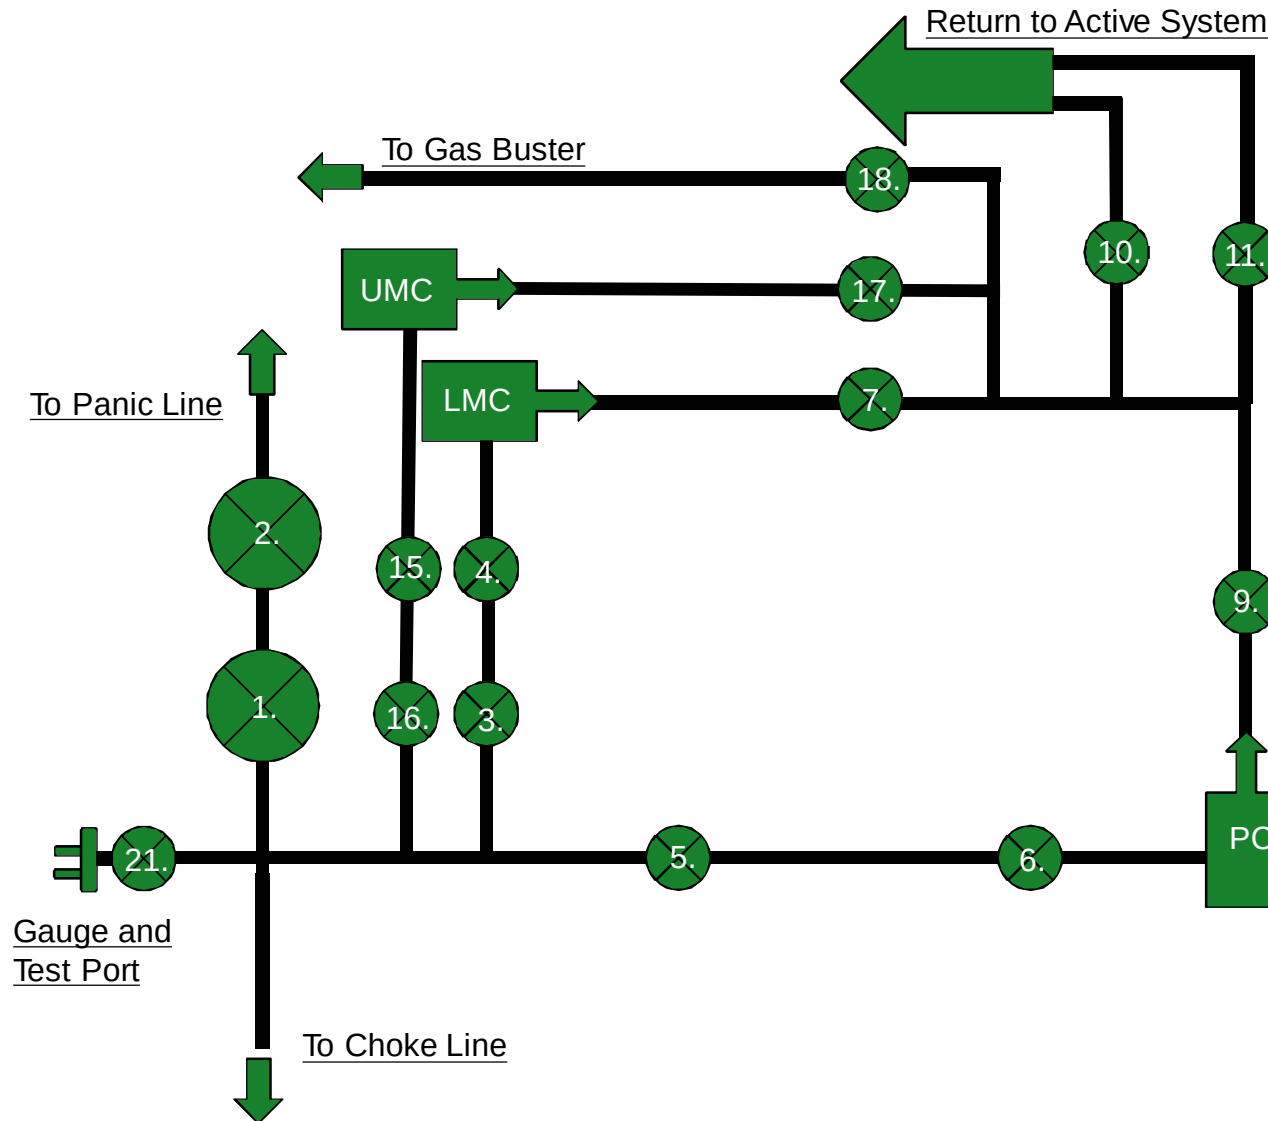


1. Choke Manifold Valve
2. Choke Manifold Valve
3. Choke Manifold Valve
4. Choke Manifold Valve
5. Choke Manifold Valve
6. Choke Manifold Valve
7. Choke Manifold Valve
8. PC – Power Choke
9. Choke Manifold Valve
10. Choke Manifold Valve
11. Choke Manifold Valve
12. LMC – Lower Manual Choke
13. UMC – Upper manual choke
15. Choke Manifold Valve
16. Choke Manifold Valve
17. Choke Manifold Valve
18. Choke Manifold Valve



21. Vertical Choke Manifold Valve

***All Valves 3" minimum**

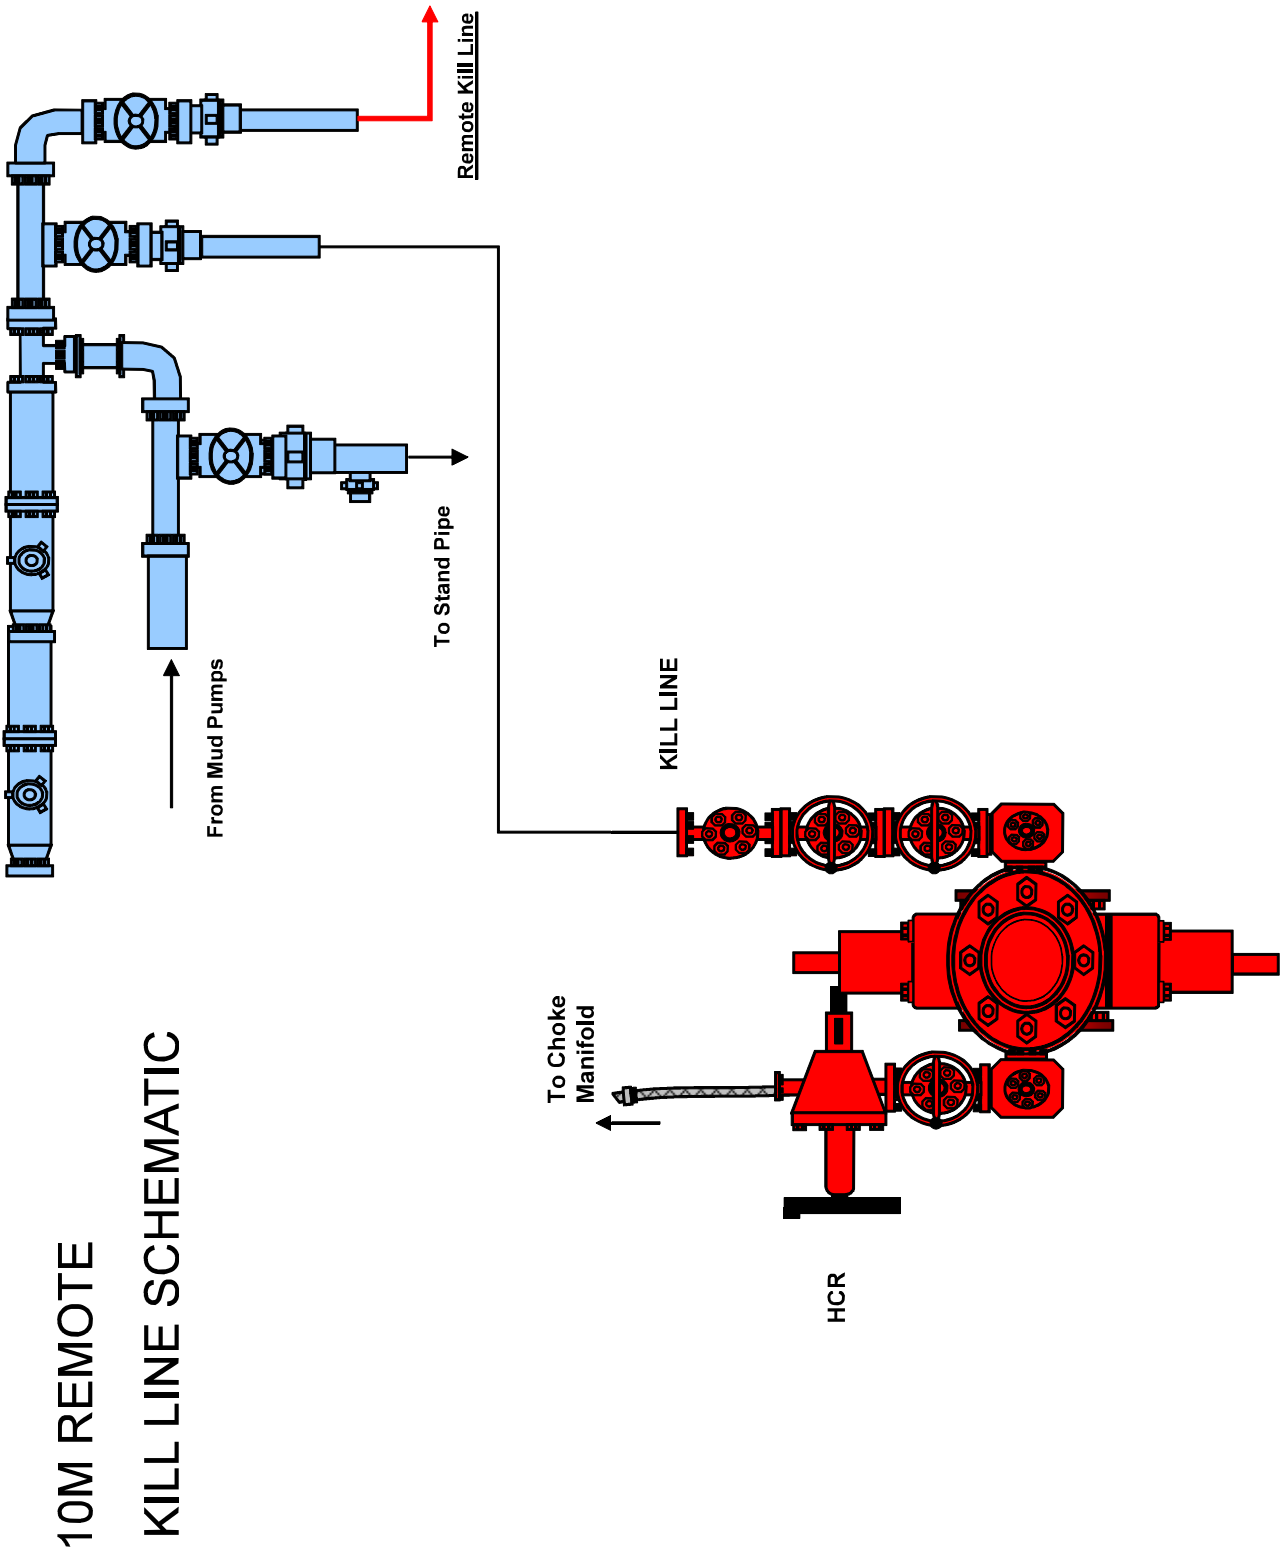



Gas Separator Routing Flex III Rigs

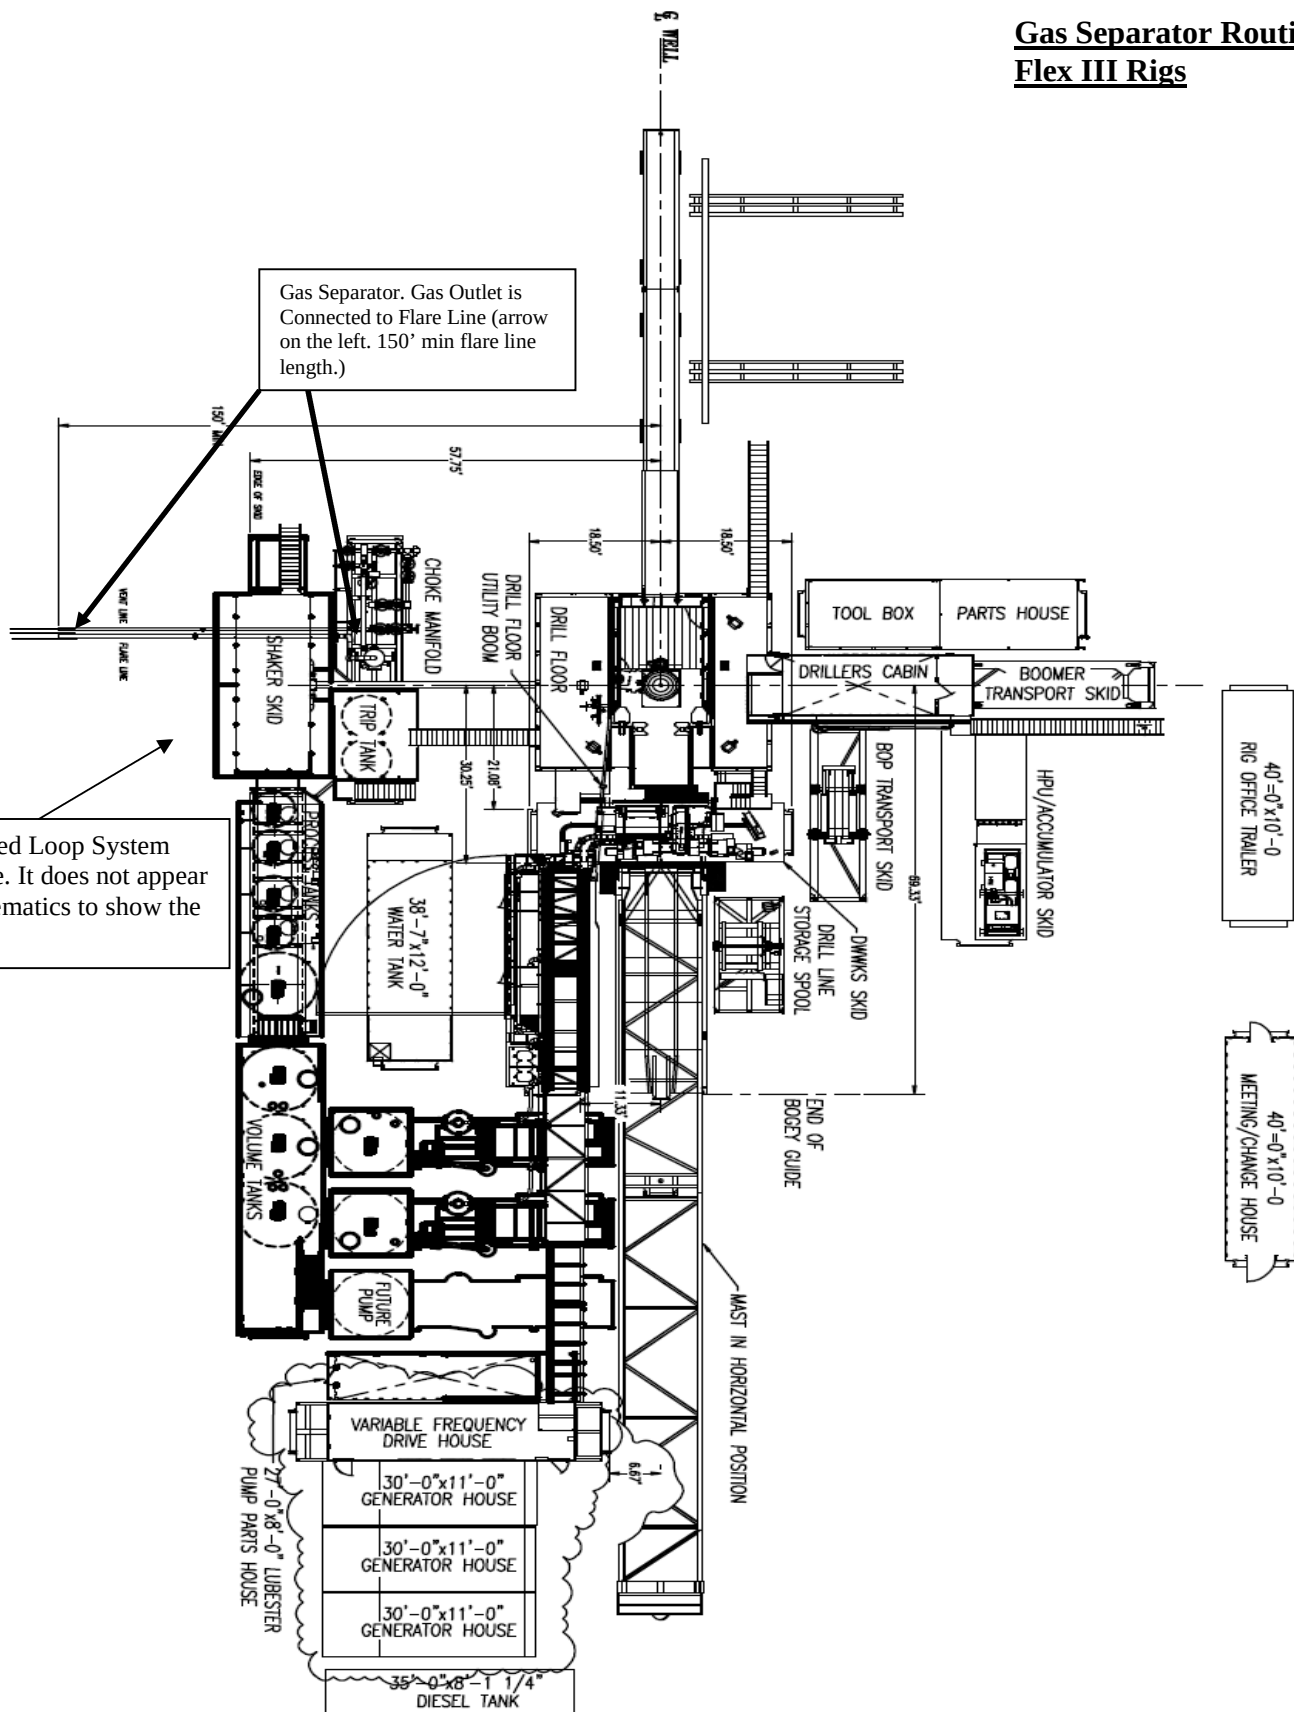

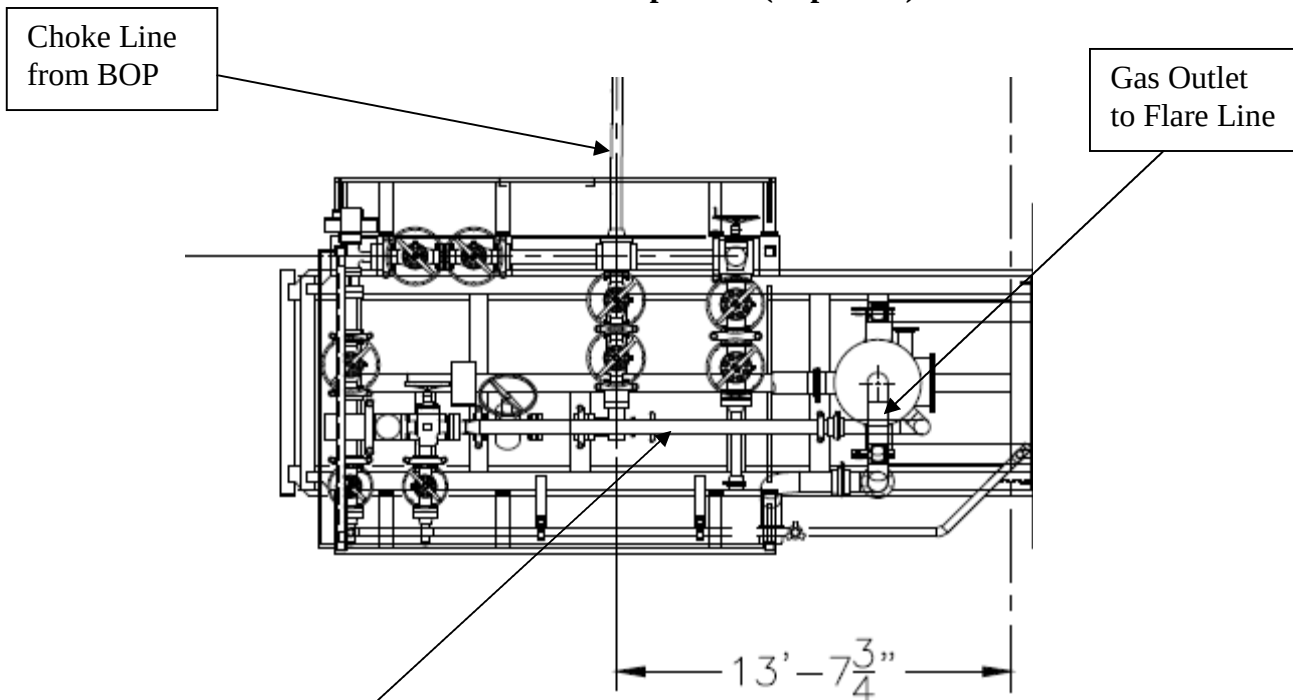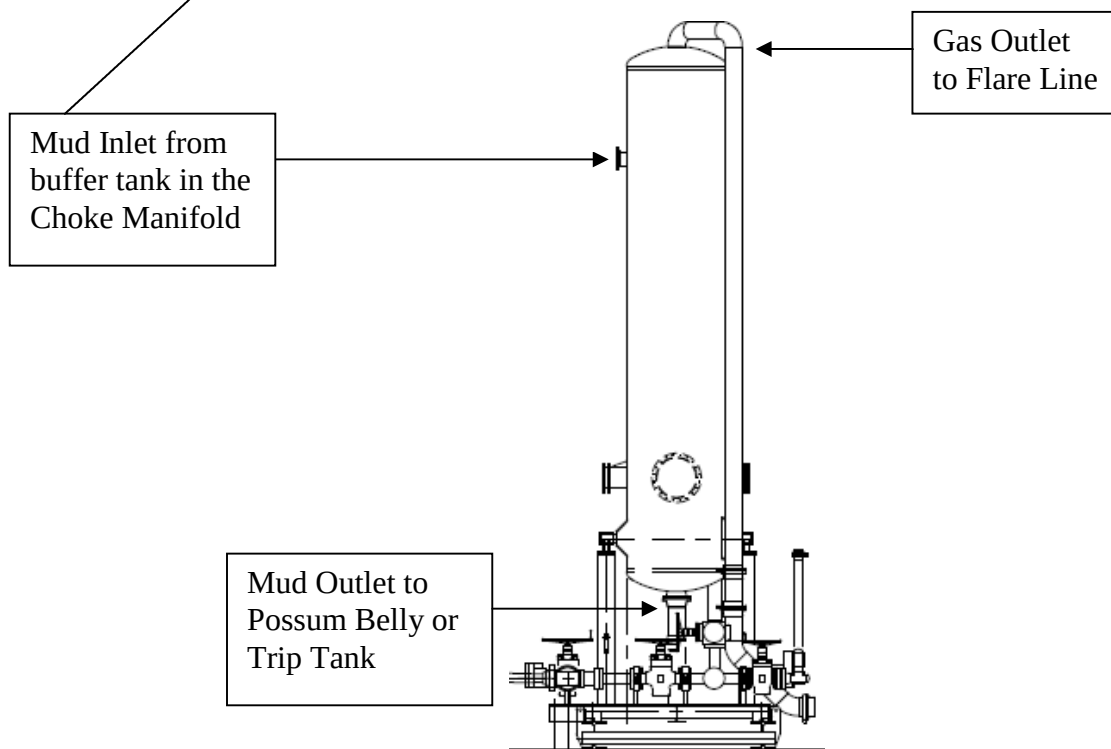Choke Manifold – Gas Separator (Top View)**Choke Manifold – Gas Separator (Side View)**

5/10M BOP Stack

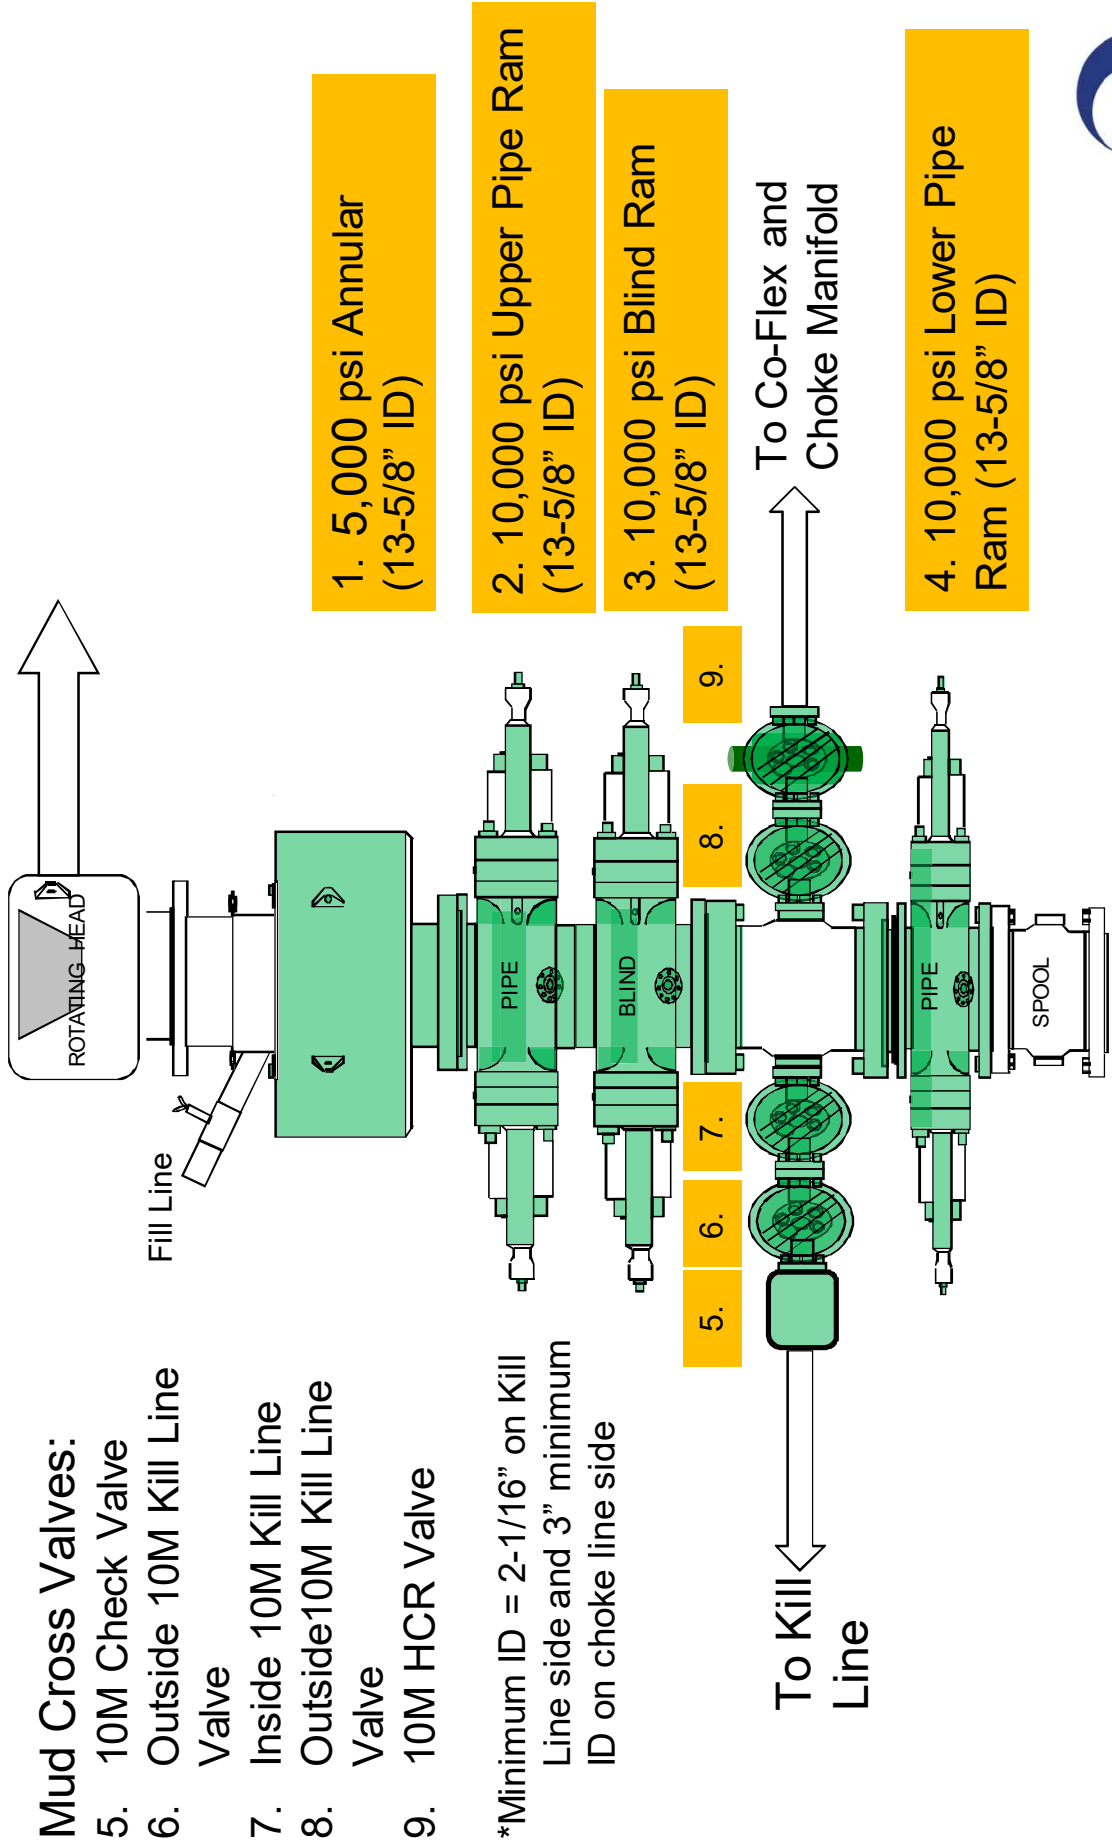

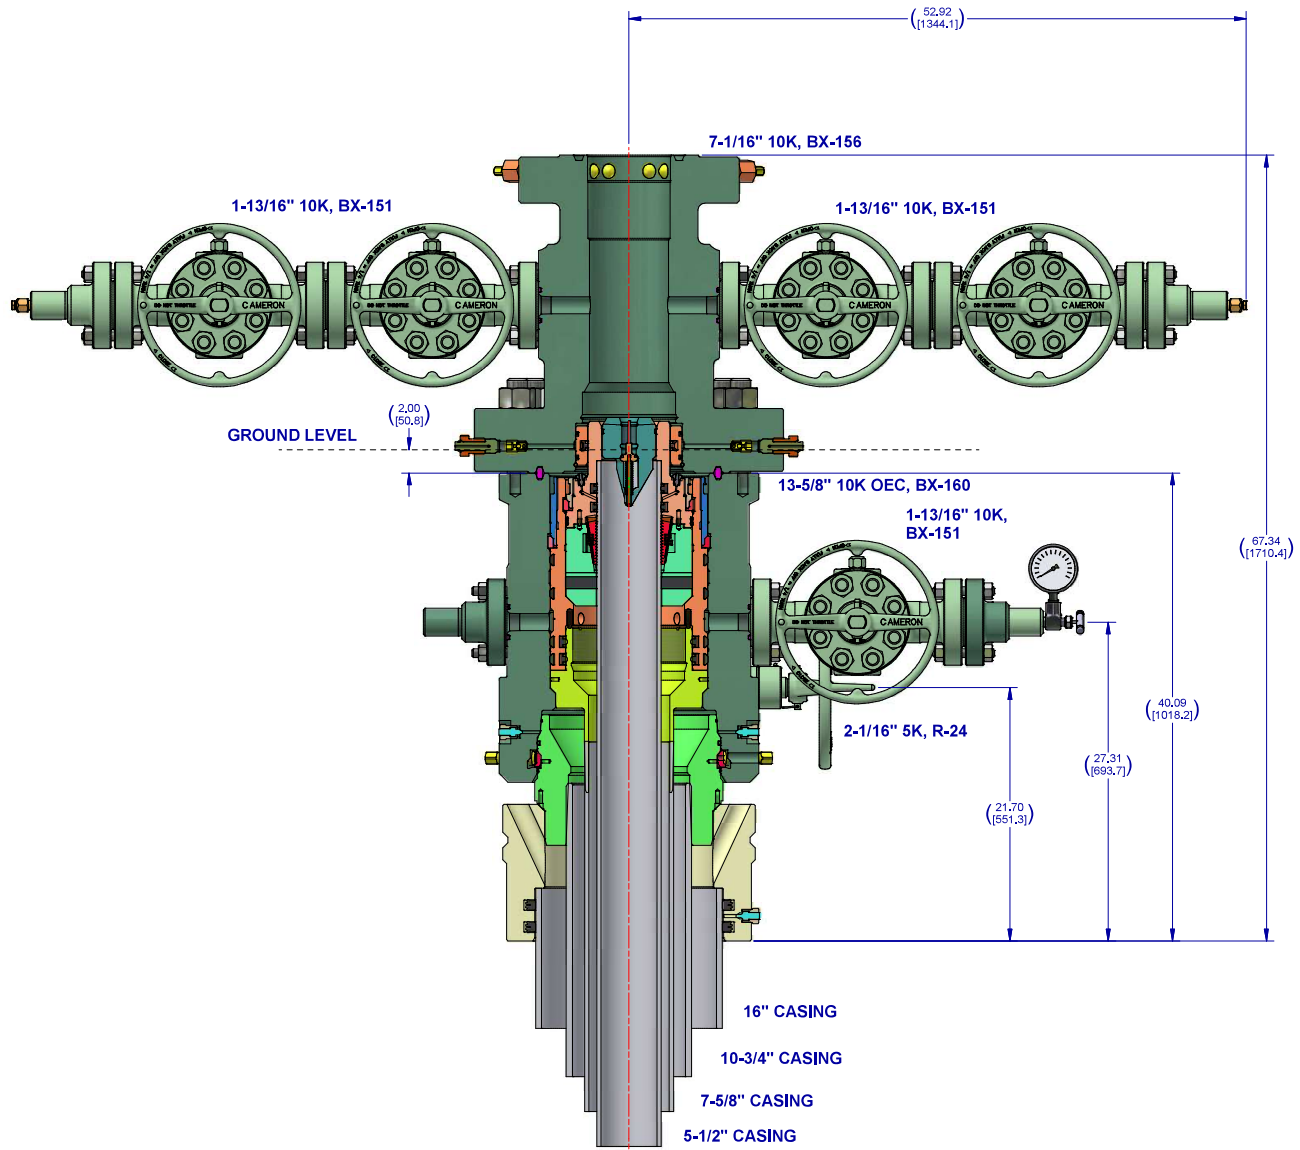

Notes:

1. THIS IS A PROPOSAL DRAWING AND DIMENSIONS SHOWN ARE SUBJECT TO CHANGE DURING THE FINAL DESIGN PROCESS.

2. DIGITALLY ENABLED SOLUTIONS, CHOKES AND ESD'S AVAILABLE ON REQUEST

CONFIDENTIAL			
SURFACE TREATMENT	DO NOT SCALE	 A Schlumberger Company	SURFACE SYSTEMS
DRAWN BY D. GOTTUNG	DATE 2 Dec 21		
CHECKED BY D. GOTTUNG	DATE 2 Dec 21		
APPROVED BY D. GOTTUNG	DATE 2 Dec 21		
ESTIMATED WEIGHT 6515.617 LBS 2955.434 KG	INTERNAL USE ONLY	SHEET 4 of 4	SD-053434-94-05 REV 01 10/01/2021

Sante Fe Main Office
Phone: (505) 476-3441

General Information
Phone: (505) 629-6116

Online Phone Directory
<https://www.emnrd.nm.gov/ocd/contact-us>

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 430015

CONDITIONS

Operator: OXY USA INC P.O. Box 4294 Houston, TX 772104294	OGRID: 16696
	Action Number: 430015
	Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

CONDITIONS

Created By	Condition	Condition Date
melissaguidry	Cement is required to circulate on both surface and intermediate1 strings of casing.	2/10/2025
melissaguidry	If cement does not circulate on any string, a Cement Bond Log (CBL) is required for that string of casing.	2/10/2025
pkautz	File As Drilled C-102 and a directional Survey with C-104 completion packet.	2/28/2025
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string.	2/28/2025
pkautz	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.	2/28/2025