

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENTFORM APPROVED  
OMB NO. 1004-0137  
Expires: January 31, 2018**SUNDRY NOTICES AND REPORTS ON WELLS**  
**Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.**5. Lease Serial No.  
NOG140218396. If Indian, Allottee or Tribe Name  
EASTERN NAVAJO7. If Unit or CA/Agreement, Name and/or No.  
NMNM132981A8. Well Name and No.  
NAGEEZI UNIT 507H9. API Well No.  
30-045-35855-00-S110. Field and Pool or Exploratory Area  
BASIN MANCOS11. County or Parish, State  
SAN JUAN COUNTY, NM**SUBMIT IN TRIPLICATE - Other instructions on page 2**

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other2. Name of Operator  
DJR OPERATING LLCContact: ALICE MASCARENAS  
E-Mail: amascarenas@djrlc.com3a. Address  
1 ROAD 3263  
AZTEC, NM 874103b. Phone No. (include area code)  
Ph: 505-632-3476

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Sec 9 T23N R9W NENE 260FNL 309FEL  
36.248043 N Lat, 107.786758 W Lon**12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Hydraulic Fracturing	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.

DJR and BLM Engineering staff (Joe Killins and John Hoffman) met on November 19, 2019 to discuss DJR's use of Coriolis meters at the Nageezi Unit A09 pad which consists of 4 producing wells. DJR is confirming BLM approval of the allocation and commingling of production applicable to this facility.

DJR will install 4 Coriolis meters off the separators from each well to use for allocation purposes only and, as such, are not subject to the provisions of 43 CFR Subpart 3174. The oil will then be commingled into tanks on the site for eventual sale via trucking. Associated documentation regarding the sale of oil via trucking will be consistent with the requirements of 43 CFR Subpart 3174. Attached is a schematic drawing discussed during our meeting.

NMOC

DEC 10 2019

DISTRICT III

14. I hereby certify that the foregoing is true and correct.

Electronic Submission #493562 verified by the BLM Well Information System  
For DJR OPERATING LLC, sent to the Farmington  
Committed to AFMSS for processing by JOE KILLINS on 12/05/2019 (20JK0026SE)

Name (Printed/Typed) ALICE MASCARENAS

Title REGULATORY TECHNICIAN

Signature (Electronic Submission)

Date 11/22/2019

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved By JOE KILLINS

Title PETROLEUM ENGINEER

Date 12/05/2019

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office Farmington

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

**\*\* BLM REVISED \*\* BLM REVISED \*\* BLM REVISED \*\* BLM REVISED \*\* BLM REVISED \*\***

OCP

Accepted For Record

**Additional data for EC transaction #493562 that would not fit on the form**

**32. Additional remarks, continued**

The gas stream from each will be measured through an allocation meter then commingled onsite which will then proceed through a sale meter which would be subject to 43 CFR 3175.

Since this well site is within the Nageezi Unit (132981A) and is an undivided unit, this proposal has no effect on the allocation of existing proportionate fixed percentage of revenues specified in the unit agreement.

## **Conditions of Approval for Coriolis Meters**

### **A. General requirements and components**


1. A Coriolis meter must be proven at the frequency and under the requirements of Onshore Order 4, Section III.D.3
2. At the beginning of every month the operator, purchaser, or transporter, as appropriate, must complete a uniquely numbered measurement ticket, in either paper or electronic format, with the following information:
  - a. Lease, unit PA, or CA number;
  - b. Unique meter ID number;
  - c. Opening and closing dates;
  - d. Opening and closing totalizer readings of the indicated volume;
  - e. Meter factor, indicating if it is a composite meter factor;
  - f. Total gross standard volume removed through the Coriolis meter;
  - g. API oil gravity:
    - (i) If the API oil gravity is determined from a composite sample, the observed API oil gravity, the temperature indicated in °F, and the API oil gravity corrected to 60 °F.
    - (ii) For API oil gravity determined by the Coriolis meter, the average density between the opening and closing dates, expressed in API units;
  - h. The average temperature in °F;
  - i. The average flowing pressure in psig;
  - j. S&W content percent;
  - k. Unique number of each seal removed and installed;
  - l. Name of the purchaser's representative; and
  - m. Name of the operator.
3. Any accumulators used in the determination of average pressure, average temperature, and average density must be reset to zero whenever a new measurement ticket is opened.
4. The Coriolis meter must be installed with the components listed in API 5.6 with the following additional requirements:
  - a. The system must have a pressure-indicating device downstream of the meter, but upstream of meter-proving connections. The pressure-indicating device must be capable of providing pressure data to calculate the CPL correction factor.
  - b. An electronic temperature averaging device must be installed, operated, and maintained as follows:
    - (i) The temperature sensor must be placed in compliance with API 7;
    - (ii) The electronic temperature averaging device must be volume weighted and take a temperature reading following API 21.2, Subsection 9.2.8;
    - (iii) The average temperature for the measurement ticket must be calculated by the volumetric averaging method using API 21.2, Subsection 9.2.13.2a (incorporated by reference, see § 3174.3);
    - (iv) The temperature averaging device must have a reference accuracy of  $\pm 0.5$  °F or better, and have a minimum graduation of 0.1 °F;
    - (v) The temperature averaging device must include a display of instantaneous temperature and the average temperature calculated since the measurement ticket was opened; and
    - (vi) The average temperature calculated since the measurement ticket was opened must be used to calculate the CTL correction factor.

- c. If nonzero sediment and water (S&W) content is to be used in determining net oil volume, the sampling system must meet the requirements of Onshore Order 4, Section III.C.7. If no sampling system is used, or the sampling system does not meet the requirements of Onshore Order 4, Section III.C.7, the S&W content must be reported as zero.
  - d. Sufficient back pressure must be applied to ensure single phase flow through the meter.
5. *Determination of API oil gravity.* The API oil gravity reported for the measurement ticket period must be determined by one of the following methods:
- a. Determined from a composite sample taken pursuant to Onshore Order 4, Section III.C.5; or
  - b. Calculated from the average density as measured by the Coriolis meter over the measurement ticket period under API 21.2, Subsection 9.2.13.2a. Density must be corrected to base temperature and pressure using API 11.1 or Table 5A.
6. *Determination of net standard volume.* Calculate the net standard volume at the close of each measurement ticket following the guidelines in API 12.2.1 and API 12.2.2.

## **B. Operating requirements**

1. *Minimum electronic pulse level.* The Coriolis meter must register the volume of oil passing through the meter as determined by a system that constantly emits electronic pulse signals representing the indicated volume measured. The pulse per unit volume must be set at a minimum of 8,400 pulses per barrel.
2. *Meter specifications.*
- a. The Coriolis meter specifications must identify the make and model of the Coriolis meter to which they apply and must include the following:
    - (i) The reference accuracy for both mass flow rate and density, stated in either percent of reading, percent of full scale, or units of measure;
    - (ii) The effect of changes in temperature and pressure on both mass flow and fluid density readings, and the effect of flow rate on density readings. These specifications must be stated in percent of reading, percent of full scale, or units of measure over a stated amount of change in temperature, pressure, or flow rate (e.g., “ $\pm 0.1$  percent of reading per 20 psi”);
    - (iii) The stability of the zero reading for volumetric flow rate. The specifications must be stated in percent of reading, percent of full scale, or units of measure;
    - (iv) Design limits for flow rate and pressure; and
    - (v) Pressure drop through the meter as a function of flow rate and fluid viscosity.
  - b. Submission of meter specifications: The operator must submit Coriolis meter specifications to the BLM upon request.
3. *Non-resettable totalizer.* The Coriolis meter must have a non-resettable internal totalizer for indicated volume.
4. *Verification of meter zero value using the manufacturer's specifications.* If the indicated flow rate is within the manufacturer's specifications for zero stability, no adjustments are required. If the indicated flow rate is outside the manufacturer's specification for zero stability, the meter's zero reading must be adjusted. After the meter's zero has been adjusted, the meter must be proven as required by Onshore Order 4, Section III.D.3. A copy of the zero value verification procedure must be made available to the Authorized Officer (AO) upon request.

5. *Required on-site information.*
  - a. The Coriolis meter display must be readable without using data collection units, laptop computers, or any special equipment, and must be on-site and accessible to the AO.
  - b. For each Coriolis meter, the following values and corresponding units of measurement must be displayed:
    - (i) The instantaneous density of liquid (pounds/bbl, pounds/gal, or degrees API);
    - (ii) The instantaneous indicated volumetric flow rate through the meter (bbl/day);
    - (iii) The meter factor;
    - (iv) The instantaneous pressure (psi);
    - (v) The instantaneous temperature (°F);
    - (vi) The cumulative gross standard volume through the meter (nonresettable totalizer) (bbl); and
    - (vii) The previous day's gross standard volume through the meter (bbl).
  - c. The following information must be correct, be maintained in a legible condition, and be accessible to the AO at the FMP without the use of data collection equipment, laptop computers, or any special equipment:
    - (i) The make, model, and size of each sensor; and
    - (ii) The make, range, calibrated span, and model of the pressure and temperature transducer used to determine gross standard volume.
  - d. A log must be maintained of all meter factors, zero verifications, and zero adjustments. For zero adjustments, the log must include the zero value before adjustment and the zero value after adjustment. The log must be made available upon request.
6. *Audit trail requirements.* Audit trail requirements must follow API 21.2, Subsection 10. All data must be available and submitted to the BLM upon request.
  - a. *Quantity transaction record (QTR).* Follow the requirements for a measurement ticket in Paragraph A.2 of these COAs.
  - b. *Configuration log.* The configuration log must comply with the requirements of API 21.2, Subsection 10.2. The configuration log must contain and identify all constant flow parameters used in generating the QTR.
  - c. *Event log.* The event log must comply with the requirements of API 21.2, Subsection 10.6. In addition, the event log must be of sufficient capacity to record all events for 7 years or the life of the meter, whichever is shorter.
  - d. *Alarm log.* The type and duration of any of the following alarm conditions must be recorded:
    - (i) Density deviations from acceptable parameters; and
    - (ii) Instances in which the flow rate exceeded the manufacturer's maximum recommended flow rate or was below the manufacturer's minimum recommended flow rate.
7. *Data protection.* Each Coriolis meter must have installed and maintained in an operable condition a backup power supply or a nonvolatile memory capable of retaining all data in the unit's memory to ensure that the audit trail information required under Paragraph B.6 of these COAs is protected.

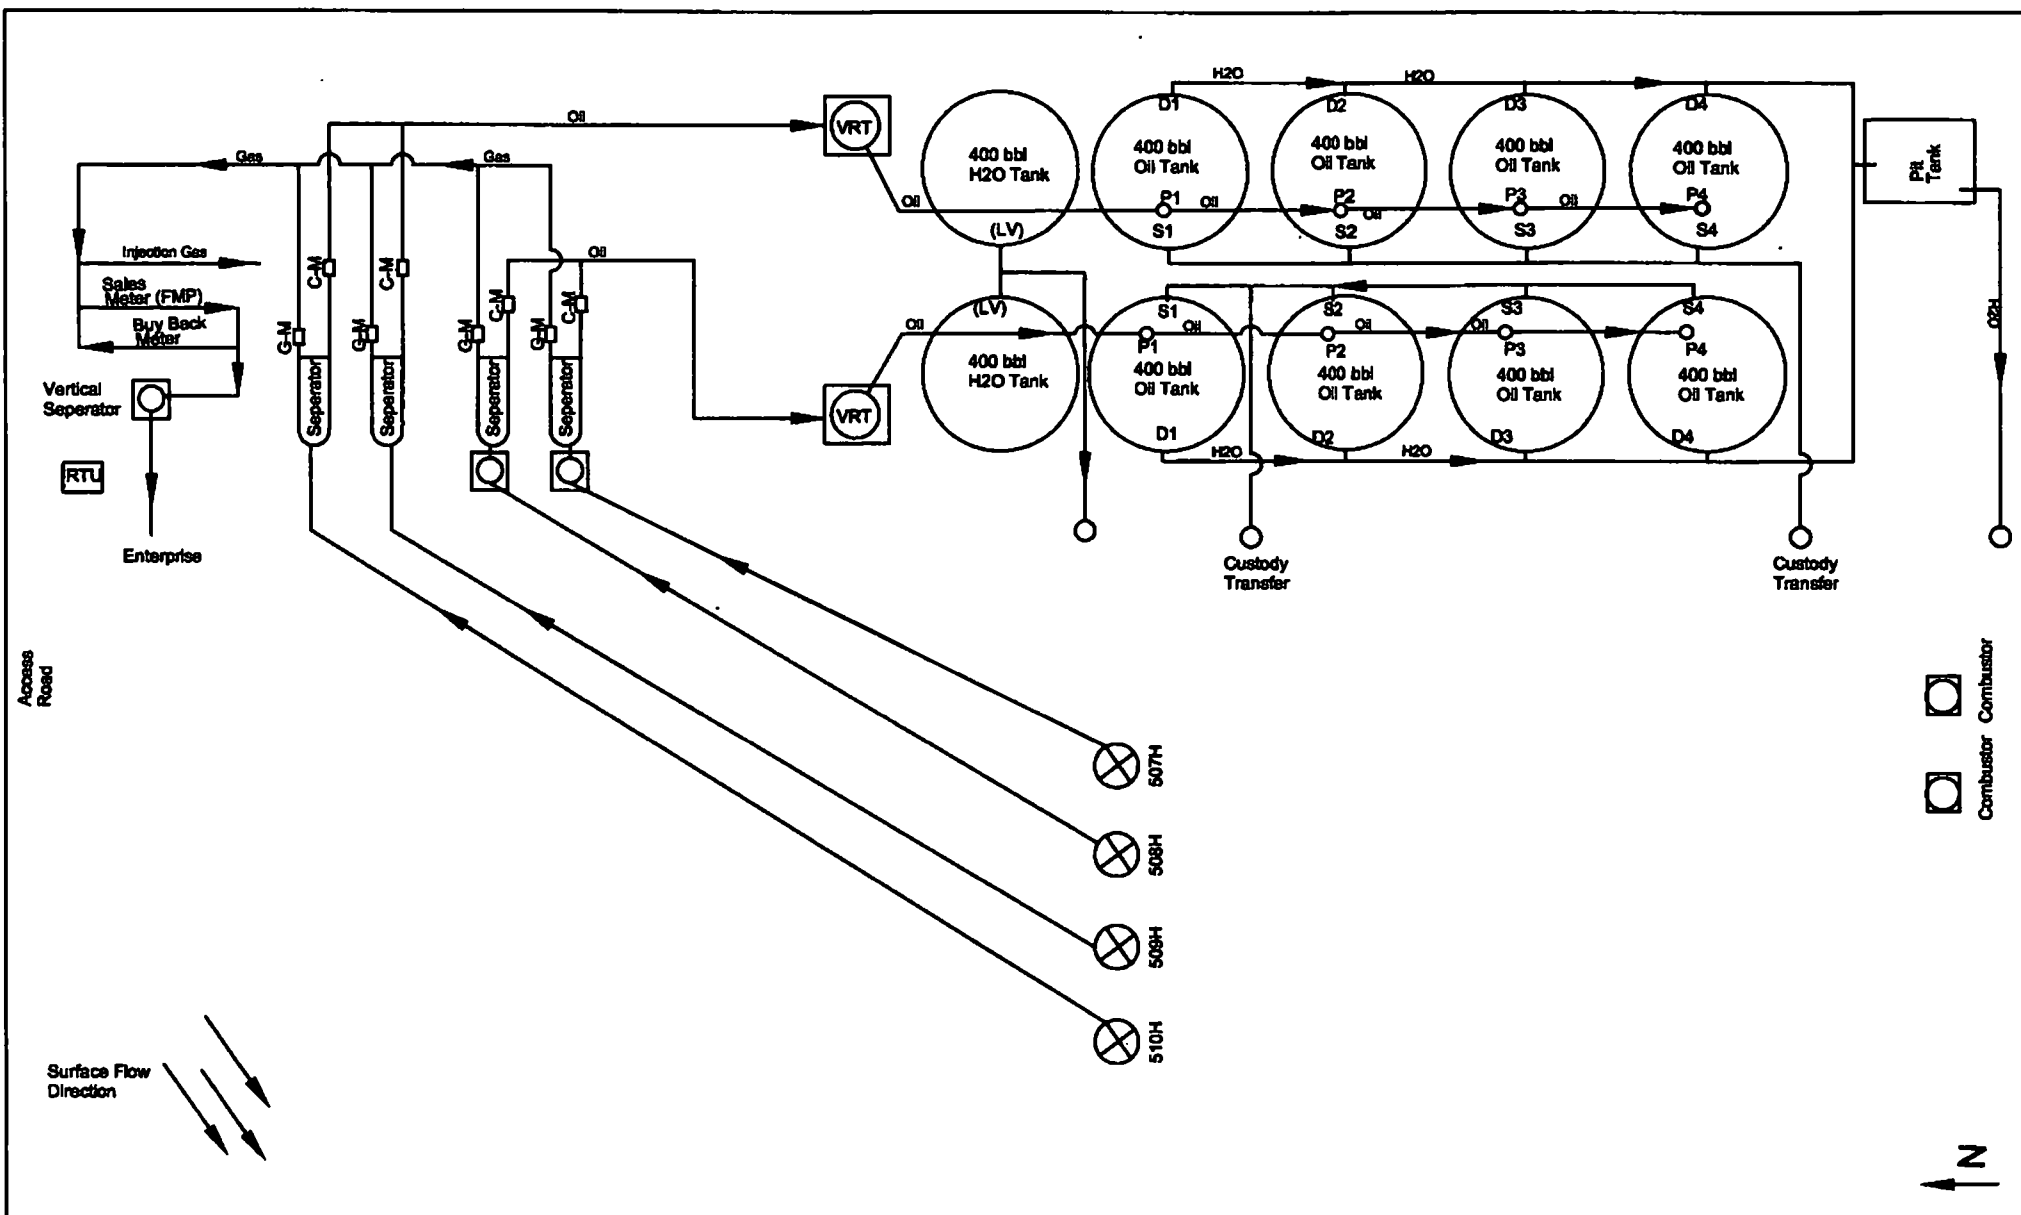

## DJR Operating LLC

Nageezi Unit A09 Pad  
 Lease # NMNM 8005  
 Unit Lease # NMNM 132981A  
 API # 30-045-35858  
 T23N, R9W, Sec 9

(G-M)=Gas Meter (Gas Measurement)  
 (C-M)=Coriolis Meter (Oil Measurement)  
 (M-M)=Mag Meter (Water Measurement)

(SV)=Sales Valve  
 (PV)=Production Valve  
 (DV)=Drain Valve  
 (LV)=Load Valve

Production Valves for the  
 Oil Tanks will be sealed  
 with the exception of the  
 tank being produced into.

Sales Valves for the  
 Oil Tanks will be sealed  
 with the exception of the  
 tank being sold.

Drain valves for the  
 Oil Tanks will be sealed  
 with the exception of  
 water being drained.