Form 3160-3 (September 2001)

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

This action is subject to technical and DRILLING OPERATIONS AUTHORIZED ARE procedural review pursuant to 43 CFR 3165.3, SUBJECT TO COMPL ANCE WITH ATTACHERIC appeal pursuant to 43 CFR 3165.4 "JENERAL REQUIREM 3105".

APPLICATION FOR PERMIT TO DRILL OR REENTER 11

FORM APPROVED OMB No. 1004-0136 Expires January 31, 2004

5. Lease Serial No.

NMSF-078765

6. If Indian, Allottee or Tribe Name

la. Type of Work: 🛛 DRILL	☐ REENTER		c	RECEIN	7. If Unit or CA Agr	eement, Na	ime and No.
			. ∧⊃∧ E/	, E. O E. 1 1 n = 1 1 1 1 1	Rosa Unit	V. 11 NT.	
1b. Type of Well: Oil Well: Gas We	ell 🗌 Other		☐ Multipl	le Zone	8. Lease Name and V 234A	Vell No.	•
2. Name of Operator					9. API Well No.		
•	30-045	-33	740				
Williams Production Company, LLC 3a, Address		3b. Phone No. (include as	rea code)		10. Field and Pool, or		
P.O. Box 640 Aztec, NM 87410		(505) 634-4208	,		Basin Fruitland	-	,
4. Location of Well (Report location clearly and	in accordance with any S				11. Sec., T., R., M., o		Survey or Area
At surface 1780' FNL & 1295' FW	•	, , , , , , , , , , , , , , , , , , ,		i			·
At Surface				[
7 tt proposed p. sa. Zone					Section 9, 31N	I <u>. 6W</u>	112.0
14. Distance in miles and direction from nearest t	•				12. County or Parish		13. State
approximately 26 miles northeast of Bla	anco, New Mexico			1	San Juan	 :	NM
		16. No. of Acres in leas	se	17. Spacing	Unit dedicated to this	well	
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig, unit line, if any) 1295' 16. No. of Acres in lease 17. Spacing Unit dedicated to this well 2,460.23 320.0 (W/2)							
/ 	1295'						
		19. Proposed Depth	1	20. BLM/B	LA Bond No. on tile		
location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 19. Proposed Depth 20. BLM/BIA Bond No. on file UT0847							
21. Elevations (Show whether DF, KDB, RT, G		22. Approximate date v	work will sta		23. Estimated duration	on	
6,419' GR		June 1, 2006			1 month		
		24. Attachments					
The following, completed in accordance with the r	equirements of Onshore		chall be attac	shed to this i	form:		
The following, completed in accordance with the r	oquiromonis or onshore		Shan oo anac	ined to time .			
 Well plat certified by a registered surveyor. 				operations	unless covered by an	existing be	ond on file (see
2. A Drilling Plan.	in al Franci Contain I	5 0	20 above). itor certificat	ion.			
A Surface Use Plan (if the location is on Nat SUPO shall be filed with the appropriate Fo					mation and/or plans a	as may be	required by the
		autho	rized officer.		· · · · · · · · · · · · · · · · · · ·		
25. Signature		Name (Printed/Typ	ped)			Date	
lans trans	· · · · · · · · · · · · · · · · · · ·	Larry Higgi	ns			5/8	/2006
Title							
Drilling COM	/						
Approved by (Signature)		Name (Printed/Typ	oed)			Date	"/3 /80
- Diff (Me	recor ()		···				/ 4/00
Title /	1	Office	75				•
		-1	<u> </u>	1 . 11 . 1	1:1 11		
Application approval does not warrant or certify the operations thereon.	at the applicant noids leg	gai or equitable title to the	ose rights in t	ne subject is	ease which would entiti	e the applic	cant to conduct
Conditions of approval, if any, are attached.							
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. States any false, fictitious or fraudulent statements	Section 1212, make it a or representations as to a	crime for any person kno	owingly and diction.	willfully to	make to any departmen	nt or agenc	y of the United
*(Instructions on reverse)							
Milliana Braduskian Camanan II Camanan	المريدات مقالين مالكات علا	las the Casin Folkland	016	41			
Williams Production Company, LLC, proposes the attached drilling and surface use plans.	to drill a well to devel	op the Basin Fruitiand	Coal forma	tion at the	above described loca	ation in acc	cordance with
The surface is under jurisdiction of the Bureau	of Land Managemen	t, Farmington Field Off	fice.		<i>*</i> .		
This location has been archaeologically surve	yed La Plata Archaeol	ogical Consultants. Co	opies of their	r report hav	ve been submitted di	rectly to th	e BLM/FFO.
This APD is also serving as an application to commonly be owned and operated by Williams Fie		of-wery (ROW) (A 183	5-foot pipelir	ne tie woul	d be required for this	location.	The pipeline
The second secon	1	1 / 1/2 /25	N.	13×			
·	1/	263	100°	(S)			
	V	10 M	M. (3)	إنت			
		is .	186 8	E Day			

District I PO Box 1980, Hobbs, NM 88241-1980

District II PO Drawer DD, Artesia, NM 88211-0719

District III 1000 Rio Brazos Ad., Aztec, NM 87410

District IV PO Box 2088, Santa Fe, NM 87504;2088 State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION

Form C-102 Revised February 21, 1994 Instructions on back

Submit to Appropriate District Office

State Lease - 4 Copies Fee Lease - 3 Copies

PO Box 2088 Santa Fe, NM 87504-2088 MAY 11 AM 2


RECEIVED AMENDED REPORT

OTO FARMINGTON NIM

WELL LOCATION AND ACREAGE DEDICATION PLAT


14	PI Numbe	r		*Pool Code *Pool Name							
30-0	45-3	3740		71629 BASIN FRUITLAND COAL							
*Property	Code				*Prope	ty Name			⁶ We	*Well Number	
17033	3				ROSA	UNIT			234A		
'OGRID N	1 0 .			· · · · · · · · · · · · · · · · · · ·	*Operat	or Name			°E	*Elevation	
12078	2			WILLIAMS PRODUCTION COMPANY 6419						6419	
					¹⁰ Surface	Location					
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/We	st line	County	
E	9	31N	БW		1780	NORTH	1295 WEST			SAN JUAN	
		11 B	ottom	Hole L	ocation	If Different	From Surf	ace		·	
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/We	st line	County	
				,							
¹² Dedicated Acres	320	0.0 Acre	s - (h	1/2)	¹³ Joint or Infill	³⁴ Consolidation Code	³⁵ Order No.				
NO ALLOWARIE WILL BE ASSIGNED TO THIS COMPLETION INTIL ALL INTERESTS HAVE BEEN CONCOLIDATED											

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

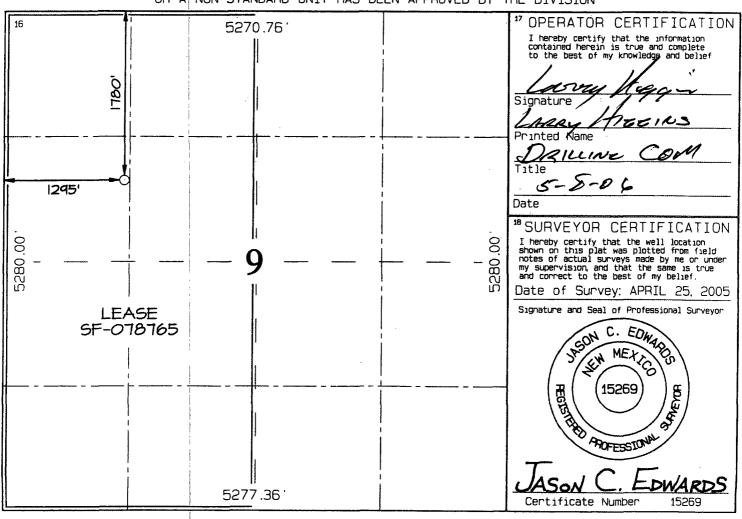



	Submit 3 Copies To Appropriate District State of New Mexico	Form C-103
	Office District I Energy, Minerals and Natural Resources	May 27, 2004
	1625 N. French Dr., Hobbs, NM 88240	WELLAPINO49-33740
	District III 1220 South St. Francis Dr.	
	1220 S. St. Francis Dr., Santa Fe, NM	NMSF-078765
1	87505 CLINIDAY NOTICES AND REPORTS ON WELLS	7 Legga Name or Unit Agreement Name
		7. Lease Name of Onit Agreement Name
	DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH	Rosa Unit
		8. Well Number 234A
Ì		9 OGRID Number 120782
		3. OGIGB RUMON
	3. Address of Operator	Basin Fruitland Coal
	P.O. Box 640 Aztec, NM 87410	
ı	4. Well Location	
1	Unit Letter E: 1780 feet from the north line and 1295 feet from the west line	,
	Section 9 Township 31N Range 6W NMPM	County San Juan
	11. Elevation (Show whether DR, RKB, RT, GR,	etc.)
	6,419' GR	
-	Pit typereserveDepth to Groundwater>100'_Distance from nearest fresh water well_>1,000'_1	Distance from nearest surface water_>1,000'
Į	Pit Liner Thickness: 12 mil Below-Grade Tank: Volumebbls; Constructi	on Material
	12. Check Appropriate Box to Indicate Nature of Notice	ce, Report or Other Data
	NOTICE OF INTENTION TO	IDOCOLICAT DEDOCT OF
		
	TOLE OF ALTER GAGING GENERAL GAGING/GENE	E141 00B
	OTHER: OTHER:	
		Attach wellbore diagram of proposed completion
	or recompletion.	
		•
E	Drilling/Completion pit to be located approximately 50 to 75 feet from well head.	Pit multi-use drilling and completion to avoid
(operated and closed in accordance with NMOCD guidelines and Williams proce	dures.
ī	District II 100 W. Grand Ave., Artesia, NM 88210 1220 South St. Francis Dr. South St. Francis	
_	CYCLY TYPE (TYPE D D W GOL	D. 100 10000
2	SIGNATURE COLONY Mag TITLE Drilling COM_	DATE5-3-2006_
7	Type or print name Larry Higgins E-mail address: larry higgins@williams.com	Telephone No. (505) 634-4208
	For State Use Only	2010phono 110. (300) 05T-1200
		MCDRATOR RACE
		INSPECTOR, DIST. 3° DATEJUN 0 5 2006

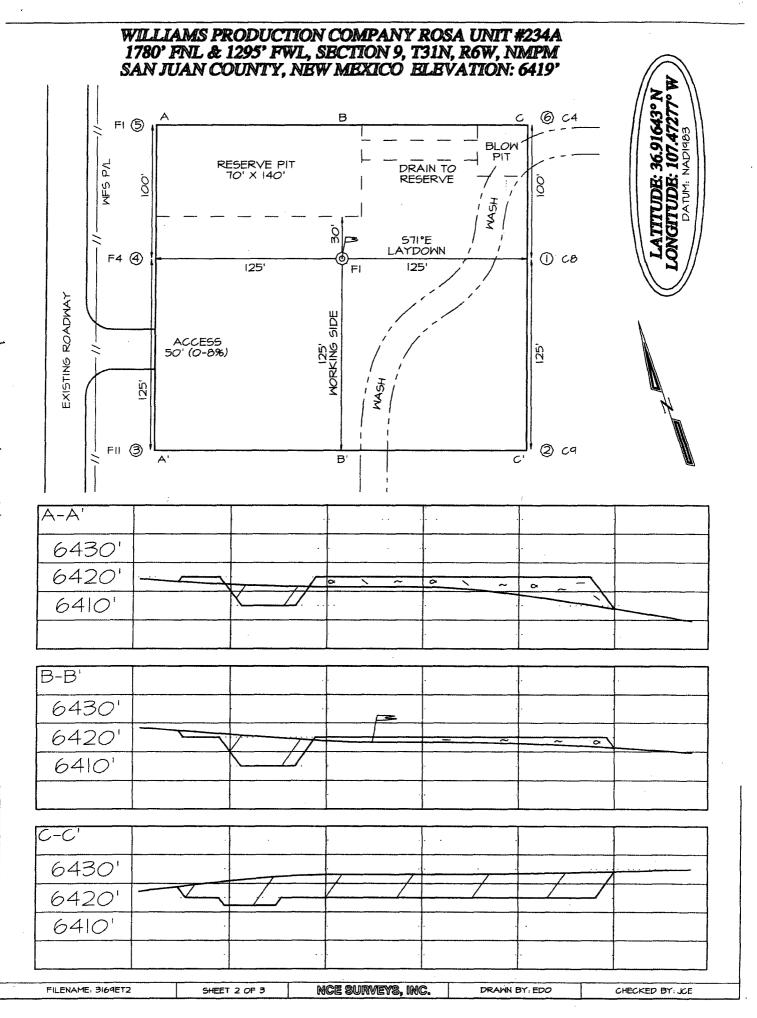



WILLIAMS PRODUCTION COMPANY

Operations Plan

(Note: This procedure will be adjusted on site based upon actual conditions)

DATE:

4/24/2006

WELLNAME:

Rosa Unit #234A

San Juan, NM

FIELD:

Basin Fruitland Coal

BH LOCATION:

SWNW Sec. 9-T31N-6W

SURFACE:

BLM

ELEVATION:

6,419' GR

MINERALS:

BLM

TOTAL DEPTH:

3,328

LEASE #

SF-078765

I. **GEOLOGY:**

Surface formation - San Jose

A. **FORMATION TOPS:** (KB)

NAME	MD	NAME	MD	
San Jose	Surface	Top Coal	3,123	
Nacimiento	1,013	Bottom Coal	3,228	
Ojo Alamo	2,388	Pictured Cliffs	3,228	
Kirtland 2,518 TD		TD	3,328	
Fruitland	2,958			

- B. **LOGGING PROGRAM:** None
- C. <u>NATURAL GAUGES:</u> Gauge any noticeable increases in gas flow. Record all gauges in Tour book and on morning reports.
- **D.** MUD LOGGING PRORAM: Mud logger will be on location at drill out below 7" casing to TD.

II. <u>DRILLING</u>

- A. <u>MUD PROGRAM:</u> Clear water with benex to 7" casing point. Treat for lost circulation as necessary. Expect 100% returns prior to cementing. Notify Engineering of any mud losses. If coal is detected before 3,103', <u>DO NOT</u> drill deeper until Engineering is contacted.
- B. DRILLING FLUID: Coal section will be drilled with Fruitland Coal water.

C. <u>BOP TESTING</u>: While drill pipe is in use, the pipe rams and the blind rams will be function tested once each trip. The anticipated reservoir is expected to be less than 1300 psi, so the BOPE will be tested to 250 psi (Low) for 5 minutes and 1500 psi (High) for 10 minutes. Utilize a BOPE Testing Unit with a recording chart and appropriate test plug for testing. The drum brakes will be inspected and tested each tour. All tests and inspections will be recorded in the tour book as to time and results.

III. MATERIALS

A. CASING PROGRAM:

CASING TYPE	HOLE SIZE	DEPTH	CASING SIZE	WT. & GRADE
Surface	12-1/4"	+/- 300'	9-5/8"	36# K-55
Intermediate	8-3/4"	+/- 3,103'	7"	20# K-55
Prod. Liner	6-1/4"	+/- 3,003'- 3,228'	5-1/2"	15.5# K-55

B. FLOAT EQUIPMENT:

- 1. <u>SURFACE CASING:</u> 9-5/8" notched regular pattern guide shoe. Run (1) standard centralizer on each of the bottom (4) joints of Surface Casing.
- 2. <u>INTERMEDIATE CASING:</u> 7" cement nose guide shoe with a self-fill insert float. Place float collar one joint above the shoe. Install (1) Turbulent centralizer on each of the bottom (3) joints and one standard centralizer every (3) joints to 2,500 ft. Run (1) Turbulent centralizer at 2,700 ft., 2,500 ft., 2,300ft., 2,000ft., 1,500 ft., and 1,000 ft. (NTL-FRA 90-1).
- 3. PRODUCTION LINER / CASING: 4-1/2" & 5-1/2" whirler type cement nose guide shoe with a latch collar on top of 20' bottom joint. Place marker joint above 5,400'. Place centralizers as needed across selected production intervals.

C. CEMENTING:

(Note: Volumes may be adjusted onsite due to actual conditions)

- 1. SURFACE: Use 160 sx (224 cu.ft.) of "Type III" with 2% CaCl₂ and 1/4# of cello-flake/sk (Yield = 1.41 cu.ft./sk, Weight = 14.5 #/gal.). Use 120% excess to circulate the surface. WOC 12 hours. Total volume = 206 cu.ft. Test to 1500#.
- 2. <u>INTERMEDIATE</u>: Lead <u>380 sx</u> (793 cu.ft.) of "Type III" 65/35 poz with 8% gel, 1% CaCl₂ and 1/4# cello-flake/sk (Yield = 2.09 cu.ft./sk, Weight = 12.1 #/gal.). Tail <u>50 sx</u> (70cu.ft.) of "Type III" with 1/4# cello-flake/sk, and 1% CaCl₂ (Yield = 1.4 cu.ft./sk, Weight = 14.5#/gal.). Use **100% excess in Lead Slurry** to circulate to surface. No excess in Tail Slurry. Total volume = 863 cu.ft. Bump Plug to 1,500 psi. Notify engineering if cement is not circulated to surface.
- 3. PRODUCTION LINER: Open hole completion. No cement.

GENERAL ROSA DRILLING PLAN

Rosa Unit boundries:

T31N, R4W: all except sections 32-36 T31N, R5W: all except sections 1 & 2

T31N, R6W: all except sections 6,7,18,20, & 27-36

T32N, R6W: sections 32-36

FORMATION	LITHOLOGY	WATER	GAS	OIL/COND	OVER-PRES	LOST CIRC
Nacimiento	Interbedded shales, siltstones and sandstones	Possible	Possible	No	No	No
Ojo Alamo	Sandstone and conglomerates with lenses of shale	Fresh	No	No	No	No
Kirtland	Shale W/interbedded sandstones	No	Possible	No	No	No
Fruitland	Inter, SS, SiltSt, SH &Coals w/carb, SS, SiltSt, SH	Yes	Yes	No	Possible	Possible
	Massive Sandstone w/thin interbedded shales	Possible	Yes	Possible	No	Possible
	Shale w/thin interbedded sandstones and siltstones	No	Possible	No	No	No
Cliff House	Transgressive sandstones	Possible	Yes	No	No	No
Menefee	Sandstones, carb shales and coal	Possible	Yes	No	No	No
J	Regressive coastal barrier sandstone	Possible	Yes	Possible	No	Yes
Mancos I	Marine shale and interbedded sandstone	No	Possible	Possible	No	Possible
Jpr Dadota	Marine sand and shales	No	Yes	Possible	No	Possible
wr Dakota	fluvial sands, shales, & coal	Possible	Yes	Possible	No	Possible

DRILLING

Potential Hazards:

- 1. There are no overpressured zones expected in this well.
- 2. No H2S zones will be penetrated while drilling this well.

Mud System:

- Surface The surface hole will be drilled with a low-solids, non-dispersed system with starch and lost circulation material as needed. Expected mud weights will be in the 8.4 to 9.0 lb per gal range. Viscosities will be in the 30 to 60 sec/qrt range as needed to remove drill cuttings.
- 2. Intermediate The intermediate hole will be drilled with clear water and Benex to TD where the well will be mudded up to log and run casing. The mud system will be low-solids, non-dispersed with mud weights in the 9 to 10 lb per gal range as needed to control the well. Viscosities will be in the 45 to 55 range as needed to support any weight material. The weight material will consist of Barite.
- Production The well will be drilled using air from the intermediate casing point to TD. For Fruitland Coal wells, the coal section will be drilled with air/mist.

viniants reduction Company, LLC

Well Control Equipment Schematic for 2M Service

Attachment to Drilling Technical Program

Typical BOP setup

