#### **UNITED STATES** DEPARTMENT OF THE INTERIOR **BUREAU OF LAND MANAGEMENT**

FORM APPROVED OMB No. 1004-0136 Expires January 31, 2004

		•
. Lease	Serial No.	
NM:	SF-078890	

5.	Lease	Serial	No.

APPLICATION FOR PERMIT TO DR	6. If Indian, Allottee or Tribe	Name			
la. Type of Work: DRILL REENTER		Committee and the second		7. If Unit or CA Agreement, N	Name and No.
		RECEIV	FO 1	Rosa Unit	
1b. Type of Well: Oil Well Gas Well Other	⊠ Si	ngle Zone   [] (Multir		8. Lease Name and Well No.	
2. Name of Operator	<u></u>	<u>कर द र ास स्थाप</u>	TOW W	A 389A	
<u> </u>				9. API Well No. 36-039-7	9507
Williams Exploration and Production Company, LLC  3a. Address	3b Phone No	. (include area code)		10. Field and Pool, or Explorat	
P.O. Box 316 Ignacio, CO 81137	1	563-3308	ì	Basin Fruitland Coal	ory
4. Location of Well (Report location clearly and in accordance with any				11. Sec., T., R., M., or Blk. and	1 Survey or Area
At surface 2460 FNL & 2380' FEL	вине гецинет		-	,,,,,	<b>,</b>
2/166					
At proposed prod. zone 660' FNL & 660' FWL" 1/D"				G Section 7. 31N. 4W	<del>-,</del>
14. Distance in miles and direction from nearest town or post office*				12. County or Parish	13. State
approximately 30 miles northeast of Blanco, New Mexico				Rio Arriba	NM
15. Distance from proposed* location to nearest property or lease line, ft.	16. No. of A	Acres in lease	17. Spacing	g Unit dedicated to this well	
(Also to nearest drig. unit line, if any)	2.539	158	291	.56 (W/2)	
18. Distance from proposed location*	19. Propose			BIA Bond No. on file	
to nearest well, drilling, completed, applied for, on this lease, ft.					
_50′	5,767		LITOS		•
21. Elevations (Show whether DF, KDB, RT, GL, etc.)	22. Approx	imate date work will st	art*	23. Estimated duration	
6,457' GR	April 1	1. 2005		1 month	
	24. Attac	chments	_		
The following, completed in accordance with the requirements of Onshor	re Oil and Gas	Order No.1, shall be atta	ached to this	form:	
1. Well plat certified by a registered surveyor.		4. Bond to cover th	e operations	unless covered by an existing	bond on file (see
2. A Drilling Plan.		Item 20 above).	-		
3. A Surface Use Plan (if the location is on National Forest System)		5. Operator certification of Such other sites		rmation and/or plans as may b	se required by the
SUPO shall be filed with the appropriate Forest Service Office).		authorized office		imauon anwoi pians as may t	~ requires by the

25. Signature

Date Name (Printed/Typed) 3/17/05 Larry Higgins

Title **Drilling COM** Name (Printed/Typed) Approved by (Signature Date Title Office

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Williams Exploration and Production Company, LLC, proposes to drill a well to develop the Basin Fruitland Coal formation at the above described location in accordance with the attached drilling and surface use plans.

The surface is under jurisdiction of the Carson National Forest Service, Jicarilla Ranger District.

This location has been archaeologically surveyed by La Plata Archaeological Consultants. Copies of their report have been submitted directly to the USFS.

This location is proposed to be twinned with the proposed Rosa Unit 365, 365A, and 389 wells.

This APD is also serving as an application to obtain a pipeline right-of-way. A 73.70-foot pipeline tie would be required for this location: HOLD CIES FOR divectional Survey

District I PO 86x 1980, Hopbs, NM 88241-1980

District II PO Orawer OD, Artesia, NM 88211-0719

District III 1000 Rio Brazos Rd., Aztec, NM 87410

District IV PO Box 2088, Santa Fe, NM 87504-2088

State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION PO Box 2088 Santa Fe, NM 87504-2088

Form C-102 Revised February 21, 1994 Instructions on back


Submit to Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies

AMENDED REPORT

#### WELL LOCATION AND ACREAGE DEDICATION PLAT

1	'API Number 30-039-29502					Pool Nam	e AND COAL 🚉		
20-03 Property 1703	Code	Property Name ROSA UNIT					O ZWe:	11 Number	
70GRID N 12078	lo.			WTII 1	*Operator	Name			889A levation 5457
	10 Surface Location								
UL or lot no.	Section 7	Township 31N	Range 4W	Let John	Feet from the 2450	North/South line NORTH	Feet from the 2380	East/West line	County RIO ARRIBA
		11 B	ottom	Hole L	ocation I	f Different	From Surf		
UL or lot no.	Section 7	Township 31N	Range 4W	Lot Idn	Feet from the	North/South line NORTH	Feet from the	WEST	County RIO ARRIBA
12 Dedicated Acres	291	.56 Acre	es - (	W/2)	<sup>33</sup> Joint or Infill	<sup>94</sup> Consolidation Code	<sup>85</sup> Order No		

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

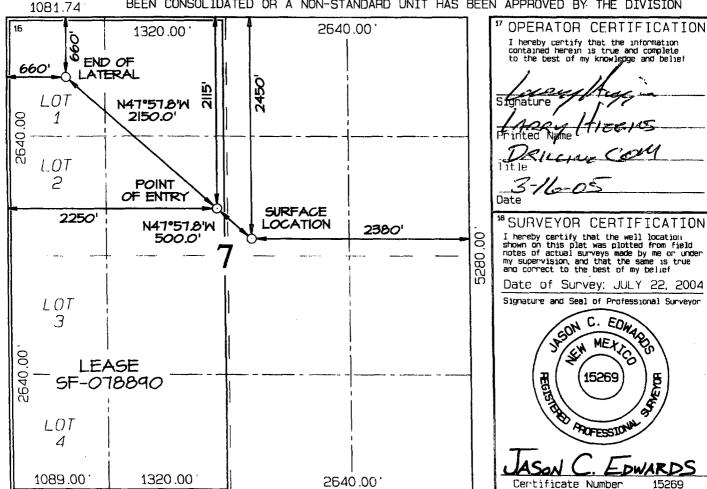

15269

Submit 3 Copies To Appropriate District	State of New M	lexico	Form C	-103
Office District I	Energy, Minerals and Na	ural Resources	May 27	, 2004
1625 N. French Dr., Hobbs, NM 88240			WELL API NO. 30-039-29500	
<u>District II</u> 1301 W. Grand Ave., Artesia, NM 88210	OIL CONSERVATION	N DIVISION	5. Indicate Type of Lease FEDERAL	<del></del>
District III	1220 South St. Fra	ancis Dr.	STATE FEE	^
1000 Rio Brazos Rd., Aztec, NM 87410 District IV	Santa Fe, NM	37505	6. State Oil & Gas Lease No.	
1220 S. St. Francis Dr., Santa Fe, NM	ŕ		Federal NMSF-0078890	
87505	ES AND REPORTS ON WELL	c	7. Lease Name or Unit Agreement Na	
(DO NOT USE THIS FORM FOR PROPOS			7. Lease Name of Omt Agreement Na	title
DIFFERENT RESERVOIR. USE "APPLIC.			Rosa Unit	
PROPOSALS.)  1. Type of Well: Oil Well   (	Gas Well 🛛 Other		8. Well Number 389A	
2. Name of Operator	das weii 🖂 Other		9. OGRID Number 120782	
Williams Exploration and Production	n Company		7. OGRID Number 120702	İ
3. Address of Operator			10. Pool name or Wildcat	
P.O. Box 316, Ignacio, CO 81137			Basin Fruitland Coal	
4. Well Location			<u> </u>	
Unit Letter G: 2460 feet fr	rom the north line and 2380 feet	from the east line		
Section 7 Township		NMPM	County Rio Arriba	
	11. Elevation (Show whether D			
	6,457' GR	, , , , ,		
Pit or Below-grade Tank Application 🛭 or			1200	
Pit typereserveDepth to Groundwate	Distance from nearest fresh	water well_>1,000'_ Dis	tance from nearest surface water	
Pit Liner Thickness: 12 mil Below-0	Grade Tank: Volume	bbls; Construction	Material	
12 Check A	ppropriate Box to Indicate	Nature of Notice	Report or Other Data	
12. Chock 11	ppropriate Box to maleute	· · · · · · · · · · · · · · · · · · ·	Troport of Outer Data	
NOTICE OF IN	FENTION TO:	SUE	SSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK	PLUG AND ABANDON	REMEDIAL WOR	<del>_</del>	G 🔲
TEMPORARILY ABANDON	CHANGE PLANS		RILLING OPNS. P AND A	3
PULL OR ALTER CASING	MULTIPLE COMPL	CASING/CEMEN	IT JOB	
OTHER:	n	OTHER:		
	eted operations (Clearly state a		nd give pertinent dates, including estimat	ed date
			ttach wellbore diagram of proposed com	
or recompletion.	,	• •		•
Reserve pit to be constructed in acco	rdance with NMOCD Interim Di	and Relow grade Te	onk Guidalinas	
Reserve pit to be constructed in acco.	dance with NWOCD intermit i	and below-grade 1	ank Guidennes	
Rserve pit to be located approximate	ly 30 feet south of the well head.	in the southeast corr	ner of the well pad	
	•		•	
I hereby certify that the information:	above is true and complete to the	hest of my knowled	ge and belief. I further certify that any pit or	r helow.
grade tank has been/will be constructed or	plosed according to NMOCD guideline	s ⊠, a general permit [	or an (attached) alternative OCD-approved p	lan 🔲.
· · · · · · · /	£			
SIGNATURE True flag	TITLE	_Drilling COM	DATE3-17-2005_	
	E mail address: ! Li:	an (A) sprillianna - ann	Tolonhone No. (070) 562 2209	
Type or print name Larry Higgins For State Use Only	E-mail address: larry.higging	18@ WIIIAIIIS.COM	Telephone No. (970) 563-3308	
/ June Ose Omy	/ka		MIN 1	0 200
APPROVED BY:	TITLE	DEPUTY OIL & GAS I	DATE DATE	. 9 2000 —
Conditions of Approval (if any):		_		



# **WILLIAMS PRODUCTION COMPANY**

### Operations Plan

(Note: This procedure will be adjusted on site based upon actual conditions)

**DATE:** 

3/16/2005

**WELLNAME:** 

Rosa #389A

Rio Arriba, NM

FIELD:

Basin Fruitland Coal

**SURF LOCATION:** 

SWNE Sec. 7-T31N-R4W

**SURFACE:** 

Forest

BH LOCATION

NWNW Sec 7-31N-4W

**ELEVATION**:

6,457' GR

**MINERALS:** 

Federal

**TOTAL DEPTH:** 

5,767

LEASE#

SF-078890

I. GEOLOGY:

Surface formation - San Jose

### A. FORMATION TOPS: (KB)

	TVD	MD		TVD	MD
San Jose	Surface	Surface	Top Coal	3,172	3,221
Nacimiento	1,297	1,297	Top Target Coal	3,272	
Ojo Alomo	2,637	2,637	Bottom Target Coal	3,287	
Kirtland	2,747	2,747	Base Coal	3,287	3,559
Fruitland	3,107	3,130	Picture Cliffs	3,292	
			TD	3,287	5,767

### B. LOGGING PROGRAM: None

C. <u>NATURAL GAUGES:</u> Gauge any noticeable increases in gas flow. Record all gauges in Tour book and on morning reports.

#### II. DRILLING

- A. <u>MUD PROGRAM</u>: Clear water with benex to 7" casing point. Treat for lost circulation as necessary. Expect 100% returns prior to cementing. Notify Engineering of any mud losses. If coal is detected before 3,122' DO NOT drill deeper until Engineering is contacted.
- B. **Drilling Fluid**: Horizontal section will be drilled with Calcium Chloride water.
- C. <u>MUD LOGGING PRORAM</u>: Mud logger will be on location from 2,500' to TD of intermediate casing. Then from drillout of intermediate casing to TD.
- D. <u>BOP TESTING</u>: While drill pipe is in use, the pipe rams and the blind rams will be function tested once each trip. The anticipated reservoir is expected to be less than 1300 psi, so the rams will be tested to 1500 psi. The surface and intermediate casing strings will be pressure tested to 1500 psi in conjunction with the BOP test before drilling out cement. The drum brakes will be inspected and tested each tour. All tests, inspections and SPR's will be recorded in the tour book as to time and results.

### III. MATERIALS

#### A. CASING PROGRAM:

CASING TYPE	<b>HOLE SIZE</b>	<b>DEPTH</b>	<b>CASING SIZE</b>	WT. & GRADE
Surface	12-1/4"	+/- 350'	9-5/8"	36# K-55
Intermediate	8-3/4"	+/- 3,557'	7"	20# K-55
Prod. Liner	6-1/4"	+/- 3,300-6,081'	4-1/2" perfed	10.5# K-55

<sup>\*</sup>Note: All casing depths are measured depths.

#### **B. FLOAT EQUIPMENT:**

- 1. <u>SURFACE CASING:</u> 9-5/8" notched regular pattern guide shoe. Run (1) standard centralizer on each of the bottom (4) joints of Surface Casing.
- 2. <u>INTERMEDIATE CASING:</u> 7" cement nose guide shoe with a self-fill insert float. Place float collar one joint above the shoe. Install (1) Turbulent centralizer on each of the bottom (3) joints and one standard centralizer every (3) joints to 2,500 ft. Run (1) Turbulent centralizer at 2,700 ft., 2,500 ft., 2,300ft., 2,000ft., 1,500 ft., and 1,000 ft. (NTL-FRA 90-1).
- 3. PRODUCTION LINER: 4-1/2" perforated liner with guide shoe on bottom.

#### C. CEMENTING:

(Note: Volumes may be adjusted onsite due to actual conditions)

- 1. SURFACE: Use 170 sx (237 cu.ft.) of "Type III" with 2% CaCl<sub>2</sub> and 1/4# of cello-flake/sk (Yield = 1.41 cu.ft./sk, Weight = 14.5 #/gal.). Use 100% excess to circulate the surface. WOC 12 hours. Total volume = 206 cu.ft. Test to 1500#.
- 2. INTERMEDIATE: Lead 420 sx (865 cu.ft.) of Premium Light with 8% gel, 1% CaCl<sub>2</sub> and 1/4# cello-flake/sk (Yield = 2.09 cu.ft./sk, Weight = 12.1 #/gal.). Tail 100 sx (139cu.ft.) of "Type III" with 1/4# cello-flake/sk, and 1% CaCl<sub>2</sub> (Yield = 1.4 cu.ft./sk, Weight = 14.5#/gal.). Use 120% excess in Lead Slurry to circulate to surface. No excess in Tail Slurry. Total volume = 1,004 cu.ft. Bump Plug to 1,500 psi. Notify engineering if cement is not circulated to surface.
- 3. PRODUCTION LINER: Open hole completion. No cement.

#### IV COMPLETION

#### A. PRESSURE TEST

Pressure test 7" casing to 3300# for 15 minutes.

#### **B. STIMULATION**

None

#### C. RUNNING TUBING

1. <u>Fruitland Coal:</u> Run 2-3/8", 4.7#, J-55, EUE tubing with a SN (1.375" ID) on top of bottom joint. Land tubing at approximately 3,730'.

Sr. Drilling Engineer

## **GENERAL ROSA DRILLING PLAN**

#### Rosa Unit boundries:

T31N, R4W: all except sections 32-36 T31N, R5W: all except sections 1 & 2

T31N, R6W: all except sections 6,7,18,20, & 27-36

T32N, R6W: sections 32-36

FORMATION	LITHOLOGY	WATER	GAS	OILICOND	OVER-PRES	LOST CIRC
Nacimiento	Interbedded shales, siltstones and sandstones	Possible	Possible	No	No	No
Ojo Alamo	Sandstone and conglomerates with lenses of shale	Fresh	No	No	No	No
Kirtland	Shale W/Interbedded sandstones	No	Possible	No	No	No
	Inter, SS, SiltSt, SH &Coals w/carb, SS, SiltSt, SH	Yes	Yes	No	Possible	Possible
Pictured Cliffs	Massive Sandstone w/thin Interbedded shales	Possible	Yes	Possible	No	Possible
Lewis	Shale w/thin interbedded sandstones and slitstones	No	Possible	No	No	No
Cliff House	Transgressive sandstones	Possible	Yes	No	No	No
Menefee	Sandstones, carb shales and coal	Possible	Yes	No	No	No
Point	Regressive coastal barrier	Possible	Yes	Possible	No	Yes
Lookout	sandstone	N.	Possible	Possible	No	Possible
Mancos	Marine shale and interbedded sandstone	No		Possible	No	Possible
Upr Dadota	Marine sand and shales	No	Yes		<del></del>	
Lwr Dakota	Fluvial sands, shales, & coal	Possible	Yes	Possible	No	Possible

#### DRILLING

## Potential Hazards:

- 1. There are no overpressured zones expected in this well.
- 2. No H2S zones will be penetrated while drilling this well.

### Mud System:


- Surface The surface hole will be drilled with a low-solids, non-dispersed system with starch and lost circulation material as needed. Expected mud weights will be in the 8.4 to 9.0 lb per gal range. Viscosities will be in the 30 to 60 sec/qrt range as needed to remove drill cuttings.
- 2. Intermediate The intermediate hole will be drilled with clear water and Benex to TD where the well will be mudded up to log and run casing. The mud system will be low-solids, non-dispersed with mud weights in the 9 to 10 lb per gal range as needed to control the well. Viscosities will be in the 45 to 55 range as needed to support any weight material. The weight material will consist of Barite.
- Production The well will be drilled using air from the intermediate casing point to TD. For Fruitland Coal wells, the coal section will be drilled with air/mist.

# viniants revoluction company, LLC

# Well Control Equipment Schematic for 2M Service

Attachment to Drilling Technical Program

# Typical BOP setup

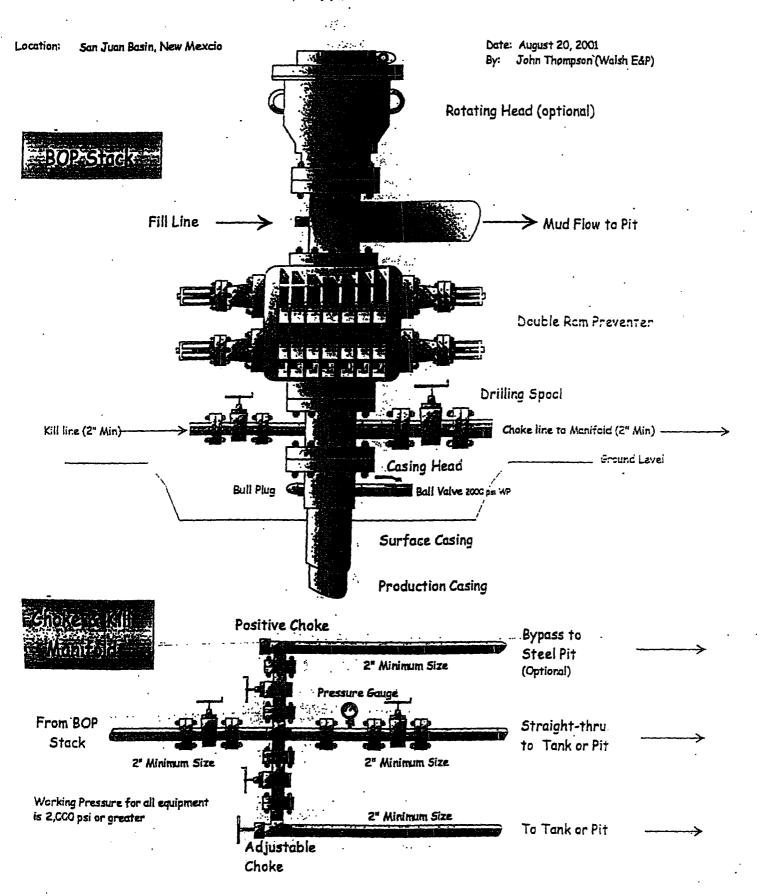

HALLIBURTON


Sperry Drilling Services

# **Williams Production Company**

**DrillQuest** 

**New Mexico Rio Arriba County** Sec. 07-T31N-R04W Rosa Unit #389A Plan 030605



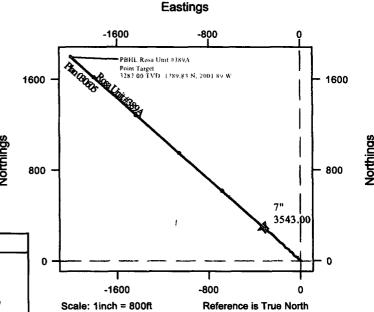

**Eastings** 

Rosa Unit #389A Surface Location

RKB Elevation:


6472.00ft above Mean Sea Level


Ref. NE Corner of Sec 7:

2450.00 S. 2380.00 W

Ref. Global Coordinates: Ref. Geographical Coordinates:

2152576.76 N, 657409.29 E 36° 54' 52.0989" N, 107° 17' 41.6157" W

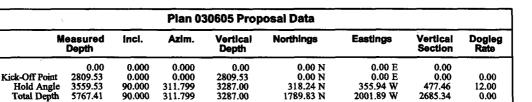

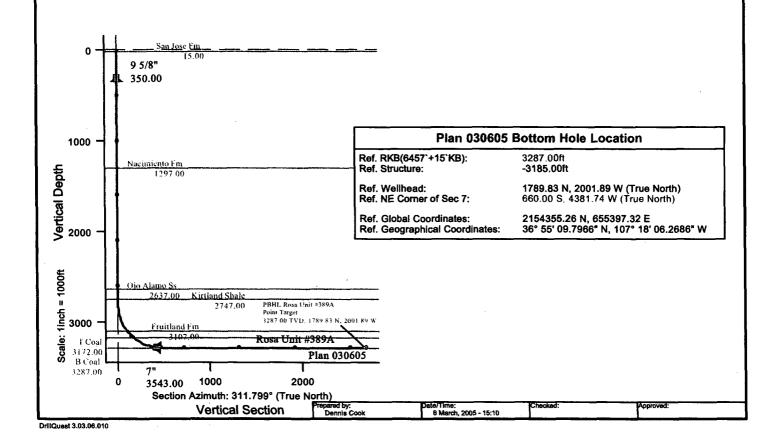


HALLIBURTON

Sperry Drilling Services

# **Williams Production Company**

**DrillQuest** 

New Mexico Rio Arriba County Sec. 07-T31N-R04W Rosa Unit #365;#365A:#389;#389A Plan 030605

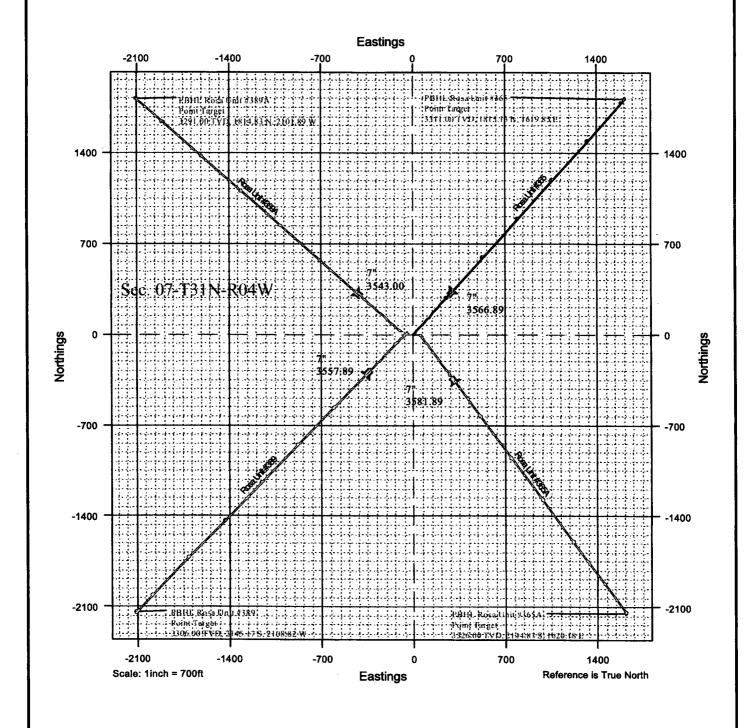

Pate/Time: 6 March, 2005 - 13:03