

Sundry Print Report
03/03/2025

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Well Name: SALADO DRAW 19 26 33 Well Location: T26S / R33E / SEC 19 /

FED COM LOT 1 / 32.0357079 / -103.6169082

County or Parish/State: LEA /

NM

Well Number: 1H Type of Well: OIL WELL Allottee or Tribe Name:

Lease Number: NMLC065880A Unit or CA Name: SALADO DRAW 19

26 33 FED COM 2

Unit or CA Number:

NMNM135996

US Well Number: 3002542661 Operator: CHEVRON USA

INCORPORATED

Notice of Intent

Sundry ID: 2838134

Type of Submission: Notice of Intent

Type of Action: Temporary Abandonment

Date Sundry Submitted: 02/24/2025 Time Sundry Submitted: 09:41

Date proposed operation will begin: 02/24/2025

Procedure Description: CHEVRON USA, INC. REQUESTS THE FOLLOWING: The Salado Draw 19 26 33 Fed Com 1H (30-025-42661) is being proposed for temporary abandonment due to attempted MIT testing in which we suspect tubing integrity issues. The well has had water influx that has caused unexpected loss of hydrocarbon production, and thus is classified as inactive as a result. We have attempted one well water shut off and are aiming to test another. If this is successful, then this well would be a candidate for water shut off. This wellbore is in our proposed permitting for gas re-injection but with tubing integrity concerns. A TA of this wellbore allows us to progress water shut off and gas re-injection on other wells while preserving this wellbore. Please see following procedure and attached wellbore diagrams. Procedure: Rig up pulling unit and prepare to pull out of hole with tbg. Rig up slickline and RIH with GR to ~8655'. RIH w/CIBP set @ 8655' w/slickline & top with 35' of class H cement with dump bailer Release slickline unit. Rig up pump truck and chart recorder and pressure test plug and cement as required by regulatory body Rig down and release slickline and pulling unit.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

SALADO_DRAW_19_26_33_FED_1H_NOI_TA_PKT_20250224094015.pdf

eived by OCD: 3/3/2025 8:40:24 AM Well Name: SALADO DRAW 19 26 33

FED COM

Well Location: T26S / R33E / SEC 19 / LOT 1 / 32.0357079 / -103.6169082

County or Parish/State: LEA/

Well Number: 1H

Type of Well: OIL WELL

Allottee or Tribe Name:

Lease Number: NMLC065880A

Unit or CA Name: SALADO DRAW 19

26 33 FED COM 2

Unit or CA Number: NMNM135996

US Well Number: 3002542661

Operator: CHEVRON USA

INCORPORATED

Conditions of Approval

Specialist Review

TA_COA_20250228184929.pdf

Operator

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a

Operator Electronic Signature: NICOLE TAYLOR Signed on: FEB 24, 2025 09:40 AM

Name: CHEVRON USA INCORPORATED

Title: Regulatory Coordinator

Street Address: 6301 DEAUVILLE BLVD

City: MIDLAND State: TX

Phone: (432) 687-7328

Email address: NICOLE.TAYLOR@CHEVRON.COM

Field

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:

BLM Point of Contact

Signature: Jonathon Shepard

BLM POC Name: JONATHON W SHEPARD BLM POC Title: Petroleum Engineer

BLM POC Phone: 5752345972 BLM POC Email Address: jshepard@blm.gov

Disposition Date: 02/28/2025

Disposition: Approved

Form 3160-5 (June 2019)

UNITED STATES

FORM APPROVED
OMB No. 1004-0137
Expires: October 31, 202

(June 2019)	DEPARTMENT OF THE INTERIOR				Ex	October 31, 2021	
	BUR	EAU OF LAND MAN	AGEMENT		5. Lease Serial No.	NMLC	065880A
	ot use this i	NOTICES AND REPO form for proposals t Use Form 3160-3 (A	to drill or to re	enter an	6. If Indian, Allottee or Tribe	Name	
SUBMIT IN TRIPLICATE - Other instructions on page 2					7. If Unit of CA/Agreement, Name and/or No. SALADO DRAW 19 26 33 FED COM 2/NMNM135996		
1. Type of Well Oil Well Gas Well Other				8. Well Name and No. SALADO DRAW 19 26 33 FED COM/1H			
2. Name of Operator	CHEVRON USA	A INCORPORATED			9. API Well No. 3002542661		
2. Name of Operator CHEVRON USA INCORPORATED 3a. Address PO BOX 1392, BAKERSFIELD, CA 93302 3b. Phone No. (include area code)					10. Field and Pool or Exploratory Area		
	· 	·	(661) 633-4000		WC025G06S263319P-BONE SPI	RING/WC	025G06S263319P-BONE SPRING
4. Location of Well (F SEC 19/T26S/R33	~	R.,M., or Survey Description))		11. Country or Parish, State		
	12. CHE	CK THE APPROPRIATE B	OX(ES) TO INDICA	TE NATURE C	OF NOTICE, REPORT OR OT	HER D	ATA
TYPE OF SUE	MISSION			ТҮРЕ	OF ACTION		
Notice of Inter	t	Acidize Alter Casing	_	Fracturing [Production (Start/Resume) Reclamation		Water Shut-Off Well Integrity
Subsequent Report		Casing Repair Change Plans	New Cons	_	Recomplete Temporarily Abandon		Other
Final Abandon	ment Notice	Convert to Injection Plu		=	Water Disposal		
is ready for final in CHEVRON US. The Salado Drawe suspect tult classified as in would be a car of this wellbore procedure and Procedure: Rig up pulling Rig up slickling RIH w/CIBP se	nspection.) SA, INC. REQUITED TO THE PROPERTY OF THE PROPERTY	ESTS THE FOLLOWING: ad Com 1H (30-025-42661) aues. The well has had wa alt. We have attempted on ar shut off. This wellbore is rogress water shut off and ore diagrams. e to pull out of hole with the GR to ~8655'. ckline & top with 35' of cla) is being proposed ter influx that has c e well water shut o in our proposed pe gas re-injection on	d for temporary aused unexpe ff and are aimi ermitting for ga other wells wi	v abandonment due to atten octed loss of hydrocarbon pr ing to test another. If this is as re-injection but with tubin hile preserving this wellbore	npted M oduction succes g integr	on, and thus is sful, then this well rity concerns. A TA
14. I hereby certify that the foregoing is true and correct. Name (<i>Printed/Typed</i>) NICOLE TAYLOR / Ph: (432) 687-7328				Regulatory Coordinator Title			
Signature (Electronic Submission)			Dat	Date 02/24/2025			
		THE SPACE	FOR FEDERA	AL OR STA	TE OFICE USE		
Approved by JONATHON W SHEPARD / Ph: (575) 234-5972 / Approved				Petrole Title	eum Engineer	Date	03/01/2025
Conditions of approval, if any, are attached. Approval of this notice does not warrant certify that the applicant holds legal or equitable title to those rights in the subject lewhich would entitle the applicant to conduct operations thereon.				Office CAR	LSBAD		
Title 18 U.S.C Section	1001 and Title 4	3 U.S.C Section 1212, make	it a crime for any pe	rson knowingly	and willfully to make to any o	lepartme	ent or agency of the United States

any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c)and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

(Form 3160-5, page 2)

Additional Information

Additional Remarks

Release slickline unit.

Rig up pump truck and chart recorder and pressure test plug and cement as required by regulatory body

Rig down and release slickline and pulling unit.

Location of Well

 $0. \ SHL: LOT\ 1\ /\ 200\ FNL\ /\ 898\ FWL\ /\ TWSP: 26S\ /\ RANGE: \ 33E\ /\ SECTION: \ 19\ /\ LAT: \ 32.0357079\ /\ LONG: \ -103.6169082\ (\ TVD: \ 0\ feet\ , MD: \ 0\ feet\)$

 $PPP: LOT\ 1\ /\ 200\ FNL\ /\ 898\ FWL\ /\ TWSP:\ 26S\ /\ RANGE:\ 33E\ /\ SECTION:\ 19\ /\ LAT:\ 0.0\ /\ LONG:\ 0.0\ (\ TVD:\ 0\ feet\ MD:\ 0\ feet\)$

 $BHL: LOT\ 4\ /\ 280\ FSL\ /\ 355\ FWL\ /\ TWSP: 26S\ /\ RANGE: 33E\ /\ SECTION: 19\ /\ LAT: 0.0\ /\ LONG: 0.0\ (\ TVD: 9105\ feet, MD: 9415\ feet\)$

CHEVRON USA, INC. REQUESTS THE FOLLOWING:

The Salado Draw 19 26 33 Fed Com 1H (30-025-42661) is being proposed for temporary abandonment due to attempted MIT testing in which we suspect tubing integrity issues. The well has had water influx that has caused unexpected loss of hydrocarbon production, and thus is classified as inactive as a result. We have attempted one well water shut off and are aiming to test another. If this is successful, then this well would be a candidate for water shut off. This wellbore is in our proposed permitting for gas re-injection but with tubing integrity concerns. A TA of this wellbore allows us to progress water shut off and gas re-injection on other wells while preserving this wellbore. Please see following procedure and attached wellbore diagrams.

Procedure:

Rig up pulling unit and prepare to pull out of hole with tbg.

Rig up slickline and RIH with GR to ~8655'.

RIH w/CIBP set @ 8655' w/slickline & top with 35' of class H cement with dump bailer


Release slickline unit.

Rig up pump truck and chart recorder and pressure test plug and cement as required by regulatory body Rig down and release slickline and pulling unit.

Received by OCD: 3/3/2025 8:40:24 AM

Salado Draw 19 26 33 Fed Com 1H Current Wellbore

API#: 30-025-42661 Spud 7/14/2015 PH4998 10/9/2015 Chevno: Complete Elevation Field: Jennings 3176 Lea County, Nm ΚB 33 County: S19 T26S R33E 20 Location:

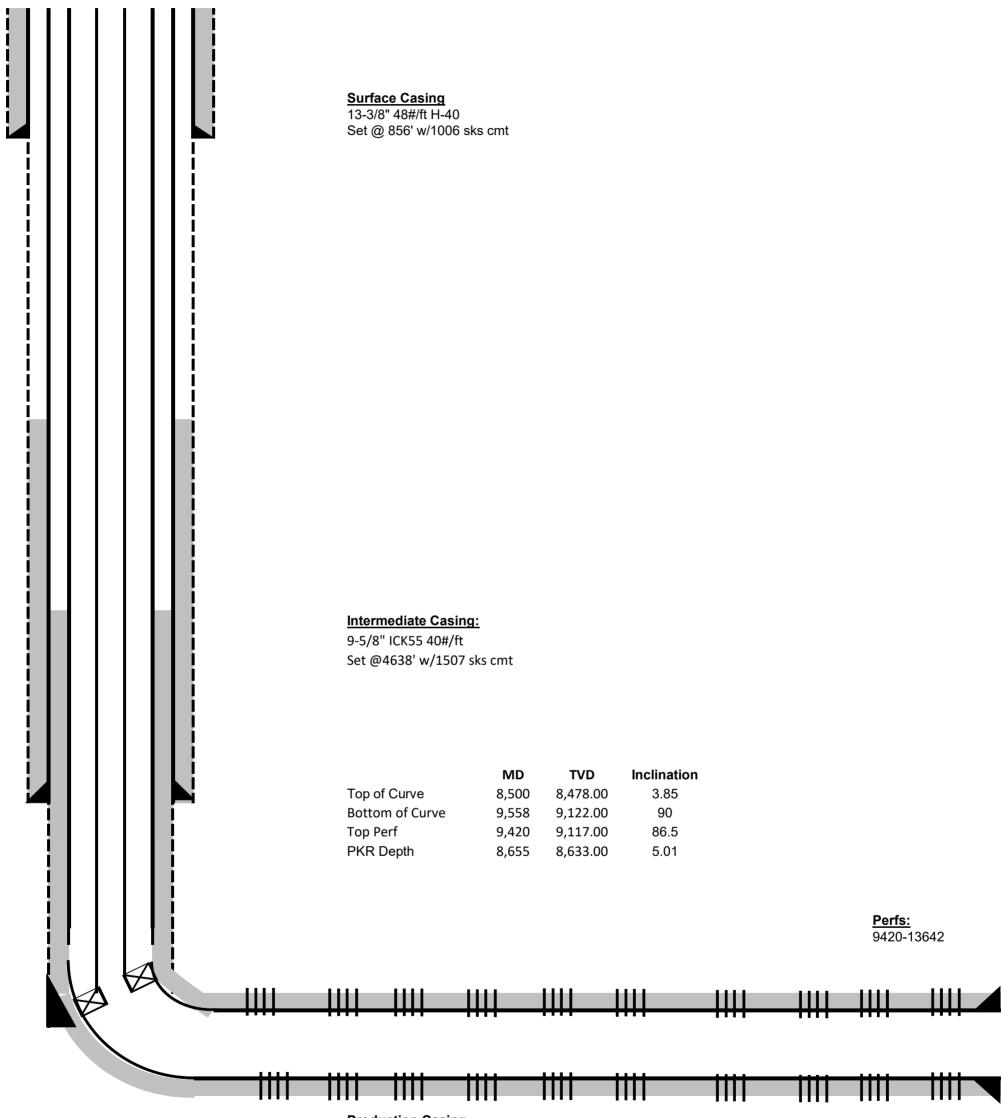


Production Casing 5-1/2" 20#/ft P-110 Set @ 13,808' w/1678 sks cmt Received by OCD: 3/3/2025 8:40:24 AM

Page 8 of 10

Salado Draw 19 26 33 Fed Com 1H Proposed Wellbore

API#: 30-025-42661 Spud 7/14/2015 10/9/2015 PH4998 Chevno: Complete Field: Jennings Elevation 3176 Lea County, Nm ΚB 33 County

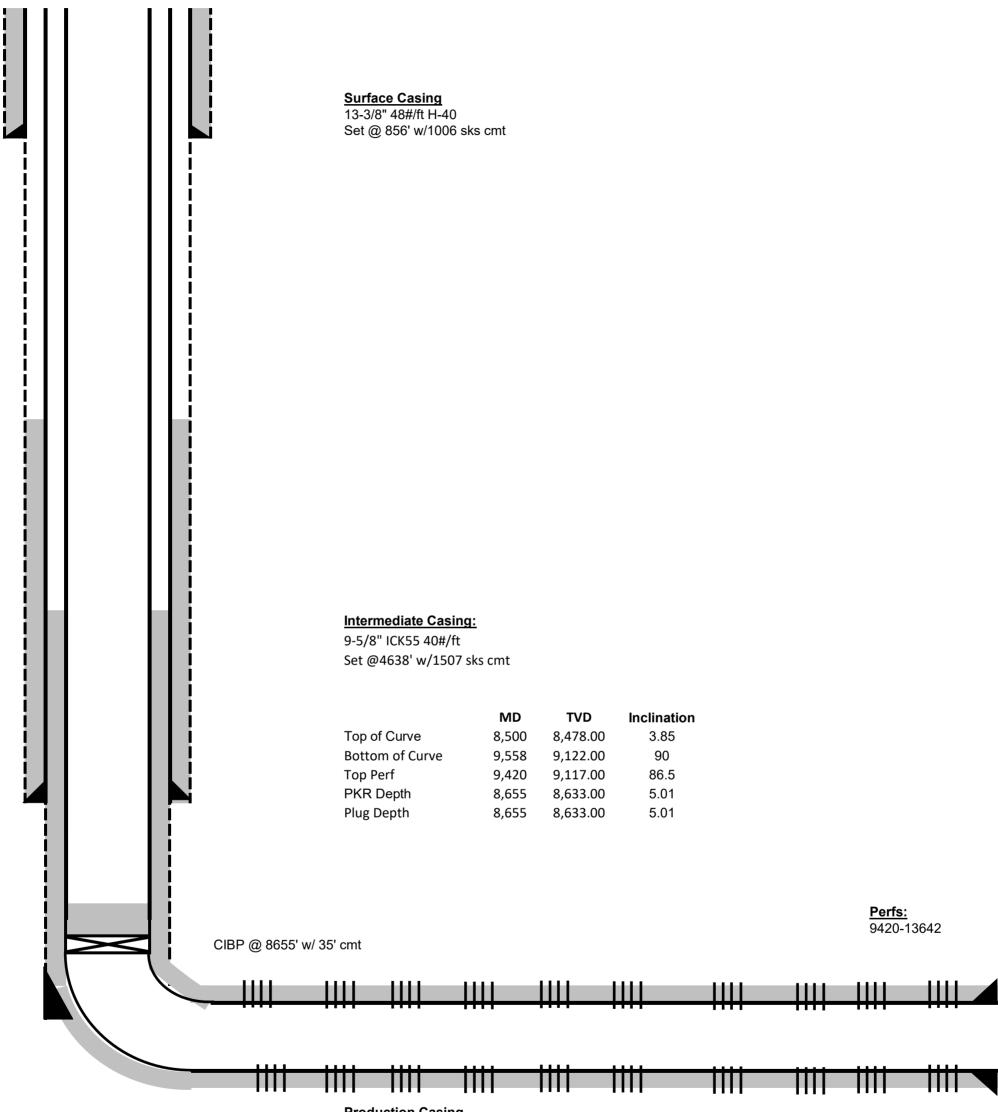

Production Casing 5-1/2" 20#/ft P-110 Set @ 13,808' w/1678 sks cmt

BUREAU OF LAND MANAGEMENT

Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

Conditions of Approval for Temporary Abandonment of Wells

Definition: A temporarily abandoned well is a completion that is not capable of production in paying quantities, but which may have future value. Pursuant to 43 CFR 3162.3-4 (c), no well may be temporarily abandoned for more than 30 days without the prior approval of the authorized officer.

- 1. TA status will be effective for a period of up to one year from the date of sundry approval and can be renewed annually thereafter per IM NM-2016-017.
- 2. A bridge plug (CIBP) must be installed 50 to 100 feet above any open perforations/open hole/kick off point. The CIBP must be capped with either a minimum of 25 sacks of cement if placed with tubing or 35 feet of cement if placed with a bailer. The top of the cement must be verified by tagging.
- 3. The wellbore must be filled with corrosion inhibited fluid and pressure tested to 500 psi. The casing shall be capable of holding this pressure for at least 30 minutes. If the well does not pass the casing integrity test, then the operator shall, within 30 days, submit a procedure to either repair the casing or to plug and abandon the well.
- 4. Contact the appropriate BLM office at least 24 hours prior to the scheduled Casing Integrity Test. For wells in Eddy County, 575-361-2822; Lea County 575-393-3612.
- 5. All downhole production/injection equipment (tubing, rods, etc.) shall be removed from the casing if it is not isolated by a packer.
- 6. A bradenhead test must be conducted. If the test indicates a problem, a remedial plan and time frame for remediation shall be submitted within ninety (90) days of the test.
- 7. Submit a subsequent Sundry Notice (Form 3160-5) with the following information:
 - a. A well bore diagram with all perforations, CIBP's, and tops of cement on CIBP's.
 - b. A description of the temporary abandonment procedure.
 - c. A clear copy or the original of the pressure test chart.

Sante Fe Main Office Phone: (505) 476-3441

General Information Phone: (505) 629-6116

Online Phone Directory https://www.emnrd.nm.gov/ocd/contact-us

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

Action 438127

CONDITIONS

Operator:	OGRID:
CHEVRON U S A INC	4323
6301 Deauville Blvd	Action Number:
Midland, TX 79706	438127
	Action Type:
	[C-103] NOI Temporary Abandonment (C-103I)

CONDITIONS

С	reated By	Condition	Condition Date
,	gcordero	Passing MIT test in accordance with 19.15.26.11 or 19.15.25.12-14 NMAC will be required at time of work.	4/17/2025