Form	3160-5
(April	2004)

UNITED STATES DEPARTMENT OF THE INTERIOR **BUREAU OF LAND MANAGEMENT**

FORM APPROVED
OM B No. 1004-0137
Expires: March 31, 20

OM I	M APPROVED 3 No. 1004-0137 ss: March 31, 20
Serial No.	

Bellette of Elitib Manufelliani.	3. Lease Senai N
SUNDRY NOTICES AND REPORTS ON WELLS	SF 078244

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE- Other instructions on reverse side.

6, [If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

				t v
1. Type of Well Gas Well Other		8. Well Name and No.		
2. Name of Operator PATINA OIL	, AND GAS			SHOOTIST #1 9. API Well No.
3a Address 5802 US HIGHWAY 64 FARM	AINGTON, NM 87401	3b. Phone No. (include 505-632-8056	e area code)	30-045-30208 10. Field and Pool, or Exploratory Area
4. Location of Well (Footage, Sec., T., R, M, or Survey Description)		BASIN FRUITLAND COAL		
"N" 1102' FSL AND 1323' FWL Sec. 19-T31N-R12W NMPM			11. County or Parish, State SAN JUAN COUNTY, NEW MEXICO	
12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA				
TYPE OF SUBMISSION		TYI	PE OF ACTION	
Notice of Intent Subsequent Report Final Abandonment Notice	Acidize Alter Casing Casing Repair Change Plans Convert to Injection	Deepen Fracture Treat New Construction Plug and Abandon Plug Back	Production (Statement Production Statement Production Recomplete Temporarily Ab. Water Disposal	Well Integrity Other

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

PLEASE BE ADVISED THAT PATINA OIL AND GAS WILL PLUG AND ABANDON THIS WELL PER THE ATTACHED P&A PROCEDURES AND WELLBORE SCHEMATIC.

SEE ATTACHED FOR CONDITIONS OF APPROVAL

14. I hereby certify that the foregoing is true and correct Name (Printed/Typed)				
JEAN M. MUSE	Title REGULATORY COMPLIANCE			
Signature, MuH	Date 10/05/2006			
THIS SPACE FOR FEDERAL OR STATE OFFICE USE				
Approved by Moran warnered	Title Pef. Eng. Date 10/23/06			
Conditions of approval in any, are attached. Approval of this notice does not warra certify that the applicant holds legal or equitable title to those rights in the subject lewhich would entitle the applicant to conduct operations thereon.				
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any states any false fictitions or fraudulent statements or representations as to any matter.	person knowingly and willfully to make to any department or agency of the United			

(Instructions on page 2)

SHOOTIST #1 BASIN FIELD Sec. 19 – T31N – R12W SAN JUAN COUNTY, NM


Patina Oil & Gas Corp's plan to plug and abandon the subject well is as follows:

NOTE: All cement volumes use 100% excess outside pipe and 50% excess inside pipe. The stabilizing wellbore fluid will be 8.3 ppg, sufficient to balance all exposed formation pressures.

- 1. Install and test rig anchors. Prepare blow pit. Comply to all MNOCD, BLM, and Patina Oil & Gas Corp's safety rules and regulations.
- 2. MIRU daylight pulling unit. Conduct safety meeting for all personnel on location. NU relief line to flow back tank. Blow well down; kill with water as necessary. ND wellhead and NU BOP and stripping head; test BOP.
- 3. Plug #1(Fruitland top, 2144-2037). Pump 30 bbls water. PU-51/2" cement-retainer and RIH to 2000'. Mix 45 sx Class B cement and spot a balanced plug from 2350' to 2037' inside of casing (over Fruitland coal perforations). POOH to 1500' and wait on cement. RIH and tag cement. Load well w/H₂O. Pressure test csg to 500#. Spot a cement from 2256' for 1877' + 50 excess.
- 4. Plug #2(intermediate). Mix approx 14 sx class B cement and spot a balanced plug from 1100' to 645' inside of casing.
- 5. Plug #3(surface). Mix approx. 60 sx Class B cement and spot a balanced plug from 500 to surface and circulate good cement out csg yalve. POOH and LD tubing. SI well and WOC.
- 6. ND BOP and cut off wellhead below surface csg flange. Install P&A marker w/cement to comply w/regulations. RD and move off location, cut off anchors. Restore location per BLM stipulations.

Shootist #1

Proposed P&A
Basin Fruitland Coal
1102' FNL, 1323' FWL
Sec. 19, T31N-R12W, San Juan County, NM

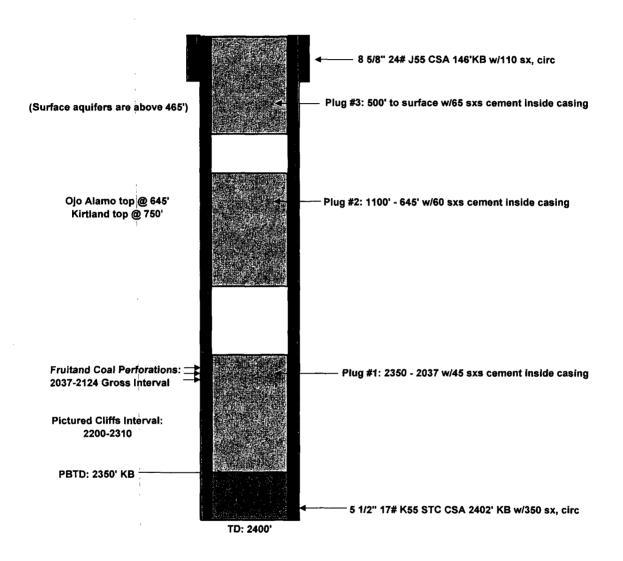



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Farmington Field Office 1235 La Plata Highway, Suite A Farmington, New Mexico 87401

Attachment to Notice of Intent for Permanent Abandonment:

Well: Shootist #1

CONDITIONS OF APPROVAL:

- 1.) Plugging operations authorized are subject to the attached "General Requirements for Permanent Abandonment of Wells on Federal and Indian Leases."
- 2.) Farmington Field Office is to be notified at least 24 hours before the plugging operations commence. (505) 599-8907.
- 3.) The following modifications to your plugging program are to be made:
 - A.) Place a cement plug inside the casing from 2256' to 1844' plus 50' excess. Tag TOC. (Top of Pictured Cliffs @ 2206', Top of Fruitland @ 1894')
 - B.) Place a cement plug inside the casing from 514' to the surface. (Top of Kirtland @ 464')